


正反印刷


SIZE : 100*135mm

PWNAGE

ULTRA CUSTOM

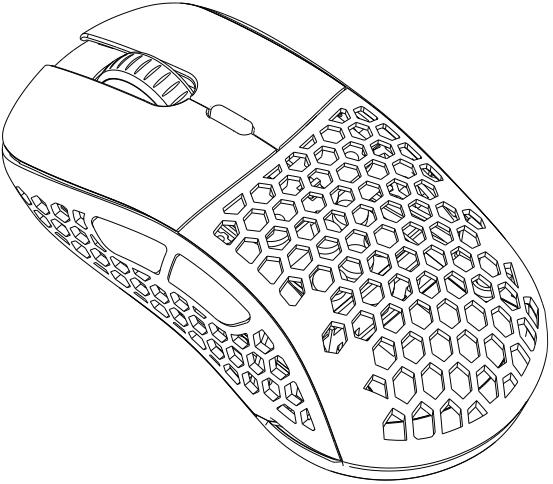

Function layout

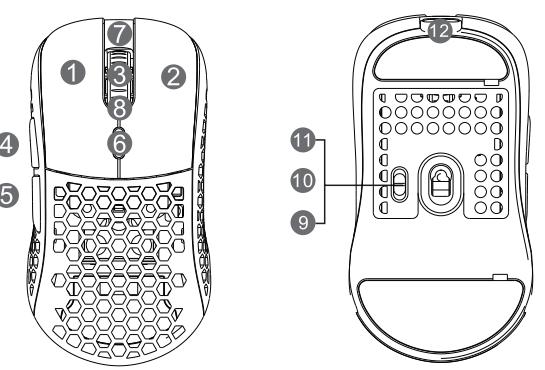

Quick Start Guide

Mouse Instructions:

1. Open top shell cover of mouse and remove the USB Nano receiver
2. Plug the receiver into your computer USB port
3. Turn on the mouse by switching on the power switch at the bottom of the mouse
4. Wait for the computer installation to finish

DPI setting and Indicator:

1. Default DPI levels: 400-800-1600-2400-3200-6400, total of 6 DPI levels
2. Press the DPI button on the top of the Ultra Custom to cycle through the DPI levels

3. The mouse scroll wheel LED color indicates the DPI level
400DPI: Red Color Breathing, 800DPI: Blue Color Breathing, 1600DPI: Green Color Breathing, 2400DPI: Yellow Color Breathing, 3200DPI: Cyan Color Breathing, 6400DPI: Purple Color Breathing
Note:
1. DPI levels can be adjusted by the software. Max DPI is 19000DPI
2. DPI LED effects can be adjusted or turned off to save power by the software

Polling Rate:
125-250-500-1000Hz can be set by the software. Default polling rate is 500Hz

Power switch function:

1. Switch at Position 11: Turns on the mouse with RGB LED off
2. Switch at Position 10: Turns off the mouse
3. Switch at Position 9: Turns on the mouse power with RGB LED on

Note If you switch from position 11 to position 9 directly, you will need to stop at Power Off (position 10) for at least 3 seconds first for the LED to be turned on properly

Note If you want to turn on the LED in wired mode, you will need to turn on the LED in wireless mode first

Wired and wireless function:

1. Wired and Wireless modes switch automatically. Simply plug the USB nano receiver into the computer without connecting the cable and the Ultra Custom will work in wireless mode
2. If you connect the USB-C cable from the computer to the mouse, the Ultra Custom will switch to wired gaming mode automatically

Low power and charging indication


1. Low power indicator: The Ultra Custom's scroll wheel will blink red to indicate that the battery's power is low (10%) and you should recharge your mouse's battery by connecting it to the PC via the charging cable
2. When charging, the scroll wheel LED will blink orange. Once the battery is fully charged, the LED will turn a solid green.

Pairing

1. If your mouse loses wireless connection, you can re-pair the mouse with the receiver by following these steps:
Hold down the left button + middle button + right button for 3 seconds until the scroll wheel flashes yellow
2. Release all the buttons, put the mouse close to the receiver then unplug the receiver and replug the receiver back into the USB port.
The LED will stop flashing after the pairing is complete.

PWNAGE

ULTRA CUSTOM

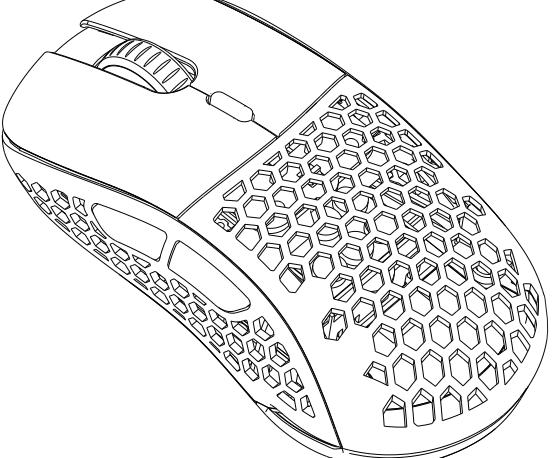


Shell Customization
The button cover and top shell cover of this mouse are detachable without the use of tools. Choose from and swap with a variety of different colored button cover and shell cover options.

Mouse button Feel adjustment

1. Included with your mouse are small clear plastic spacers with numbers on the back which indicate the thickness of the spacers.
2. You can remove and replace the clear plastic spacers under the button cover triggers.
3. To Disassemble the button spacer, use a sharp thin tool to pry off the default spacer.
4. Peel and stick the desired spacer into the triggers under the button cover.

Note: try 0.8mm for 1 and 0.7mm for 2 for crisp & tactile feeling clicks. use thinner spacers for light & softer feeling clicks

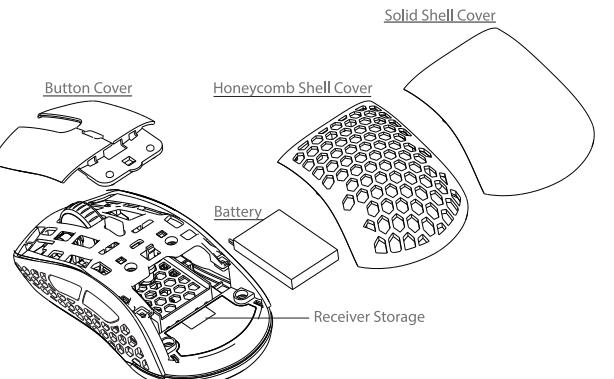

CAUTION

1. Keep the mouse away from liquid, humidity or moisture.
2. Connect the provided cable to your computer's USB port to charge the mouse
3. Do not attempt to remove battery

Main Specification

Size:	120x63.5x39mm
Weight	65g-73g
Switch	Kailh 80M
Sensor	PAW3370
Max DPI	19000DPI
Default DPI:	400-800-1600-2400-3200-6400
IPS	400ips
Acceleration	50g(Max)
Polling rate	125-250-500(default)-1000Hz
Interface	USB 2.0
Battery type	Li-ion Polymer Battery
Battery capacity	580mAh
Default working time(1 time charge)	~97h(500Hz & LED On)
Charging time	around 2.5 h

PWNAGE

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.