


材质105g哑粉
尺寸:756.4*85mm（单面47.2X85mm）
单黑+专色&双面印刷+风琴折16页15折

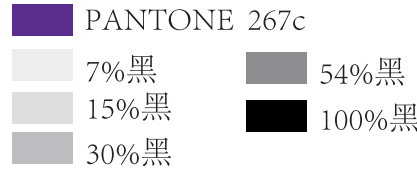

LISEN

3-in-1 Wireless Charging Power Bank

2E416

Thanks for choosing Lisen! To bring you a fantastic experience, please read the manual before using.

PRODUCT DESCRIPTION

This product is a multifunctional portable power bank with a built-in PD fast charging cable, a digital display screen, a wireless charging pad for smartwatches, support for phone magnetic wireless charging, and a low-current charging mode. It can be used for various small electronic devices such as mobile phones, tablets (IPads), Bluetooth earphones, small speakers, and so on.

1.Supports 20W PD fast charging for iPhone 8-15, compatible with magnetic wireless charging for Apple iPhone 12/13/14/15 series, supports up to 1.5W wireless charging for iWatch, and also supports 15W fast charging for Huawei devices.

2.The total wireless output power of the three-in-one and the mobile phone wireless charging only support 15W when working independently.

PRODUCT INFORMATION

PRODUCT INFORMATION

PRODUCT NAME
LISEN 3-IN-1 WIRELESS CHARGING POWER BANK

MODELL
2E416

MATERIAL
FIRE-RESISTANT ABS+PC

BATTERY
POLYMER LITHIUM BATTERY

PRODUCT DIMENSIONS
L113W69H35MM

WEIGHT
APPROXIMATELY 351G

MAGNET
N52 STRONG MAGNET WITH A SUCTION FORCE OF 10N

BATTERY CAPACITY
20000MAH 3.85V 77WH

PRODUCT PARAMETERS

LIGHTNING INPUT
5V/2.4A

TYPE-C INPUT
5V/3A, 9V/2A, 12V/1.5A (PD 18W MAX)

TYPE-C OUTPUT
5V/3A, 9V/2.23A, 12V/1.67A (PD 20W MAX)

USB OUTPUT
5V/3A, 9V/2A, 12V/1.5A (QC 18W MAX)

TYPE-C CABLE OUTPUT
5V/3A, 9V/2.23A, 12V/1.67A (20W MAX)

LIGHTNING CABLE OUTPUT
5V/3A, 9V/2.22A (20W MAX)

MULTI-PORT SIMULTANEOUS OUTPUT
5V/3A 15W MAX

PHONE WIRELESS OUTPUT/PHONE WIRELESS
15W MAX. COMPATIBLE WITH 15W/10W/7.5W/5W

APPLE WATCH WIRELESS OUTPUT/IWATCH WIRELESS
1.5W MAX

2.Interface and Charging Cable Discharge and Charging Indicator Light
: The power bank's interface and built-in cable can be used for charging smartphones immediately. During fast charging, the green lightning symbol will remain lit. Pressing the button twice in a row will turn off the output.

3.Wireless charging indication status: Press the button once for about 6 seconds to activate wireless charging. The wireless symbol on the display screen is always on. After recognizing the wireless load, it will enter the 10W/15W charging status, and the green lightning symbol will be always on. Double-click the button continuously to turn off the output.

4.Apple Watch wireless charging indication status: Press the button once to turn on wireless charging. The wireless charging symbol on the display screen will light up. Then, press and hold the button for about 3 seconds to activate the Apple Watch wireless charging. The wireless symbol on the display screen will be on continuously. After recognizing the Apple Watch wireless load, it will start charging. Double-click the button continuously to turn off the output.

2.Avoid using or storing in places with high humidity, microwaves, etc

3.Do not place the battery in a heat source or under direct sunlight as the temperature rise may shorten the product's lifespan

4.Use a manufacturer-approved charging device and charging program. Improper charging can cause power damage

5.Avoid using appliances or loads that exceed the output current of this product (the circuit will protect and there will be no output)

6.Avoid strong physical impact, including hitting, throwing, stepping, squeezing, etc

7.Do not throw the power source into the fire

8.Non-professionals are strictly prohibited from disassembling this product

9.If accidents occur due to failure to follow the above regulations, our company is not responsible

This device generates and radiates radio frequency energy during use. If not installed and used in accordance with the instructions, it may cause harmful interference to radio or television reception. However, it cannot be guaranteed that interference will not occur in a particular installation

If the device does cause harmful interference to radio or television reception and it can be determined by turning the device off or on, users are encouraged to try one or more of the following measures to correct the interference

--Relocate or reposition the receiving antenna.

--Increase the distance between the device and the receiver

--Connect the device to a different outlet than the one connected to the receiver

--Seek help from a dealer or experienced broadcast/TV technician

The antenna should be kept at a distance of 0cm from the user, and the transmitter should not be placed with other transmitters or antennas.

Declaration of Toxic and Hazardous Substances in Electronic Information Products:

Part Name	Toxic and hazardous substances or elements						
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	
PCB	○	○	○	○	○	○	
Battery	○	○	○	○	○	○	
Shell	○	○	○	○	○	○	
Gasket,Tape and Small Structural Parts	○	○	○	○	○	○	

This form is prepared according to the specification of 53/TI1364.

0: Indicates that the content of the toxic and hazardous substance in all materials of the part is below the limit requirement stipulated in the GB/T26572 standard.

X: The content of the listed toxic and hazardous substances in at least one homogeneous material of the part exceeds the limit requirement specified in the GB/T 26572 standard.

FCC Warning Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur

in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

365 Worry-free 365-Day Warranty

24 24/7 Easy-to-Reach Support Email support@lisen.us, get connection within 24 hours.

AFTER SALE SERVICE

Lisen always dedicates to bring great shopping experience for each customer. Please feel free to contact us if you have any questions.

@LISEN Tech @LISEN Tech
support@LISEN.com @LISEN Tech

Shenzhen Xiangdangwen Technology Co., Ltd.

ADDRESS: 106, 1/F, No.313-4 Building Huachang Road,Langkou Community Dalang Street Longhua District, Shenzhen, China.

MANUFACTURE: Huizhou Yimai Electronics Technology Co.Ltd.

ADDRESS: 3rd Floor, Building B, Huakai High-tech Industrial Park, Electronic City Road, Longxi Street, Boluo County.

3-in-1-Akku zum kabellosen Aufladen

ANKLAB GmbH Leubenthal 23, 45326 Essen
UKCA SERVICE LTD 21 8 Beaumont Avenue, Worley, Manchester, UK, M28 0AL

Designed by LISEN Made in China

FC CE UKCA

正面印刷

2E416

反面印刷

Vielen Dank, dass Sie sich für das Produkt von Lisen entschieden haben. Um Ihnen eine bessere Erfahrung zu gewährleisten, lesen Sie bitte diese Bedienungsanleitung des Fingerhalters und Ihres Handys oder elektronischen Produkts.

Produktbeschreibung

Dieses Produkt ist eine multifunktionale tragbare Powerbank mit eingebaute PD-Schnelladekabel, digitalem Display, drahtloser Ladestation für Smartwatches, Unterstützung für magnetische kabellose Ladung für das Telefon und einem Niedrigstrom-Lademodus. Sie kann für verschiedene kleine elektronische Geräte wie Mobiltelefone, Tablets (IPads), Bluetooth-Kopfhörer, kleine Lautsprecher und so weiter verwendet werden.

1.Unterstützt 20W PD-Schnellladung für iPhone 8-15, unterstützt magnetisches kabelloses Laden für die iPhone 12/13/14/15 Serie, unterstützt kabelloses Laden für die iWatch mit maximal 1,5W und unterstützt 22,5W Schnellladung für Huawei.

2.Die gesamte drahtlose Ausgangsleistung des Drei-in-Eins sowie das drahtlose Laden des Handys unterstützen nur 15W, wenn sie unabhängig voneinander arbeiten.

Produktstruktur

Produktinformationen

Produktname
LISEN 3-in-1-Akku zum kabellosen Aufladen

Modell
2E416

Material
Fire-resistant ABS+PC

Batterie
Polymer-Lithium-Batterie

Produktabmessungen
L113W69H35mm

Gewicht
ca. 351g

Magnet
N52 starker Magnet mit einer Saugkraft von 10N

Batteriekapazität
20000mAh 3.85V 77Wh

Product Parameters

Lightning-Eingang
5V/2.4A

Typc-C-Eingang
5V/3A, 9V/2A, 12V/1.5A (PD 18W MAX)

Typc-C-Ausgang
5V/3A, 9V/2.23A, 12V/1.67A (PD 20W MAX)

USB-Ausgang
5V/3A, 9V/2A, 12V/1.5A (QC 18W MAX)

Typc-C-Kabelausgang
5V/3A, 9V/2.23A, 12V/1.67A (20W MAX)

Lightning-Kabelausgang
5V/3A, 9V/2.22A (20W MAX)

Telefon-Wireless-Ausgang/Telefon-Wireless
15W max. Kompatibel mit 10W/7.5W/5W

Simultaner Ausgang mit mehreren Anschlüssen
5V/3A 15W MAX

Apple Watch Wireless-Ausgang/i-Watch Wireless
1.5W MAX

Status und Bedeutung der Produktanzeigen

1. Ein-/Ausschalten und Anzeige: Durch Drücken der Einschalttaste wird der Anzeigebildschirm eingeschaltet und alle Symbole leuchten für eine Sekunde auf. Durch zweimaliges Drücken der Taste hintereinander wird der Ausgang ausgeschaltet.

2. Ladekontrollleuchte und Schnittstelle und Ladekabel Entladeanzeige: Die Schnittstelle und das eingebaute Kabel der Powerbank können sofort zum Laden von Smartphones verwendet werden. Während des Schnellladens leuchtet das grüne Blitzsymbol dauerhaft. Durch zweimaliges Drücken der Taste hintereinander wird der Ausgang ausgeschaltet.

3.Anzeigestatus des kabellosen Ladens: Drücken Sie die Taste einmal etwa 6 Sekunden lang, um das kabellose Laden zu aktivieren. Das Wireless-Symbol auf dem Display leuchtet immer. Nachdem die drahtlose Last erkannt wurde, wechselt sie in den 10-W-/15-W-Ladezustand und das grüne Blitzsymbol leuchtet immer. Doppelklicken Sie wiederholt auf die Schaltfläche, um den Ausgang auszuschalten.

4.Anzeigestatus des kabellosen Ladens der Apple Watch: Drücken Sie die Taste einmal, um das kabellose Laden auf dem Anzeigebildschirm leuchtet auf. Halten Sie dann die Taste etwa 3 Sekunden lang gedrückt, um das kabellose Laden der Apple Watch zu aktivieren. Das Wireless-Symbol auf dem Anzeigebildschirm leuchtet dauerhaft. Nachdem die Apple Watch Wireless Load erkannt wurde, beginnt sie mit dem Aufladen. Doppelklicken Sie wiederholt auf die Schaltfläche, um den Ausgang auszuschalten.

oder gelagert werden.

2.Vermeiden Sie die Verwendung oder Lagerung an Orten mit hoher Luftfeuchtigkeit, Mikrowellen usw

3.Legen Sie den Akku nicht in eine Wärmequelle oder in direktes Sonnenlicht, da der Temperaturanstieg die Lebensdauer des Produkts verkürzen kann

4.Verwenden Sie ein vom Hersteller zugelassenes Ladegerät und Ladeprogramm. Unsachgemäßes Laden kann zu Stromschäden führen

5.Vermeiden Sie die Verwendung von Geräten oder Lasten, die den Ausgangsstrom dieses Produkts überschreiten (der Schaltkreis schützt und es gibt keinen Ausgang)

6.Vermeiden Sie starke physische Stöße, einschließlich Schlagen,

7.Werfen Sie die Stromquelle nicht ins Feuer

8.Nichtfachleuten ist es strengstens untersagt, dieses Produkt zu zerlegen

9.Kommt es aufgrund der Nichtbeachtung der vorstehenden Vorschriften zu Unfällen, haftet unser Unternehmen nicht

Dieses Gerät erzeugt und strahlt während des Gebrauchs Hochfrequenzenergie aus. Wenn es nicht gemäß den Anweisungen installiert und verwendet wird, kann es schädliche Interferenzen mit der Funkkommunikation verursachen. Es kann jedoch nicht garantiert werden, dass bei einer bestimmten Installation keine Interferenzen auftreten

10.If the device does cause harmful interference to radio or television reception and it can be determined by turning the device off or on, users are encouraged to try one or more of the following measures to correct the interference

--Versetzen oder positionieren Sie die Empfangsantenne neu

--Vergrößern Sie den Abstand zwischen dem Gerät und dem Empfänger

--Schließen Sie das Gerät an eine andere Steckdose als die an den Receiver angeschlossene an

--Wenden Sie sich an einen Händler oder erfahrenen Rundfunk-/Fernsehtechniker

Die Antenne sollte in einem Abstand von 0 cm vom Benutzer gehalten werden, und der Sender sollte nicht mit anderen Sendern oder Antennen aufgestellt werden

Erklärung zu giftigen und gefährlichen Substanzen in elektronischen Informationsprodukten:

Teilename	Giftig und gefährlich Substanzen oder Elemente						
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	
Leiterplatte	○	○	○	○	○	○	
Batterie	○	○	○	○	○	○	
Muschel	○	○	○	○	○	○	
Dichtung, Klebeband und kleine Struktureile	○	○	○	○	○	○	

Dieses Formular wurde gemäß der Spezifikation von 53/TI1364 erstellt.

0: Zeigt an, dass der Gehalt an giftigen und gefährlichen Stoffen in allen Materialien des Teils unter den in der Norm GB/T 26572 festgelegten Grenzwerten liegt.

X: Der Gehalt der aufgeführten giftigen und gefährlichen Stoffe in mindestens einem homogenen Material des Teils überschreitet die in der Norm GB/T 26572 festgelegte Grenzwertanforderung.

FCC Warning Statement

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

365 Sorgenfreie 365-Tage-Garantie

24 24/7 Einfach zu erreichenderSupport E-Mail an support@lisen.us, innerhalb von 24 Stunden eine Verbindung herstellen.

ANKLAB GmbH Leubenthal 23, 45326 Essen
UKCA SERVICE LTD 21 8 Beaumont Avenue, Worley, Manchester, UK, M28 0AL

Entworfen von LISEN Hergestellt in China

FC CE UKCA

Service nach dem Verkauf

Lisen ist stets bemüht, jedem Kunden ein großartiges Einkaufserlebnis zu bieten. Bitte zögern Sie nicht, uns zu kontaktieren, wenn Sie Fragen haben.

@LISEN Tech @LISEN Tech
support@LISEN.com @LISEN Tech

Shenzhen Xiangdangwen Technology Co., Ltd.

ADDRESS: 106, 1. Stock, Nr. 313-4 Huachang Gasse, Gemeinschaft Langkou, Dalang Straße, Bezirk Longhua, Stadt Shenzhen, Provinz Guangdong.

MANUFACTURE: Huizhou Yimai Elektronische Technik GmbH.

ADDRESS: 3.Stockwerk, Haus B, Huakai Hightech -Industriepark, Dianzhicheng Str. Longxi Wohnbezirk, Boluo Kreis.

LISEN.COM

PHONE ACCESSORIES

反面印刷