

Everestek

5GHz 2.1CH Module (SW-S)

Data Sheet

Everestek Inc.
Version: 1.4

2020/01/07

1. Features

The SW-S is a module based on Everestek ETK52, providing 3 channels audio for 2.1 channel (L+R+subwoofer) application. Operating in both 5.2G and 5.8GHz RF bands.

This module support 3 channels compressed audio stream and comes with additional features such as data encryption, pairing functionality, bi-directional data messages, enhanced RF interference detection, and automatic frequency allocation.

Brief features include:

- Radio Frequency: 5.8G and 5.2G unlicensed bands**
- Delay Time Variation + audio jitter is only +/- 6.5 μ sec.**
(Total delay time variation is less than +/-2.5 degree @ 1K sine tone.)
- Long Link Distance**
- Advanced RF Selection Algorithm**
- Small RF Foot Print**
- Best Coexistence with Wi-Fi/Bluetooth**
- Highly Integrated SoC: RF/PA/CPU/Flash Embedded**
- Wide-Band Antenna on Module**
- Short RBOM List**
- RF Modulation: FSK**
- Digital I2S (master or slave) Audio Interface, 24bit , 32/44.1/48KHz Sampling Rate**
- Low Power Consumption**
- Supply Voltage: 2.7~3.6V**
- Support I2C master/slave mode and UART**
- Compliant with EMC Regulations (FCC/CE)**

2. Application

- Wireless 2.1 channels audio**
- Dolby ATMOS 5.1.2 / 5.1.4**
- Dolby Digital 5.1**

3. Electrical Specifications

RF Specification

Item	Min	Typ	Max	Unit	Note
RF Carrier Frequency	5725	—	5845	MHz	For 5.8GHz
	5135	—	5255	MHz	For 5.2GHz
-20dB bandwidth	—	2	—	MHz	
Output Power		7		dBm	
RF Sensitivity	—	-85		dBm	

Operation Condition

Item	Min	Typ	Max	Unit	Note
VDD	2.7	3.3	3.6	V	Power Supply Voltage

Digital interface


Item	Min	Typ	Max	Unit	Note
VIH	0.7VDD		VDD+0.2	V	Input High Threshold
VIL	VSS		0.3VDD	V	Input Low Threshold
VOH	VDD-0.3		VDD	V	Output High Threshold
VOL	0		0.3	V	Output Low Threshold

4. Mechanical Specification




Different labels and part numbers are used to distinguish between Tx and Rx.

- Dimension : 34 mm x 18 mm, thickness 2.5mm (PCB with shielding case, connector is not included)
- PCB 4 Layers
- Mechanical Drawing:
Bottom view

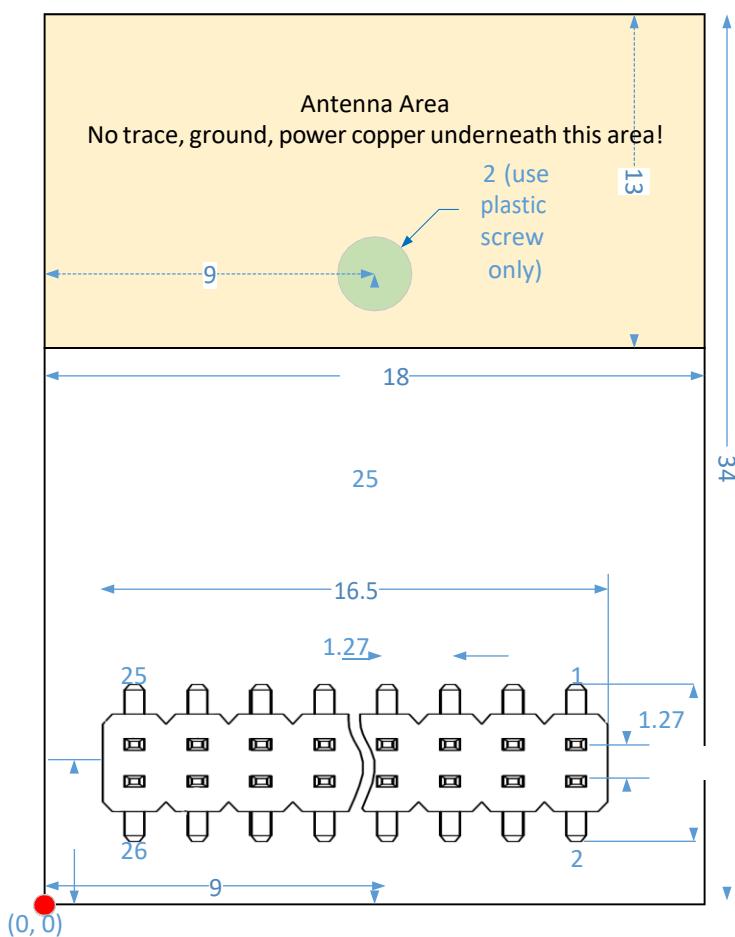

■ Connector Drawing:

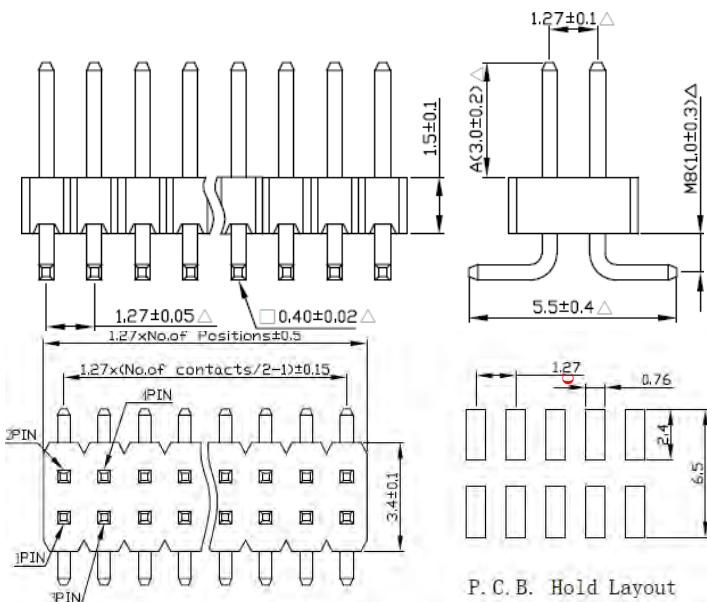

2.1 Channel I2S pins connections

Note: Subwoofer I2S output, L-channel data will be the original data from Tx, R-channel will be the inverse data of L-channel

FCC**Federal Communication Commission Interference Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device is restricted for indoor use.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

IMPORTANT NOTE:

This module is intended for OEM integrator. This module is only FCC authorized for the specific rule parts listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. The final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

Additional testing and certification may be necessary when multiple modules are used.

USERS MANUAL OF THE END PRODUCT:

In the users manual of the end product, the end user has to be informed to keep at least 20cm separation with the antenna while this end product is installed and operated. The end user has to be informed that the FCC radio-frequency exposure guidelines for an uncontrolled environment can be satisfied.

The end user has to also be informed that any changes or modifications not expressly approved by the manufacturer could void the user's authority to operate this equipment.

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

LABEL OF THE END PRODUCT:

The final end product must be labeled in a visible area with the following " Contains TX FCC ID: 2AWBQ-EW21SF ".

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

ANT LIST

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Remark
1	N/A	N/A	Printed Antenna	N/A	2	TX
2	N/A	N/A	Printed Antenna	N/A	2	RX