



WINNF-TS-0122 Test Report

Applicant : Codium Networks LLC
Equipment : Outdoor CPE
Brand Name : Codium
Model Name : OCBX12
FCC ID : 2AWJHOCBX12
Reference : WINNF-TS-0122 Version V1.0.2
TEST DATE(S) : Oct. 10, 2024 ~ Oct. 12, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in WINNF-TS-0122 Version V1.0.2 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sportun International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Administration Data -----	5
1.1 Testing Laboratory-----	5
2. General Information -----	6
2.1 Applicant-----	6
2.2 Manufacturer-----	6
2.3 Description of Equipment Under Test (EUT)-----	6
2.4 Protocol Test Summary -----	7
2.5 Time test for getting Grant Summary -----	8
2.6 Support Equipment-----	8
2.7 Test Equipment List -----	8
3. Measurement Environment -----	9
3.1 Test configuration without Domain Proxy -----	10
3.2 Standards -----	11
3.3 Protocol test procedure -----	11
3.4 Time test for getting Grant Procedure -----	11
4. Protocol Test Results -----	12
4.1 [WINNF.FT.C.REG.1] Multi-Step registration -----	12
4.2 [WINNF.FT.C.REG.7] Registration due to change of an installation parameter -----	13
4.3 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102) -----	14
4.4 [WINNF.FT.C.REG.10] Pending registration (responseCode 200) -----	15
4.5 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)-----	16
4.6 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101) -----	17
4.7 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100) -----	18
4.8 [WINNF.FT.C.REG.18] Group Error (responseCode 201) -----	19
4.9 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE) -----	20
4.10 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)-----	21
4.11 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response) -----	22
4.12 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (Deregister) -----	24
4.13 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT) -----	25
4.14 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response -----	26
4.15 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response -----	27
4.16 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM) -----	29



4.17 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat) -----	30
4.18 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)-----	31
4.19 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig -----	32
4.20 [WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig -----	34
4.21 [WINNF.FT.C.RLQ.1] Successful Relinquishment-----	36
4.22 [WINNF.FT.C.DRG.1] Successful Dereistration -----	37
4.23 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness -----	38
4.24 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate -----	39
4.25 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate -----	40
4.26 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA	41
4.27 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted -----	42
4.28 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement-----	43
5. Result of Time test for getting Grant-----	45
5.1 1 second within any 10-second period -----	45
5.2 10 seconds within any 300-second period -----	46
5.3 20 seconds within any 3600-second period-----	47
6. UUT register with the SAS irrespective of power levels-----	48
6.1 Test Procedure -----	48
6.2 Result-----	48

Appendix A. Setup Plot**Appendix B. RF measurement plots**



Revision History

Note:

This is a change FCC ID report. Since no changes have been made to this device, all test cases were leveraged from original report (FCC ID: 2AU8HSRU410, report number FG492703B)



1. Administration Data

1.1 Testing Laboratory

Sportun International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Site	Sportun International Inc. (Kunshan)
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158
Test Site No.	Sportun Site No. DFS02-KS
Test Engineer	Carry Xu
Temperature	20 ~ 25 °C
Relative Humidity	46 ~ 55 %



2. General Information

2.1 Applicant

Company Name	Codium Networks LLC
Address	3410 GALT OCEAN DRAPT 1601N Fort Lauderdale, FL 33308 United States

2.2 Manufacturer

Company Name	Codium Networks LLC
Address	3410 GALT OCEAN DRAPT 1601N Fort Lauderdale, FL 33308 United States

2.3 Description of Equipment Under Test (EUT)

Product Feature & Specification	
Equipment	Outdoor CPE
Brand Name	Codium
Model Name	OCBX12
FCC ID	2AWJHOCBX12
IMEI Code	863109050027122
Professional Installation	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
UUT Under Test Type	<input type="checkbox"/> BTS-CBSD product (Base Station) <input checked="" type="checkbox"/> CPE-CBSD product (Customer Premises Equipment)
UUT Category	<input type="checkbox"/> Category A <input checked="" type="checkbox"/> Category B
Unit Under Test in Test ID	<input type="checkbox"/> UUT with Domain Proxy <input checked="" type="checkbox"/> UUT without Domain Proxy
UUT Antenna Gain	19.42 dBi
UUT HW Version	V1.0
UUT SW Version	OCB12_FW_V2.0.5M
Device Power Class	LTE Band 48: Power Class 3



2.4 Protocol Test Summary

Section	Test Case ID	Test Case Title	Test Result
6.1.4.1.1	WINNF.FT.C.REG.1	Multi-Step registration	PASS
6.1.4.1.7	WINNF.FT.C.REG.7	Registration due to change of an installation parameter	PASS
6.1.4.2.1	WINNF.FT.C.REG.8	Missing Required parameters (responseCode 102)	PASS
6.1.4.2.3	WINNF.FT.C.REG.10	Pending registration (responseCode 200)	PASS
6.1.4.2.5	WINNF.FT.C.REG.12	Invalid parameter (responseCode 103)	PASS
6.1.4.2.7	WINNF.FT.C.REG.14	Blacklisted CBSD (responseCode 101)	PASS
6.1.4.2.9	WINNF.FT.C.REG.16	Unsupported SAS protocol version (responseCode 100)	PASS
6.1.4.2.11	WINNF.FT.C.REG.18	Group Error (responseCode 201)	PASS
6.3.4.2.1	WINNF.FT.C.GRA.1	Unsuccessful Grant responseCode=400 (INTERFERENCE)	PASS
6.3.4.2.2	WINNF.FT.C.GRA.2	Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)	PASS
6.4.4.1.1	WINNF.FT.C.HBT.1	Heartbeat Success Case (first Heartbeat Response)	PASS
6.4.4.2.1	WINNF.FT.C.HBT.3	Heartbeat responseCode=105 (DREGISTER)	PASS
6.4.4.2.2	WINNF.FT.C.HBT.4	Heartbeat responseCode=500 (TERMINATED_GRANT)	PASS
6.4.4.2.3	WINNF.FT.C.HBT.5	Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response	PASS
6.4.4.2.4	WINNF.FT.C.HBT.6	Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response	PASS
6.4.4.2.5	WINNF.FT.C.HBT.7	Heartbeat responseCode=502 (UNSYNC_OP_PARAM)	PASS
6.4.4.3.1	WINNF.FT.C.HBT.9	Heartbeat Response Absent (First Heartbeat)	PASS
6.4.4.3.2	WINNF.FT.C.HBT.10	Heartbeat Response Absent (Subsequent Heartbeat)	PASS
6.5.4.2.3	WINNF.FT.C.MES.3	Grant Response contains measReportConfig	PASS
6.5.4.2.4	WINNF.FT.C.MES.4	Heartbeat Response contains measReportConfig	PASS
6.6.4.1.1	WINNF.FT.C.RLQ.1	Successful Relinquishment	PASS
6.7.4.1.1	WINNF.FT.C.DRG.1	Successful Dereistration	PASS
6.8.4.1.1	WINNF.FT.C.SCS.1	Successful TLS connection between UUT and SAS Test Harness	PASS
6.8.4.2.1	WINNF.FT.C.SCS.2	TLS failure due to revoked certificate	PASS
6.8.4.2.2	WINNF.FT.C.SCS.3	TLS failure due to expired server certificate	PASS
6.8.4.2.3	WINNF.FT.C.SCS.4	TLS failure when SAS Test Harness certificate is issue by unknown CA	PASS
6.8.4.2.4	WINNF.FT.C.SCS.5	TLS failure when certificate at the SAS Test Harness is corrupted	PASS
7.1.4.1.1	WINNF.PT.C.HBT	UUT RF Transmit Power Measurement	PASS



2.5 Time test for getting Grant Summary

Trail	Time limit	Monitoring time	Measured result	Verdict
1	1 second	10 seconds	4.000ms	PASS
2	10 seconds	300 seconds	328.125 ms	PASS
3	20 seconds	3600 seconds	19049.311ms	PASS

2.6 Support Equipment

Name	Manufacturer	Type/Model	Serial Number	FCC ID
Q910	RUCKUS	Q910-US02	Y201909003	S9GQ910US02

2.7 Test Equipment List

Name	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
Signal Analyzer	R&S	FSV7	101472	Jan. 04, 2024	Jan. 03, 2025




3. Measurement Environment

Measurement Environment Information	
SAS Test Harness version	1.0.0.3
Operating System	Windows 10
TLS version	V1.2
Python version	V2.7

Conditional Test Case		
Support (Yes / No)	Condition	Definition
Yes	C1	Mandatory for UUT which supports multi-step registration message
No	C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.
No	C3	Mandatory for UUT which supports single-step registration containing CPIsigned data in the registration message.
No	C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type
Yes	C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.
Yes	C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration.

3.1 Test configuration without Domain Proxy

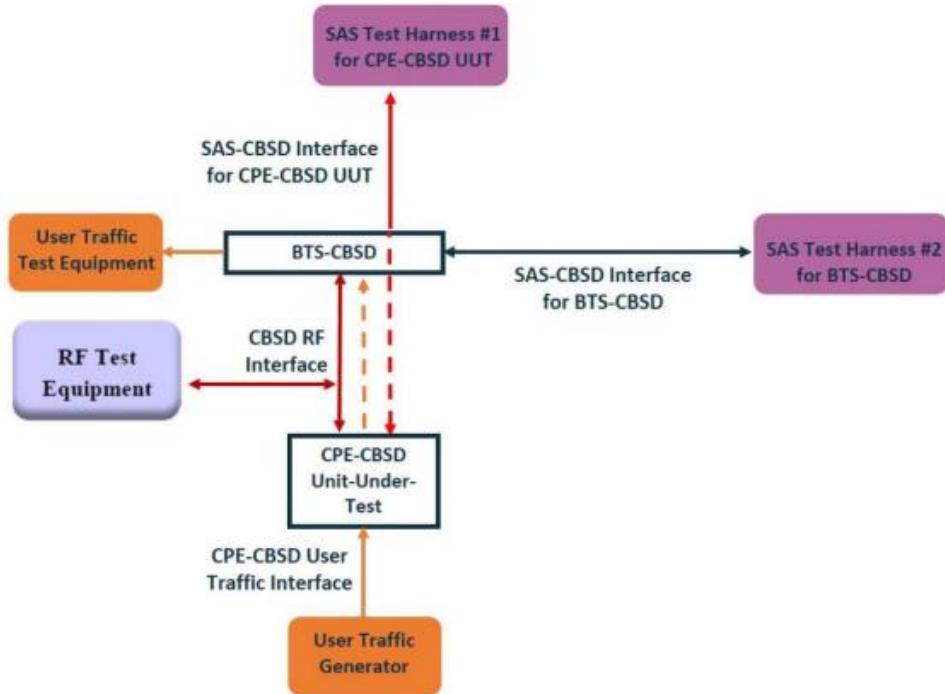

CPE-CBSD as UUT, BTS-CBSD direct communication.



3.2 Standards

- [n.1]. FCC KDB 940660 D02 CPE-CBSD Handshake Procedures v02, 22 October 2019
- [n.2]. WINNF-TS-0122 Version 1.0.2, "Conformance and Performance Test Technical Specification; CBSD/DP as Unit Under Test (UUT)", 25 November 2020
- [n.3]. WINNF-TS-0016 Version 1.2.7, "SAS to CBSD Technical Specification", 21 March 2022

3.3 Protocol test procedure

The test cases for SAS<->CBSD protocol in [n.2] apply for CPE-CBSD device type. Following the [n.1], when running the test cases in [n.2] for CPE-CBSD device type, verify that

1. CPE-CBSD can begin transmitting its RF only after receiving radio signal from its compatible BTS-CBSD.
2. For all CPE-CBSD RF transmissions, the CPE-CBSD UUT radio frequency range and bandwidth are less or equal to the frequency range and bandwidth of its compatible BTS-CBSD.
3. Judging the last execution step appearing in [n.2] with "User data traffics" instead of "RF transmission."

3.4 Time test for getting Grant Procedure

Use the WinnForum SAS Harness run test case WINNF.FT.C.GRA.1. Without answering the last question in WINNF.FT.C.GRA.1 will keep UUT's grant request being rejected, then measure the time.



4. Protocol Test Results

4.1 [WINNF.FT.C.REG.1] Multi-Step registration

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness: <ul style="list-style-type: none">• The required userId, fcclId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges.• Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. <p>Note: It is outside the scope of this document to test the Registration information that is supplied via another means.</p>	PASS
3	<ul style="list-style-type: none">• SAS Test Harness sends a CBSD Registration Response as follows:<ul style="list-style-type: none">– cbsdId = C– measReportConfig shall not be included– responseCode = 0	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.2 [WINNF.FT.C.REG.7] Registration due to change of an installation parameter

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness	--
2	UUT has successfully registered with SAS Test Harness	--
3	Change an installation parameters at the UUT (time T) Tester needs to record the current time at which the parameter change is executed.	--
4	Monitor the SAS-CBSD interface. UUT sends a deregistrationRequest to the SAS Test Harness The deregistration request shall be sent within (T + 60 seconds) from step 3.	PASS



4.3 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include cbsdId– responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.4 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include cbsdId– responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=200) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.5 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include cbsdId– responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=103) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.6 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include cbsdId– responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=101) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.7 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include cbsdId– responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=100) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.8 [WINNF.FT.C.REG.18] Group Error (resultCode 201)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT is in the Unregistered state	--
2	CBSD sends a Registration request to SAS Test Harness.	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: <ul style="list-style-type: none">– SAS response does not include cbsdId– responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (resultCode=201) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.9 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness, with cbsdId = C	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none">• cbsdId=C• responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS

**4.10 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)**

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness, with cbsdId = C	--
2	UUT sends valid Grant Request.	--
3	SAS Test Harness sends a Grant Response message, including <ul style="list-style-type: none">• cbsdId=C• responseCode = R	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=401) to further request messages from the UUT.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.11 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness, with cbsId = C	--
2	UUT sends a message: <ul style="list-style-type: none">• If message is type Spectrum Inquiry Request, go to step 3, or• If message is type Grant Request, go to step 5	--
3	UUT sends Spectrum Inquiry Request. Validate: <ul style="list-style-type: none">• cbsId = C• List of frequencyRange objects sent by UUT are within the CBRS frequency range	PASS
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: <ul style="list-style-type: none">• cbsId = C• availableChannel is an array of availableChannel objects• responseCode = 0	--
5	UUT sends Grant Request message. Validate: <ul style="list-style-type: none">• cbsId = C• maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96• operationFrequencyRange, F, sent by UUT is a valid range within the CBRS band	PASS
6	SAS Test Harness sends a Grant Response message, including the parameters: <ul style="list-style-type: none">• cbsId = C• grantId = G = a valid grant ID• grantExpireTime = UTC time greater than duration of the test• responseCode = 0	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "GRANTED"	PASS



#	Test Execution Steps	Results
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = current UTC time + 200 seconds• responseCode = 0	--
9	For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and: <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters: <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = current UTC time + 200 seconds• responseCode = 0	PASS
10	Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify: <ul style="list-style-type: none">• UUT does not transmit at any time prior to completion of the first heartbeat response• UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F.	PASS



4.12 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DREGISTER)

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbsId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "AUTHORIZED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = T = Current UTC time• responseCode = 105 (DREGISTER)	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT shall stop transmission within (T + 60 seconds) of completion of step 3	PASS

**4.13 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbsdId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none">• cbsdId = C• grantId = G• operationState = "AUTHORIZED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none">• cbsdId = C• grantId = G• transmitExpireTime = T = current UTC time• responseCode = 500 (TERMINATED_GRANT)	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT shall stop transmission within (T + 60 seconds) of completion of step 3	PASS



4.14 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbsId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is formatted correctly, including:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "GRANTED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = T = current UTC time• responseCode = 501 (SUSPENDED_GRANT)	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "GRANTED" <p>B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT does not transmit at any time	PASS



4.15 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbsId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "AUTHORIZED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = T = current UTC time• responseCode = 501 (SUSPENDED_GRANT)	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--



5	<p>Monitor the SAS-CBSD interface. Verify either A OR B occurs:</p> <p>A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters:</p> <ul style="list-style-type: none">• cbsdId = C• grantId = G• operationState = "GRANTED" <p>B. UUT sends a Relinquishment Request message. Ensure message is correctly formatted with parameters:</p> <ul style="list-style-type: none">• cbdsId = C• grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT shall stop transmission within (T + 60 seconds) of completion of step 3	PASS
---	---	------

**4.16 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)**

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbdsId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none">• cbdsId = C• grantId = G• operationState = "AUTHORIZED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, including the following parameters:</p> <ul style="list-style-type: none">• cbdsId = C• grantId = G• transmitExpireTime = T = Current UTC Time• responseCode = 502 (UNSYNC_OP_PARAM)	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--
5	<p>Monitor the SAS-CBSD interface. Verify:</p> <ul style="list-style-type: none">• UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters:<ul style="list-style-type: none">◦ cbdsId = C◦ grantId = G <p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT shall stop transmission within (T+60) seconds of completion of step 3.	PASS



4.17 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbsId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "GRANTED"	PASS
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--
4	<p>Monitor the RF output of the UUT from start of test to 60 seconds after step 3.</p> <p>Verify:</p> <ul style="list-style-type: none">• At any time during the test, UUT shall not transmit on RF interface	PASS



4.18 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has registered successfully with SAS Test Harness• UUT has a valid single grant as follows:<ul style="list-style-type: none">◦ valid cbsId = C◦ valid grantId = G◦ grant is for frequency range F, power P◦ grantExpireTime = UTC time greater than duration of the test• UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "AUTHORIZED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, with the following parameters:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = current UTC time + 200 seconds• responseCode = 0	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--
5	<p>Monitor the RF output of the UUT. Verify:</p> <ul style="list-style-type: none">• UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3.	PASS



4.19 [WINNF.FT.C.MES.3] Grant Response contains measReportConfig

#	Test Execution Steps	Results
1	Ensure the following conditions are met for test entry: <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with cbsId=C and measCapability = "RECEIVED_POWER_WITH_GRANT"	--
2	UUT sends a Grant Request message. Verify Grant Request message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none">• cbsId = C• operationParam is present and format is valid	PASS
3	SAS Test Harness sends a Grant Response message, with the following parameters: <ul style="list-style-type: none">• cbsId = C• grantId = G = valid grant ID• grantExpireTime = UTC time in the future• heartbeatInterval = 60 seconds• measReportConfig= "RECEIVED_POWER_WITH_GRANT"• operationParam is set to valid operating parameters• channelType = "GAA"• responseCode = 0	--
4	UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically: <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "GRANTED"	PASS
5	If Heartbeat Request message (step 4) contains measReport object, then: <ul style="list-style-type: none">• verify measReport is properly formatted as object rcvdPowerMeasReport• end test, with PASS result else, if Heartbeat Request message (step 4) does not contain measReport object, then:	PASS



	If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL	
6	SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically: <ul style="list-style-type: none">• cbsId = C• grantId = G• transmitExpireTime = current UTC time + 200 seconds• responseCode = 0 Go to Step 4, above	--



4.20 [WINNF.FT.C.MES.4] Heartbeat Response contains measReportConfig

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with cbsId=C and measCapability = "RECEIVED_POWER_WITH_GRANT"• UUT has received a valid grant with grantId = G• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant.• Grant has heartbeatInterval = 60 seconds	--
2	<p>UUT sends a Heartbeat Request message.</p> <p>Verify Heartbeat Request message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "AUTHORIZED"	PASS
3	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• measReportConfig= "RECEIVED_POWER_WITH_GRANT"• responseCode = 0	--
4	<p>UUT sends a Heartbeat Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• operationState = "AUTHORIZED"	PASS



5	<p>If Heartbeat Request message (step 4) contains measReport object, then:</p> <ul style="list-style-type: none">• verify measReport is properly formatted as object rcvdPowerMeasReport• end test, with PASS result <p>else, if Heartbeat Request message (step 4) does not contain measReport object, then:</p> <ul style="list-style-type: none">• If number of Heartbeat Requests sent by UUT after Step 3 is = 5, then stop test with result of FAIL	PASS
6	<p>SAS Test Harness sends a Heartbeat Response message, containing all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G• responseCode = 0 <p>Go to Step 4, above</p>	--



4.21 [WINNF.FT.C.RLQ.1] Successful Relinquishment

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with cbsId=C• UUT has received a valid grant with grantId = G• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. <p>Invoke trigger to relinquish UUT Grant from the SAS Test Harness</p>	--
2	<p>UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically:</p> <ul style="list-style-type: none">• cbsId = C• grantId = G	PASS
3	<p>SAS Test Harness shall approve the request with a Relinquishment Response message with parameters:</p> <ul style="list-style-type: none">– cbsId = C– grantId = G– responseCode = 0	--
4	<p>After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.</p>	--
5	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none">• UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	PASS



4.22 [WINNF.FT.C.DRG.1] Successful Deregistration

#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness• UUT has successfully registered with SAS Test Harness, with cbsId=C• UUT has received a valid grant with grantId = G• UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. <p>Invoke trigger to deregister UUT from the SAS Test Harness</p>	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--
3	UUT sends Deregistration Request to SAS Test Harness with cbsId = C.	PASS
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: <ul style="list-style-type: none">• cbsId = C• responseCode = 0	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--
6	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none">• UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs:<ol style="list-style-type: none">UUT sending a Registration Request message, as this is not mandatoryUUT sending a Deregistration Request message	PASS



4.23 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">• UUT shall start CBSD-SAS communication with the security procedure• The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate.• Configure the SAS Test Harness to accept the security procedure and establish the connection	PASS
2	<ul style="list-style-type: none">• Make sure that Mutual authentication happens between UUT and the SAS Test Harness.• Make sure that UUT uses TLS v1.2• Make sure that cipher suites from one of the following is selected,<ul style="list-style-type: none">• TLS_RSA_WITH_AES_128_GCM_SHA256• TLS_RSA_WITH_AES_256_GCM_SHA384• TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256• TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384• TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	PASS
3	<p>A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability.</p> <ul style="list-style-type: none">• UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId.	PASS
4	<p>Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify:</p> <ul style="list-style-type: none">• UUT shall not transmit RF	PASS



4.24 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">Make sure that UUT uses TLS v1.2 for security establishment.Make sure UUT selects the correct cipher suite.UUT shall use CRL or OCSP to verify the validity of the server certificate.Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.25 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">Make sure that UUT uses TLS v1.2 for security establishment.Make sure UUT selects the correct cipher suite.UUT shall use CRL or OCSP to verify the validity of the server certificate.Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.26 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">Make sure that UUT uses TLS v1.2 for security establishment.Make sure UUT selects the correct cipher suite.UUT shall use CRL or OCSP to verify the validity of the server certificateMake sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.27 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted

#	Test Execution Steps	Results
1	<ul style="list-style-type: none">UUT shall start CBSD-SAS communication with the security procedures	PASS
2	<ul style="list-style-type: none">Make sure that UUT uses TLS v1.2 for security establishment.Make sure UUT selects the correct cipher suite.UUT shall use CRL or OCSP to verify the validity of the server certificate.Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	PASS
3	UUT may retry for the security procedure which shall fail.	PASS
4	SAS Test-Harness shall not receive any Registration request or any application data.	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: <ul style="list-style-type: none">UUT shall not transmit RF	PASS



4.28 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement


#	Test Execution Steps	Results
1	<p>Ensure the following conditions are met for test entry:</p> <ul style="list-style-type: none">• UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness• UUT has registered with the SAS, with CBSID ID = C• UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <p>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</p>	--
2	<p>UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows:</p> <ul style="list-style-type: none">• UUT sends Heartbeat Request, including:<ul style="list-style-type: none">○ cbsId = C○ grantId = G• SAS Test Harness responds with Heartbeat Response, including:<ul style="list-style-type: none">○ cbsId = C○ grantId = G○ transmitExpireTime = current UTC time + 200 seconds○ responseCode = 0	--



3	<p>Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, P_i. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method.</p> <p>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</p>	PASS
---	---	------


5. Result of Time test for getting Grant

5.1 1 second within any 10-second period

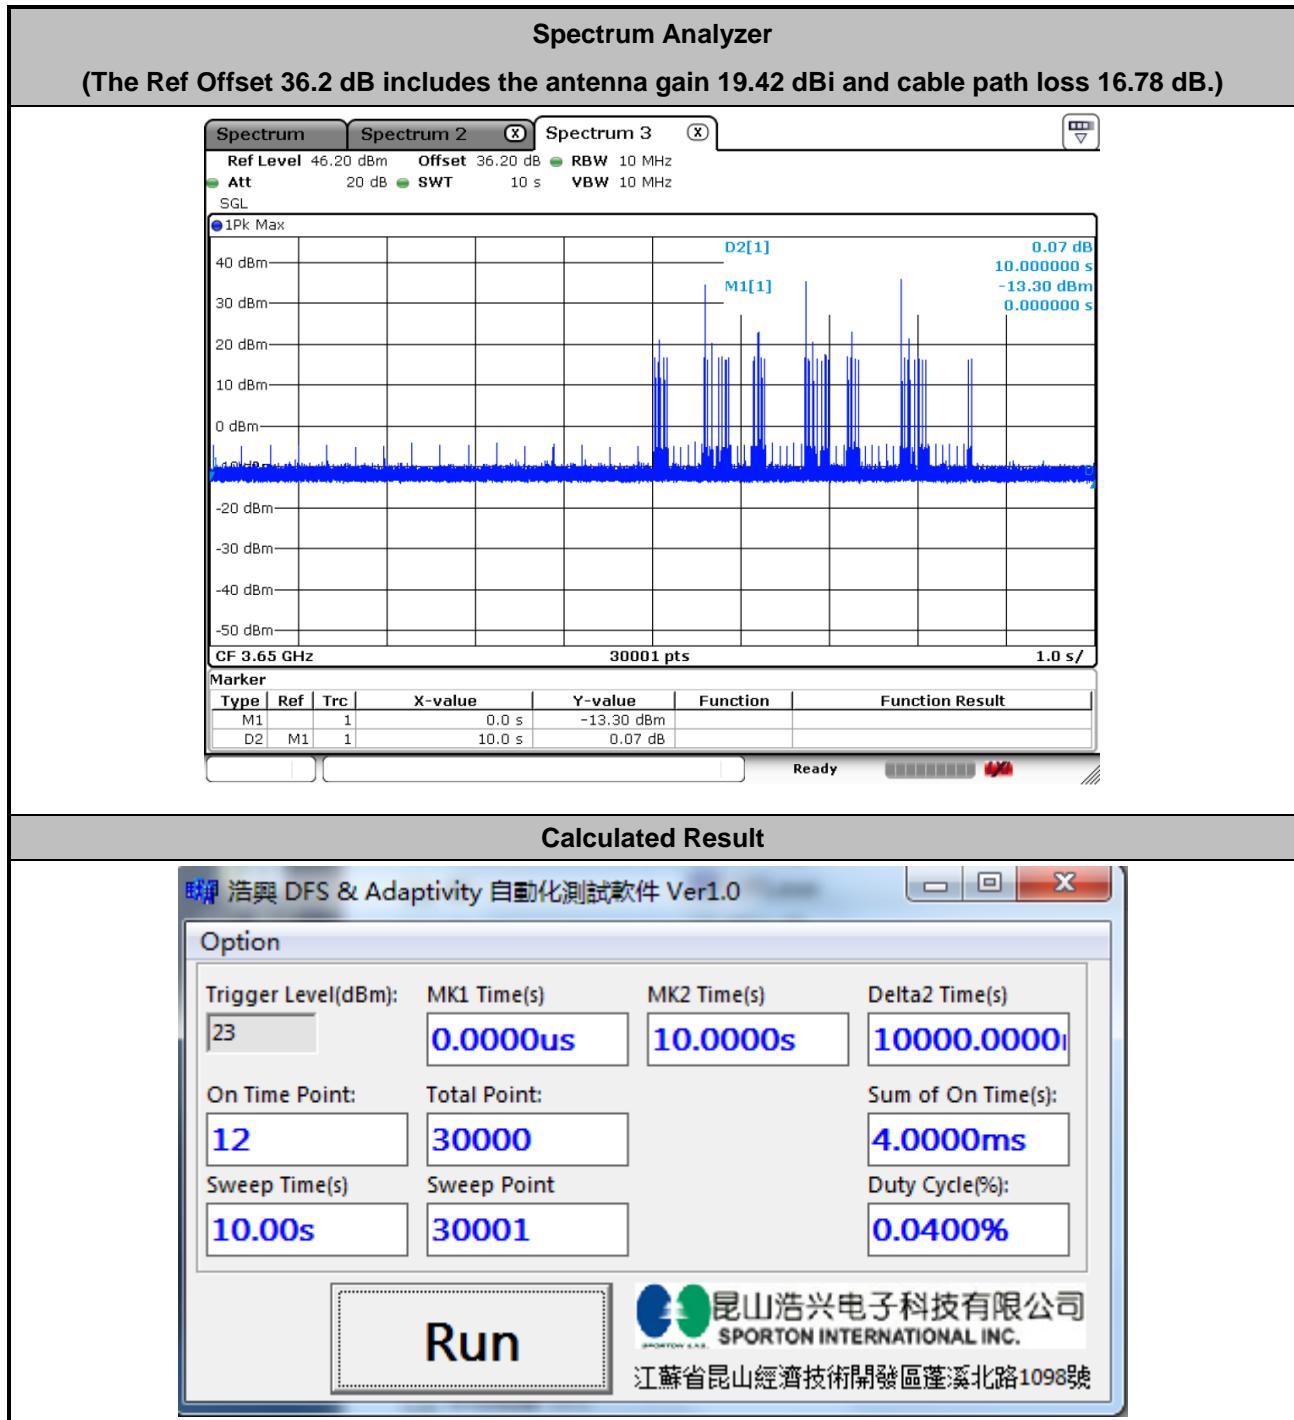


The sum of On Time (aggregated time from marker 1 to 2): 4.0000ms < 1s, Pass.

5.2 10 seconds within any 300-second period

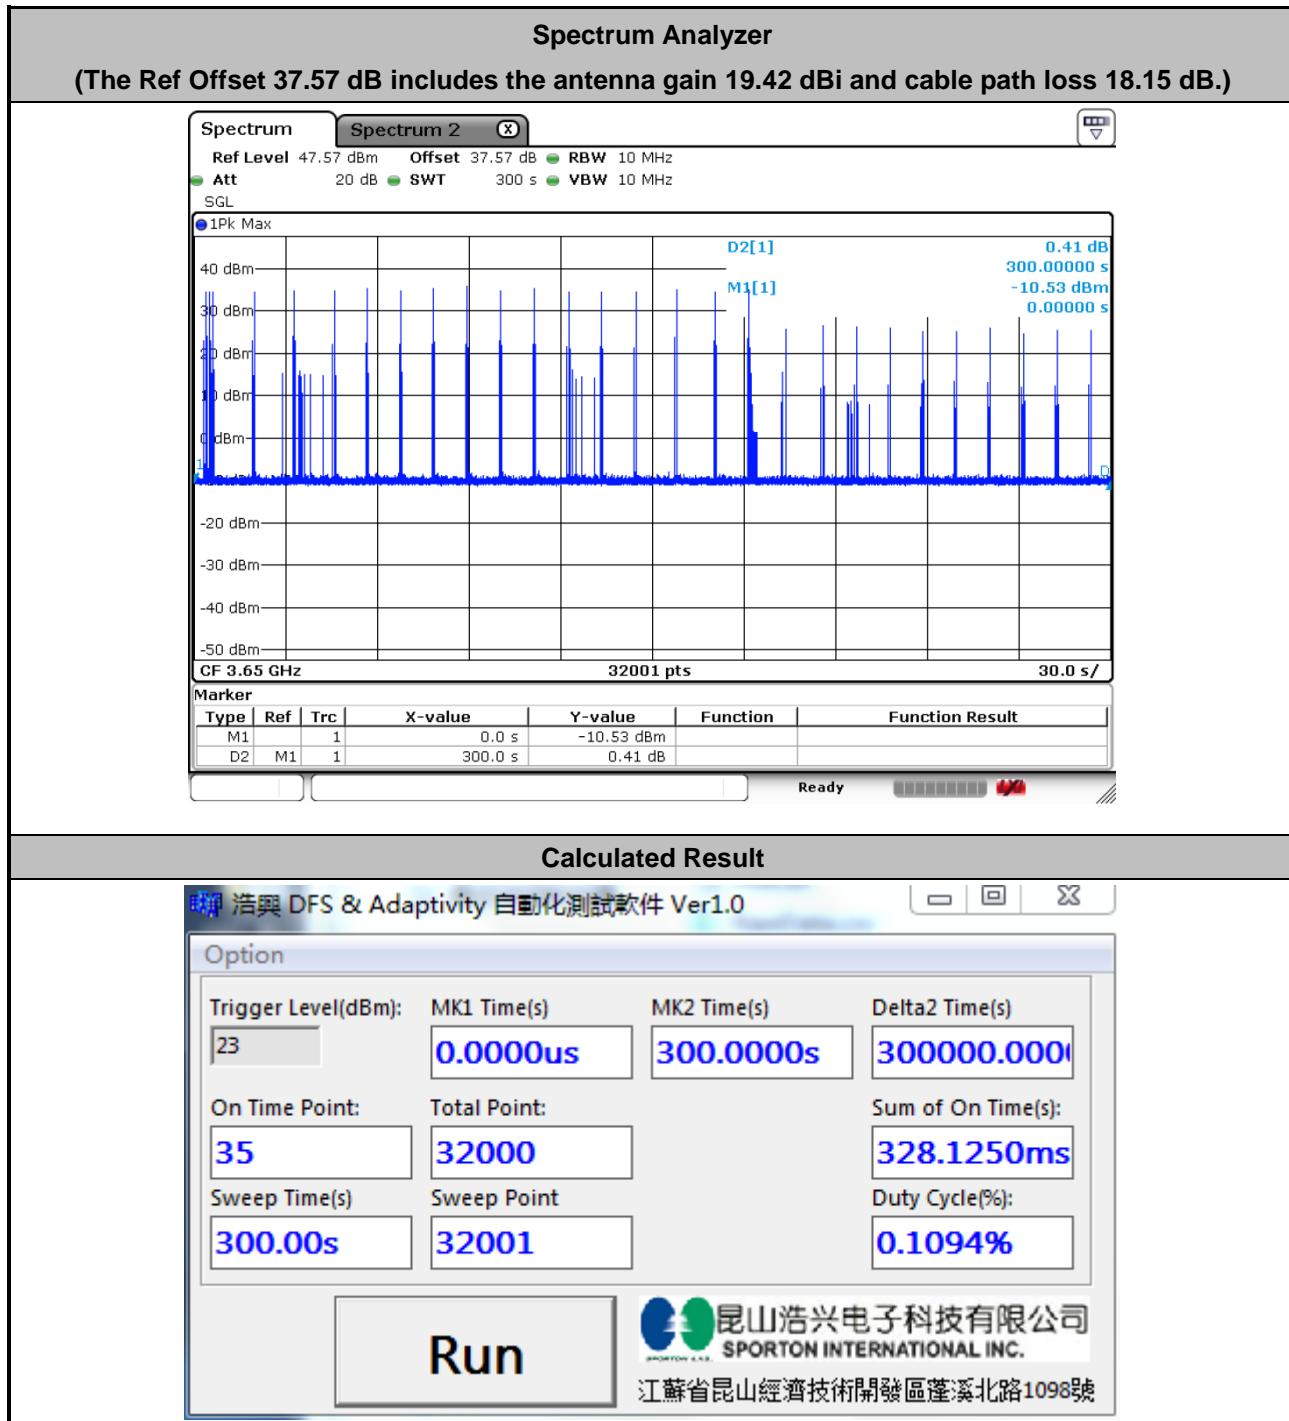

5.3 20 seconds within any 3600-second period

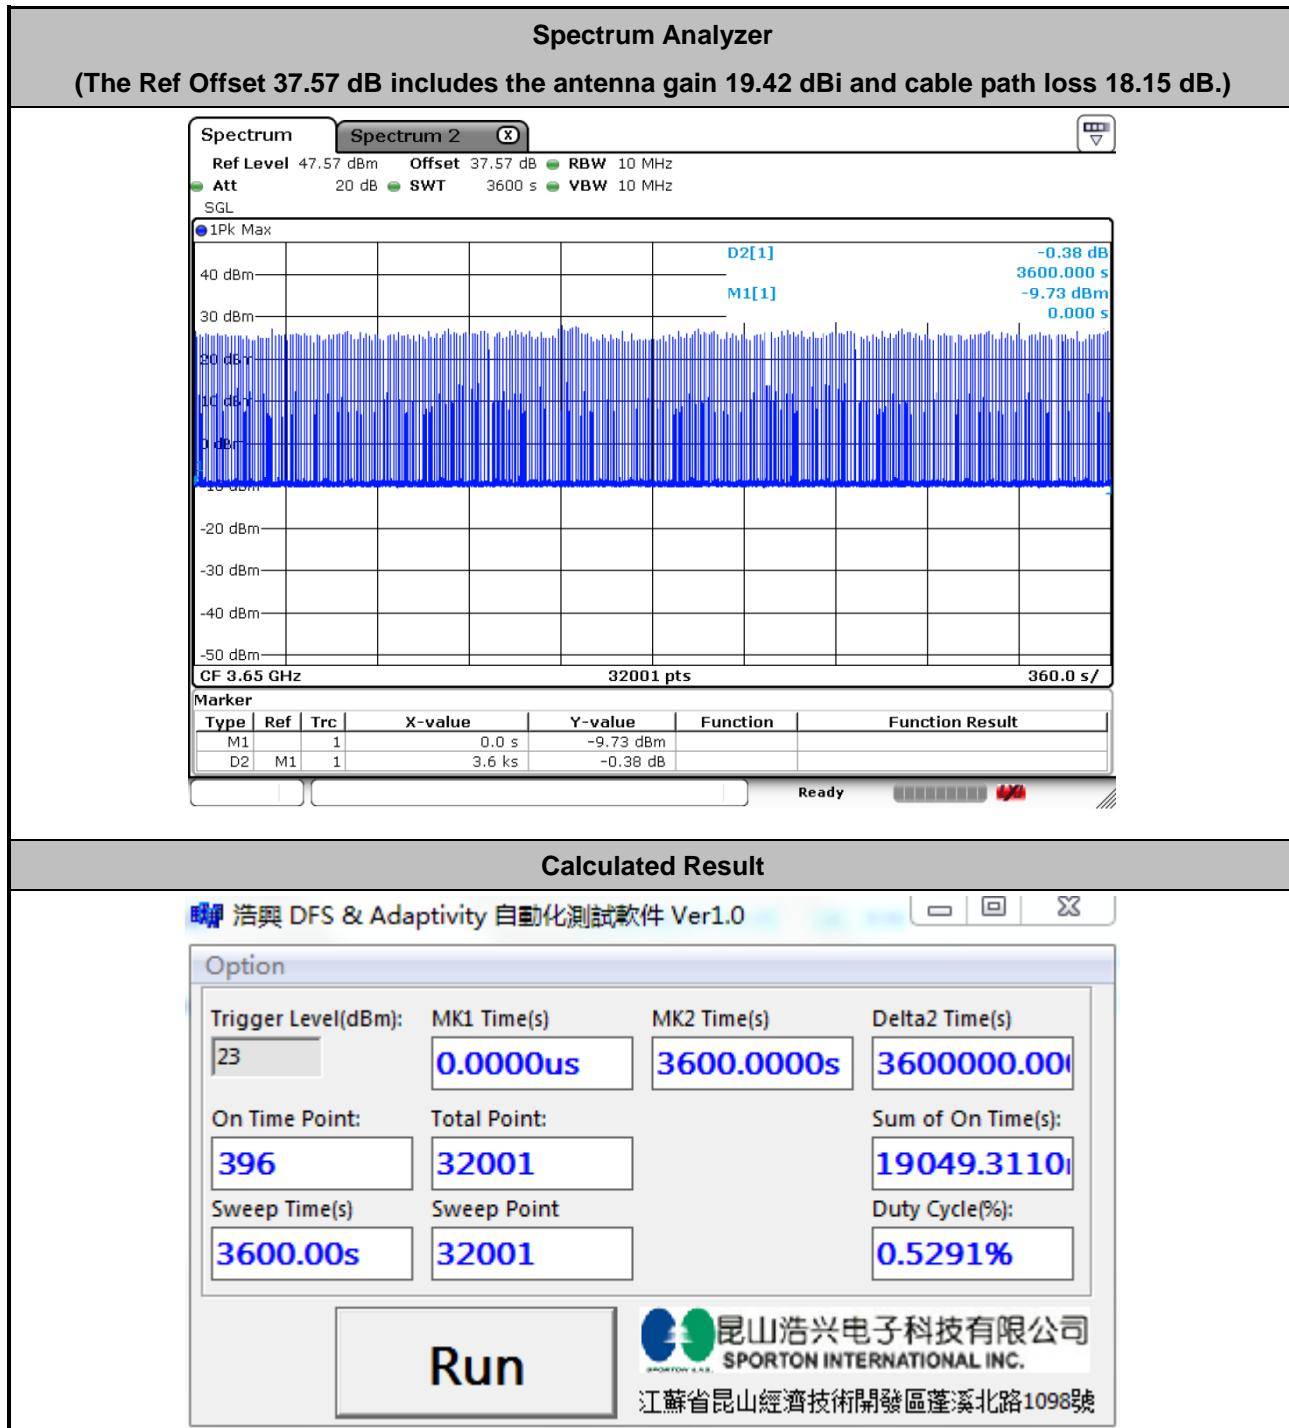

The sum of On Time (aggregated time from marker 1 to 2): 19049.3110ms < 20s, Pass.


6. UUT register with the SAS irrespective of power levels

6.1 Test Procedure

1. Set the SAS test harness to grant UUT with the highest EIRP higher than 23 dBm.
2. Check if UUT has successfully registered with SAS test harness, when operating EIRP less than 23 dBm.
3. After the UUT granted/authorized by the SAS, it can transmit with power less than the max EIRP granted from SAS.

6.2 Result

The UUT can register with SAS under above operating conditions to meet the FCC criteria that the UUT will register with the SAS irrespective of power levels at which the device is set to operate – even below 23 dBm.

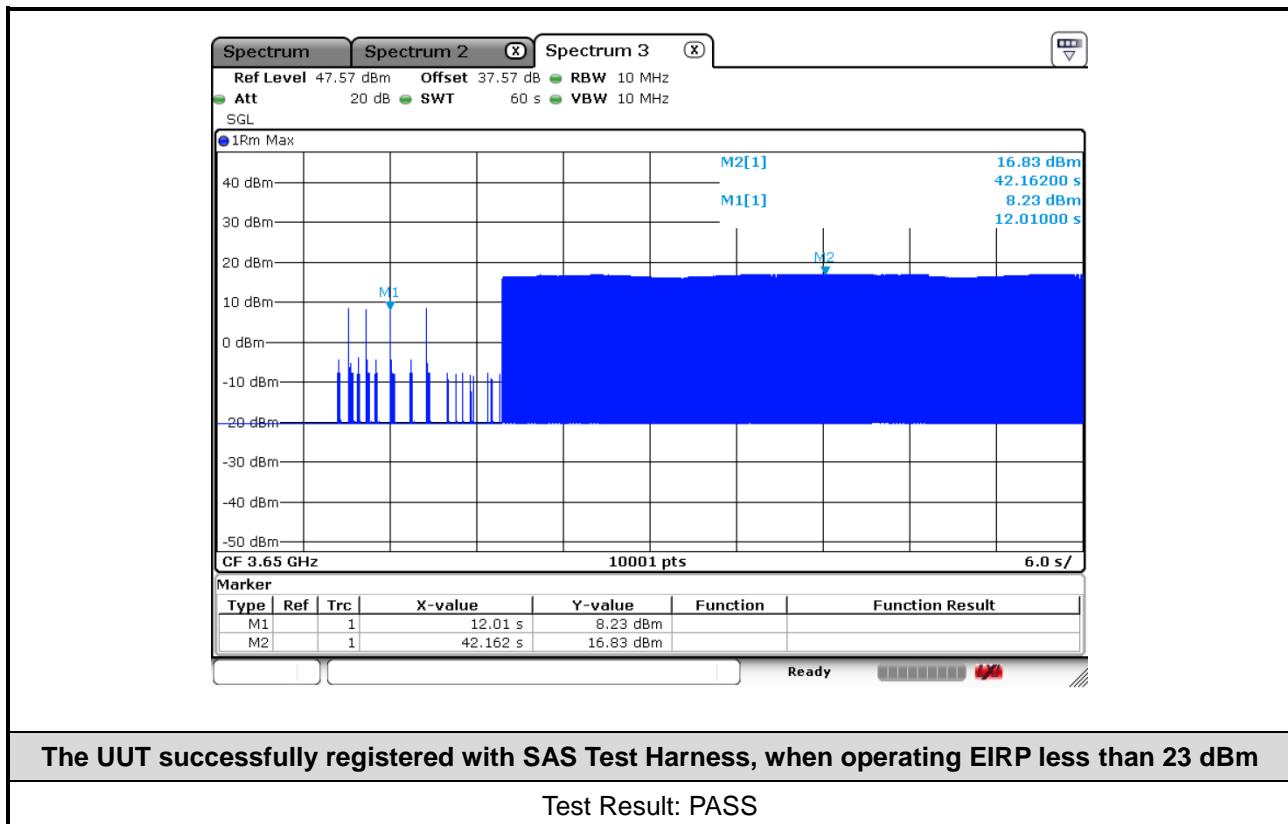

Note: The Ref Offset 37.57 dB includes the antenna gain 19.42 dBi and cable path loss 18.15 dB.

Marker 1: The UUT successfully registered with SAS Test Harness, when operating 8.23 dBm EIRP.

Marker 2: After the UUT granted/authorized by the SAS, it can transmit with power less than the maxEIRP granted.

Appendix B. RF measurement plots


B.1 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement

Report Clause 4.28 [WINNF.PT.C.HBT] UUT RF Transmit Power Measurement

Center Frequency [MHz]	Bandwidth [MHz]	Granted maxEIRP [dBm/MHz]	Conducted PSD [dBm/MHz]	Duty Cycle Factor [dB]	Antenna Gain [dBi]	UUT MaxEIRP [dBm/MHz]
3650	20	29	2.58	4.06	19.42	26.06
		26	-0.27			23.21
		23	-2.25			21.23
		20	-5.58			17.90
		18	-6.73			16.75
		16	-8.33			15.15
		14	-11.77			11.71
		12	-12.53			10.95
		10	-14.36			9.12

Note: The total path loss is offset with 18.15 dB.

Duty Cycle factor:

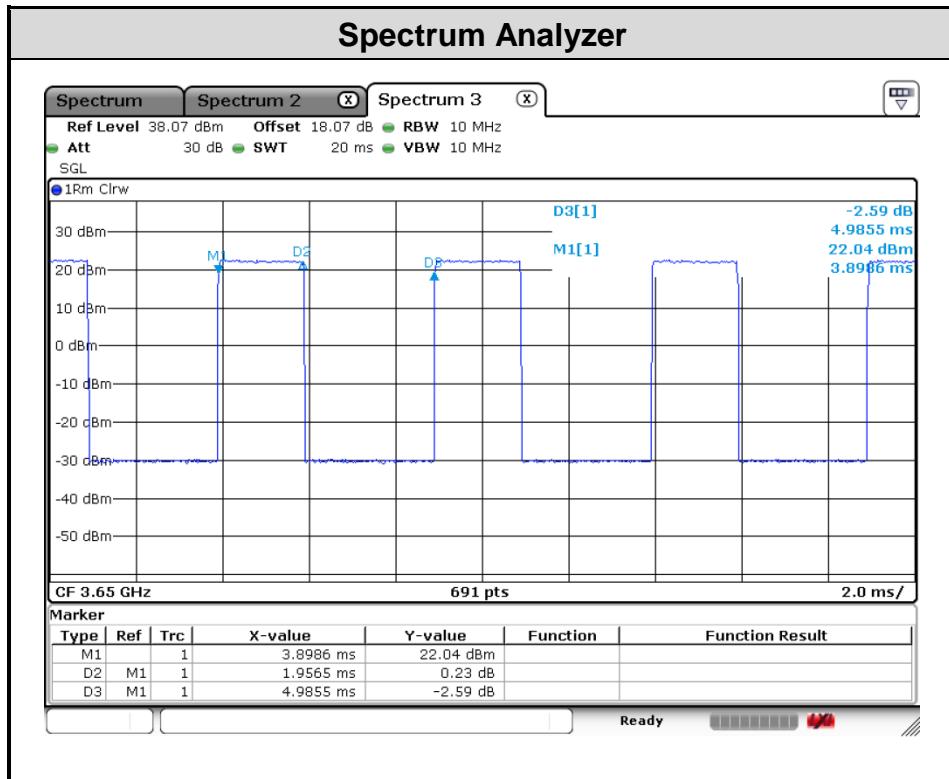


Note: The duty cycle value is 39.24%, add $10\log(1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.

B.1.1 Test Procedure

[WINNF.PT.C.HBT] UUT RF Transmit Power Measurement defined in clause 4.28 of this test report.


B.1.2 Test Result

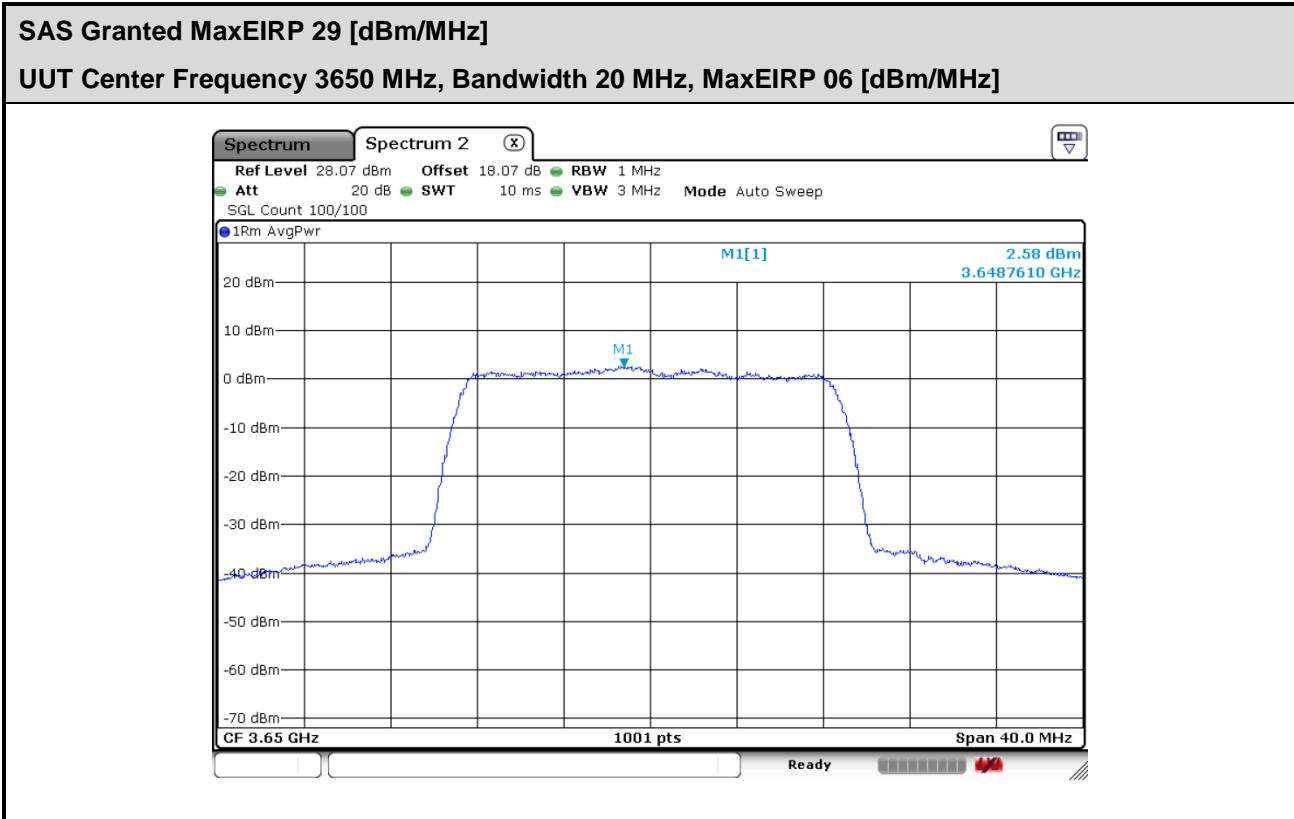




SAS Granted MaxEIRP 26 [dBm/MHz]



UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 23.21 [dBm/MHz]


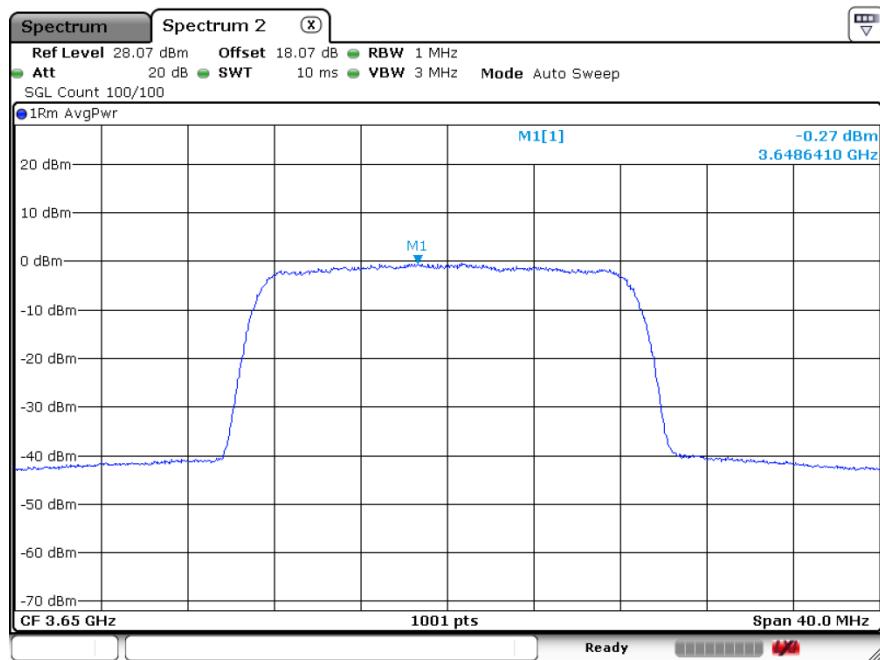



SAS Granted MaxEIRP 23 [dBm/MHz]

UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 23 [dBm/MHz]

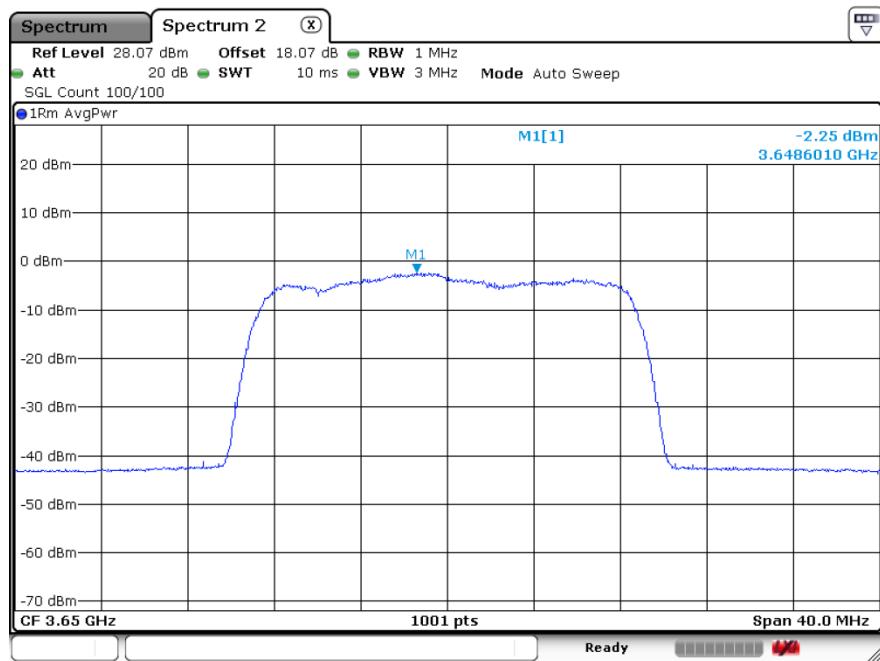

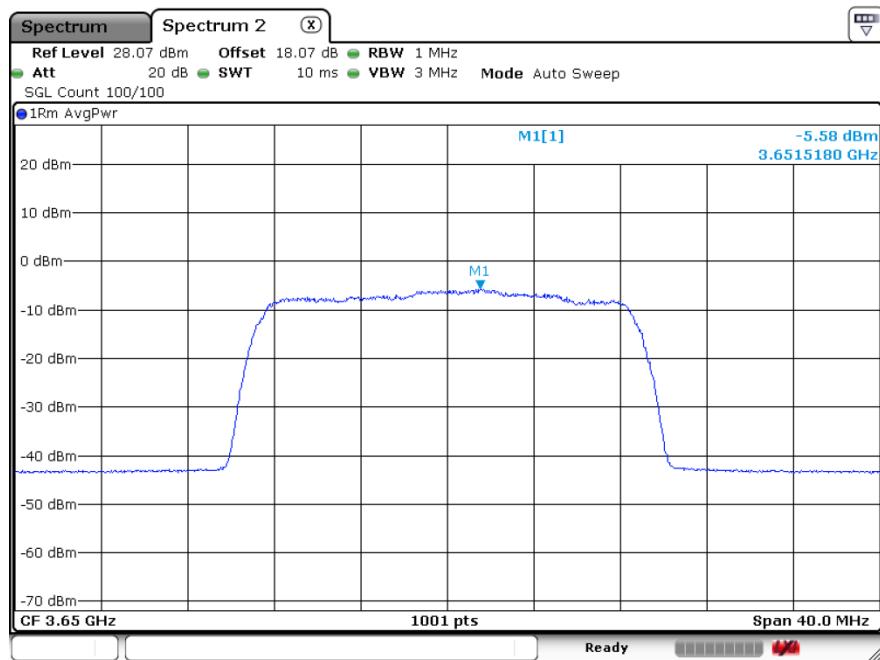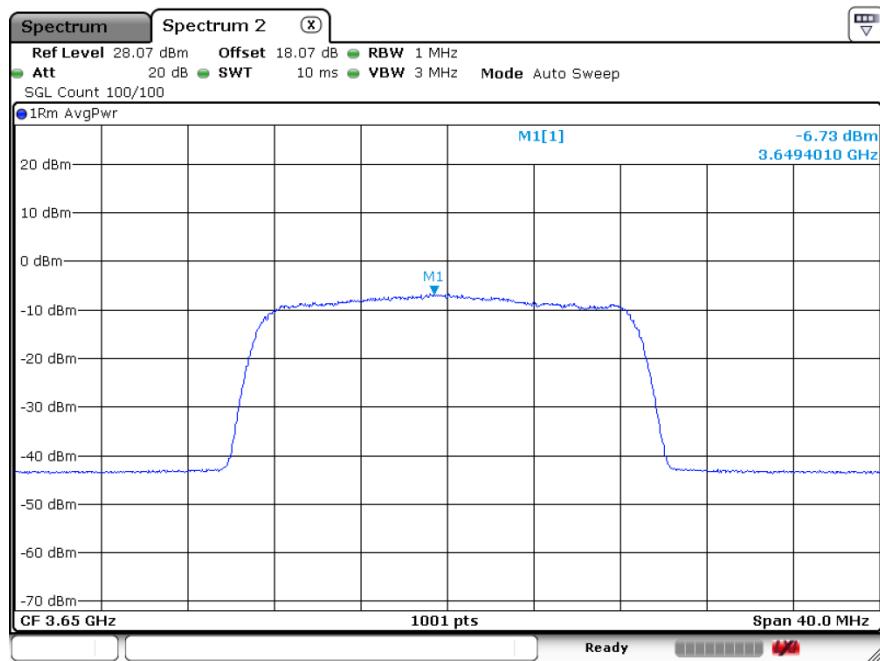SAS Granted MaxEIRP 20 [dBm/MHz]**UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 17.90 [dBm/MHz]****SAS Granted MaxEIRP 18 [dBm/MHz]****UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 16.75 [dBm/MHz]**

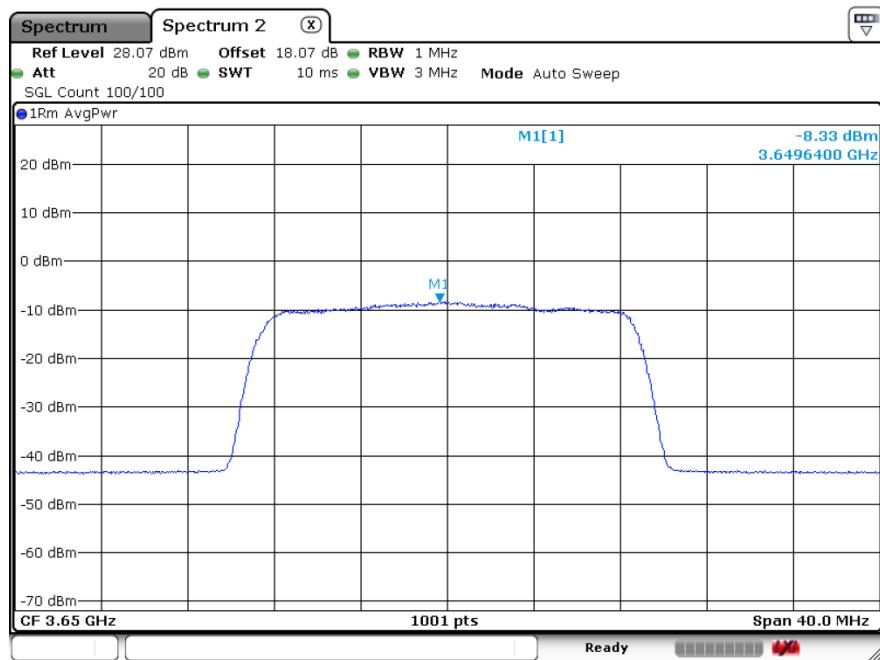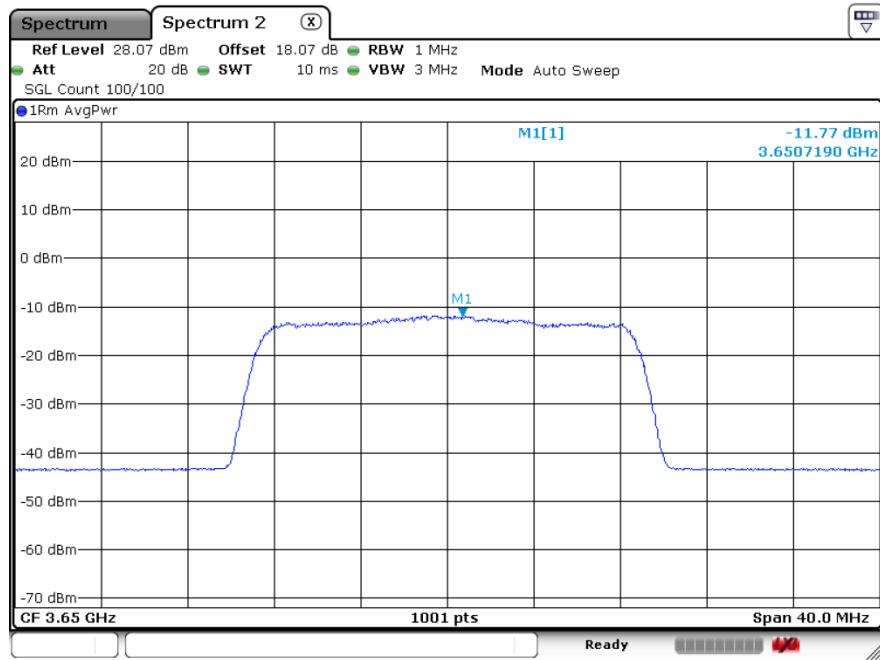SAS Granted MaxEIRP 16 [dBm/MHz]**UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 15.15 [dBm/MHz]****SAS Granted MaxEIRP 14 [dBm/MHz]****UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 11.71 [dBm/MHz]**

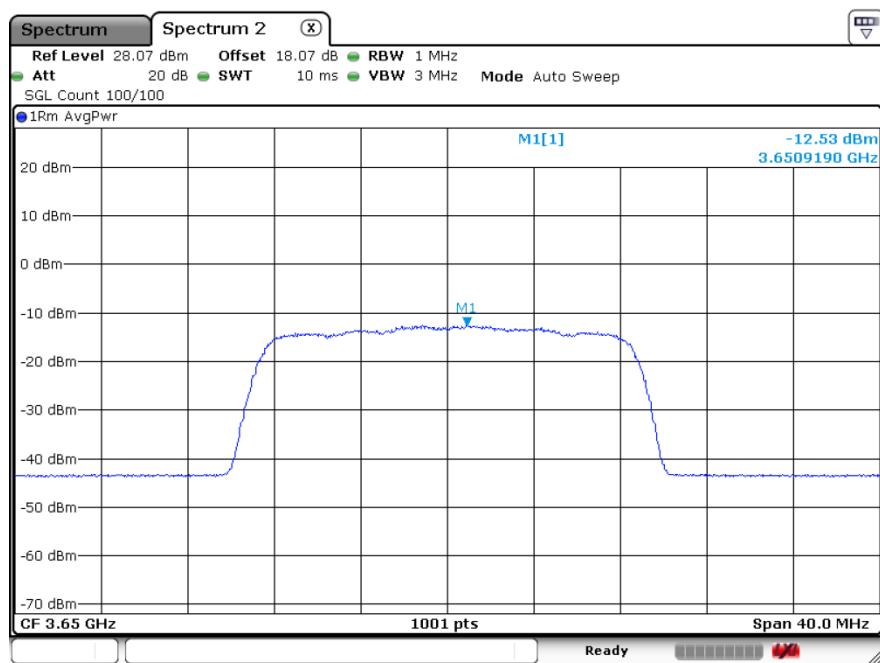SAS Granted MaxEIRP 12 [dBm/MHz]**UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 10.95 [dBm/MHz]****SAS Granted MaxEIRP 10 [dBm/MHz]****UUT Center Frequency 3650 MHz, Bandwidth 20 MHz, MaxEIRP 9.12 [dBm/MHz]**