



Sku Number: 348-2129

LED CEILING LIGHT WIFI WITH VOICE CONTROL


Model Number: C7253



Questions, problems, missing parts?


Before returning to your retailer, call our customer service at 1-800-887-6326
Monday – Friday 9:00 a.m. – 5:00 p.m. CST

PACKAGE CONTENTS

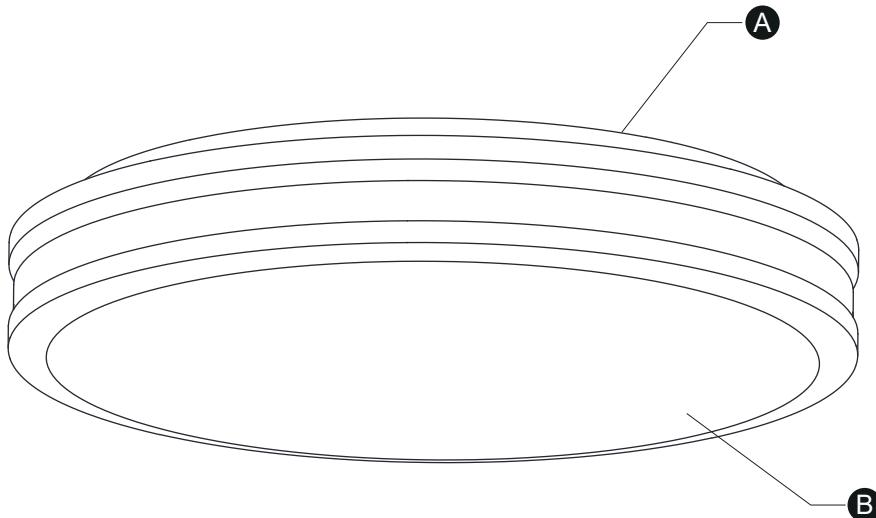

HARDWARE CONTENTS Note: Hardware not shown actual size.

AA



Mounting Screw
X2

BB



Wire Connector
X3

! SAFETY INFORMATION

Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING

- Turn off electricity at main fuse box (or circuit breaker box) before beginning installation by removing fuse (or switching off circuit breaker).
- Be careful not to damage or cut the wire insulation (covering) during fixture installation. Do not permit wires to contact any surface having a sharp edge. To do so may damage or cut the wire insulation, which could cause serious injury or death from electric shock.
- LED electronics can be damaged by electro static discharge (ESD)shock. Before installation, discharge yourself by touching a grounded bare metal surface to remove this hazard. To avoid damage, do not touch the LED module.

CAUTION

- All electrical connections must be in agreement with local codes, ordinances or the national electric code (NEC). Contact your municipal building department to learn about your local codes, permits and/or inspections.
- Risk of fire – most dwellings built before 1985 have supply wire rated for 140°F/60°C. Consult a qualified electrician before installation.
- Do not connect this fixture to an electrical system that does not provide a means for equipment grounding. Never use a fixture in a two-wire system that is not grounded. If you are not sure your lighting system has a grounding means, do not attempt to install this fixture. Contact a qualified, licensed electrician for information with regards to proper grounding methods as required by the local electrical code in your area.

PREPARATION

Before beginning assembly, installation or operation of product, make sure all parts are present. Compare parts with package contents list and diagram on previous page. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included): Screwdriver, Phillips Screwdriver, Pliers, Electrical Tape, Wire Cutters, Safety Glasses, Ladder.

Only general ON/OFF wall switch applies for this fixture, the dimmable wall switch shouldn't be required.


If you are unfamiliar with electrical installation, it is recommended to use a qualified electrician for your installation(s).

Mobile device requirements: Iphone 4S or newer running IOS 9.0 x or later. Android v5.0 or later.


ASSEMBLY INSTRUCTIONS

Turn off the power at fuse or circuit box.


1. Attach the two mounting screws (AA) to the holes on outlet box, thread them in part way: 2 to 3 turns only.




2. Connect the black to black (power), white to white (neutral) and copper wire or green / yellow wire to ground wire with supplied wire connectors (BB). Tuck all wires into outlet box.



3. Attach the ceiling pan (A) to the outlet box by inserting two mounting screws (AA) head into the key holes, then rotate the ceiling pan until it is locked in place, finally secure the mounting screws tightly with screwdriver (not included).



4. Attach the plastic shade (B) to the ceiling pan (A) by aligning studs and slots, then turn it clockwise until it is locked in place.



Turn on the power at fuse or circuit box.

REGISTRATION / LOGIN / PASSWORD RETRIEVAL


Setting for single light through mobile device (Take iOS for example as below. Android will be slightly different).

Before you start


1. Download the Smart Life App  from the Apple App StoreSM or Android Google Play™ store.

Registration


If you do not have an app account, you may choose to register or log in by authentication code. The registration process is described on this page and the next.

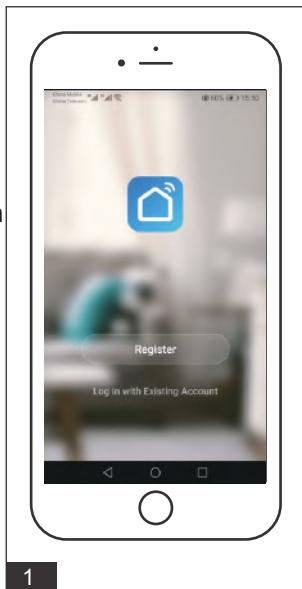

2. Click "Register" to go to the Smart Life privacy policy page. Click "Agree" to proceed to the registration page.

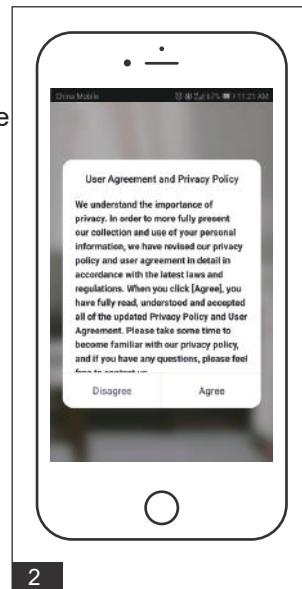

3. The system will identify automatically the country/region you are in, or you may choose to select manually a country/region. Enter your mobile phone number or email and click "Get authentication code", as shown in Fig. 3. Enter the authentication code you received. Then enter the password and click "Completed" to complete registration.

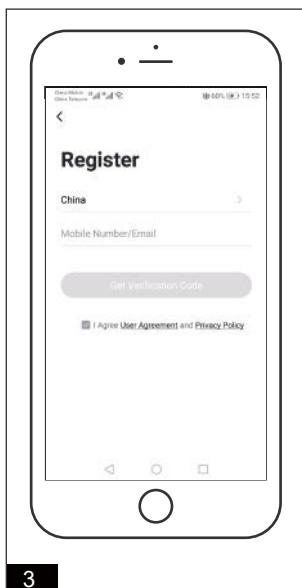

Account ID + Password Login

If you already have an app account, click "Log in with existing account" to proceed to the login page.

- a. The system will identify automatically the country / region you are in, or you may also choose to select manually a country / region.

- b. Enter the mobile phone number or email you have registered and enter the password in to log in.

REGISTRATION / LOGIN / PASSWORD RETRIEVAL (continued)


4. Verification Code Login

Click "Verification code login" in Fig. 4 to go to the next page.



4

5. The system will identify automatically the country / region you are in, or you may also choose to select manually a country / region. Enter your mobile phone number or email and click "Obtain authentication code", as shown in Fig. 2.

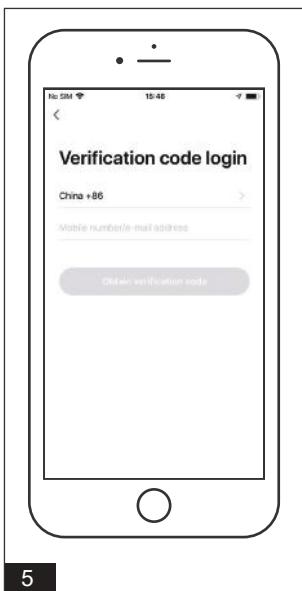

5

6. Enter the authentication code in the text message or email to log in, as shown in Fig. 6.



6

7. Forgot password

If you forgot your app password, you can reset your password by following the Password Retrieval procedure. Click "Forgot password", as shown in Fig. 7.



7

8. The system will identify automatically the country / region you are in, or you may choose to select manually a country/region. Enter the mobile phone number or email you used to register and click "Obtain authentication code", as shown in Fig. 2.



8

9. Enter the authentication code sent to your mobile phone number or email, as shown in Fig. 9.



9

USER GUIDE (continued)

10. Enter the new password and click "Completed" to log in, as shown in Fig.10.




10


Family / Member Management

Click the pull-down arrow at the top left corner to add a family and manage families.


One account can manage multiple families at the same time. The user can operate a device in a family by selecting your family.

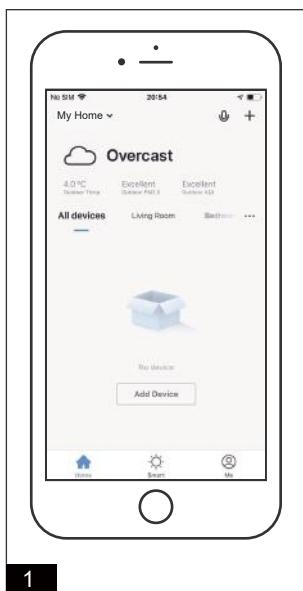

1

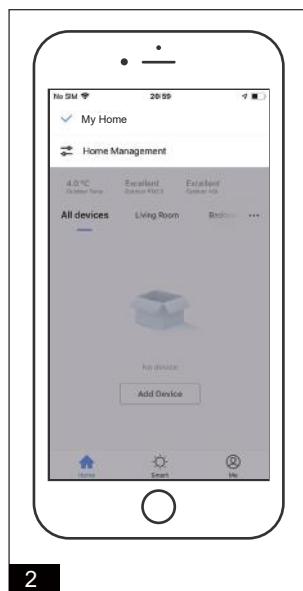


2

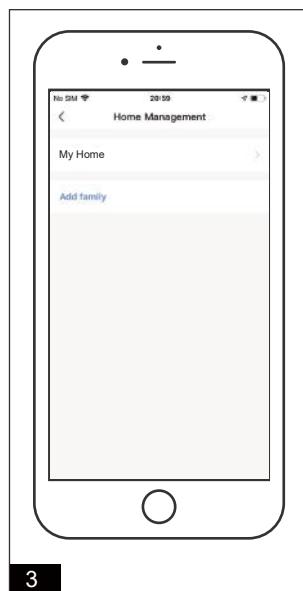

3

4. When logged in, click "Create family" to go to the "Add family" page, as shown in Fig. 4.

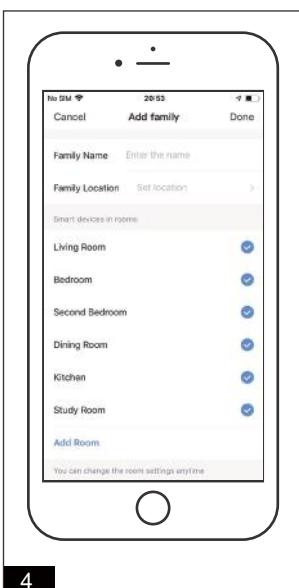

4


5. When logged in, click "Create family" to go to the "Add family" page, as shown in Fig. 5.



5

USER GUIDE (continued)

6. Click "Add Room" to add a room, as shown in Fig. 6.

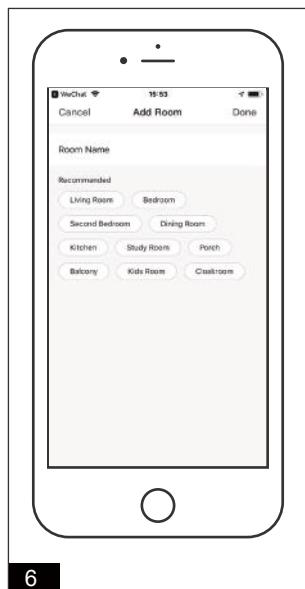

7. Click "Done" at the top right corner to complete room settings. Room settings can be changed anytime by clicking on "..." as shown in Fig. 7.




8. Click the family name to go to the Family Settings page, as shown in the figure.

6 rooms: Add / Delete rooms in a family and manage all room settings in a family in one place.


Administrator: Administrators have the highest level of access, which allows them to manage access to devices or access granted to other family members.

Kiki: After the invitation is sent, "Waiting to join" will be displayed before confirmation.

Add Member: Administrators can click here to invite other family members to join the family.

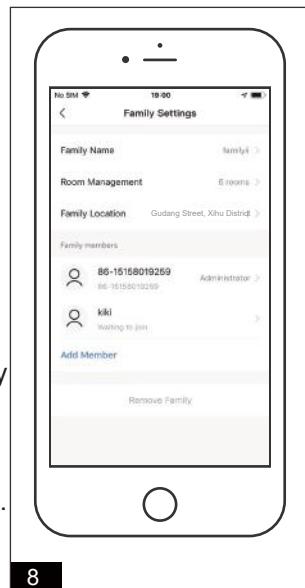

9. The added member will receive a pop-up reminder in the App, and you can choose to accept or refuse it.

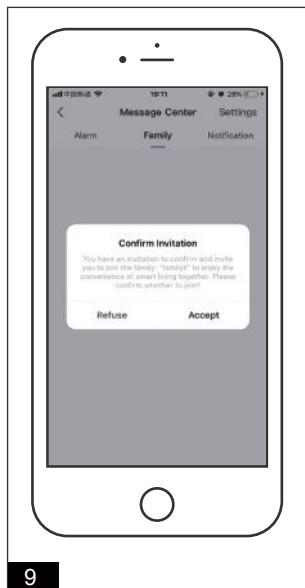

10. In the meantime, you will receive the reminder in message center.




USER GUIDE (continued)

The app supports three configurations: Add Manually mode, Auto scan search device mode and AP mode.

Add Manually

Click "Add Device" or "+" at the top right corner of the App homepage to enter the "Add Device" page.

1. Click add device or upper right corner and enter the Fig. 2.

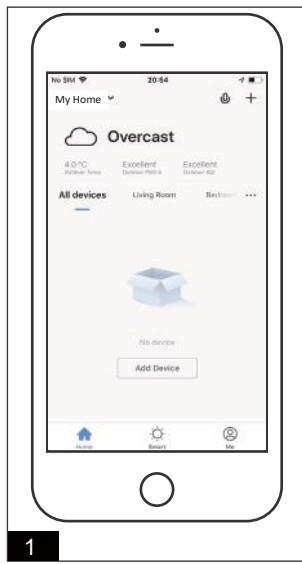

1

2. Click lighting to enter the Fig. 3.




2

3. Click lighting (BLE +WIFI) to enter the Fig.4.



3

4. Click NEXT to enter the page below.

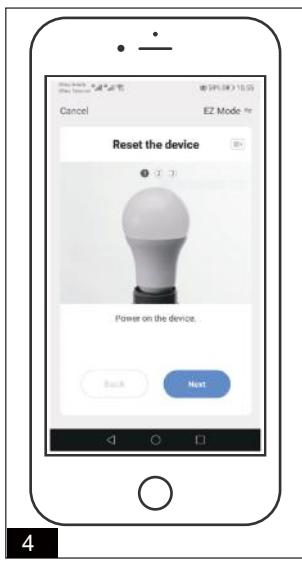


4


5. To select "Add Manually Mode", please make sure the indicator light on the smart device is flashing rapidly (blinking twice per second) and then click the button to proceed to the next step. If the indicator light is not flashing rapidly (can be switched by on-off-on-off-on-wall switch).

Note: Switch the device on, off, on, off, and on (subject to the user manual)


How to set indicator light to rapid flashing.

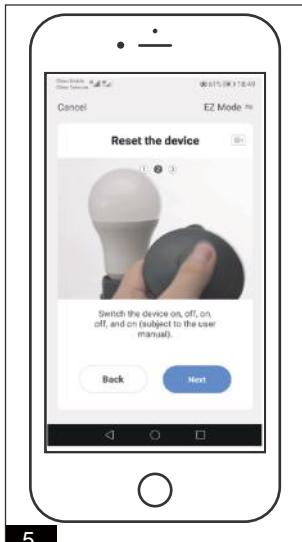


5

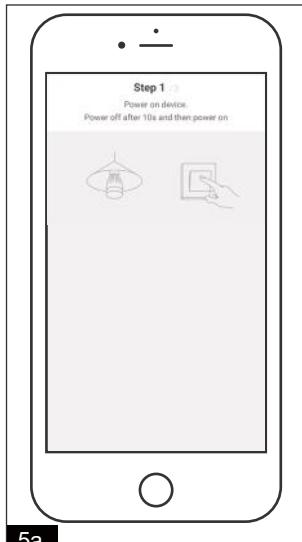

5a

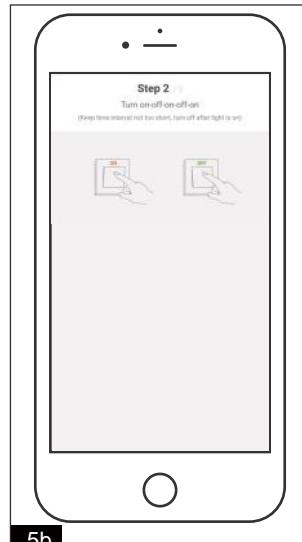


5b

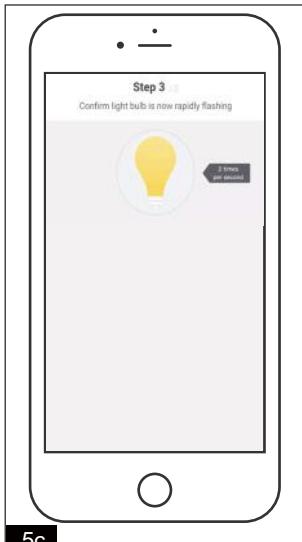

5c


USER GUIDE (continued)

6. Click to enter the Fig. 7.

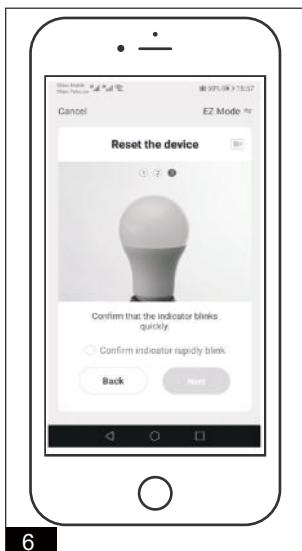


6

7. First check "Confirm indicator rapidly blink", then click next to enter the figure below.

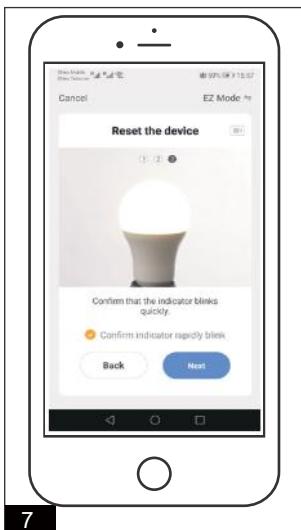


7

8. Click setting to enter the Fig. 9.

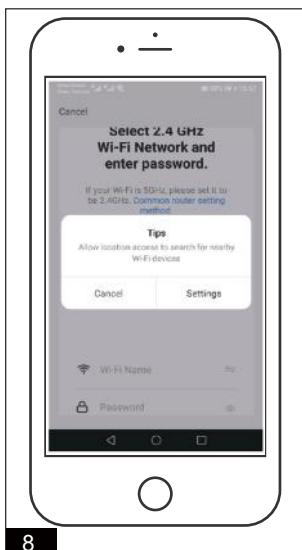

8


9. Open the location in the phone and click the arrow to return to the Fig.10.

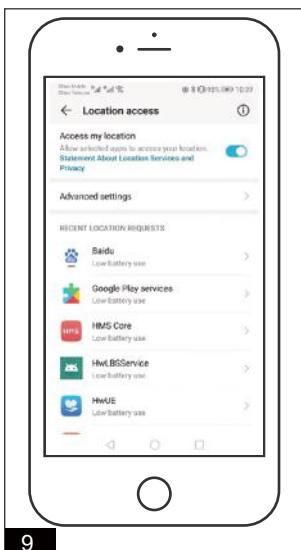

9


10. Make sure the connection WiFi is 2.4GHz.

Note: Select 2.4 GHz Wi-Fi Network and enter password.

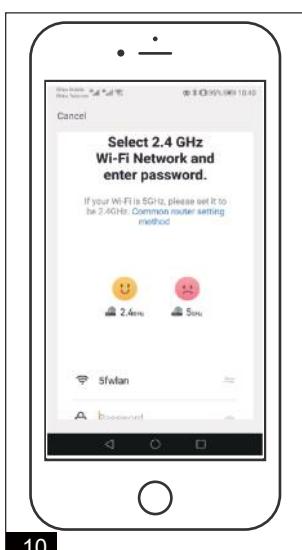

10


11. Enter the WiFi password and click next to enter the Fig.12.

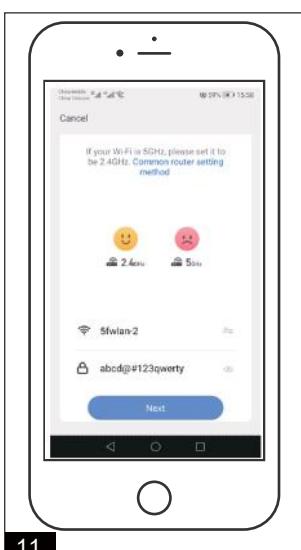


11

USER GUIDE (continued)

12. Add progress.

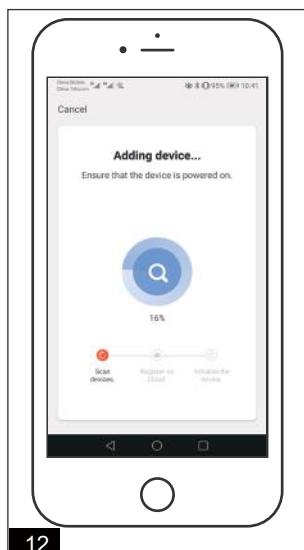

13. After adding successfully, click done to enter the Fig.14.

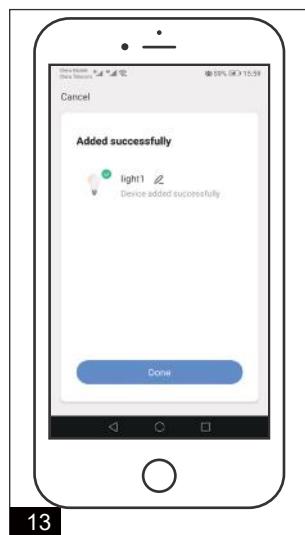


14. As shown in Fig.14.




Auto scan search device

1. Click add device or upper right corner and enter the Fig. 2.

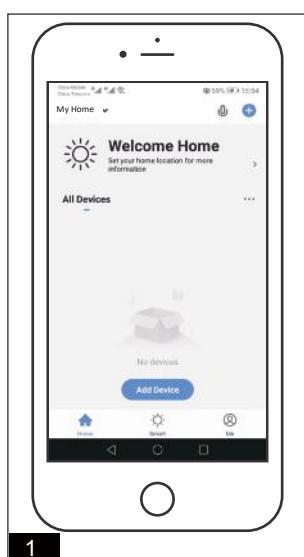

2. Click lighting to enter the Fig. 3.

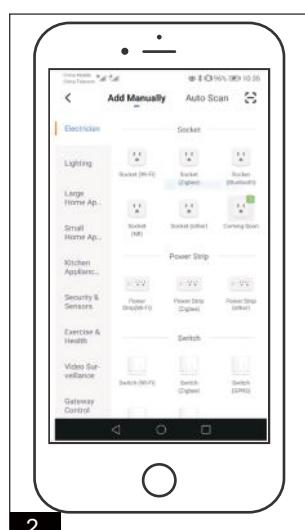


USER GUIDE (continued)


3. Click auto scan to enter the Fig. 4.




4. Click accsee location to enter the Fig. 5.

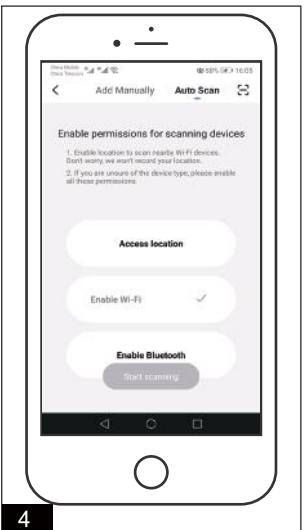


5. Click settings to enter the Fig. 6.

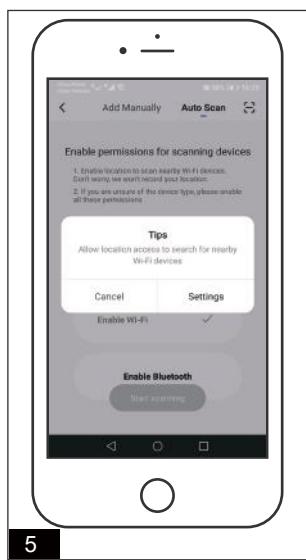


6. Open the location in the phone and click the arrow to return to the Fig.7.

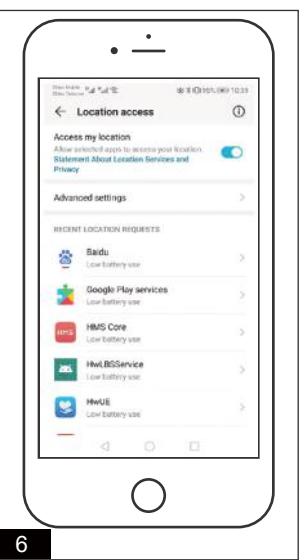

7. After the display is turned on, click Enable bluetooth.

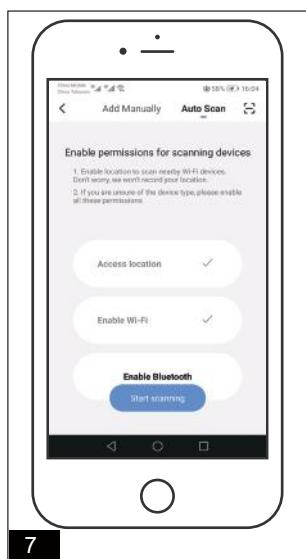


8. Click allow to enter.

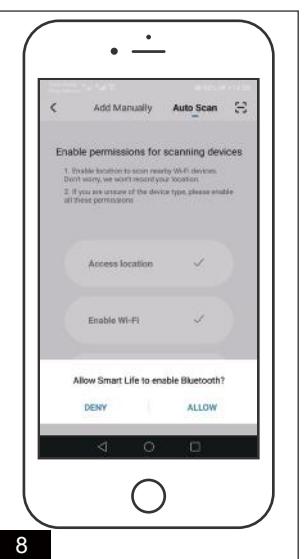


USER GUIDE (continued)


9. Click start scanning to enter.

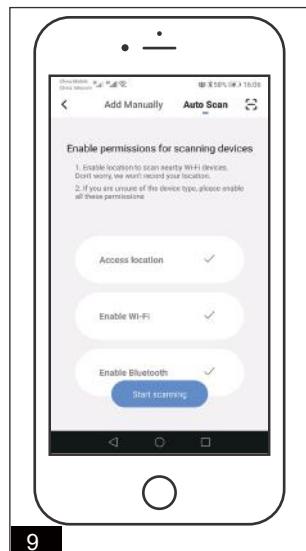

10. As shown in Fig.10.

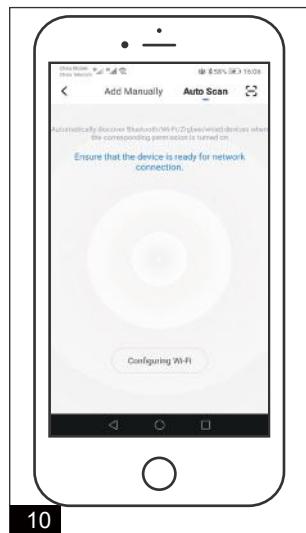

11. After collecting the ceiling light, click next to enter the Fig.12.

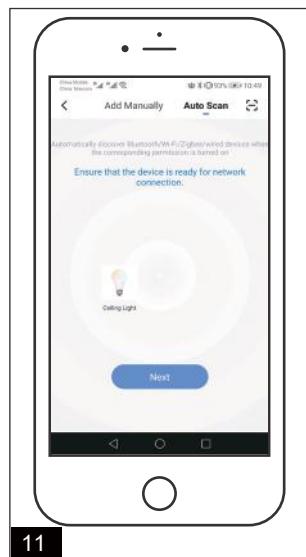


12. Select home WiFi and enter the password point confirm to enter the Fig.13.



13. Enter connection state.



14. Successfully configured.

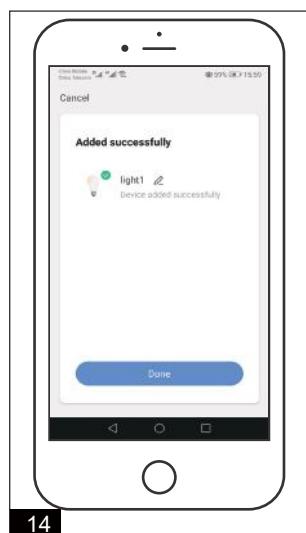


USER GUIDE (continued)

AP Mode Devices


1. Click add device or upper right corner and enter the Fig. 2.




2. Click lighting to enter the Fig. 3.

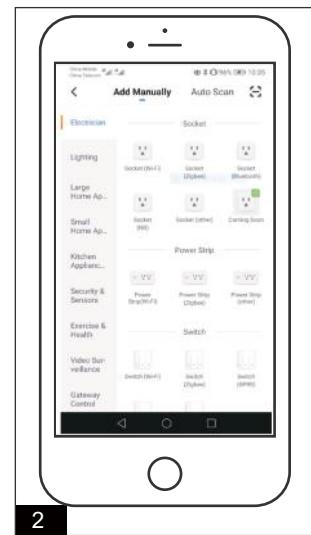

3. Click lighting (BLE +WIFI) to enter the Fig.4.

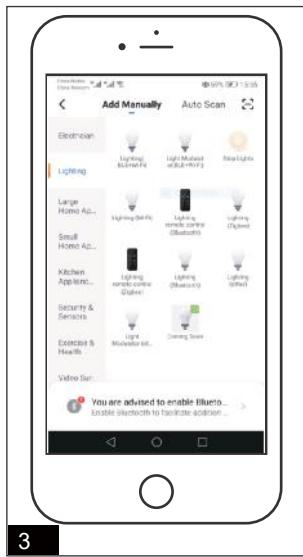


4. Click EZ Mode to enter the Fig. 5.

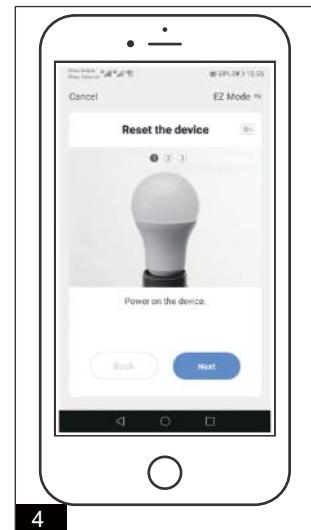

5. Click AP Mode to enter the Fig. 6.



6. Enter AP Mode and click next Fig.7.

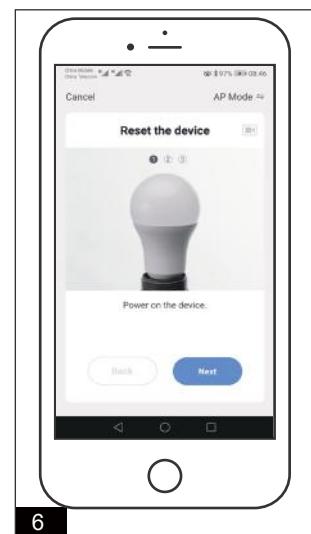

USER GUIDE (continued)





AP Mode Devices

7. To select "AP Mode", please make sure the indicator light on the smart device is flashing slowly (blinking once every three seconds) and then click the button to proceed to the next step.


If the indicator light is not flashing slowly (can be switched by on-off-on-off-on-wall switch), as shown in Fig.7, Fig.7a, Fig.7b, Fig.7c and Fig7d.

Click next to enter the Fig.8.


Note: Switch the device on, off, on, off, and on (subject to the user manual) How to set indicator light to slow flashing.

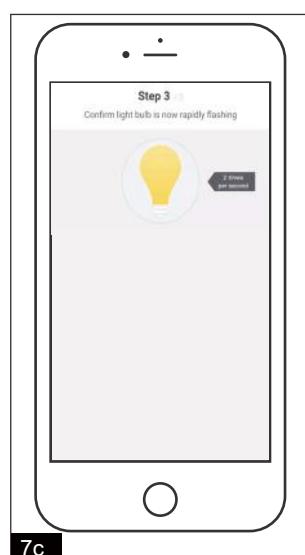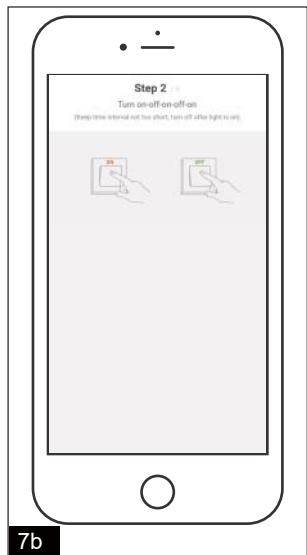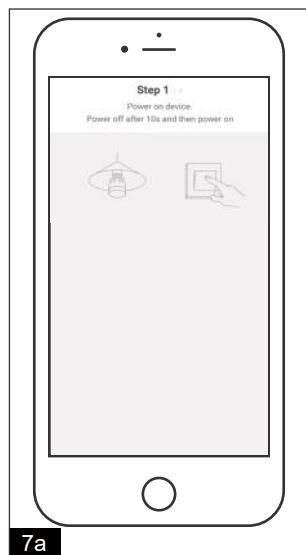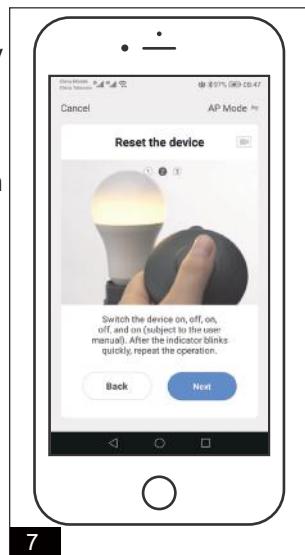

8. Make sure the light flashes every 3 seconds, after checking, enter the Fig.9.

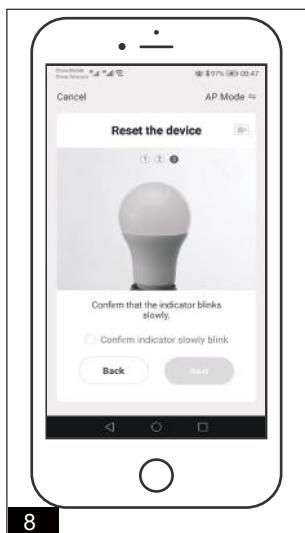

9. Click next to enter the Fig. 10.

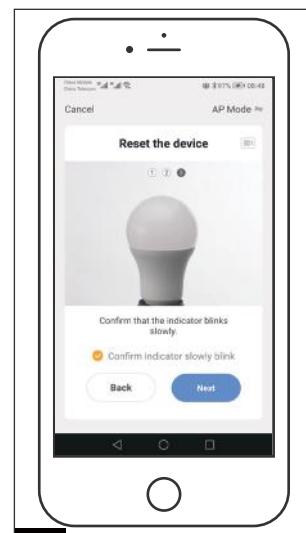

USER GUIDE (continued)


When in AP (slow flashing) Mode, you can select hotspot configuration, and connection must be made with the Wi-Fi hotspot whose name begins with "SmartLife", as shown in the fig.

Note: Some hotspot names may be user-defined.

15. Turn on phone positioning.




16. Select the WiFi in your home, enter the WiFi password, click next to enter the next step.

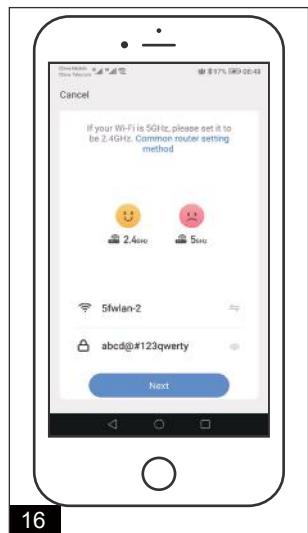


17. Click go to connect to enter the Fig.18.



18. You can select hotspot configuration, connection must be made with the WiFi hotspot whose name begins with "SmartLife".

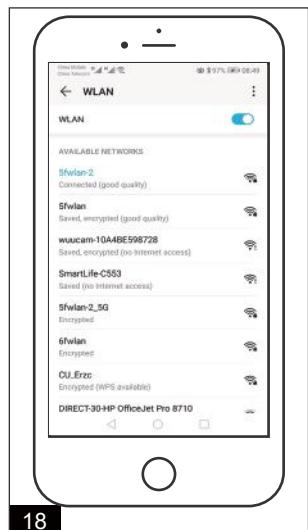

19. Click connect to enter the Fig. 20.

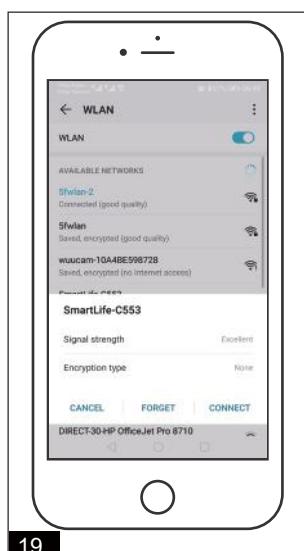


20. After connecting the WiFi of the lamp, click the back arrow to go to the Fig. 21.




USER GUIDE (continued)

21. Enter automatic connection.

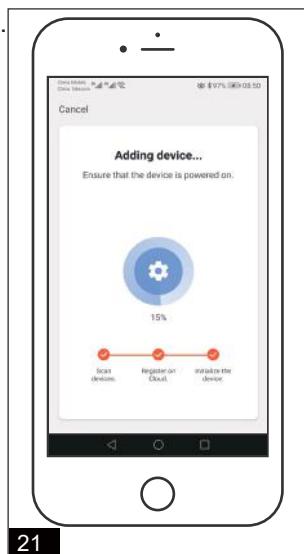


22. Click done to connect successfully.

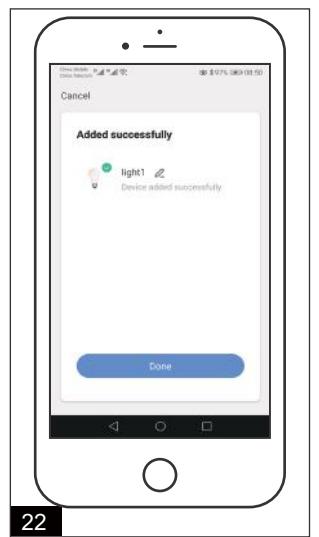

Add Manually -- ZigBeeDevice

- When adding zigbee devices, gateway should be added first
- Plug in a gateway and use a networking cable to connect to the router.
- Make mobile phone and gateways under the same network environment.

1. Click the button of “Add Device” on the home page, as shown in figure 1.

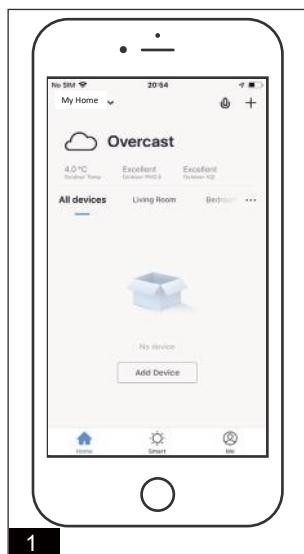


2. Click the “Gateway (ZigBee)” under the category of “Others”.



3. Click “Confirm CONF...hts on (green)” to enter the Fig. 4.



4. As shown in Fig.4

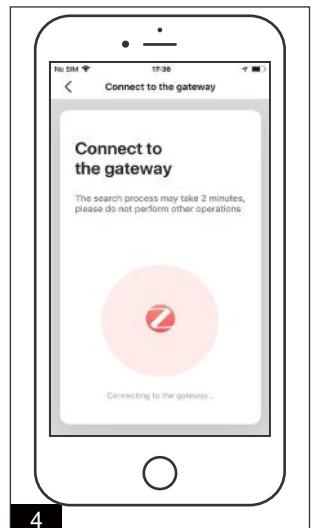

USER GUIDE (continued)

5. Confirm that the indicator for distribution turns green and click "Bind" to enter the adding process, as shown in fig.5.




5

6. After a gateway has been added successfully, go to the gateway page, click "Add sub-device" and select the matching device to add other devices under the same gateway, in the same way as in add manually.




6

7. Click smoke detector to enter the Fig.8.

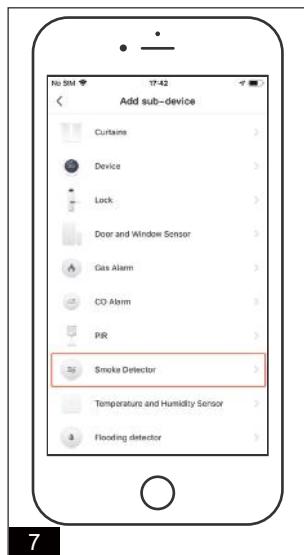

7

8. As shown in Fig.8.

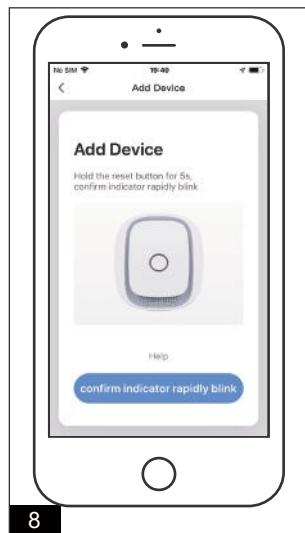

8

Search Device

1. Search devices: multiple search modes are triggered at the same time, including searching wifi devices found in the network free of distribution, bluetooth gateway, bluetooth devices, zigbee gateway and zigbee devices under the existing gateway.



1

USER GUIDE (continued)

Control Devices - Individual Control

When devices have been configured successfully, the smart devices will appear on the home page. Click to open the control panel for smart devices.

1. When devices are online, some will support use of hotkeys. Click "Common Functions" to use them. When devices are offline, they will appear as "Offline" and will not be available for use.



2. Open the control panel for devices. For example, Fig. 1 shows the light is off, and only the timer can be accessed in the off mode.




3. Fig. 2 shows the light is on, and scene, color, brightness, and schedule can be configured in the on mode. Click "..." at the top right corner of the control panel to manage individual devices.



4. The device modification menu is shown in the figure:

- Device Name: You can change the name and location of a device.
- Device Location: You can choose where the device is located, such as the living room or bedroom.
- Share Device: You can share any individual device with others by entering their mobile phone numbers.
- Note: Their mobile phone numbers must be registered with Tuya app accounts.
- Create Group: Click and the page will automatically show all devices that have been added and have the same model number. A group cannot be created for devices with different model numbers.
- Device Information: Check here for: device ID, Wi-Fi signal strength, IP address, Mac address, and device time zone.
- Feedback: You can submit feedback here on problems encountered during usage.
- Add to Home Screen: You can add devices to your phone's desktop for easier control of your device.
- Check for Firmware Update: You can check here for firmware updates.
- Remove Device: Delete a previously added device from the list of devices.
- Restore factory defaults: Remove devices and clear all data.

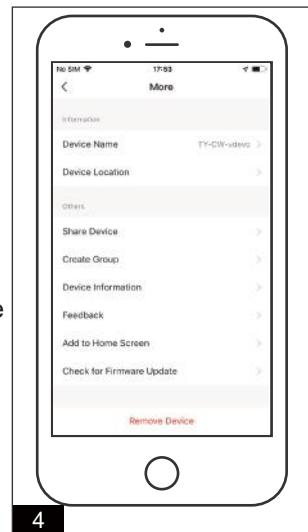

USER GUIDE (continued)

Control Devices - Share Devices


Click "Add Sharing", enter the account to share devices with, and click "Done" to finish. To stop sharing with an account previously added, press and hold to delete in Android, or slide to the left to delete in iOS.

Note: You can only share devices with whom has the account of the app and registered in the same country / region.



Control Devices - Group Control

1. Click "Create Group" under "More" on a selected device page, as shown in Fig. 1.

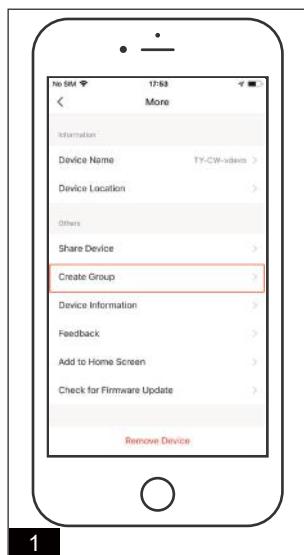

2. The page displays all devices with the same model number and available to be added as a group. Select a device and click "Save", then enter group name and click "Confirm" to finish, as shown in Fig. 2.



3. When a group has been created successfully, the page will be automatically redirected to the group control panel in Fig. 3, where grouped devices can be managed.



4. Groups that have been created can be viewed on the "Home" page, and managed with hotkeys.




USER GUIDE (continued)

5. Open the group control panel as shown in Fig. 2.




6. Click "..." at the top right corner to configure or dismiss groups, as shown in Fig.6.

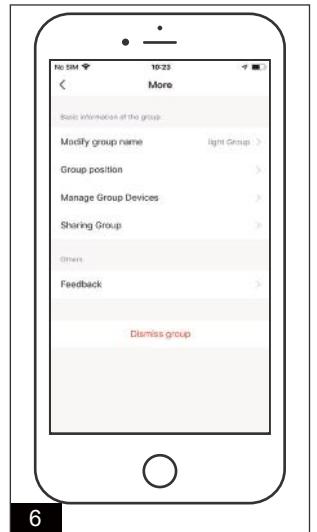


Smart Features - Automation


1. Click "Add Smart" on the "Smart" page or "+" at the top right corner.

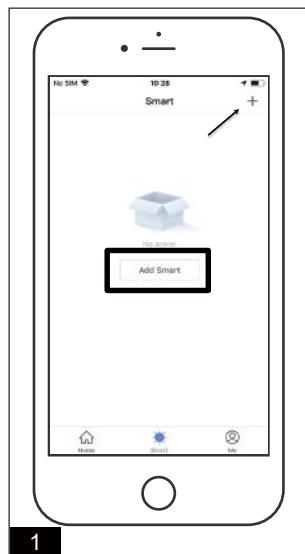

2. Select "Automation" to go to the smart configuration page as shown in Fig. 3.

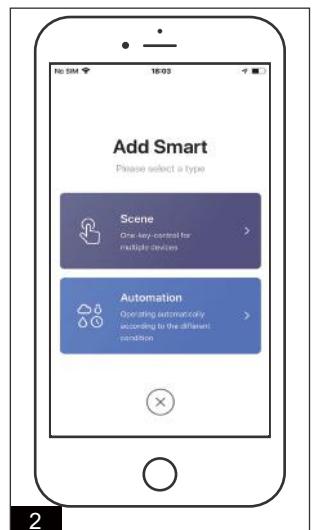


3. Click "+" as shown in Fig. 3 to add multiple conditions or multiple actions.

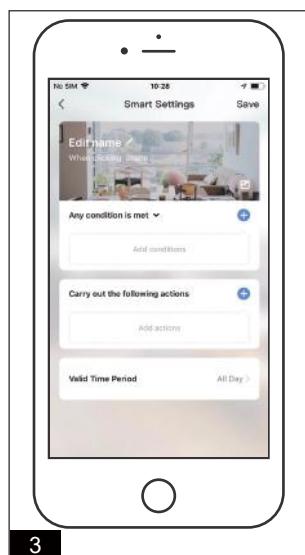

Add condition:

4. For example, to add temperature as a condition, select temperature as shown in Fig. 4.

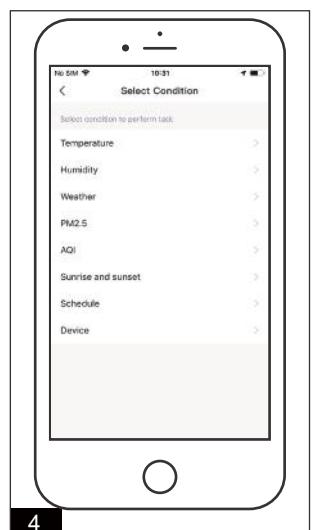


USER GUIDE (continued)

5. Configure temperature-related conditions as shown in Fig. 5.



5

6. Click "Next" to add the condition as shown in Fig. 6.

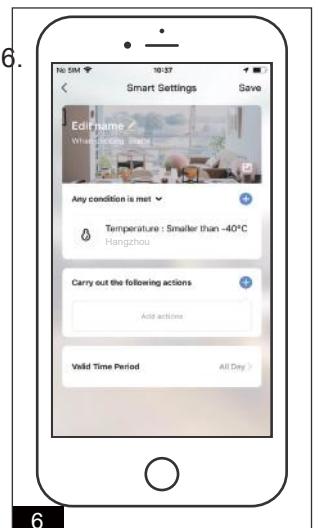


6

7. Add action:
Click "Add action" or "+" at the top right corner to open the menu, as shown in Fig.7. There are four types of actions: execute scene, trigger automation, send a reminder and time-lapse.




7

2. Valid Time Period:
You can set a valid time period for automation.

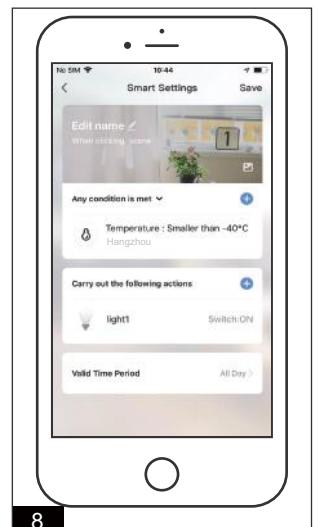


8

3. For example, if you define a scene where the nightlight automatically lights up when the human motion sensor detects human presence, you can select "Night" as the valid time period. In this case, the nightlight will not automatically turn on in the daytime.

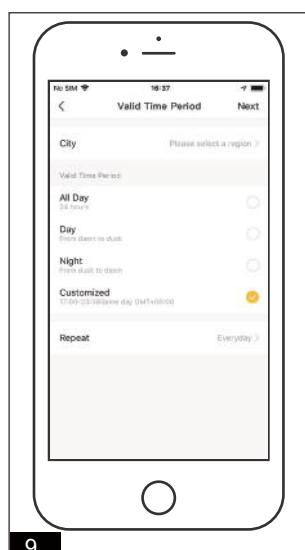

9

10. Conditions and actions of automation can all be set up as shown in Fig.10. The system primarily supports three types of automation:
a. Inter-device synchronization: such as turning on the aroma diffuser and air purifier automatically at the same time the A/C unit is turned on.
b. External environment and device synchronization: such as turning on the A/C unit automatically when the temperature falls below 0°C.
c. Timed actions: such as drawing back the curtains drawn automatically at 8:00 am every morning.

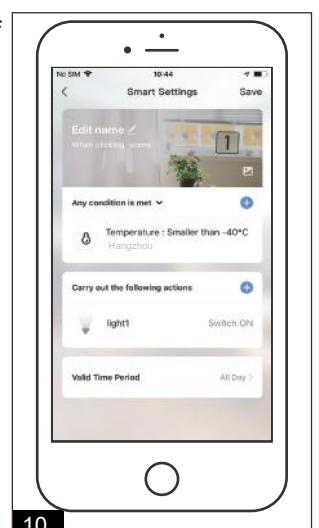


10


USER GUIDE (continued)

Smart Features - Scene


1. Select the scene and enter the Settings page.

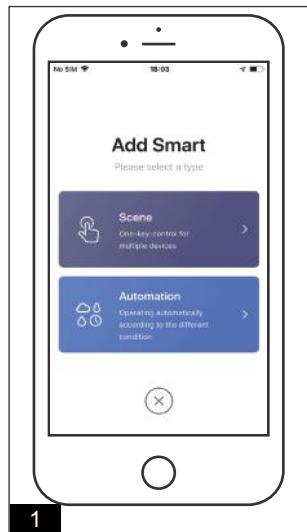


2. You can edit the scene name. Click "Add actions" or "+" in the top right corner to add the execution action. The action menu is shown in Fig. 3.

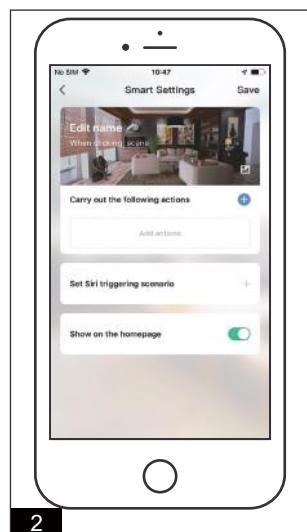


3. Configuration is similar to that of automated devices. In addition, you can use Siri to trigger the scene.

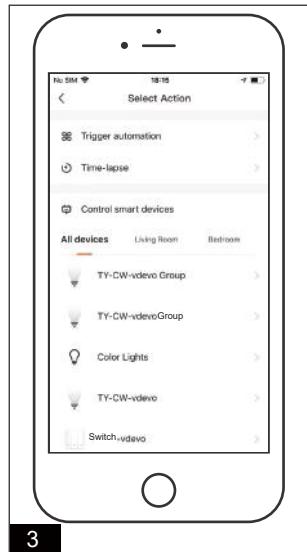

4. To configure a scene with "Trigger automation", you must set up an automated scene in advance. If existing automation options are available as shown in Fig. 4, select "Enabled after triggering" or "Disable after triggering". Then, click "Next" and enter scene name.

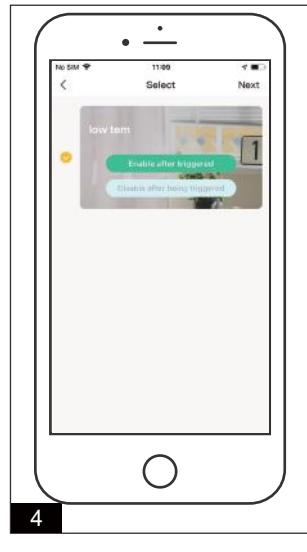


5. Click "Save" at the top right corner to finish configuration.

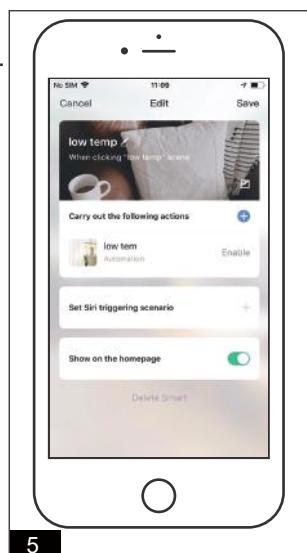

Smart - add / modify / delete


1. Previously configured automation and scenes are displayed in the "Intelligent" page. Click "Edit Automation" at the top left corner to modify existing scenarios and automated devices.

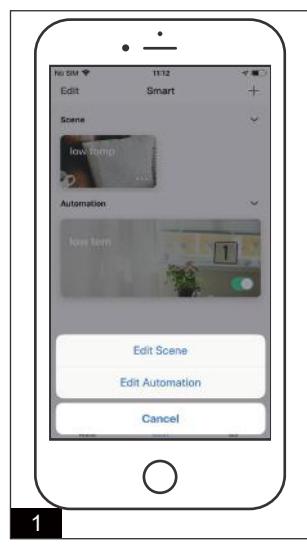

USER GUIDE (continued)

Smart - add / modify / delete


2. For example, click "Update Scene" to go to the page shown in Fig. 2, where the order of scenes can be changed and can be deleted by sliding left. (In iOS, click "-" on the left of scenario name to delete.)

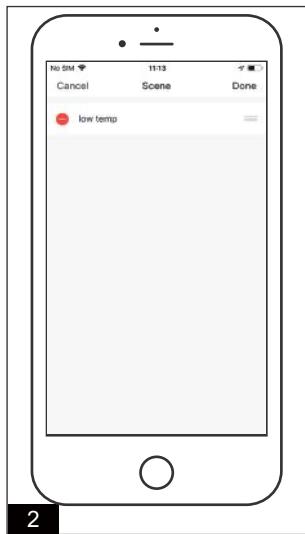


3. As shown in Fig. 3.



4. Edit a scene: Click "..." as shown in Fig.4 to go to the Edit page. Edit automation: Click anywhere on the background of automation, as shown in Fig.4, to go to the Edit page.

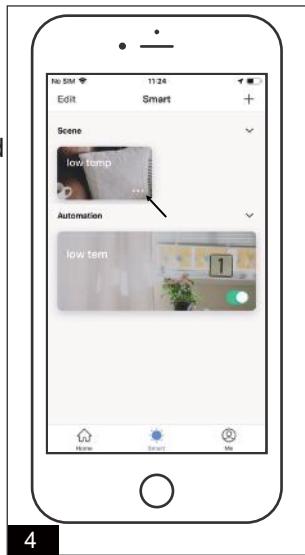


5. Go to the automation edit page shown in Fig. 2. Slide left to delete previously added conditions or actions, add new conditions or actions, or delete the smart feature entirely.

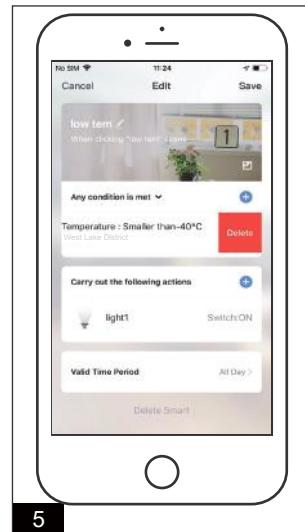

My Home


- a. My family: For users with multiple families able to switch between/add families.
- b. Click to enter the weather factor page, you can drag to adjust the order, the first three factors will be displayed on the home page.
- c.  Add various types of devices.
- d.  One-key activation for smart scenes Easy switch between everyday scenes.
- e. One-key activation for smart scenes Easy switch between everyday scenes.
- f. Switch between rooms in a household View status of smart devices in each room.

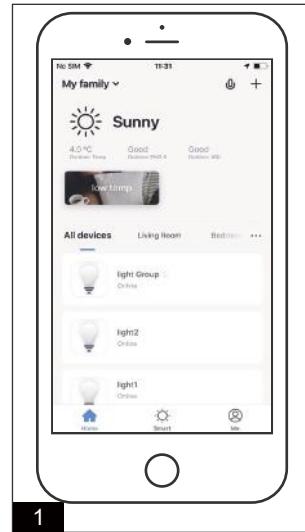

USER GUIDE (continued)


1. "Me" Page

- a. Home Management: you can manage your family and members;
- b. Message Center: the message is divided into three categories: alarm, family, and notification, and can set the do not disturb time segment for the notification of the message.
- c. Help Center: it includes four parts: fault submission, network diagnostics, suggestion and FAQs;
- d. More Services: include voice services and other services;
- e. Settings.

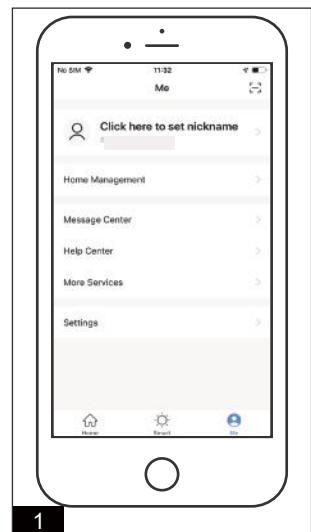


2. "Me"—Message Center

- a. Alarm messages include: Device alarm, automatic message notification, alarm alarm, device timing failure, etc;
- b. Family messages include: Add family member, remove family member, dismiss family, set family member as administrator, add device, share device, etc.
- c. Notification messages include: status update of feedback, official message push, etc.

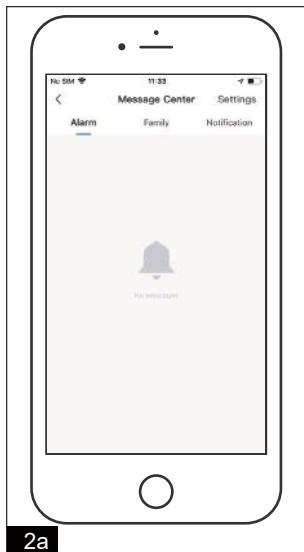


- 2b. At the same time, the message center can also set up an uninterrupted period. Click "Settings" in the top right corner to enter the Settings page. First turn on the button of "Do Not Disturb", then set the do not disturb time segment and device. After successful setup, you will not receive messages during the do not disturb period.

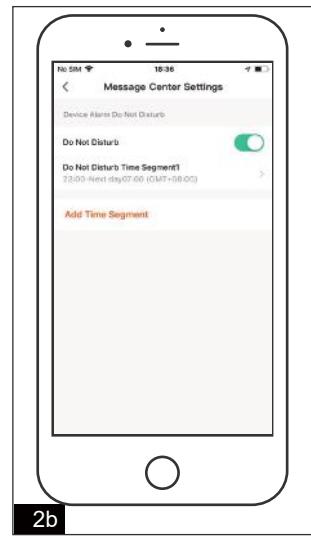


3. "Me"—Help Center

- a. My Feedback: Check the processing results of feedback.
- b. Submit Fault: Submit your feedback here on problems encountered during usage.
- c. Network diagnosis: Network diagnosis helps us solve the problem for you faster. The diagnosis time is about 2 minutes.
- d. Suggestion: You can submit your optimization suggestions for the App here.
- e. FAQs: Contains three types of frequently asked questions: Device networking, App use and third-party control.

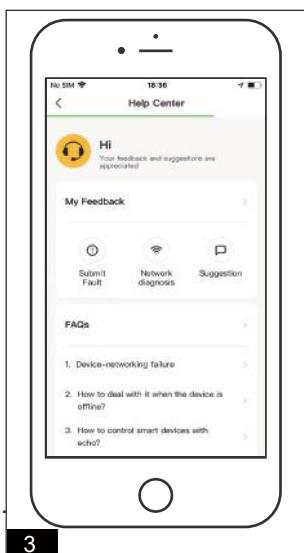

4. "Me"—More Services


- a. Voice Services: You can click on the corresponding speaker icon to see how to connect to it.
- b.
 - 1). Other Services:
 - IFTTT: How to connect with IFTTT;
 - 2). Service Orders: You can check the services you have purchased here;
 - 3). AI Filtered Notification: Once the service is activated, notifications will be filtered by cloud based algorithm before you ever receive them.
 - 4). Video Cloud Storage: Once the service is activated, the device can encrypt and upload the video data to the server, and the user can view the historical video in the App.
 - 5). Phone Reminder: Once the service is activated, when the user-defined scene is triggered, the system will automatically notify the phone numbers on the file (more than one number can be called each time) to better protect you and your family.

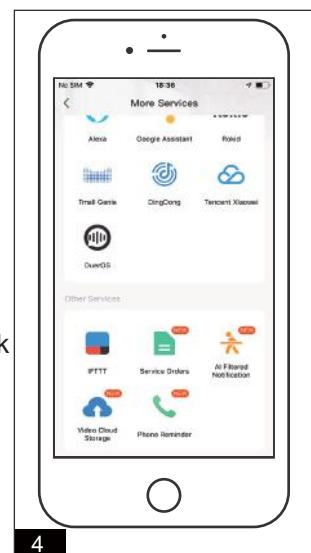

USER GUIDE (continued)


5. "Me"—Settings

- 5a. Click "Rate Us", jump to the app market to make a score of the app.

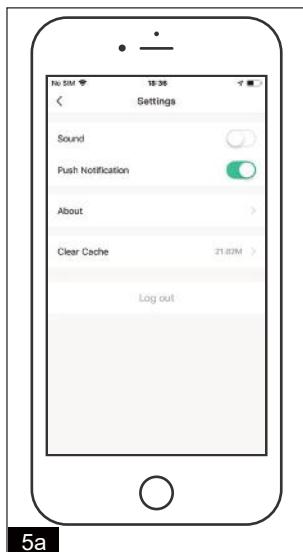

5a


- 5b. 1). About TuyaSmart
2). Privacy Policy
3). Service Agreement
4). Open Source License
5). Version

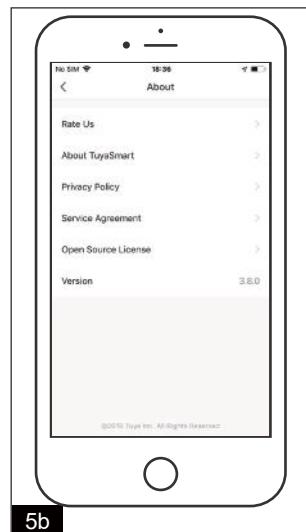

5b


6. Personal Center

- 6a. You can modify the profile photo, nickname, temperature unit and time zone here.

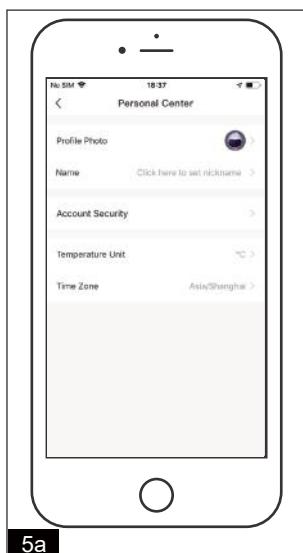

5a


- 6b. Go to the "Accounts Security" page, you can modify login password, set the gesture password, and deactivate the account.

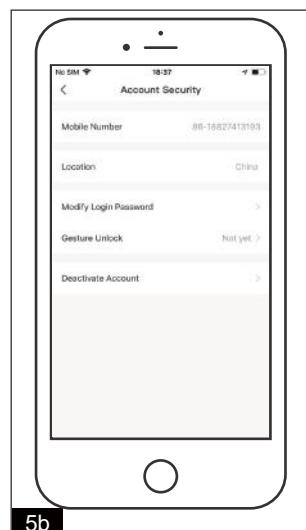

5b


7. Personal-Modify Login Password

- 7a. Click "Gesture unlock" to set up a gesture password. Once a gesture password is activated, you will have to use the gesture to access the app.

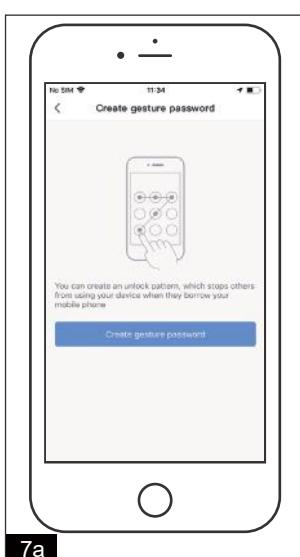


7a

- 7b. If you forgot your gesture password, click "Forgot the gesture password" to have an authentication code sent to your registered mobile phone number or your email.

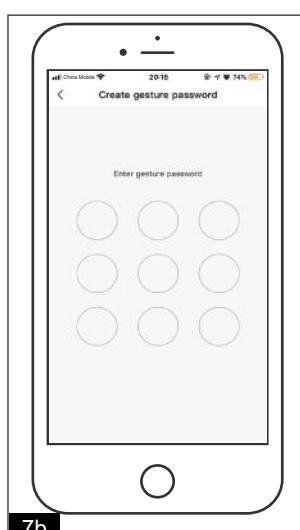

7b

- 7c. Enter the code and set up a new gesture password to continue.

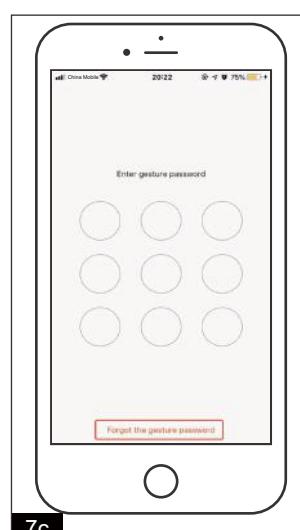


7c

USER GUIDE (continued)

QUICK GUIDE OF USING GOOGLE HOME NEW

a. Set up Google Home and configure in Home Control.

1. Configuration needs Google Home App. Search “Google Home” in App Store or Google Play to install the App.

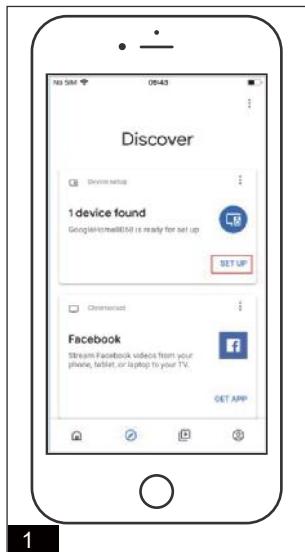

2. Make sure your Google Home is energized and four colored lights on the top are on which means that it is in a state of waiting for a connection. Make sure Google Home is in a Wi-Fi network that has smooth access.



3. Open the Google Home App, the device will automatically Appear in the “Discover” page. Click “SET UP” to start connecting to Google speakers and click “YES” after you hear the voice prompts.




4. Help improve Google Home and click “YES, I'M IN” in the lower right corner.



5. Choose a location for Google Home, for example, choose “bedroom”.




6. Choose your WI-FI network to set up your Google Home.

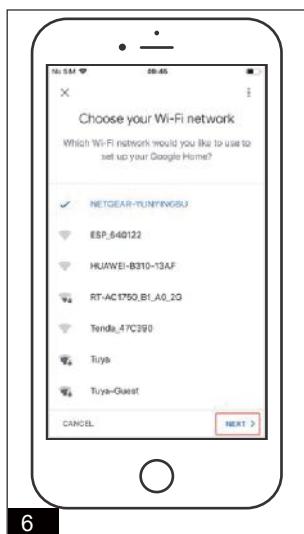


USER GUIDE (continued)

7. After successfully connected, the App page will display as follows.

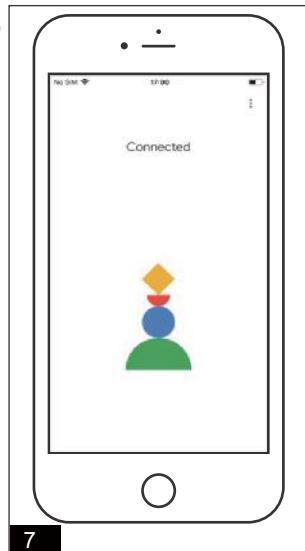


8. Select a language, then click "Next".

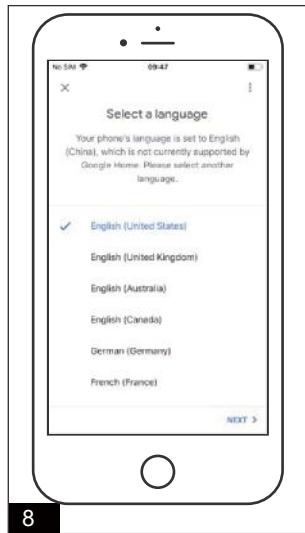

9. Waiting for the system to set up your Google Assistant automatically, click "Next".



10. Click "VIEW MORE" to pop up a dialog box.

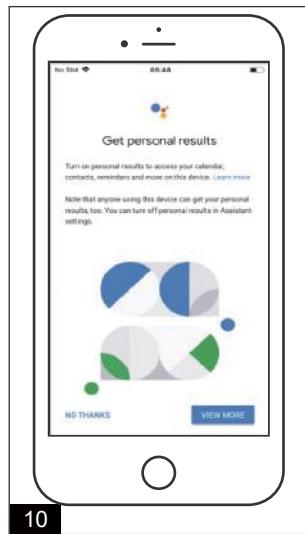

11. Click "I AGREE" to allow Google Home to get your calendar, flight itinerary, and more to provide personalized customization.




12. Then set your geographic location, select the music service you need, click on "NEXT". If you don't need it, you can click "Not Now" to skip.




USER GUIDE (continued)


13. Repeat the operation of Fig.12.

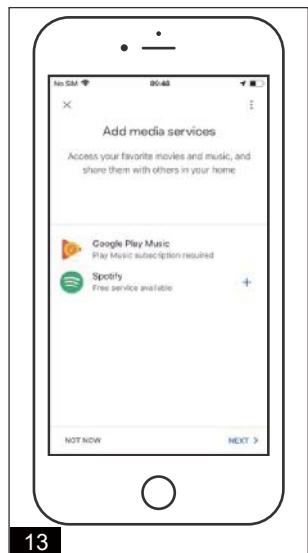


14. Then comes a review of what you have done.

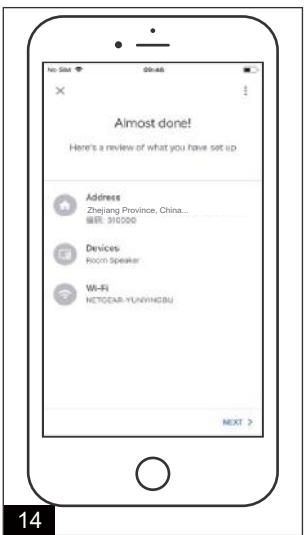

15. After clicking "Next" the page will display "Google Home is ready". At this point, Google Home's setup is complete.

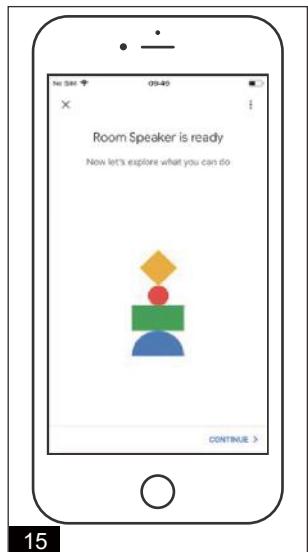

b. Link Smart Life account in Home Control

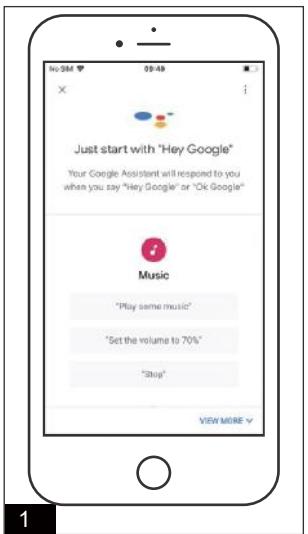

2. Attention: Due to the Google Home App's known bug, you could only use one Google account to control "Home Control Action".




3. If you sign in Google Home App with several Google accounts, only the first Google account you signed in can be used for "Home Control".




USER GUIDE (continued)

4. On the homepage of Google Home App, click the button in the lower right corner, select “MORE SETTING”, select “Home CONTROL” under the list of “ASSISTANT”, then click the plus sign in the lower right corner.

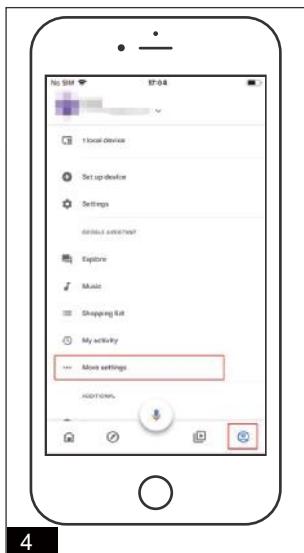

4

5. Attention: Due to the Google Home App's known bug, you could only use one Google account to control “Home Control Action”.

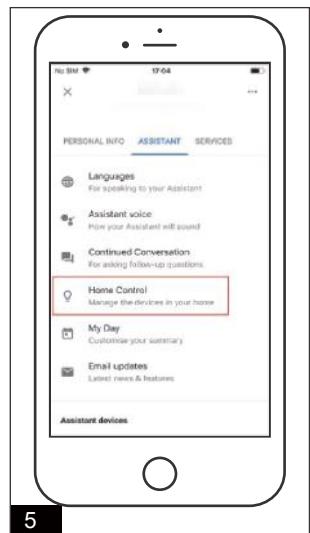


5

6. If you sign in Google Home App with several Google accounts, only the first Google account you signed in can be used for “Home Control”.



6

7. Find “Smart Life” in the list. In the new window, select your Smart Life account’s region, type your Smart Life account and password, then tap “Link Now”. After you assign rooms for devices, your devices will be listed in the Home Control page.

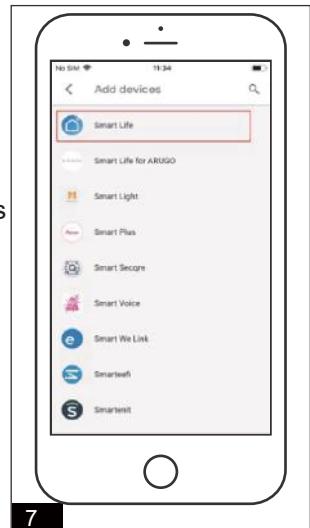

7

8. Link with Verification Code, open Tuya Smart App, click “Me—More Services—Google Assistant”.



8


9. As shown in Fig. 9.



9

USER GUIDE (continued)

10. As shown in Fig.10.

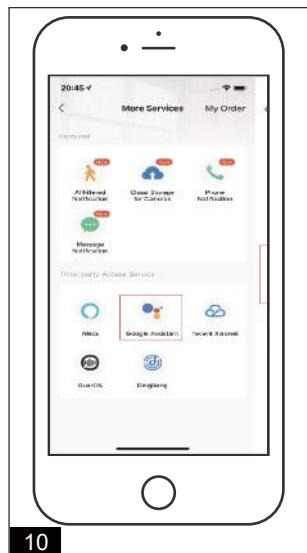


11. As shown in Fig. 11.



12. As shown in Fig. 12.



13. As shown in Fig. 13.

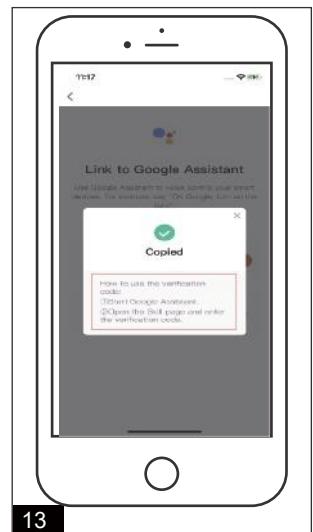

C. Control your smart devices through Google Home

Now you can control your smart devices through Google Home. Take bedroom light as the example, the supported voice commands are as below:

Ok Google, turn on/off bedroom light.

Ok Google, set bedroom light to 50 percent.

Ok Google, brighten bedroom light.

Ok Google, dim bedroom light.

Ok Google, set bedroom light to white.

USER GUIDE (continued)

SET UP AMAZON ECHO AND ENABLE SMART LIFE SKILL


Search “Amazon Alexa” in App Store or Google Play to install the App.

We take App configuration as an example. Configuration through web and App are basically the same.


1. Set up Echo with Alexa app

You can skip this part if your Echo is already set up.


- 1). Make sure your Echo device is energized.
- 2). Make sure Echo is in a Wi-Fi network that can access Amazon services smoothly.
- 3). Open the Alexa App by tapping the App icon on your mobile device.
- 4). Type in your Amazon account and password, then tap “SIGN IN”.

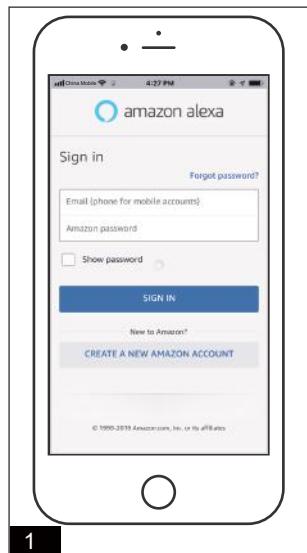


2. As shown in Fig.2.

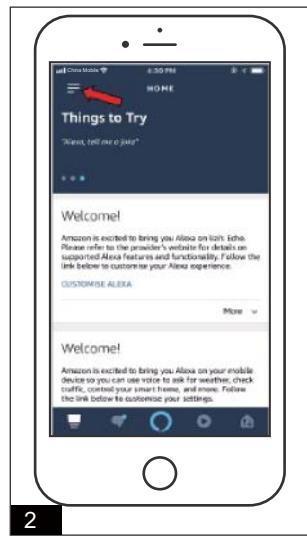


3. Tap the hamburger menu on the top left corner, select “Add Device”.

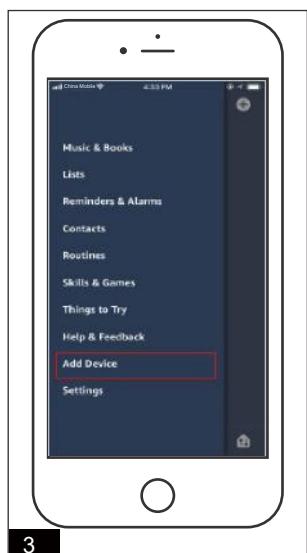

4. Select Amazon Echo in the Set up page.

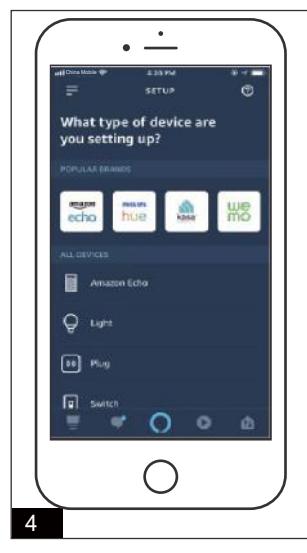

5. As shown in Fig.5.

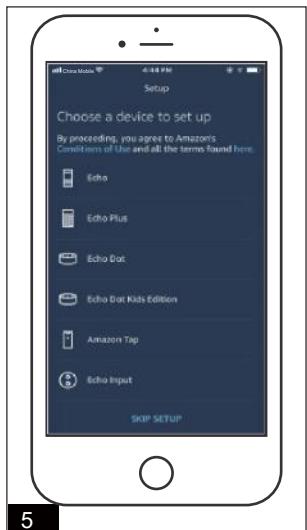

6. As shown in Fig.6.




USER GUIDE (continued)

7. Select the type of your Echo, then tap “CONTINUE”.




8. Long press the dot button on the top of your Echo device until the orange light shows up, then tap “CONTINUE”. Make your mobile phone connected to the hot spot of echo, then tap “CONTINUE”.

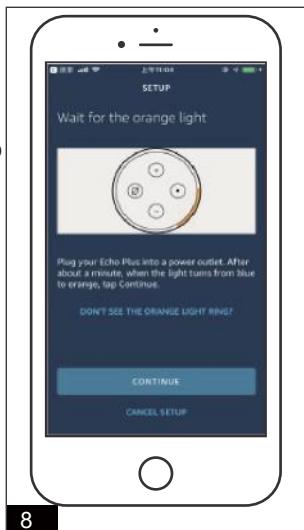

9. Connect your iphone to your Echo Plus.



10. Continue Echo Plus setup.

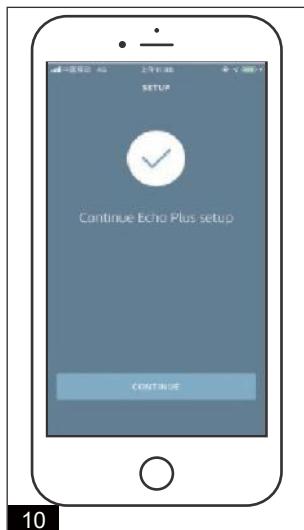

11. Select a Wi-Fi to let Echo have the access to the internet. Type in the Wi-Fi password, then tap “CONNECT”. Echo may take several minutes to connect the network.




12. Preparing your Echo Plus.




USER GUIDE (continued)

13. As shown in Fig.13.

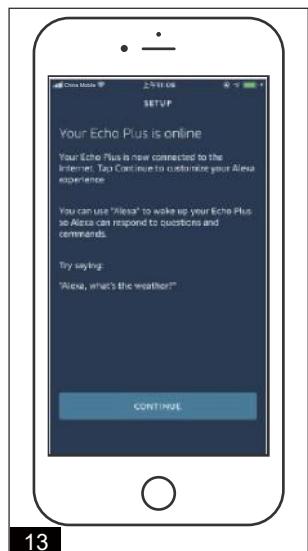


14. Tap “CONTINUE” when Echo is connected to the network. After an introduction video, tap “NEXT” to finish the setup. At this point, the Echo configuration process ends.

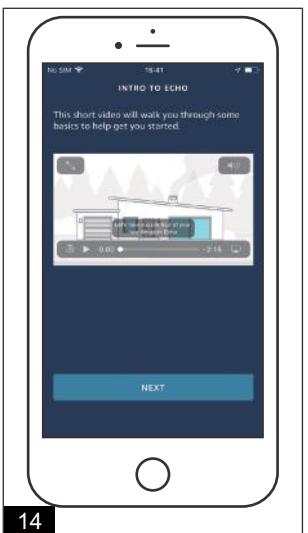


Link Smart Life account to Alexa


15. Tap “Skills&Games” in the hamburger menu, then search “Smart Life”. Select “Smart Life” and tap “ENABLE” to enable the Skill.

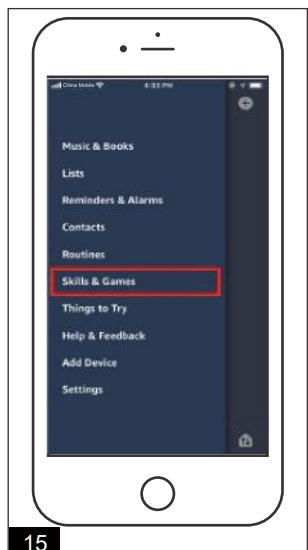

16. You will be redirected to the account link page. Type in your Smart Life account and password, don't forget to select the country/region where your account belongs to.

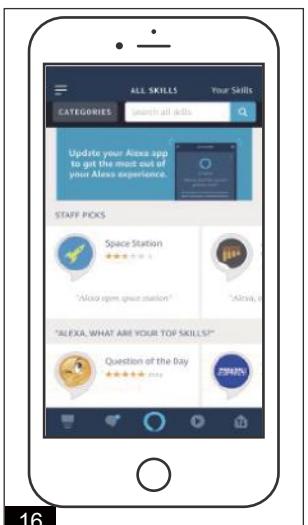

17. Then tap “Link Now” to link your Smart Life account. The country/region, the account, and the password must match with the exact content in Step 2.2.

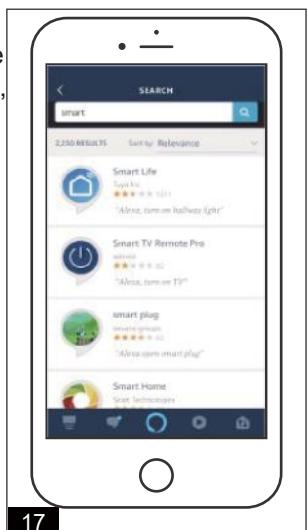

18. As shown in Fig.18.



USER GUIDE (continued)

19. Smart life has been successfully linked.



20. Link with Verification Code, open Tuya Smart App, click "Me-More Services- Alexa".



21. Amazon alexa.



22. Link to Amazon Alexa.



Control your smart devices through Echo

23. Enter the code and set up a new gesture password to continue.




24. Discover devices
Echo needs to discover your smart devices before it controls them. After the skill binding is successful, the page as fig.1. will appear automatically. Click "DISCOVER DEVICES" to discover the device, or you can say "Alexa, discover devices" to Echo. Echo will discover devices which have already been added in the Smart Life App. You can also tap "DISCOVER DEVICES" to discover the smart devices. Discovered devices will be shown in the list.

Note: Every time you change the device's name on Smart Life App, Echo must re-discover before you control them.



USER GUIDE (continued)

25. Add Group.

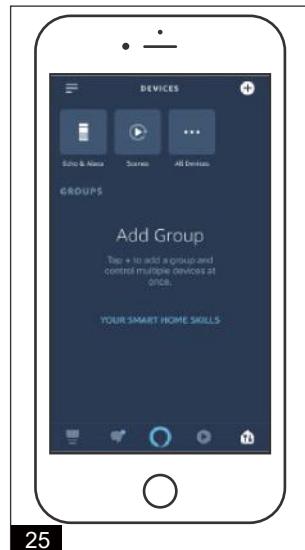


Control devices by voice commands

Now you can control your smart devices through Echo. You can use the following commands to control your devices (e.g., bedroom light):

Alexa, turn on/off bedroom light.
Alexa, set bedroom light to 50 percent.
Alexa, brighten/dim bedroom light.
Alexa, set bedroom light to white.
Alexa, set bedroom light to warm white.

The following parts are available for reorder if damaged or missing. Call our toll free at 1-800-887-6326.

Spare Parts List:

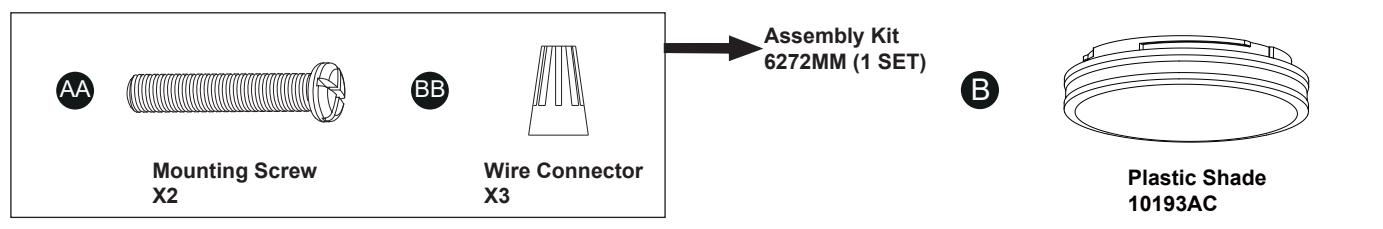

CARE AND MAINTENANCE

- To clean, turn off and wipe with a damp, non-abrasive cloth.

TROUBLESHOOTING

1) The light does not come on at all:

- a) Make sure the wall switch and circuit breaker are on.
- b) Make sure the wiring is correct.

2) Fuse blows or circuit trips when light is turned on.

- a) Check for crossed wires, ensure wiring is correct.

3) APP connection failure or the device doesn't connect to network.

- a) Make sure the connection WiFi is 2.4GHz.
- b) Make sure the WiFi password that you enter is correct.
- c) Make sure the internet connection speeds is over 10mbps.
- d) Mobile device requirements: Iphone 4S or newer running IOS 9.0 x or later. Android v5.0 or later.

If unable to fix any of the above issues, please consult a certified electrician.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference.

(2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment should be installed and operated with a minimum distance of 20 cm between the radiator and your body.

FIVE-YEAR LIMITED WARRANTY: If, during normal use, this PATRIOT LIGHTING® lighting fixture breaks or fails due to a defect in material workmanship within five (5) years from the date of original purchase, simply bring this lighting fixture with the original sales receipt back to your nearest MENARDS® retail store. At its discretion, PATRIOT LIGHTING® agrees to have the product or any defective part(s) repaired or replaced with the same or similar PATRIOT LIGHTING® product or part free of charge, within the stated warranty period, when returned by the original purchaser with original sales receipt. This warranty: (1) excludes expendable parts including but not limited to light bulbs; (2) does not cover damage that has resulted from abuse or misuse; and (3) does not cover any losses, labor, injuries to persons/property or costs. This warranty does give you specific legal rights and you may have other rights, which vary from state to state.



Questions, problems, missing parts?

Before returning to your retailer, call our customer service at 1-800-887-6326
Monday – Friday 9:00 a.m. – 5:00 p.m. CST