




OBW NVNT ac40 5270MHz Ant1

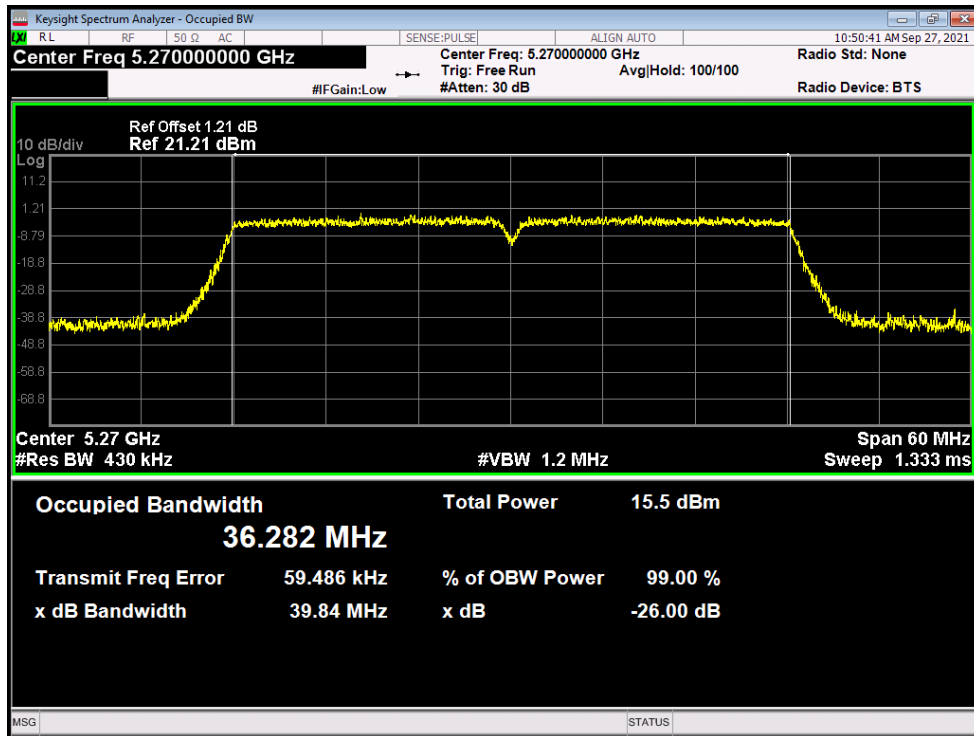


OBW NVNT ac40 5310MHz Ant1

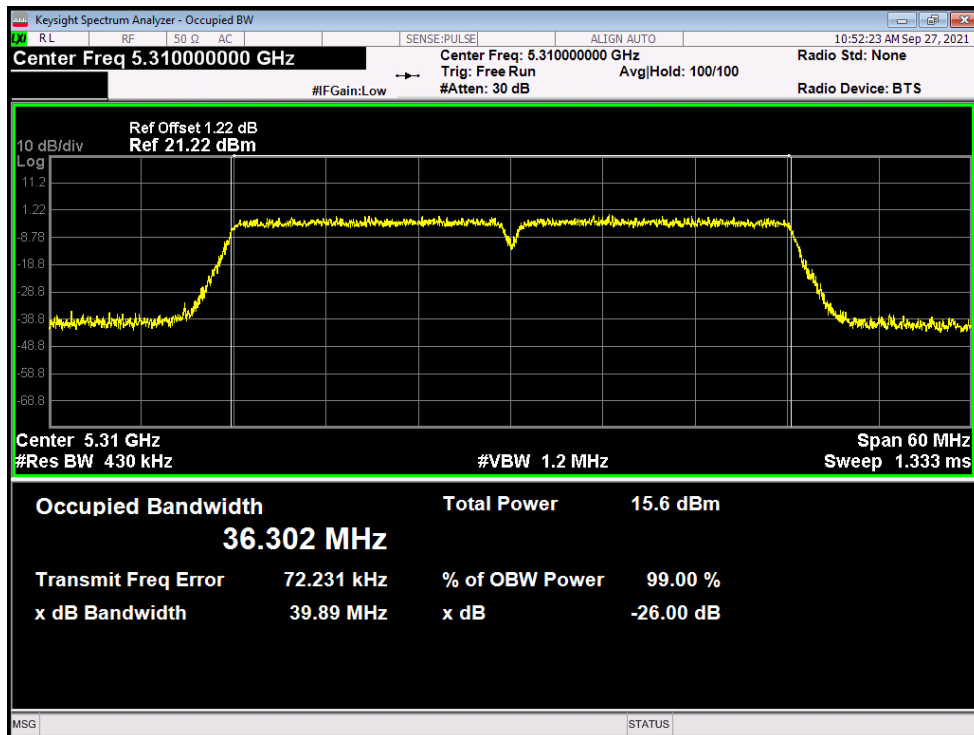


OBW NVNT ac40 5270MHz Ant2

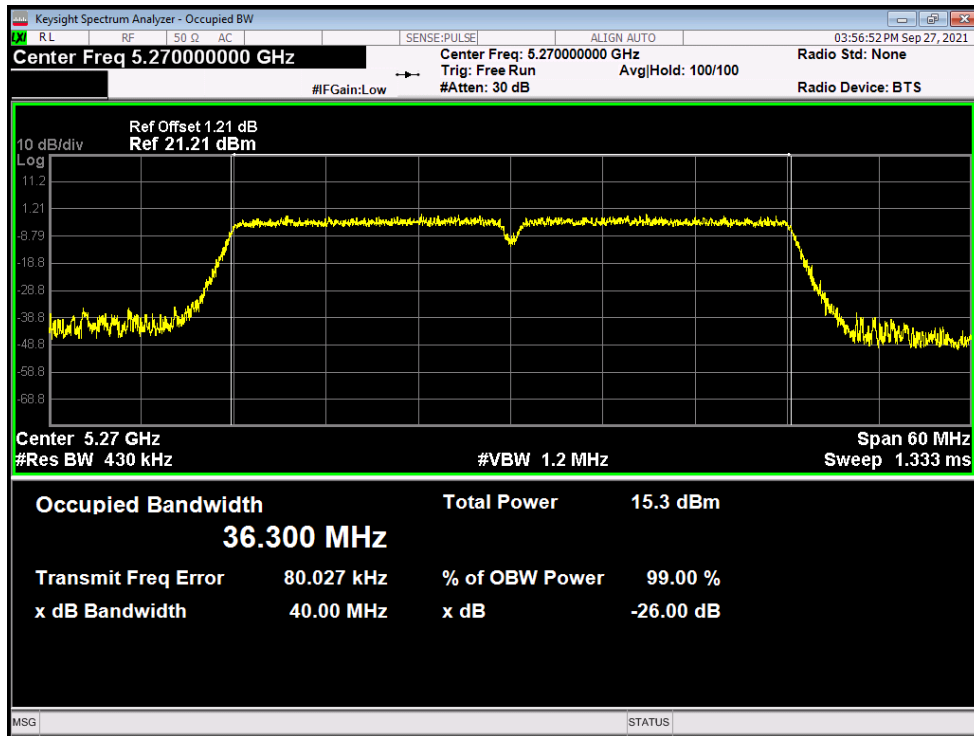


OBW NVNT ac40 5310MHz Ant2

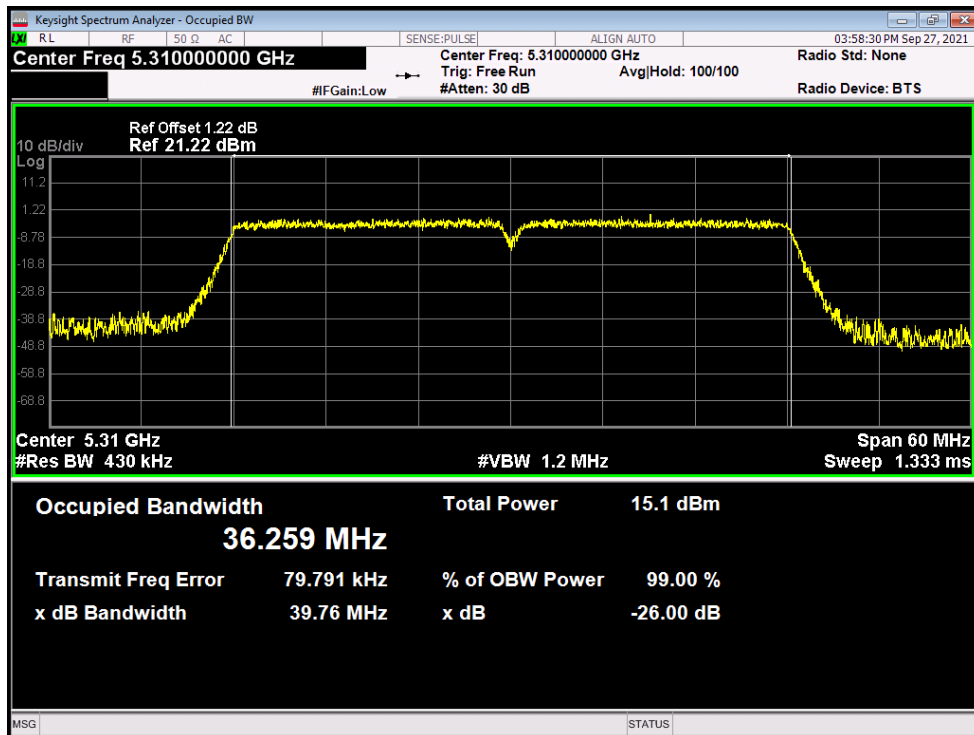


OBW NVNT ac80 5290MHz Ant1

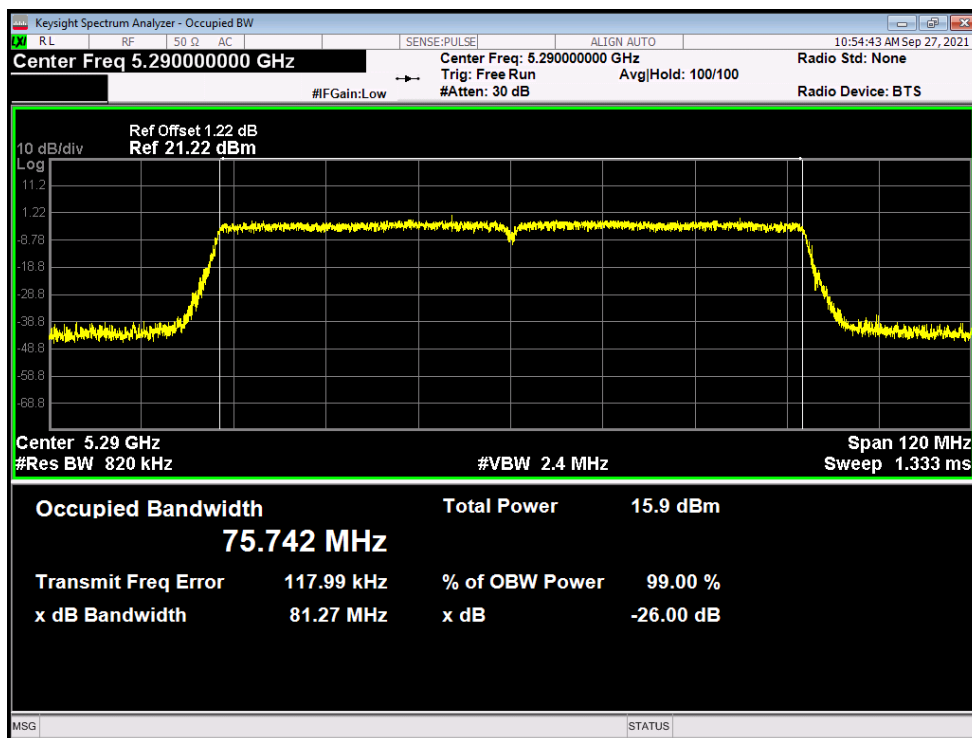


OBW NVNT ac80 5290MHz Ant2

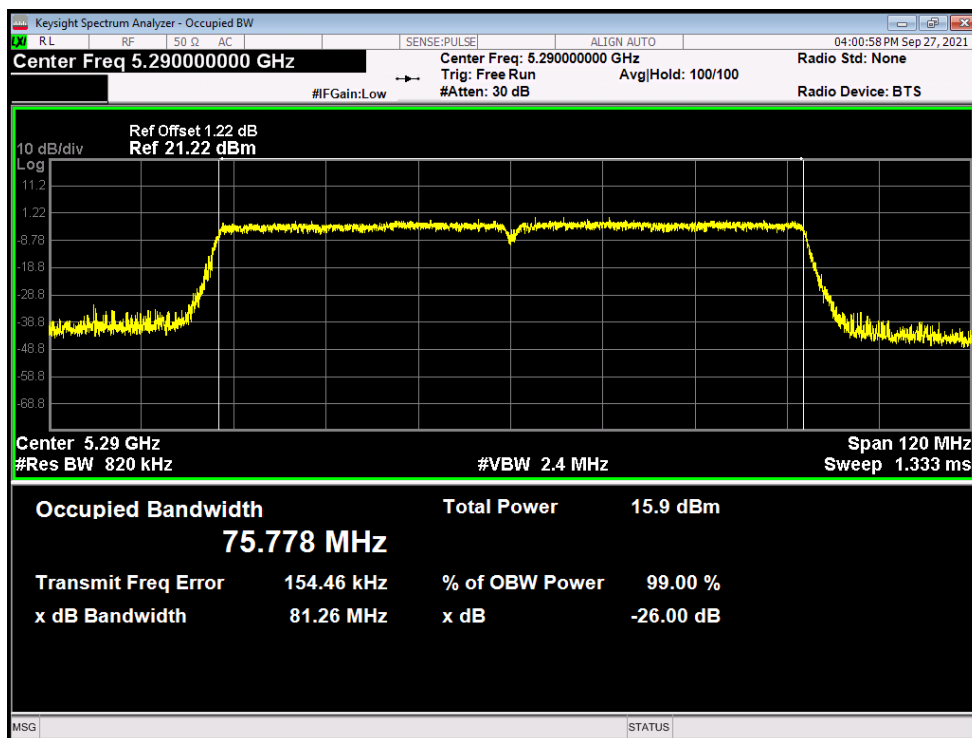


OBW NVNT n20 5260MHz Ant1

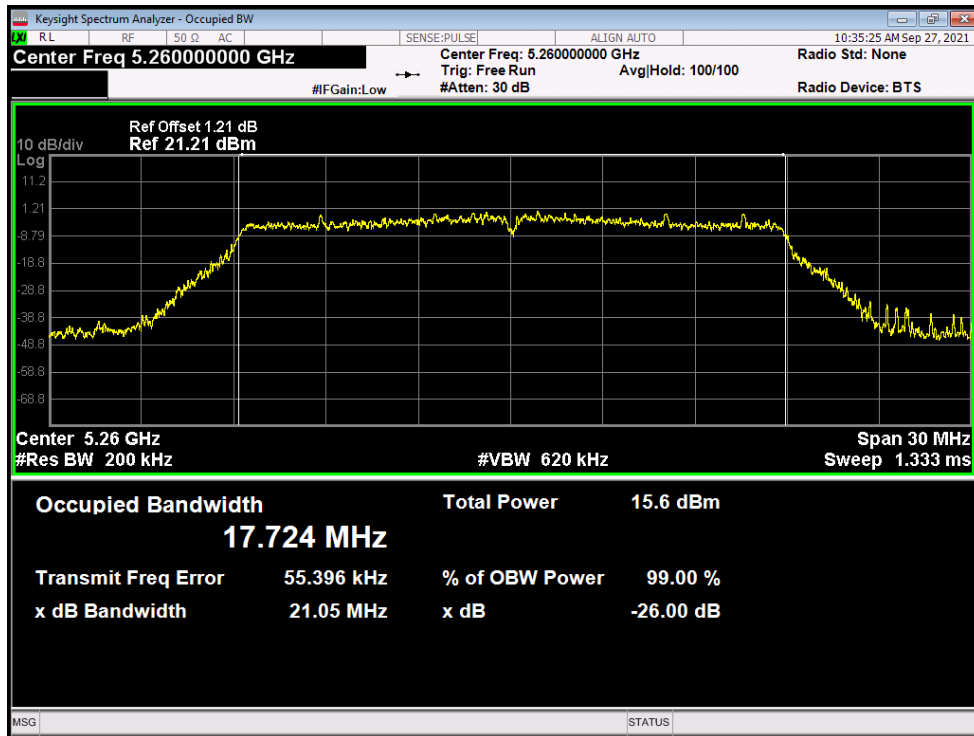


OBW NVNT n20 5280MHz Ant1

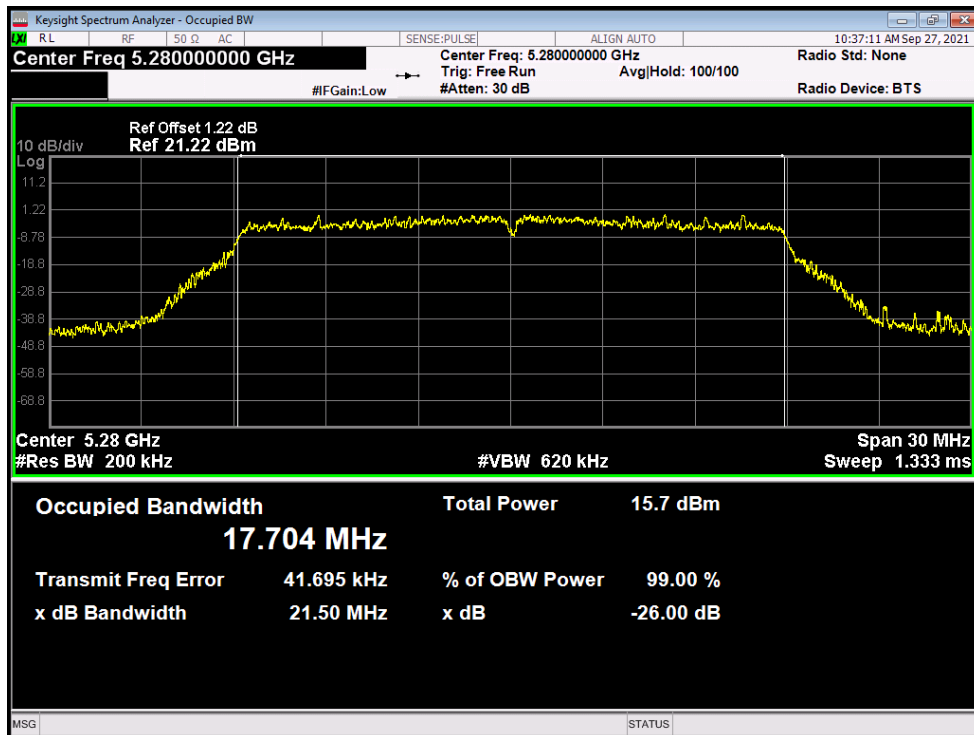


OBW NVNT n20 5320MHz Ant1

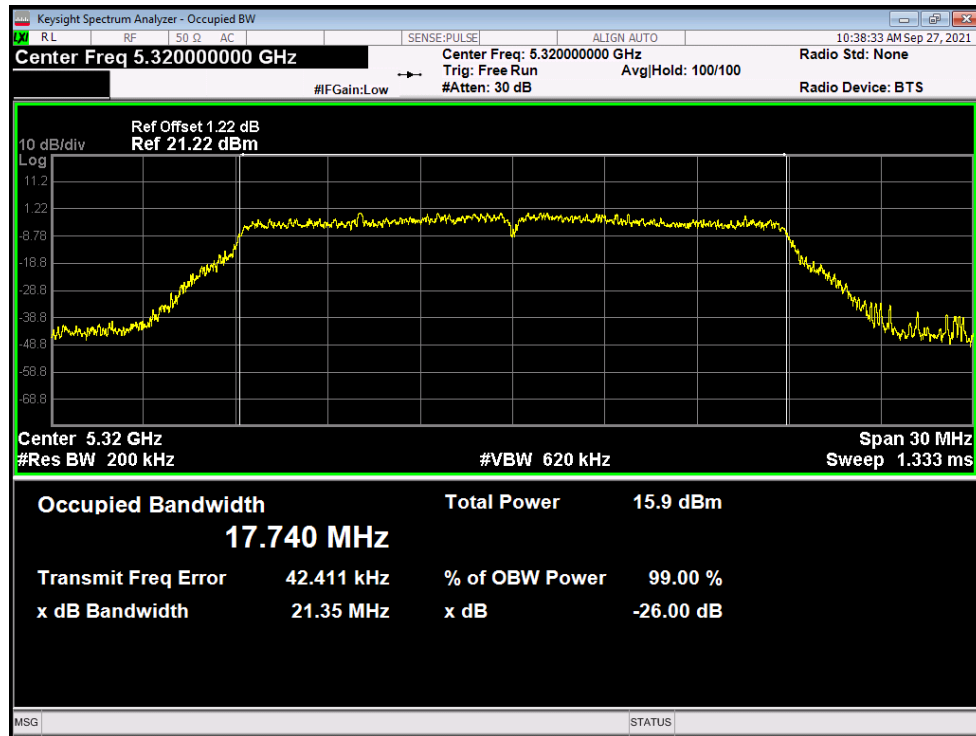


OBW NVNT n20 5260MHz Ant2

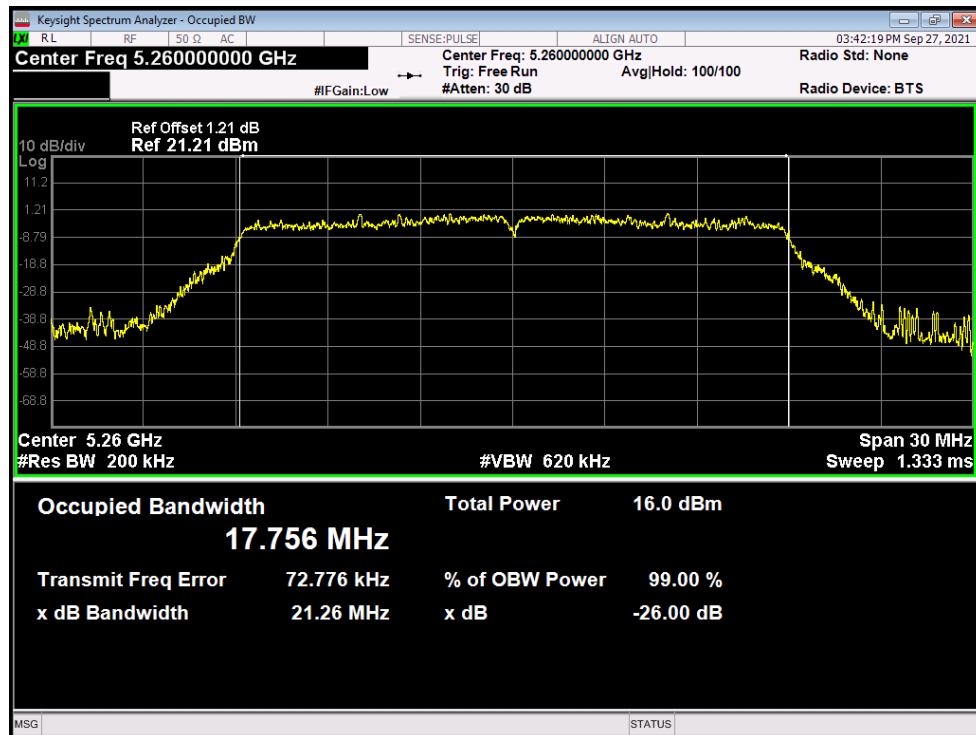


OBW NVNT n20 5280MHz Ant2

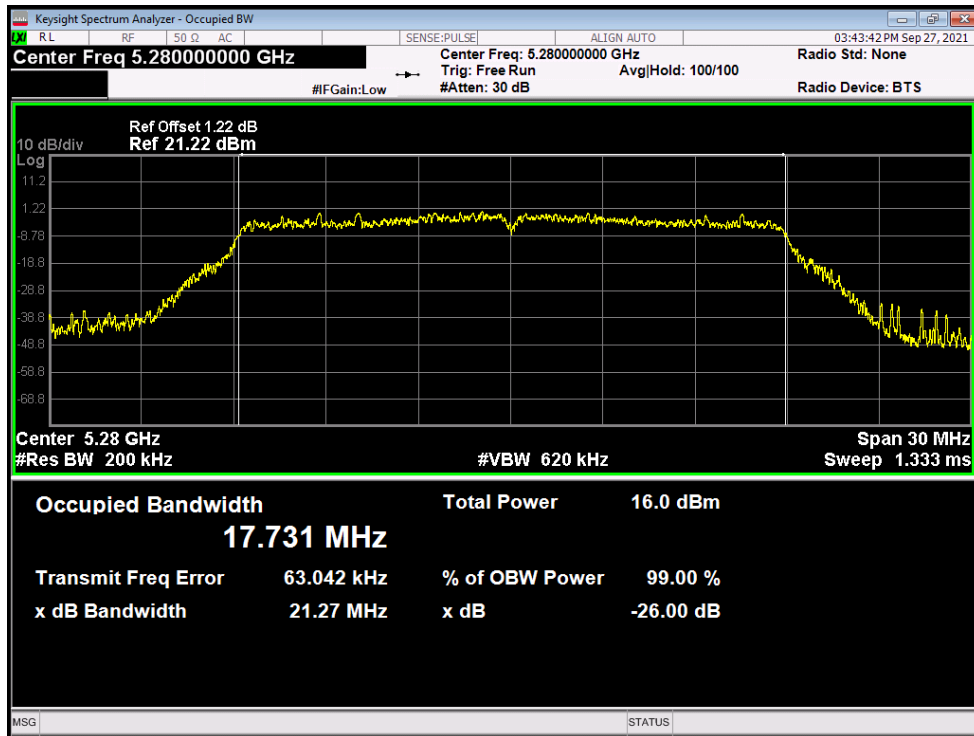


OBW NVNT n20 5320MHz Ant2

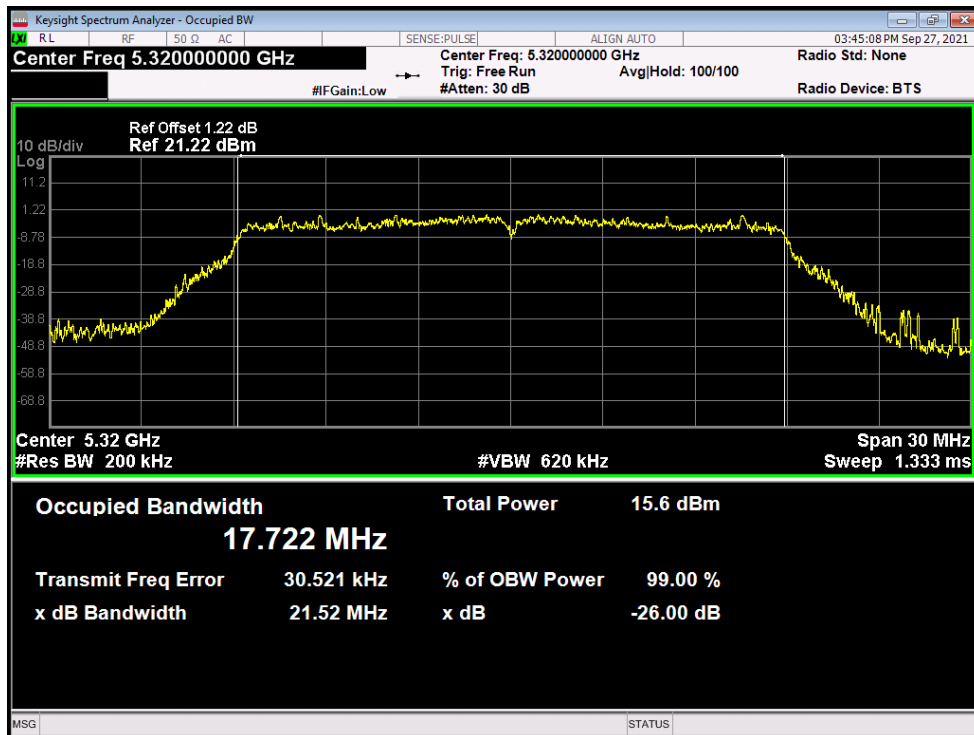


OBW NVNT n40 5270MHz Ant1

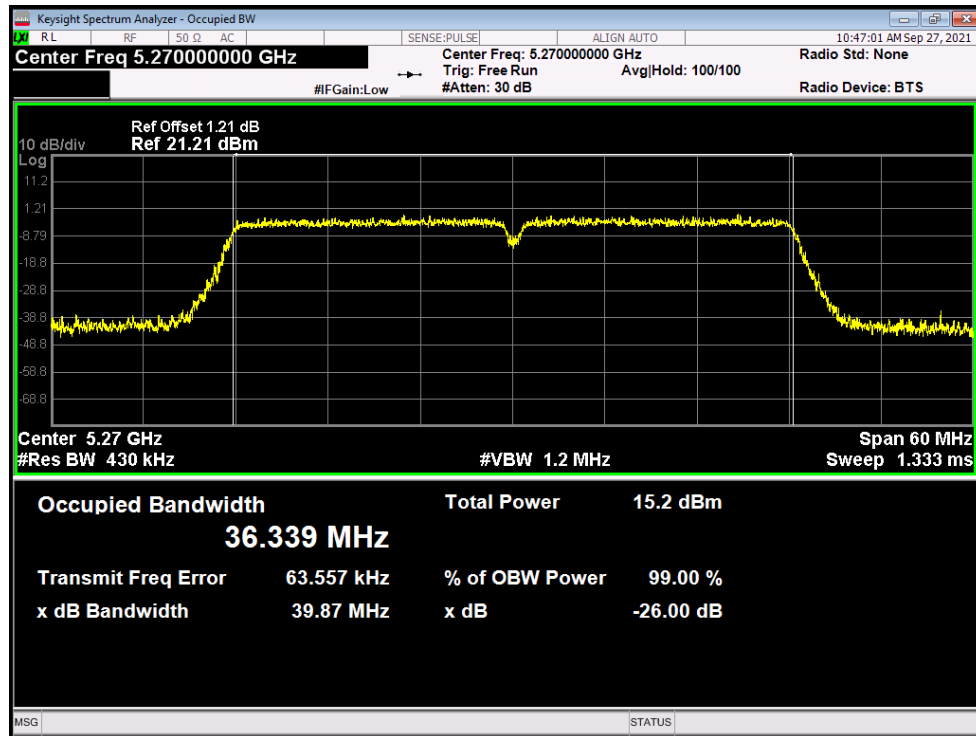


OBW NVNT n40 5310MHz Ant1

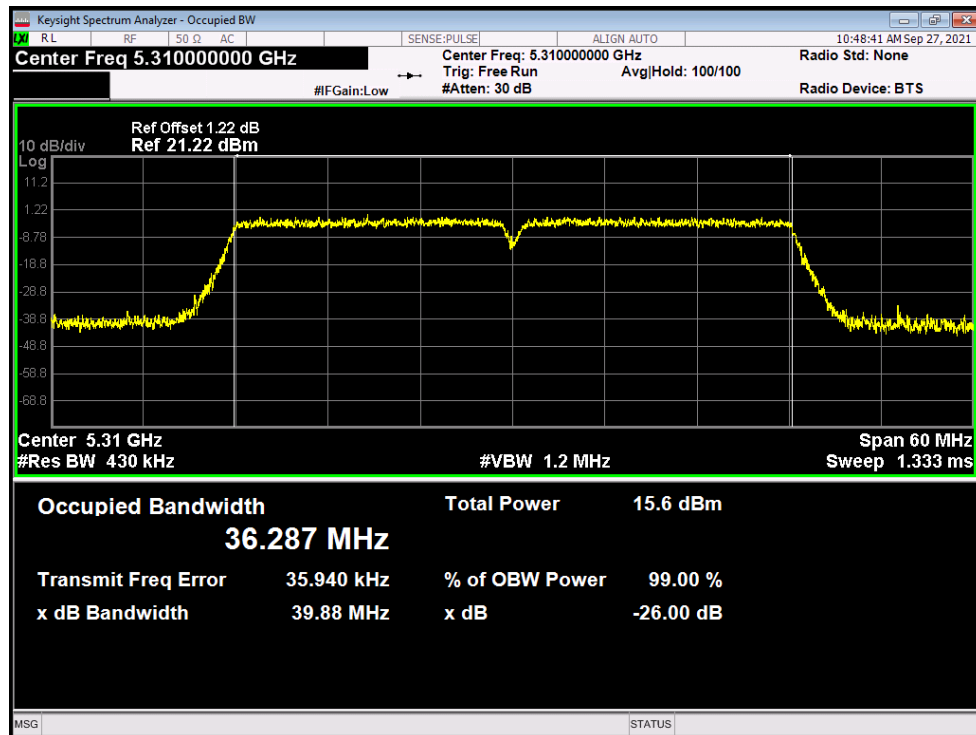

OBW NVNT n40 5270MHz Ant2

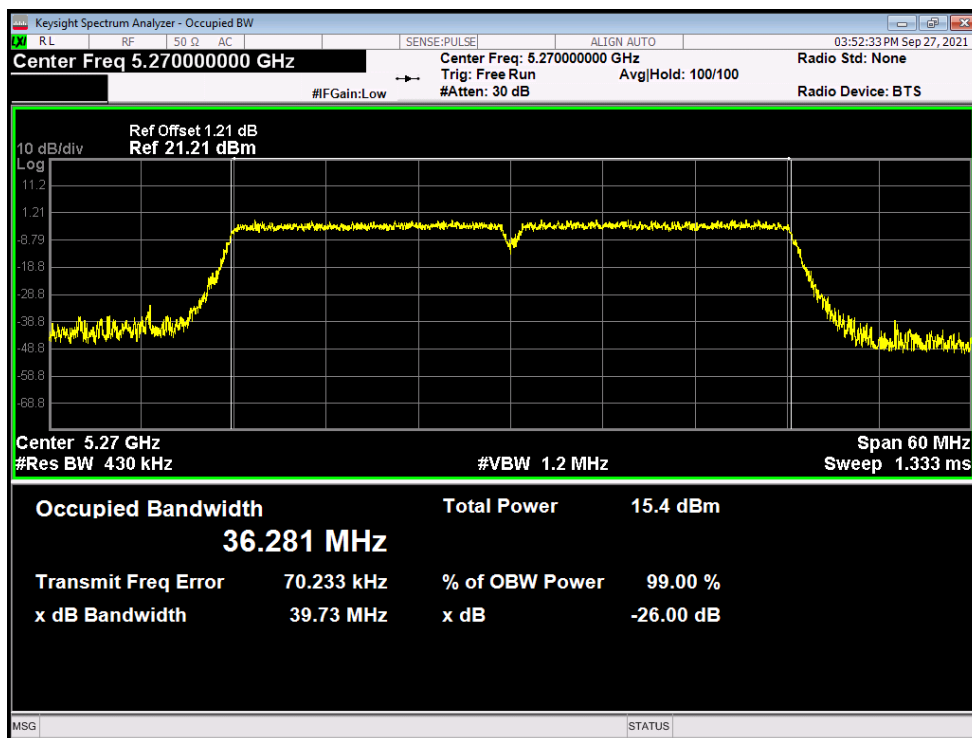


OBW NVNT n40 5310MHz Ant2

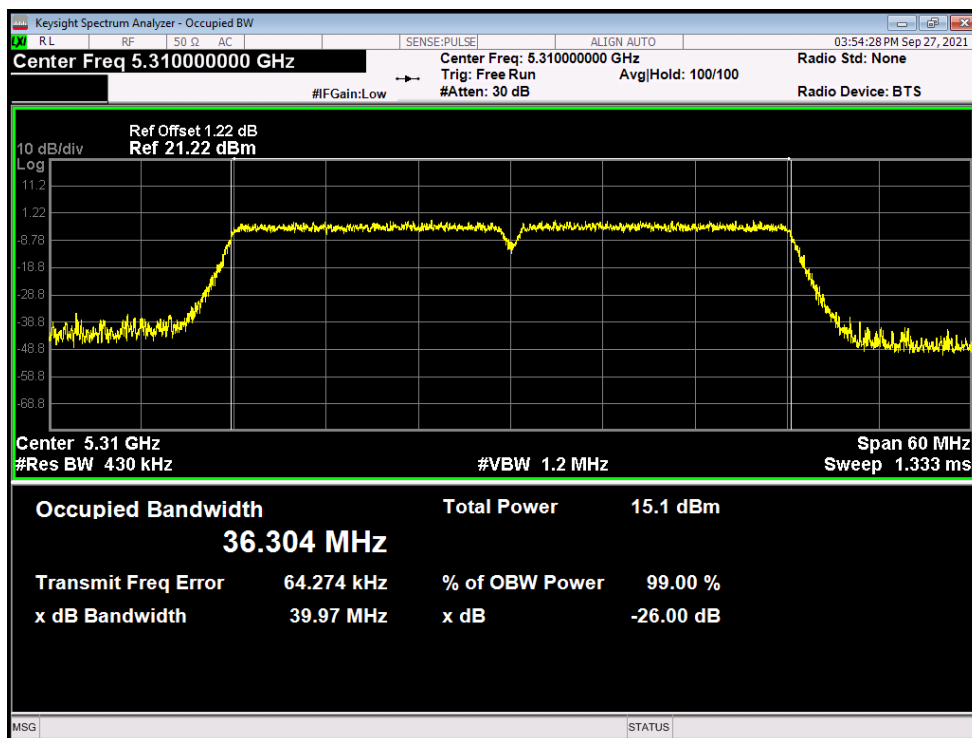


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	7.953	11	Pass
NVNT	a	5280	Ant1	9.214	11	Pass
NVNT	a	5320	Ant1	9.232	11	Pass
NVNT	a	5260	Ant2	9.035	11	Pass
NVNT	a	5280	Ant2	7.834	11	Pass
NVNT	a	5320	Ant2	7.391	11	Pass
NVNT	ac20	5260	Ant1	7.104	11	Pass
NVNT	ac20	5280	Ant1	7.668	11	Pass
NVNT	ac20	5320	Ant1	7.68	11	Pass
NVNT	ac20	5260	Ant2	8.576	11	Pass
NVNT	ac20	5280	Ant2	8.237	11	Pass
NVNT	ac20	5320	Ant2	8.271	11	Pass
NVNT	ac40	5270	Ant1	3.979	11	Pass
NVNT	ac40	5310	Ant1	4.095	11	Pass
NVNT	ac40	5270	Ant2	3.939	11	Pass
NVNT	ac40	5310	Ant2	3.266	11	Pass
NVNT	ac80	5290	Ant1	0.262	11	Pass
NVNT	ac80	5290	Ant2	0.077	11	Pass
NVNT	n20	5260	Ant1	7.116	11	Pass
NVNT	n20	5280	Ant1	7.531	11	Pass
NVNT	n20	5320	Ant1	7.92	11	Pass
NVNT	n20	5260	Ant2	7.715	11	Pass
NVNT	n20	5280	Ant2	7.476	11	Pass
NVNT	n20	5320	Ant2	7.468	11	Pass
NVNT	n40	5270	Ant1	3.317	11	Pass
NVNT	n40	5310	Ant1	3.582	11	Pass
NVNT	n40	5270	Ant2	3.207	11	Pass
NVNT	n40	5310	Ant2	3.387	11	Pass


PSD NVNT a 5260MHz Ant1

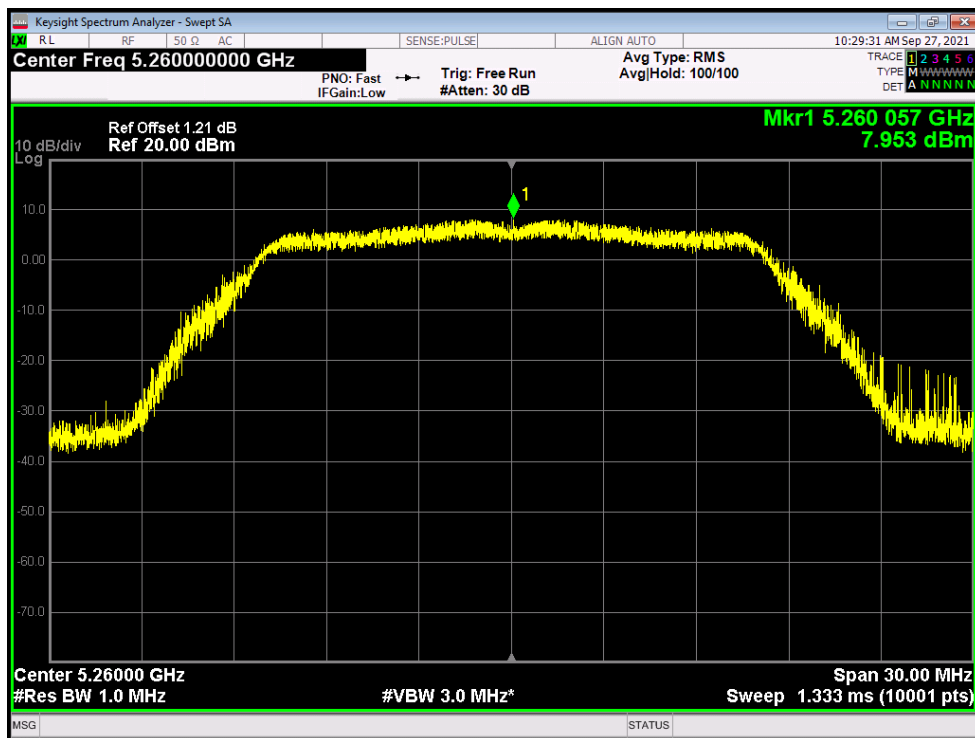


PSD NVNT a 5280MHz Ant1

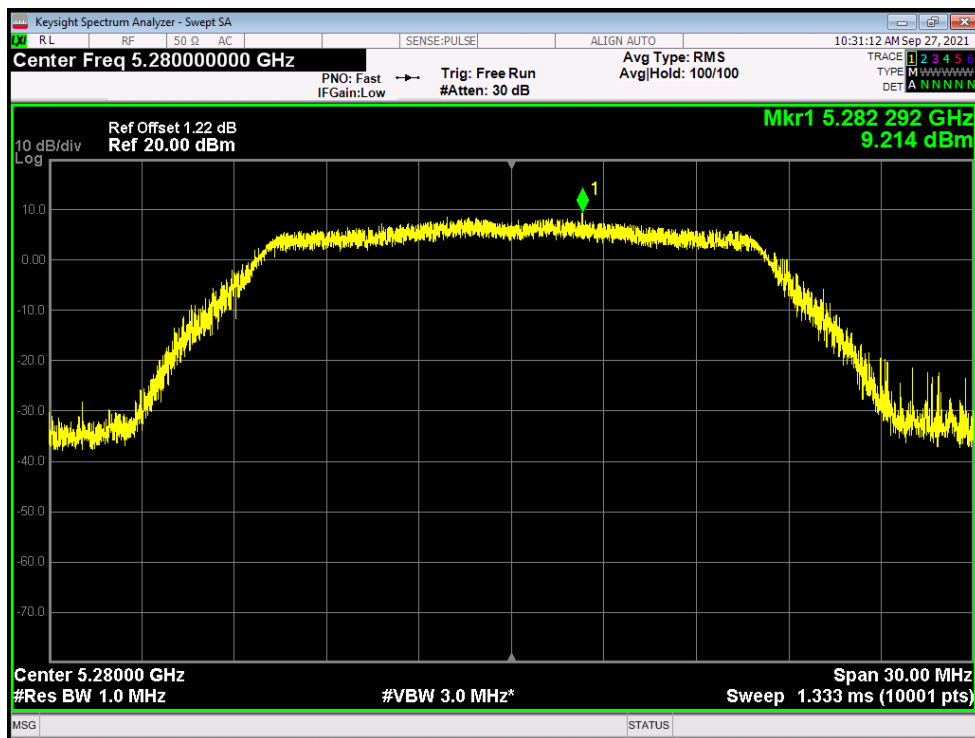


PSD NVNT a 5320MHz Ant1

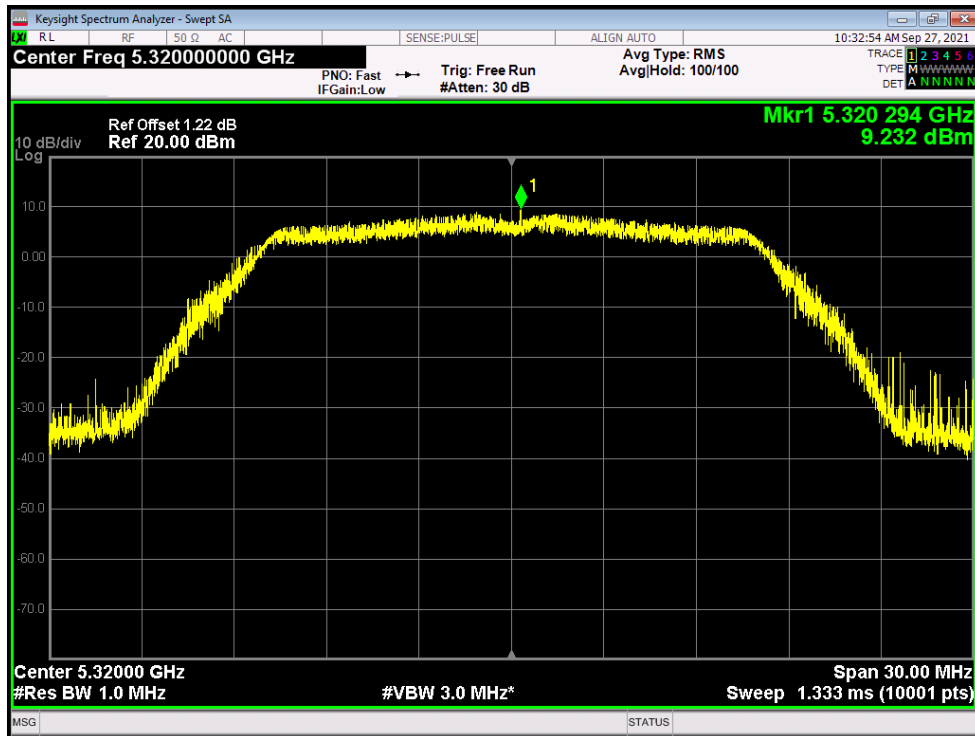


PSD NVNT a 5260MHz Ant2

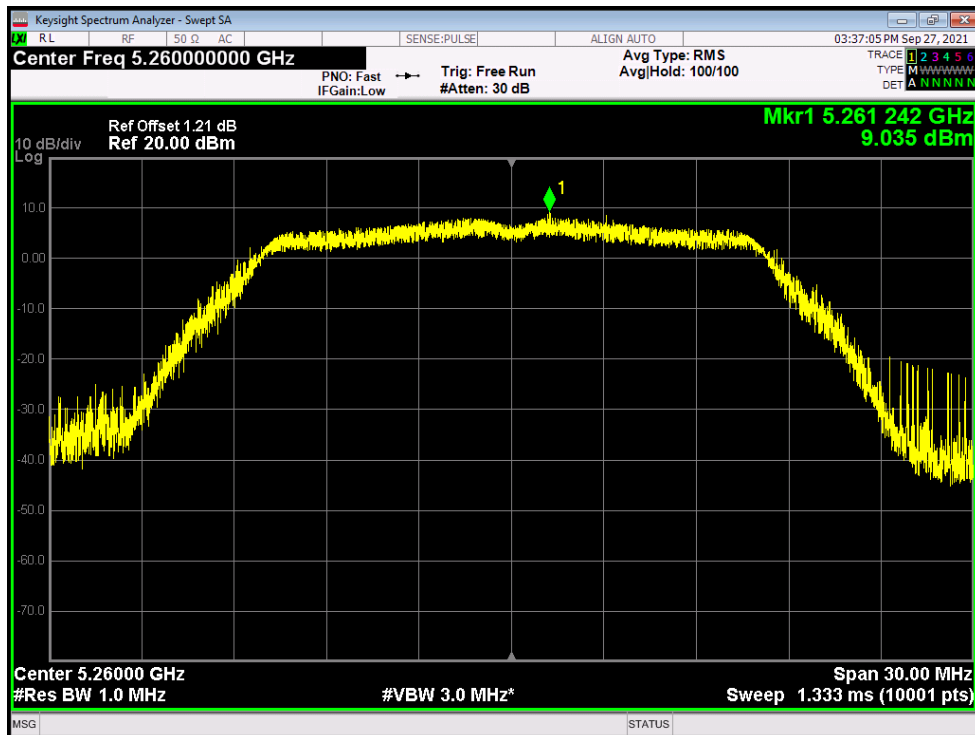


PSD NVNT a 5280MHz Ant2

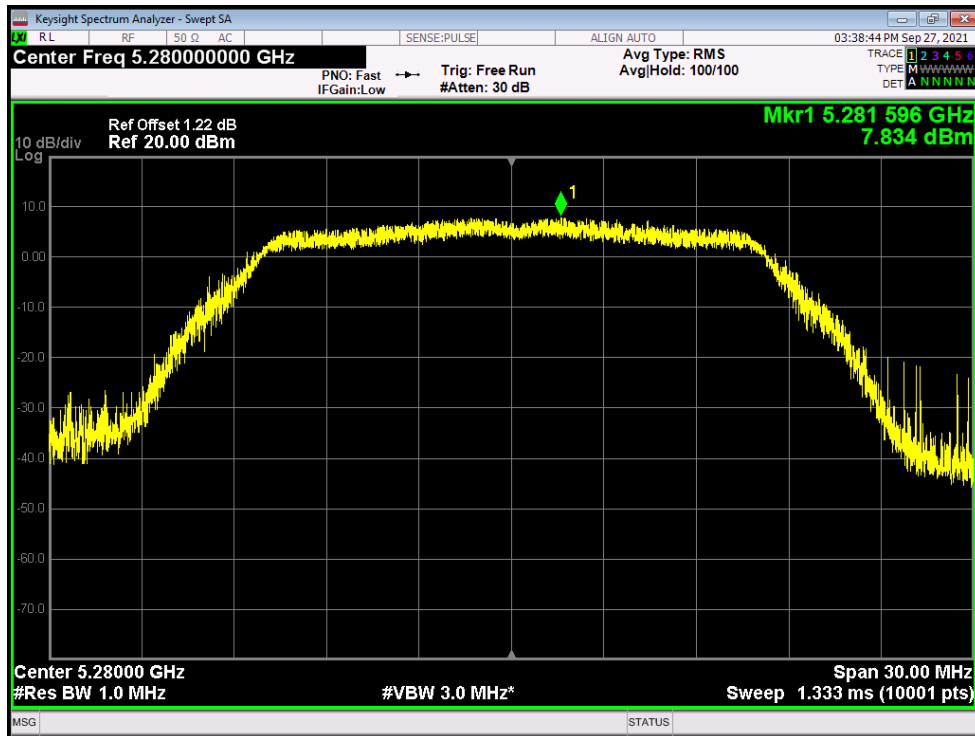


PSD NVNT a 5320MHz Ant2

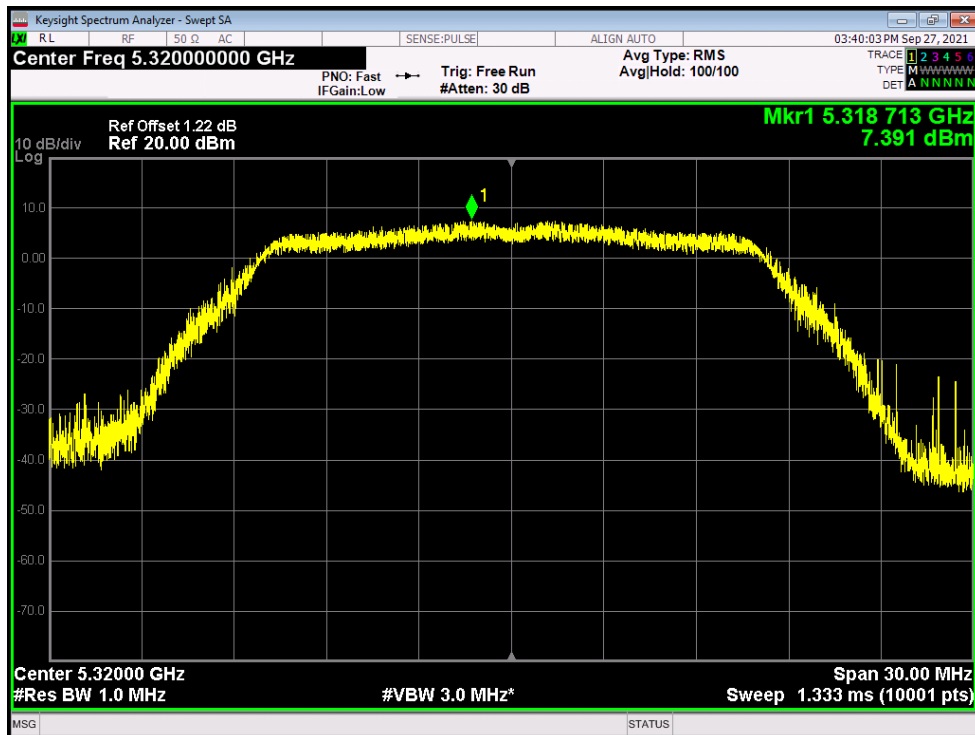


PSD NVNT ac20 5260MHz Ant1

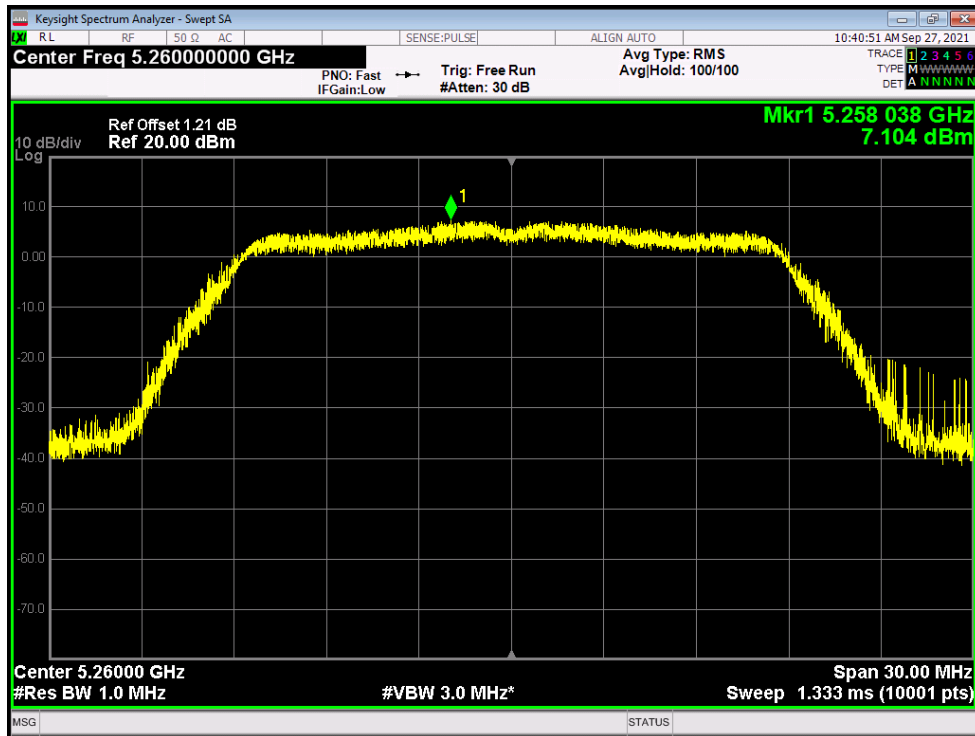


PSD NVNT ac20 5280MHz Ant1

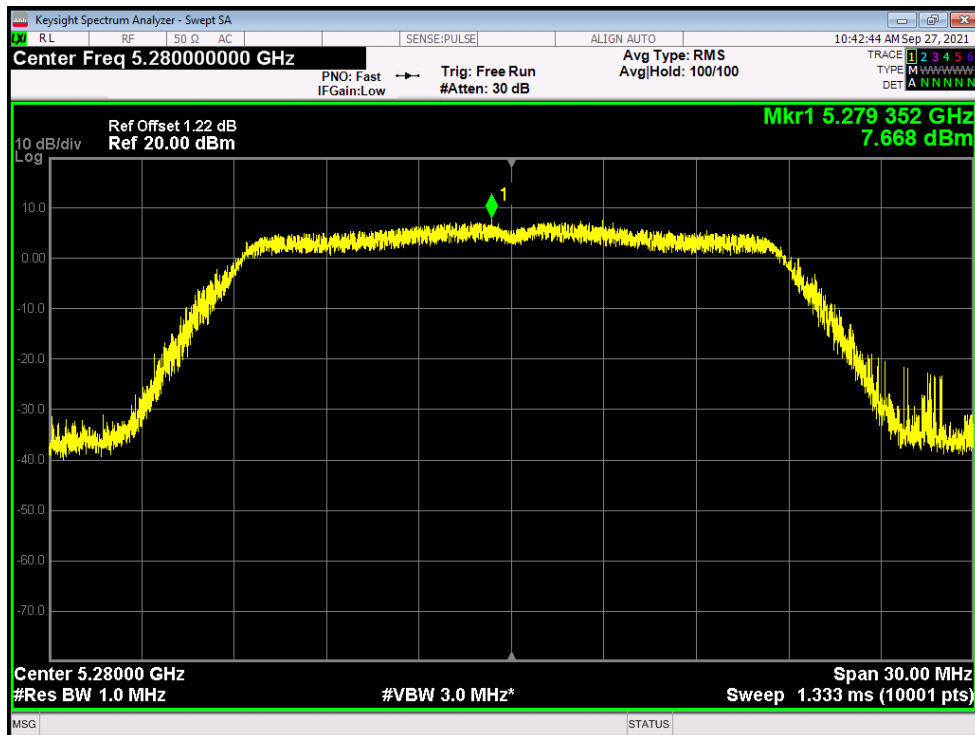


PSD NVNT ac20 5320MHz Ant1

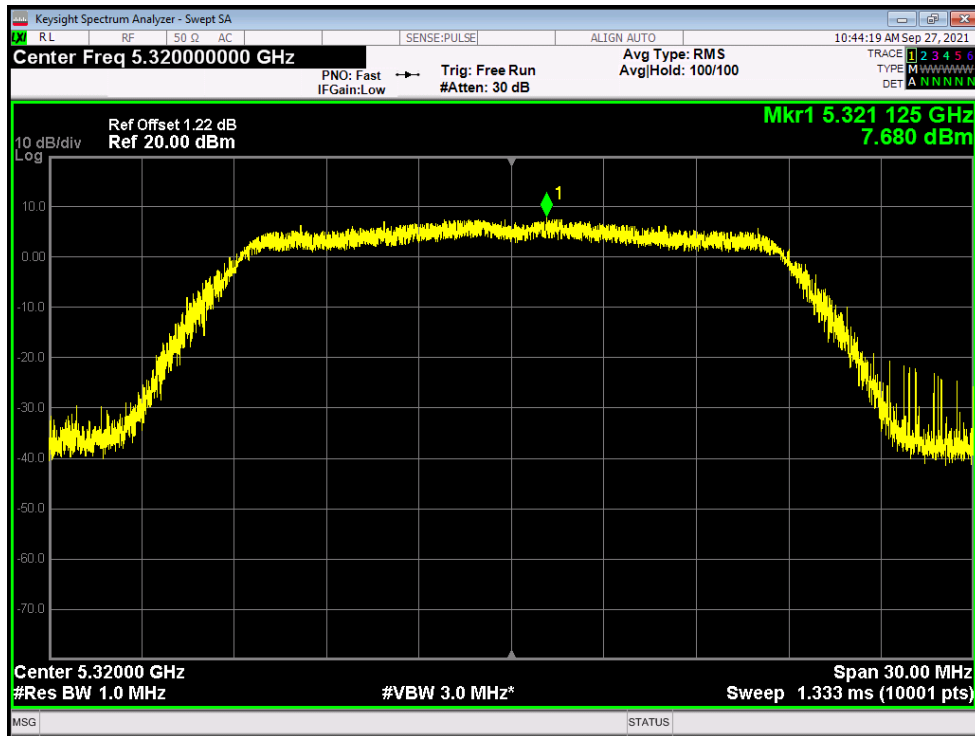


PSD NVNT ac20 5260MHz Ant2

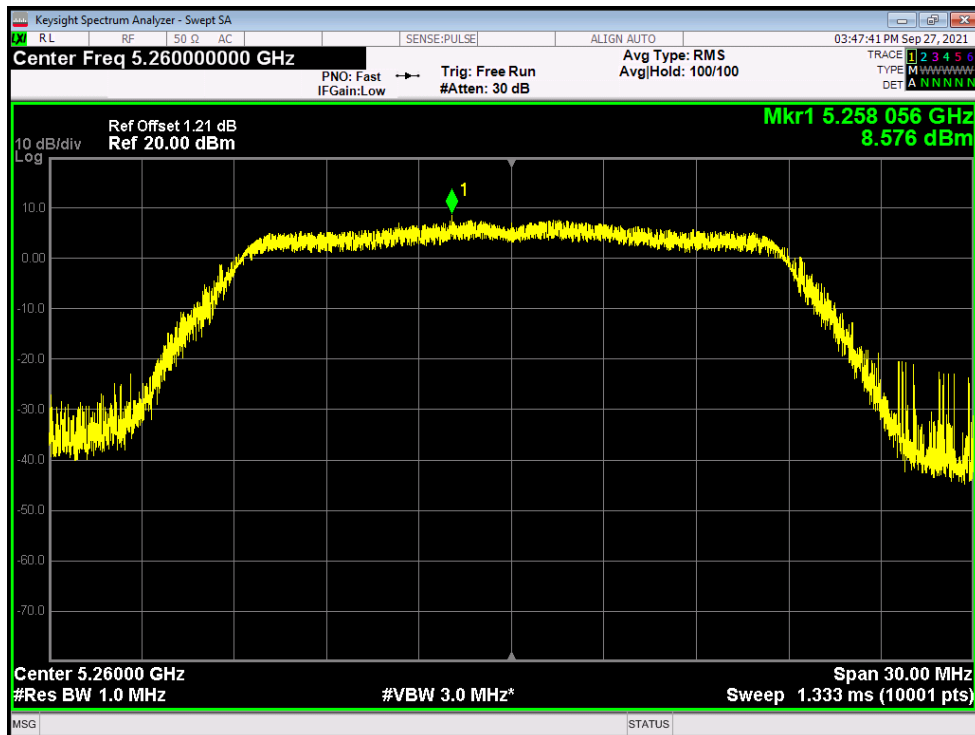


PSD NVNT ac20 5280MHz Ant2

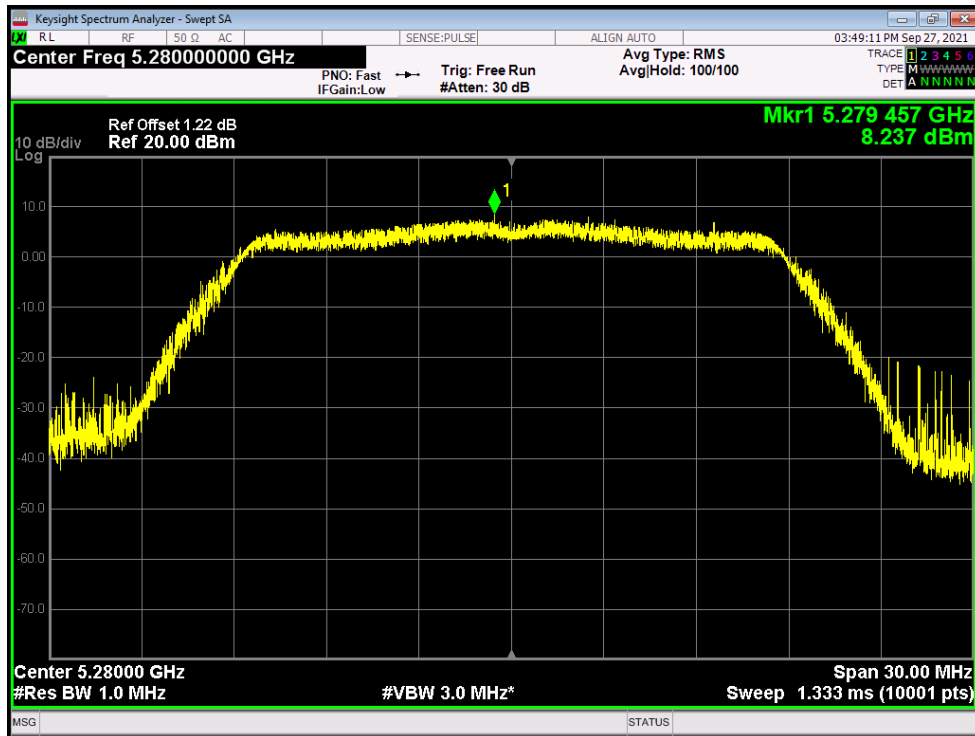


PSD NVNT ac20 5320MHz Ant2

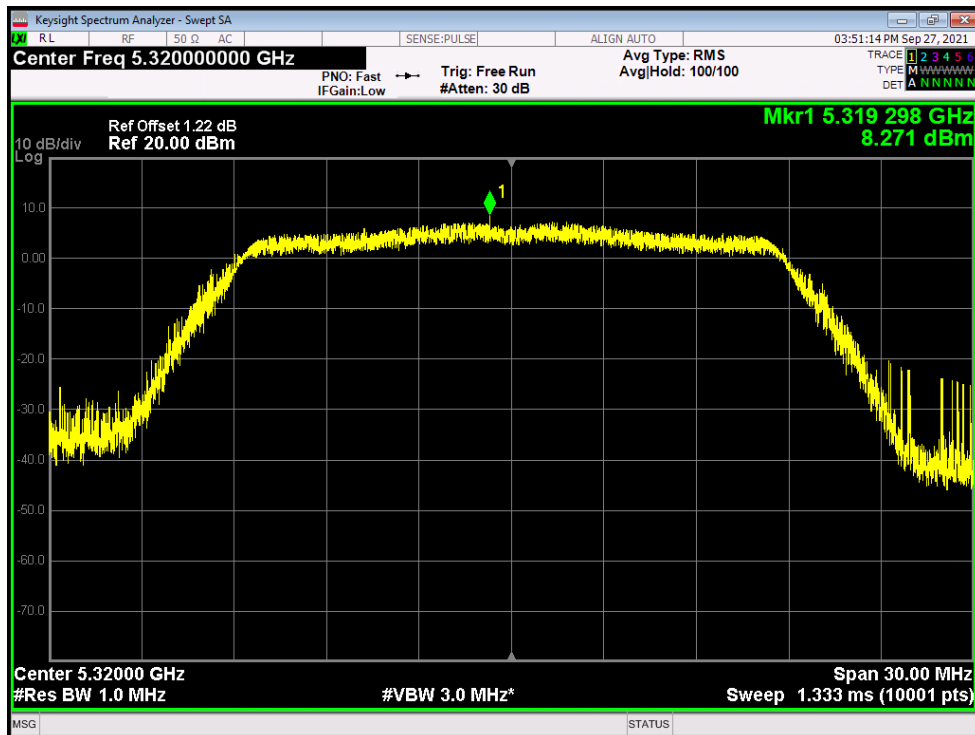


PSD NVNT ac40 5270MHz Ant1

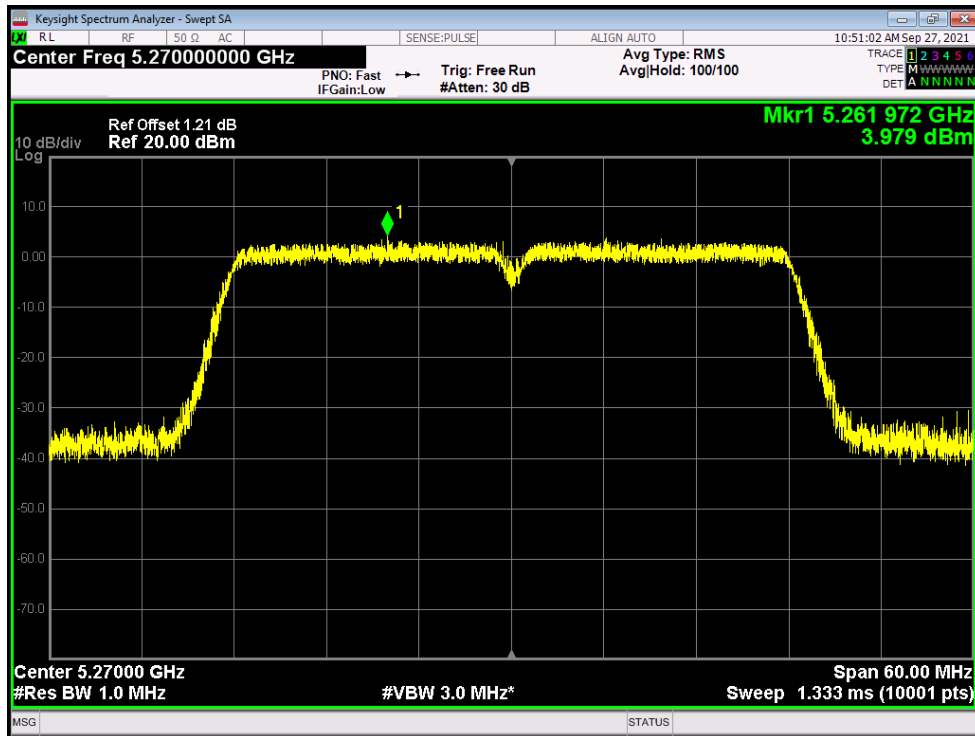


PSD NVNT ac40 5310MHz Ant1

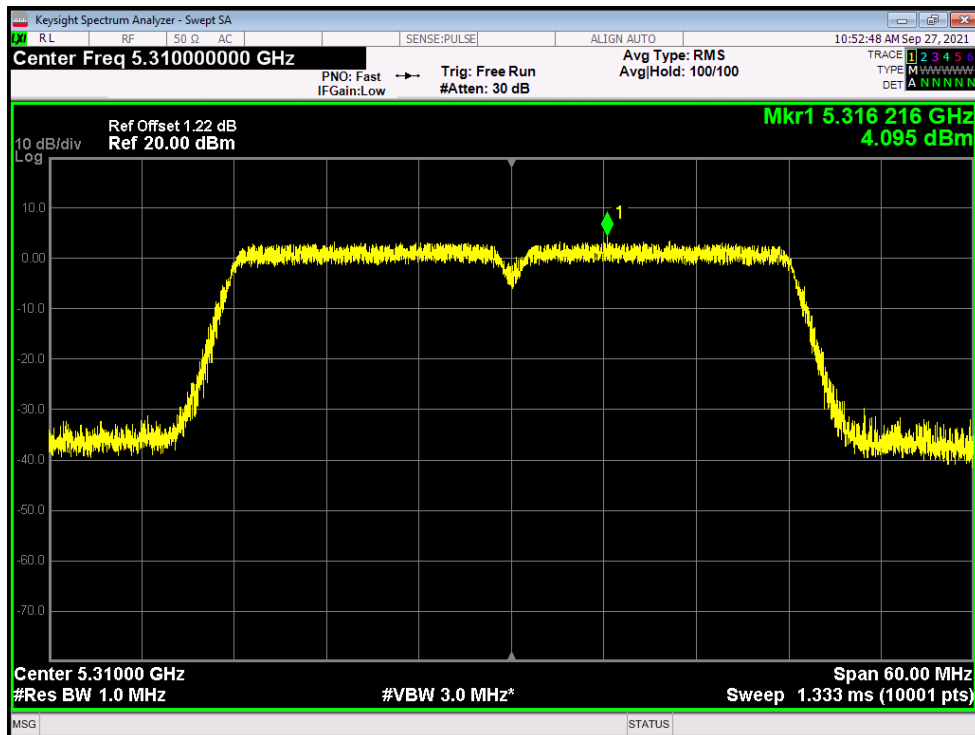


PSD NVNT ac40 5270MHz Ant2

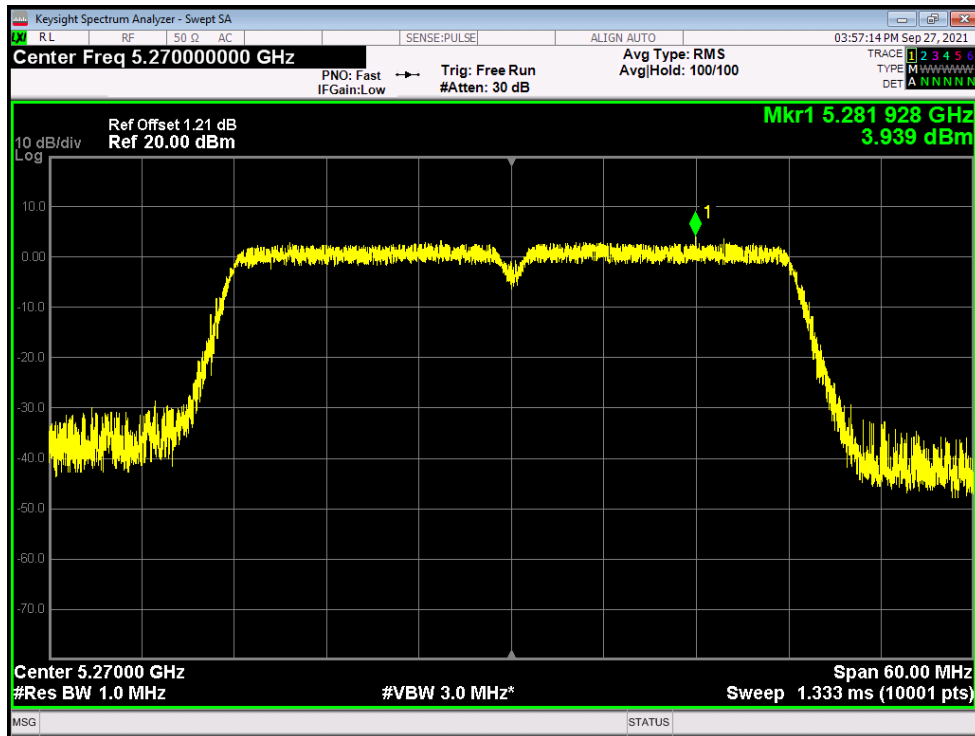


PSD NVNT ac40 5310MHz Ant2

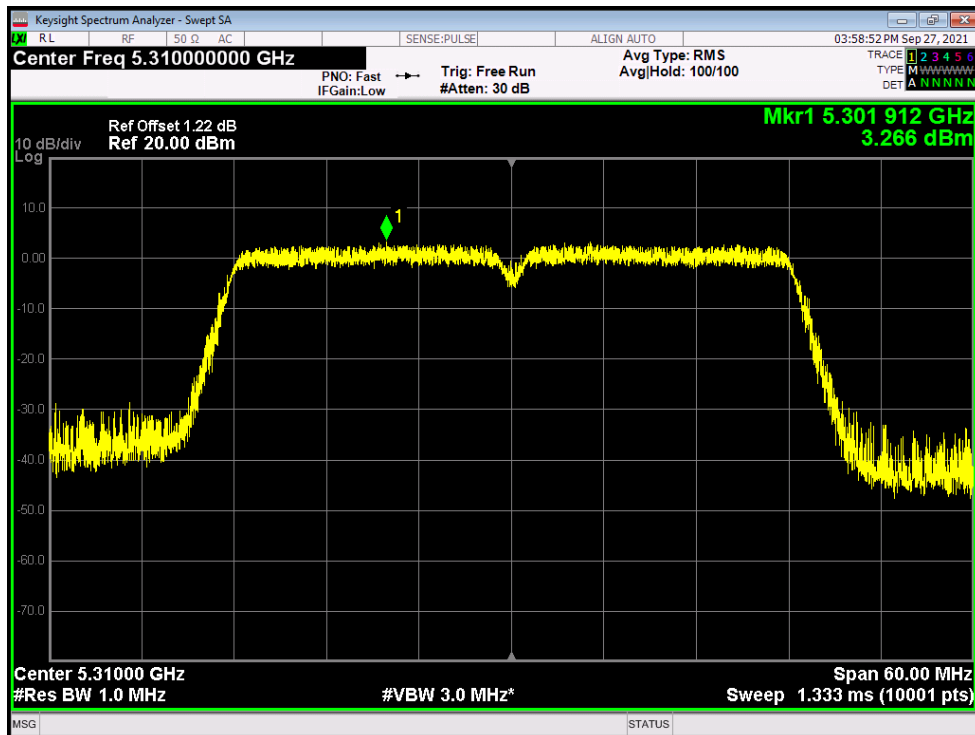


PSD NVNT ac80 5290MHz Ant1

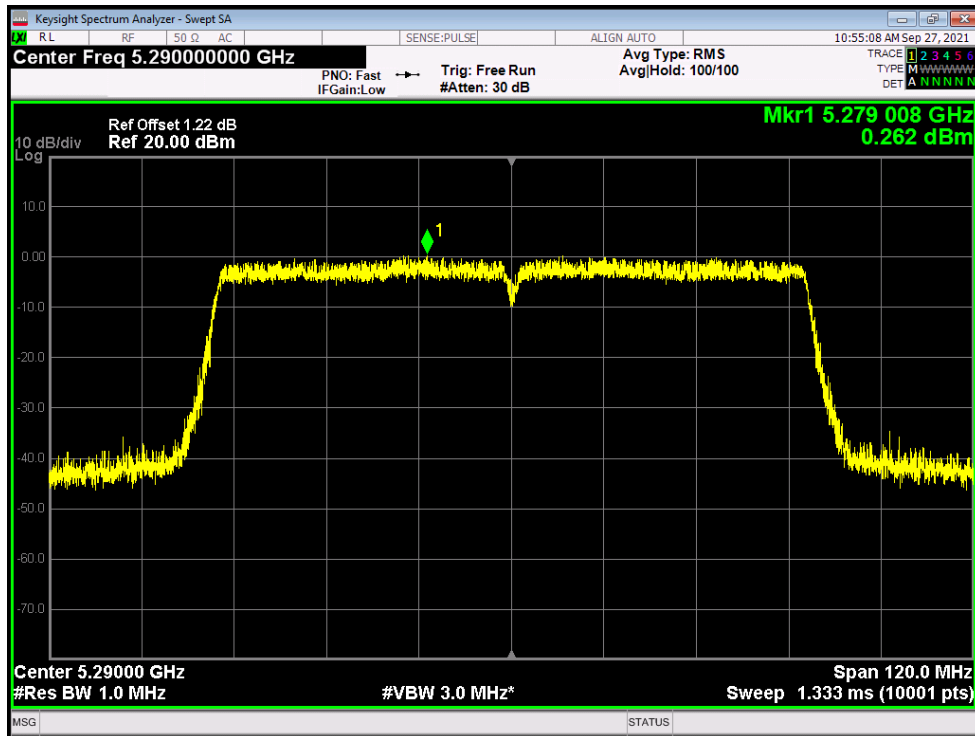


PSD NVNT ac80 5290MHz Ant2

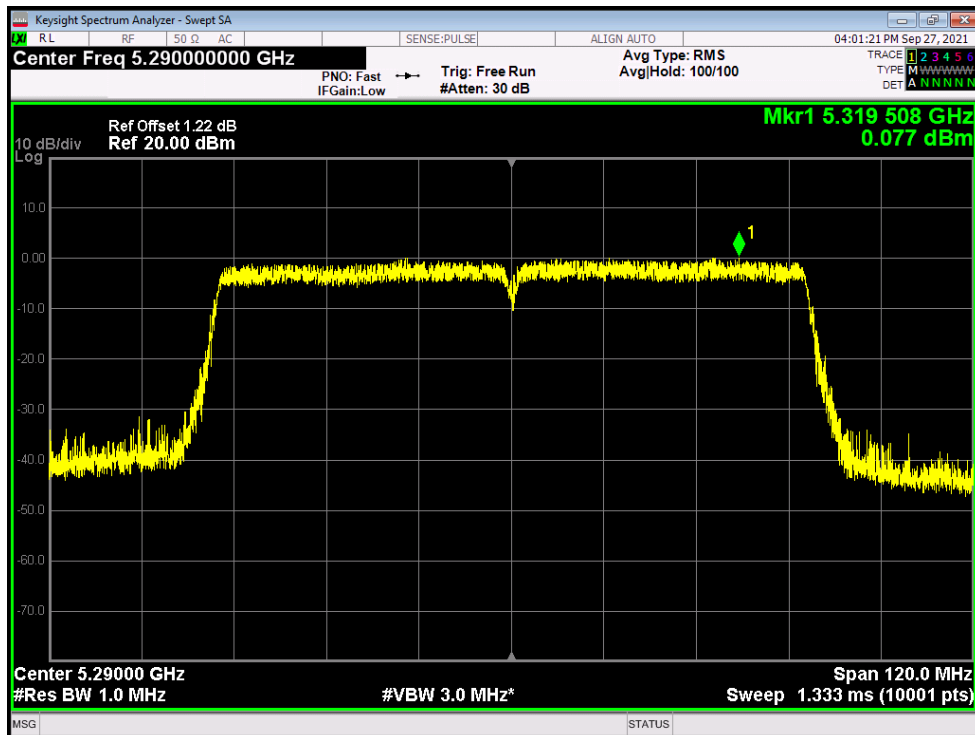


PSD NVNT n20 5260MHz Ant1

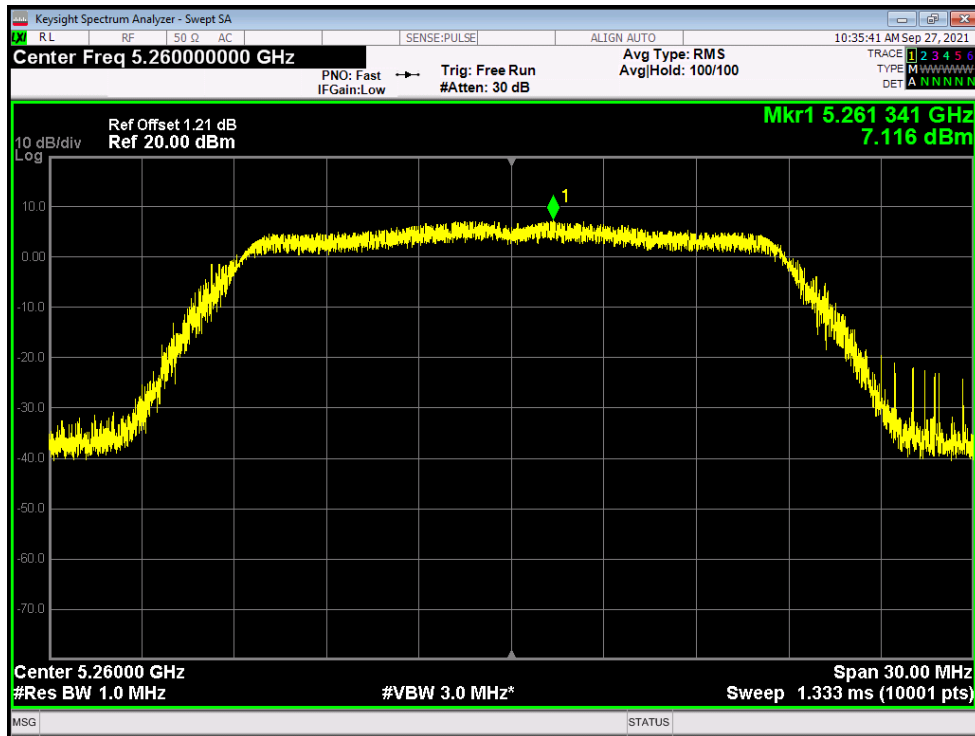


PSD NVNT n20 5280MHz Ant1

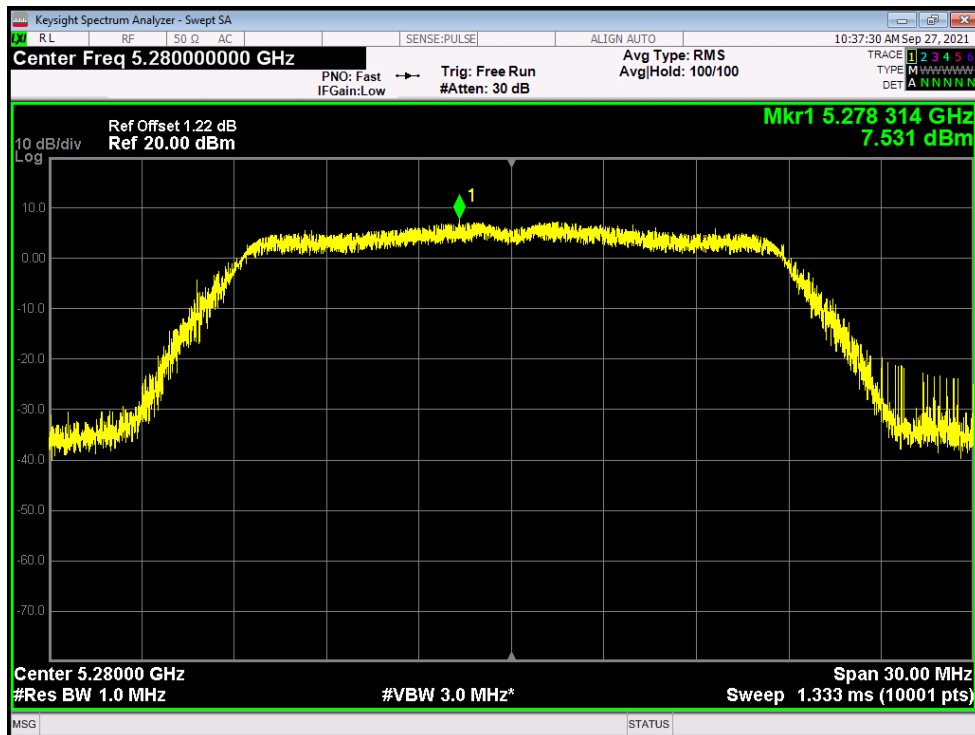


PSD NVNT n20 5320MHz Ant1

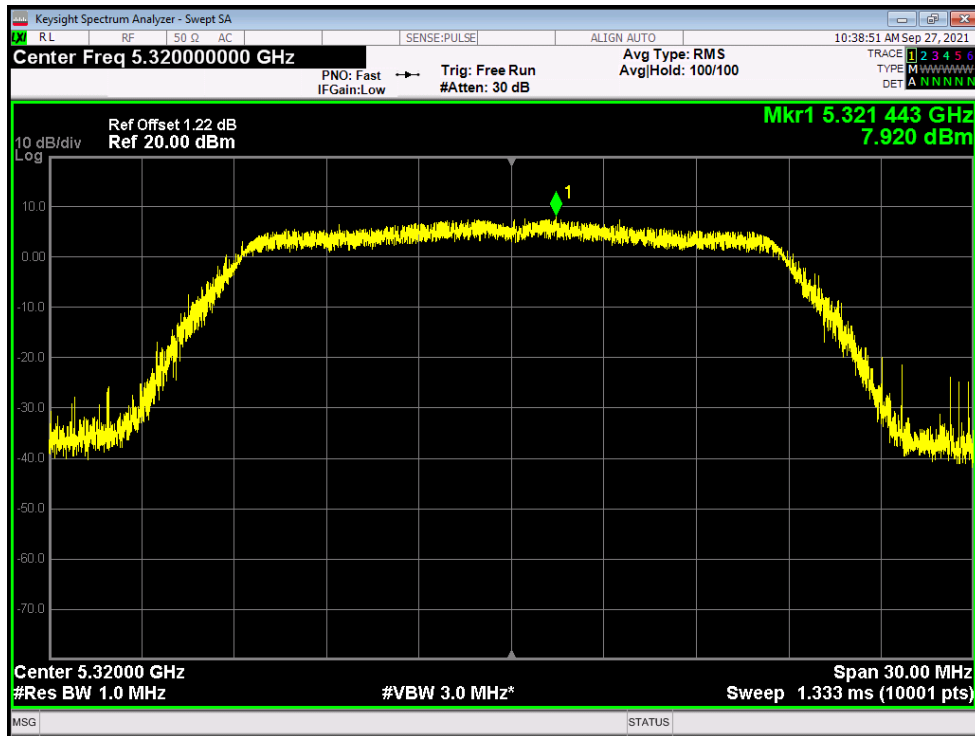


PSD NVNT n20 5260MHz Ant2

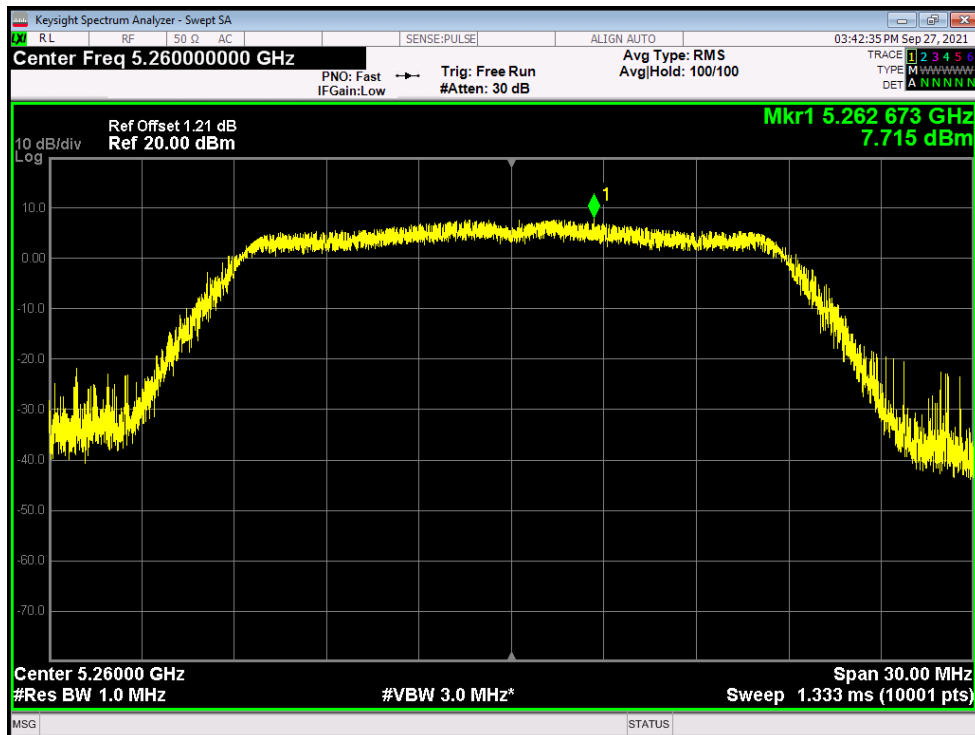


PSD NVNT n20 5280MHz Ant2

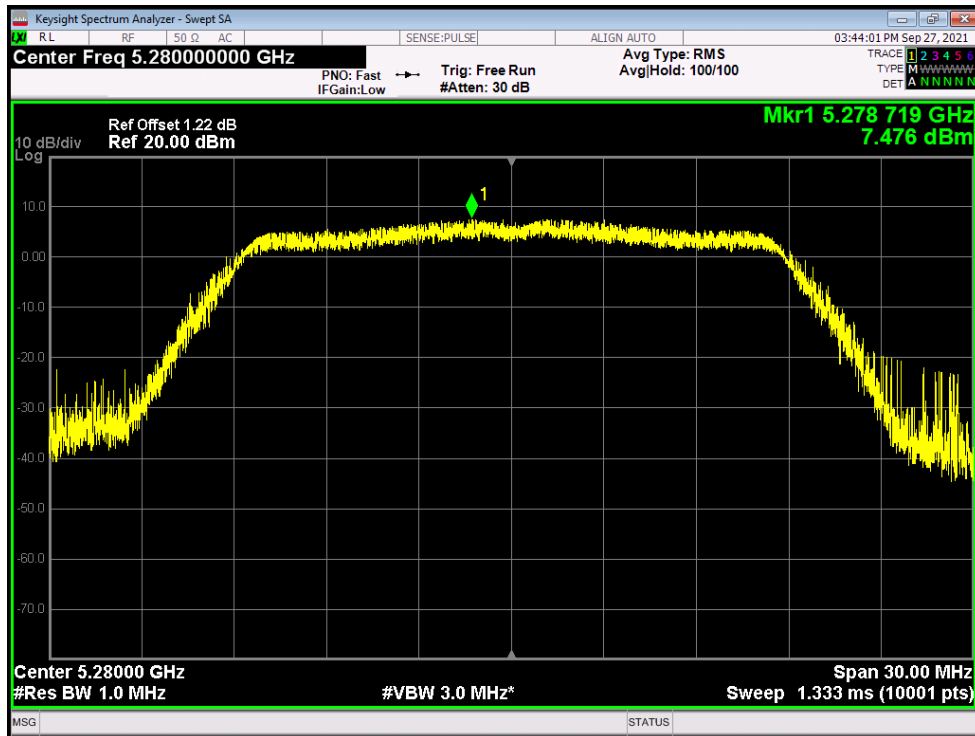


PSD NVNT n20 5320MHz Ant2

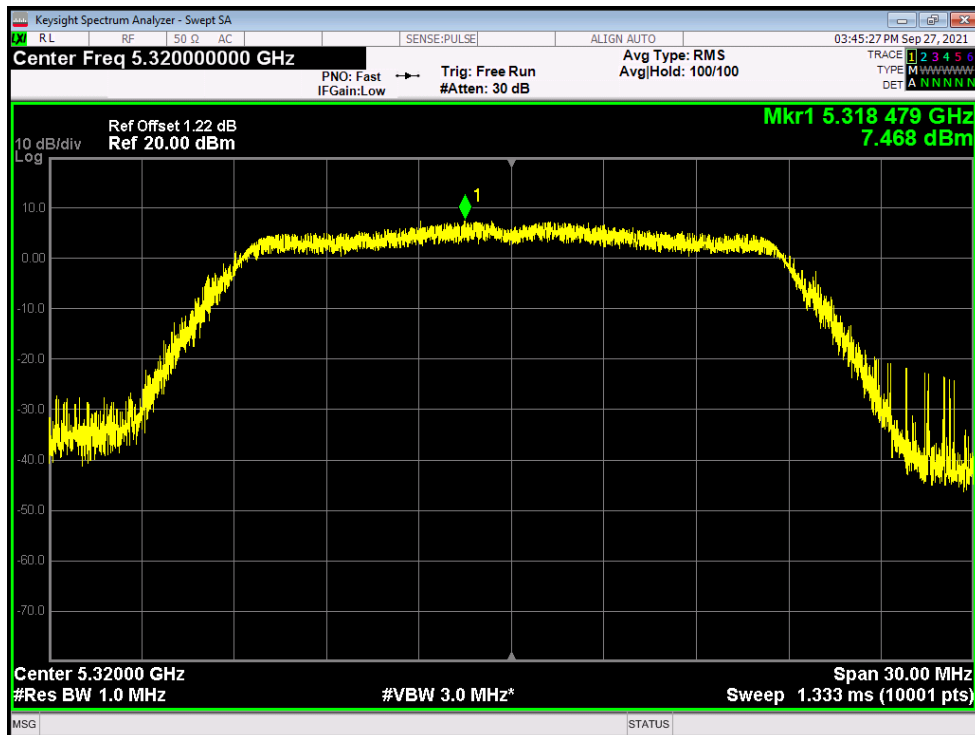


PSD NVNT n40 5270MHz Ant1

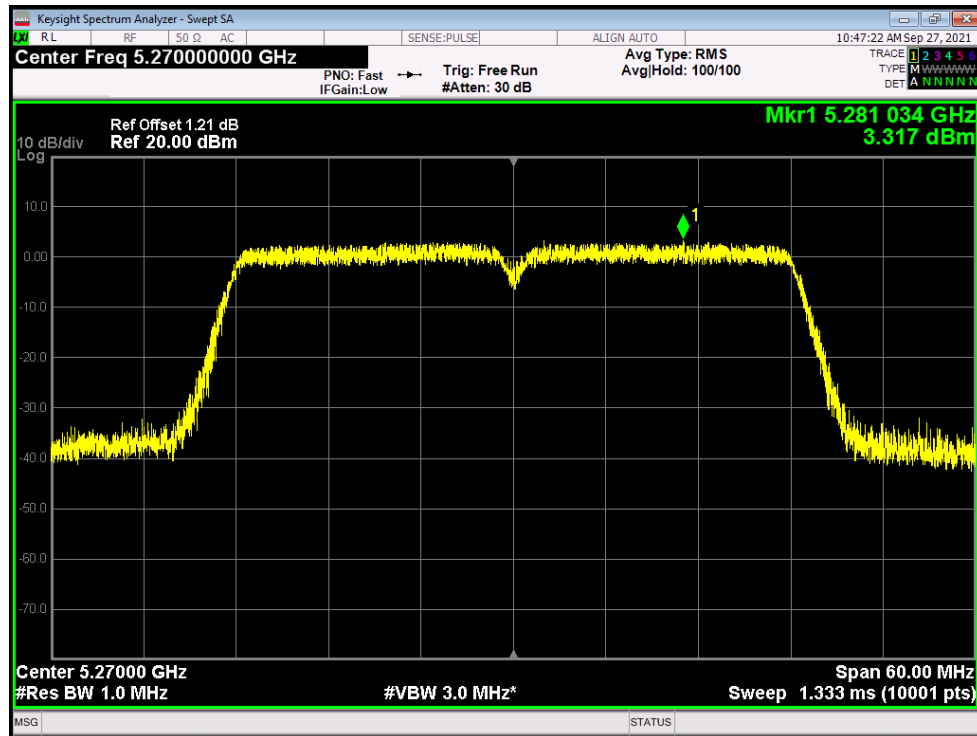


PSD NVNT n40 5310MHz Ant1

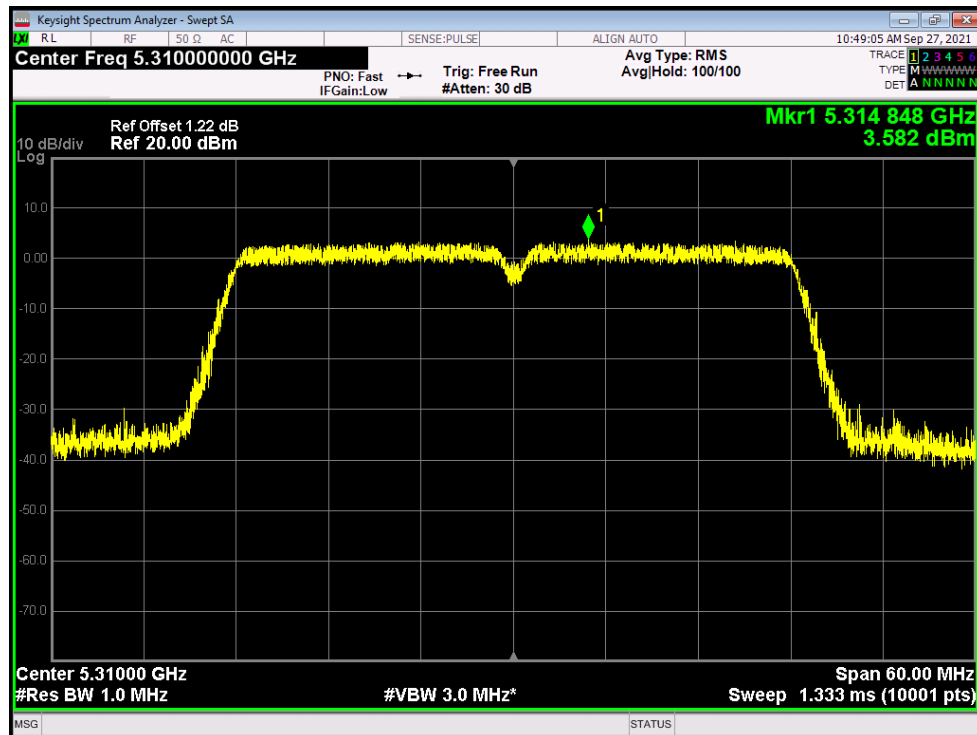

PSD NVNT n40 5270MHz Ant2

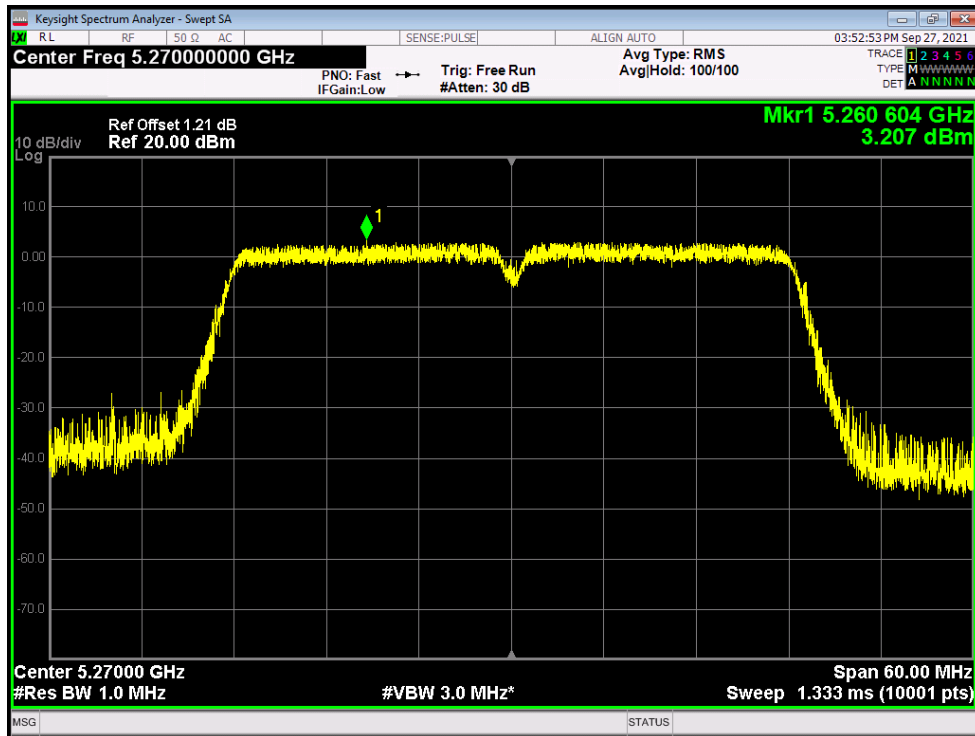


PSD NVNT n40 5310MHz Ant2

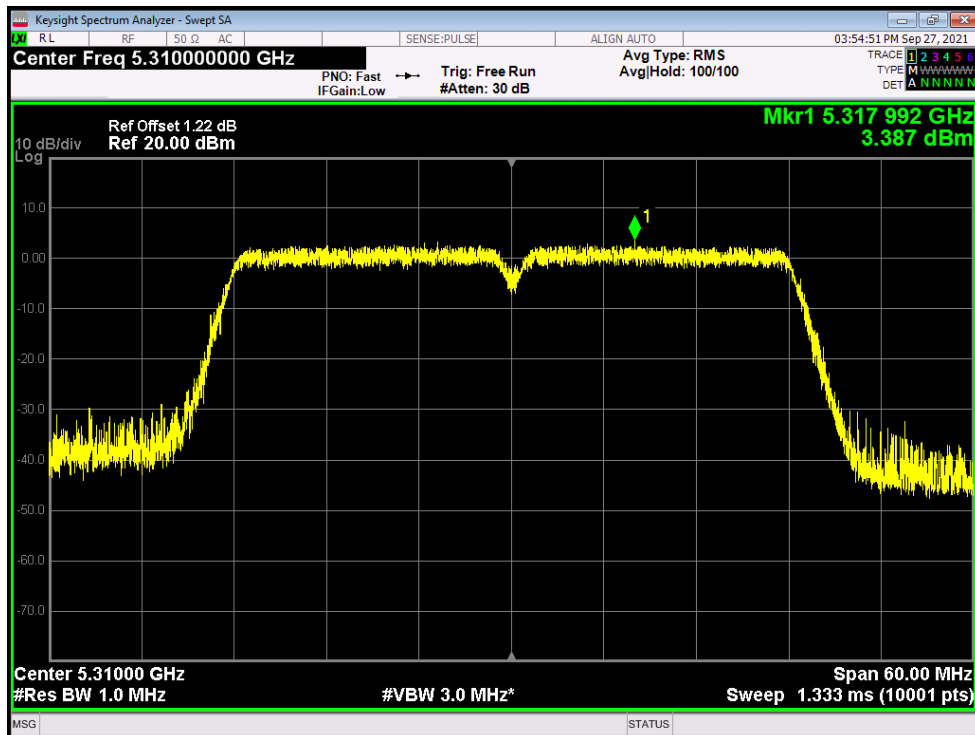


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5260	Ant1	-46.52	-27	Pass
NVNT	a	5320	Ant1	-39.16	-27	Pass
NVNT	a	5260	Ant2	-44.57	-27	Pass
NVNT	a	5320	Ant2	-34.42	-27	Pass
NVNT	ac20	5260	Ant1	-52.72	-27	Pass
NVNT	ac20	5320	Ant1	-36.65	-27	Pass
NVNT	ac20	5260	Ant2	-51.63	-27	Pass
NVNT	ac20	5320	Ant2	-38.64	-27	Pass
NVNT	ac40	5270	Ant1	-51.41	-27	Pass
NVNT	ac40	5310	Ant1	-31.47	-27	Pass
NVNT	ac40	5270	Ant2	-49.49	-27	Pass
NVNT	ac40	5310	Ant2	-37.85	-27	Pass
NVNT	ac80	5290	Ant1	-43.44	-27	Pass
NVNT	ac80	5290	Ant2	-43.61	-27	Pass
NVNT	n20	5260	Ant1	-44.55	-27	Pass
NVNT	n20	5320	Ant1	-42.71	-27	Pass
NVNT	n20	5260	Ant2	-45.1	-27	Pass
NVNT	n20	5320	Ant2	-37.57	-27	Pass
NVNT	n40	5270	Ant1	-45.09	-27	Pass
NVNT	n40	5310	Ant1	-33.87	-27	Pass
NVNT	n40	5270	Ant2	-45.26	-27	Pass
NVNT	n40	5310	Ant2	-36.59	-27	Pass


Band Edge NVNT a 5260MHz Low Ant1

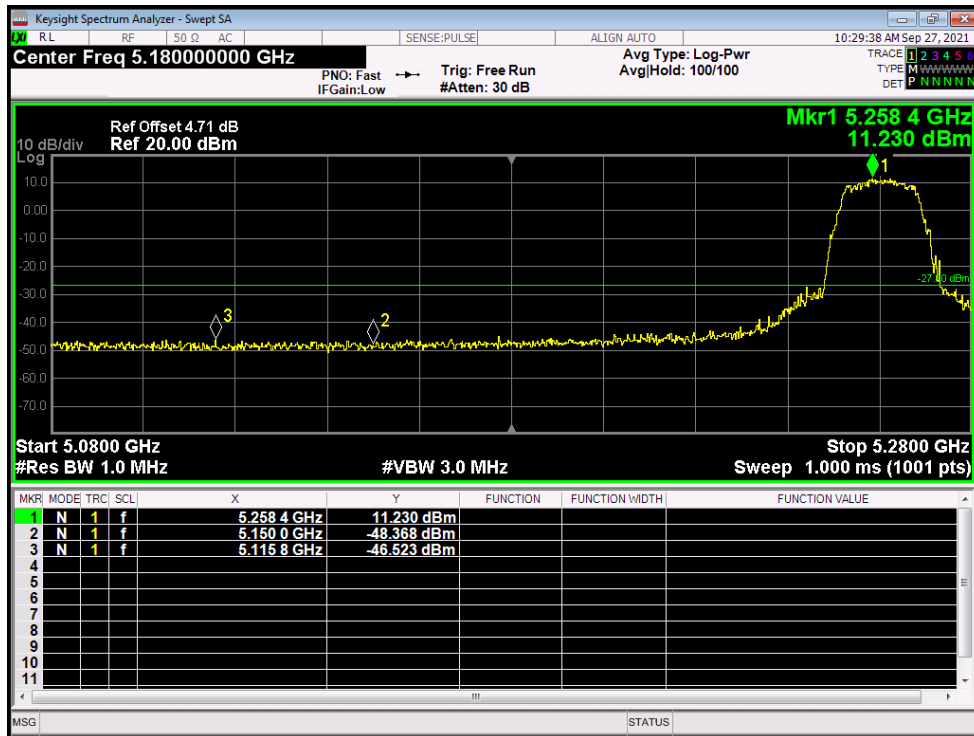


Band Edge NVNT a 5320MHz High Ant1

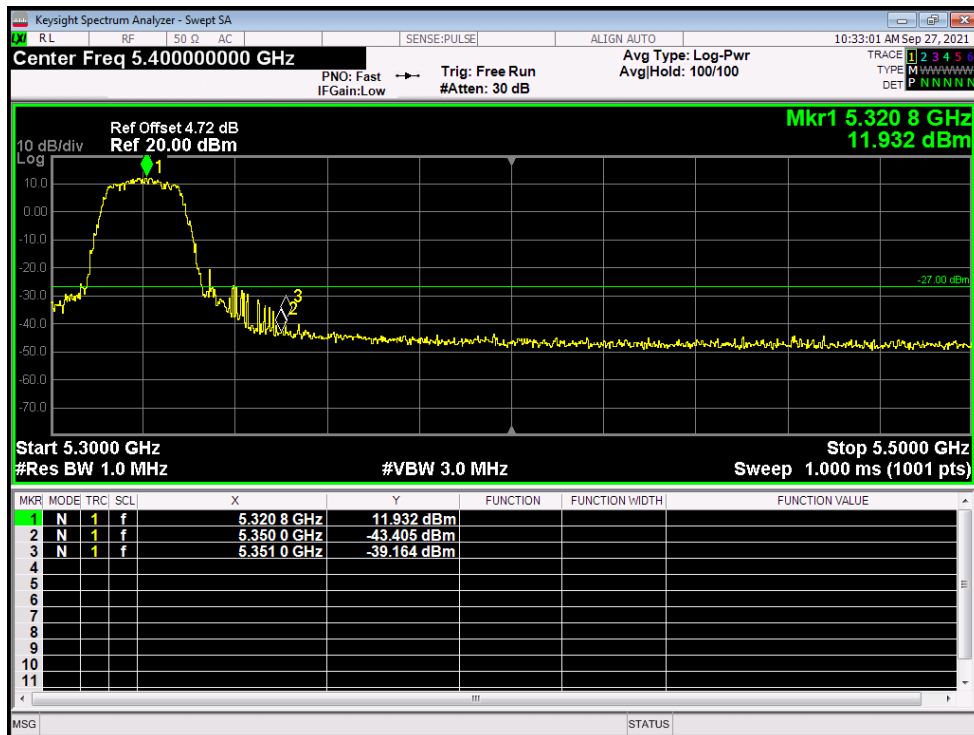


Band Edge NVNT a 5260MHz Low Ant2

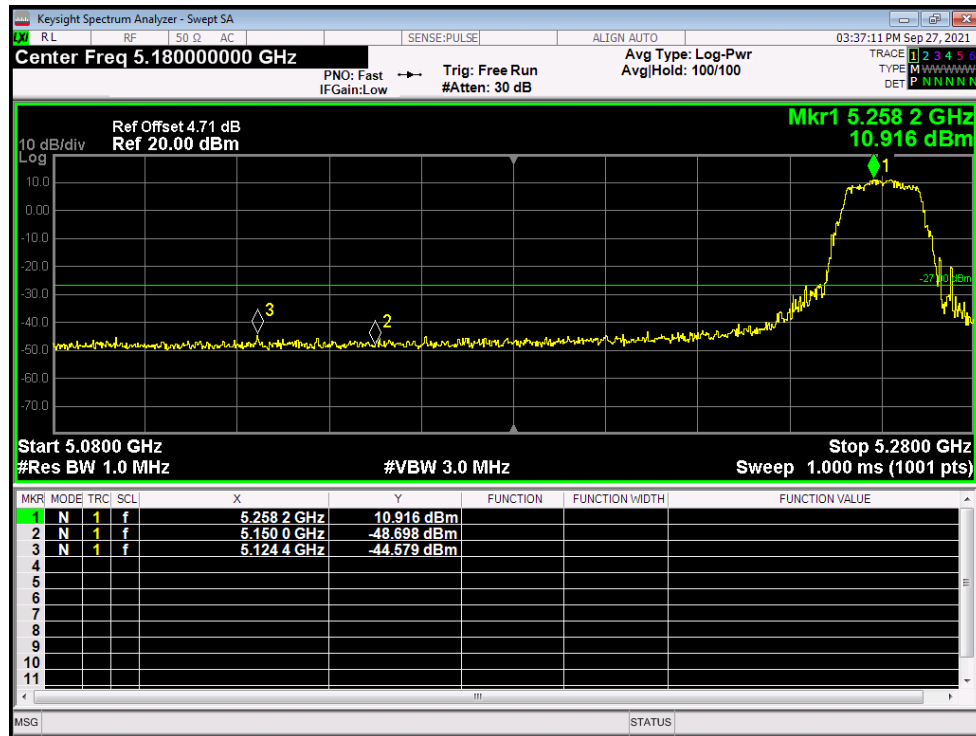


Band Edge NVNT a 5320MHz High Ant2

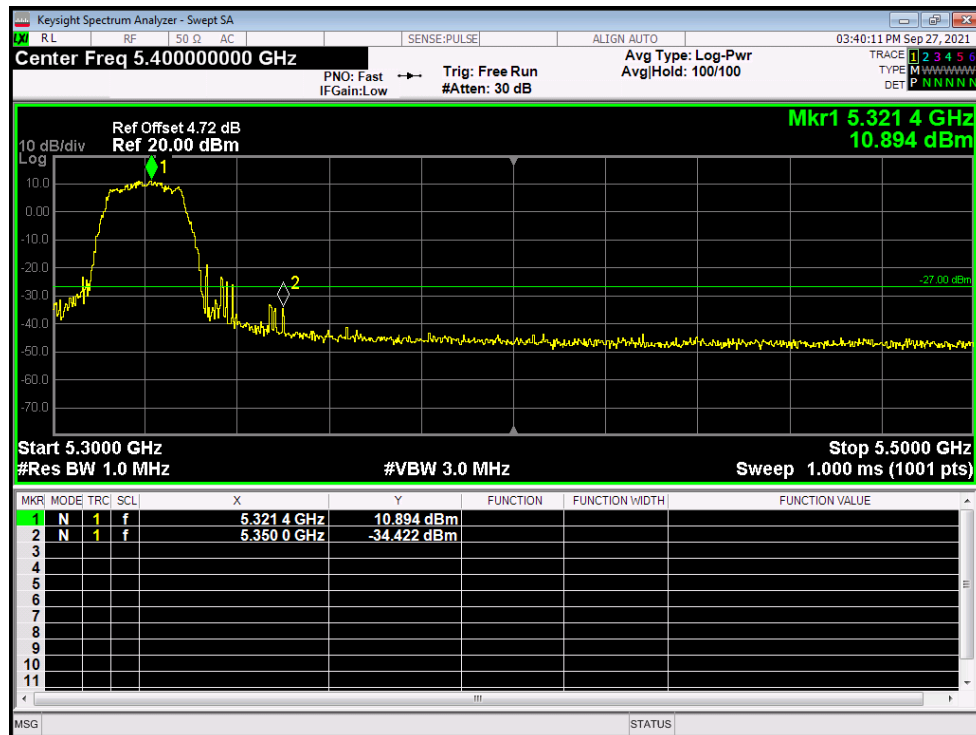


Band Edge NVNT ac20 5260MHz Low Ant1

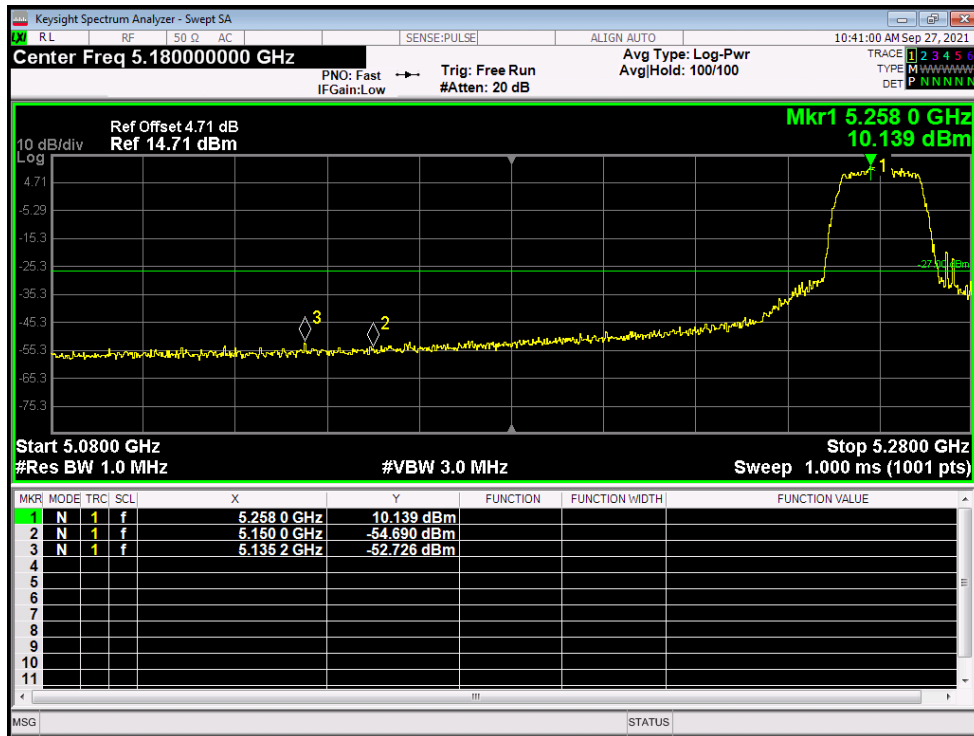


Band Edge NVNT ac20 5320MHz High Ant1

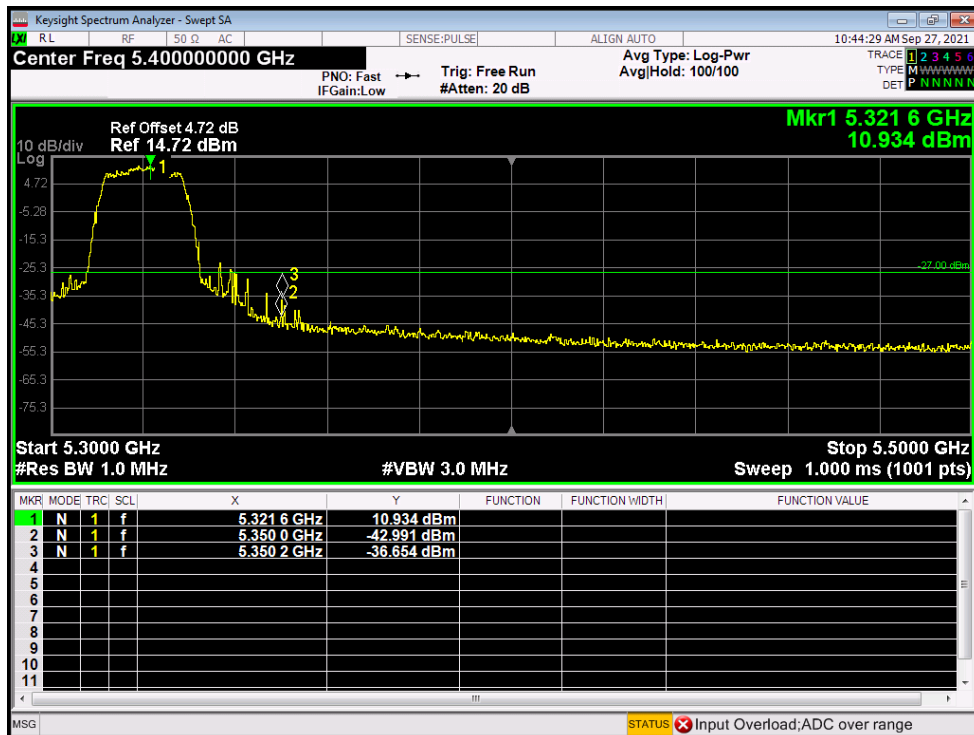


Band Edge NVNT ac20 5260MHz Low Ant2

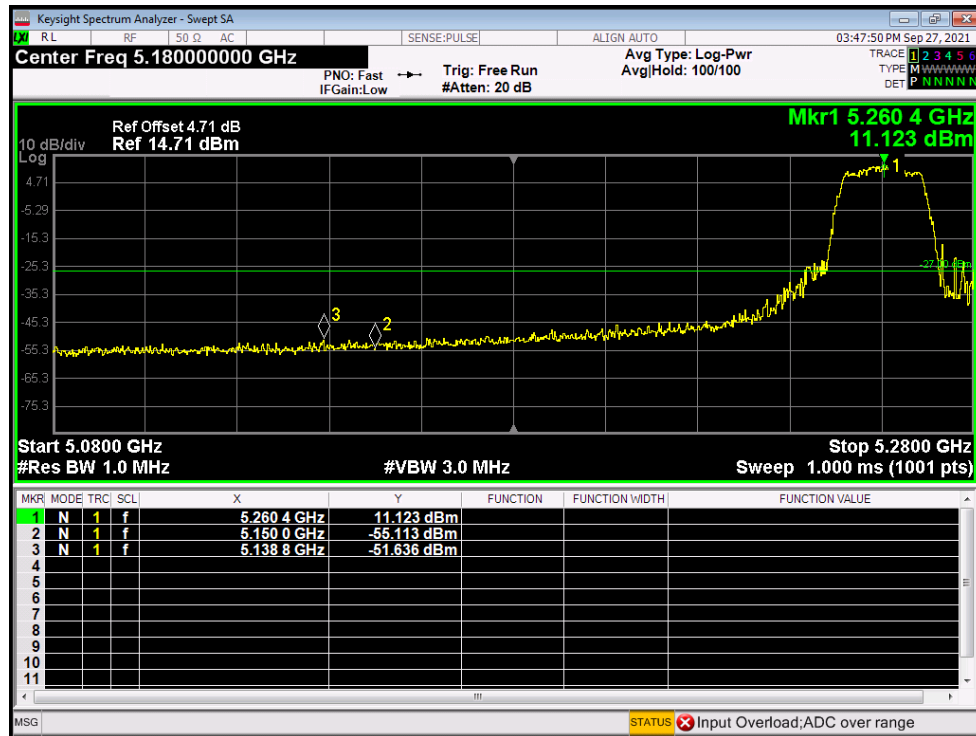


Band Edge NVNT ac20 5320MHz High Ant2

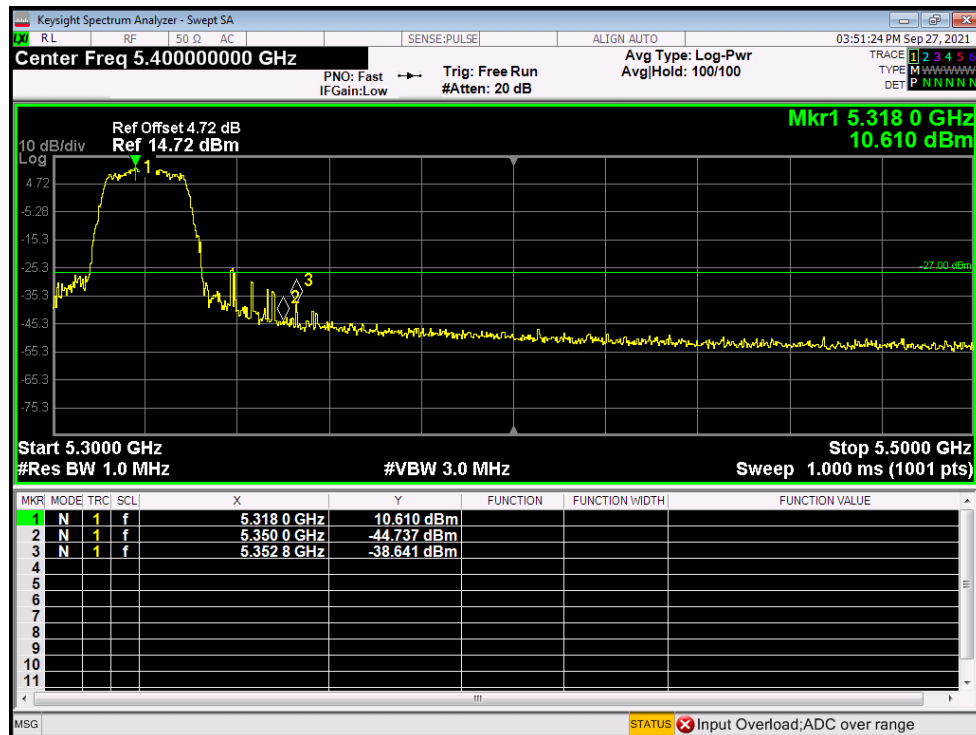


Band Edge NVNT ac40 5270MHz Low Ant1

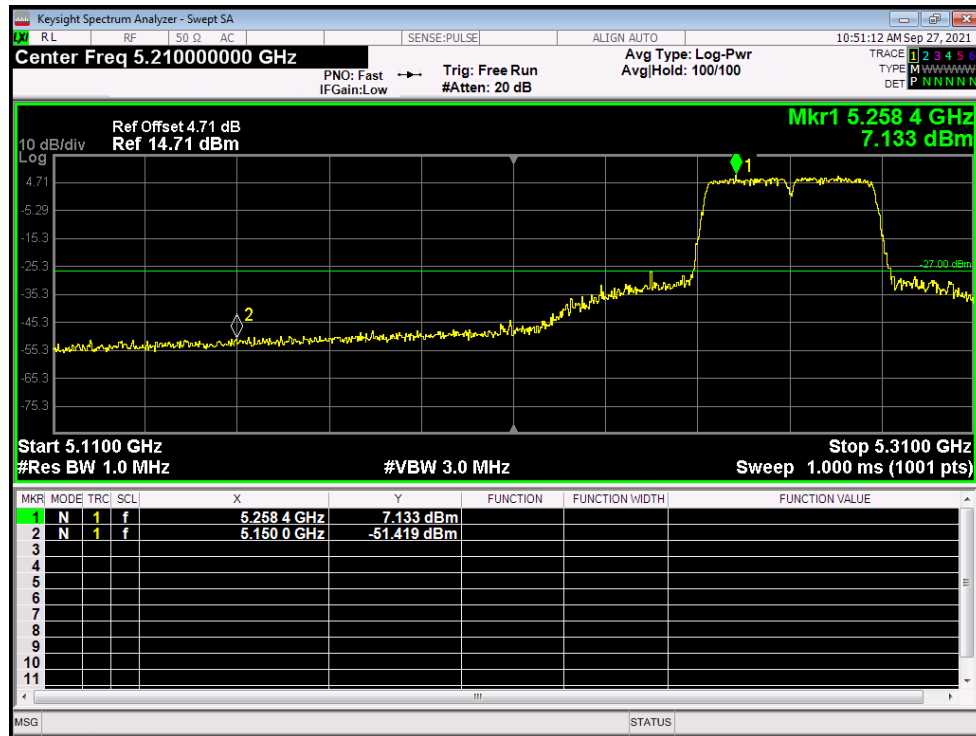


Band Edge NVNT ac40 5310MHz High Ant1

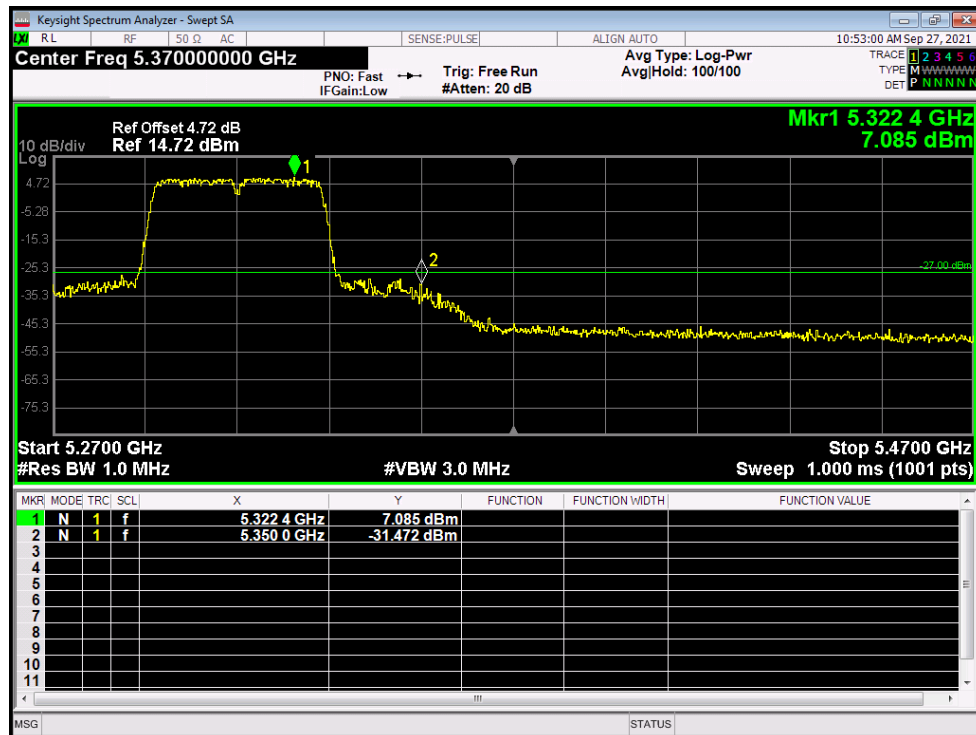


Band Edge NVNT ac40 5270MHz Low Ant2

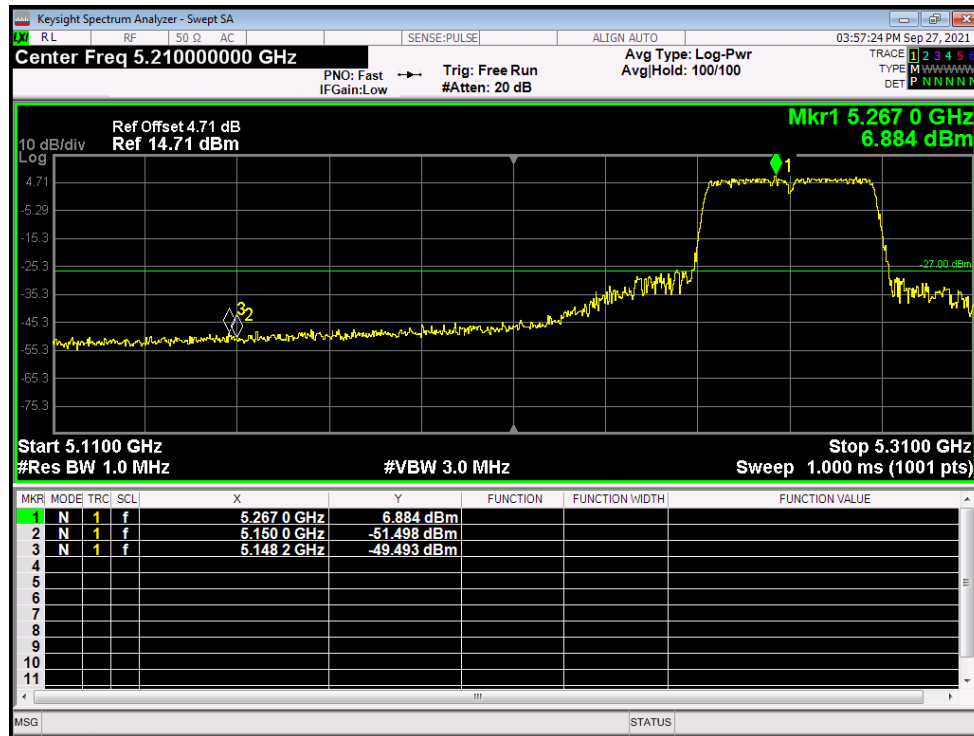


Band Edge NVNT ac40 5310MHz High Ant2

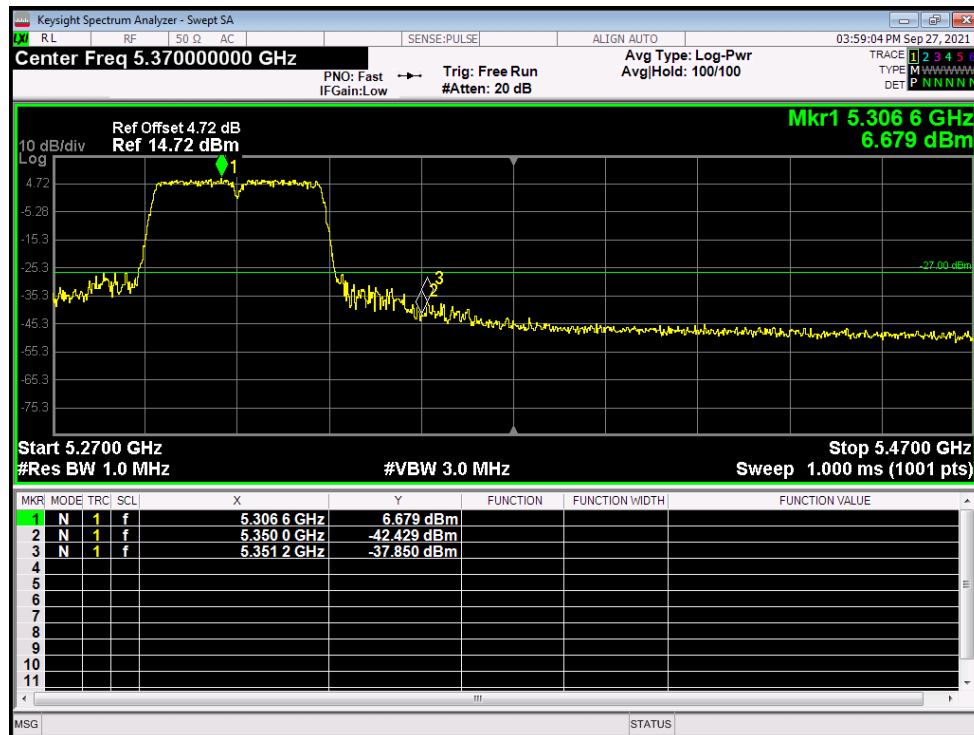


Band Edge NVNT ac80 5290MHz Low Ant1

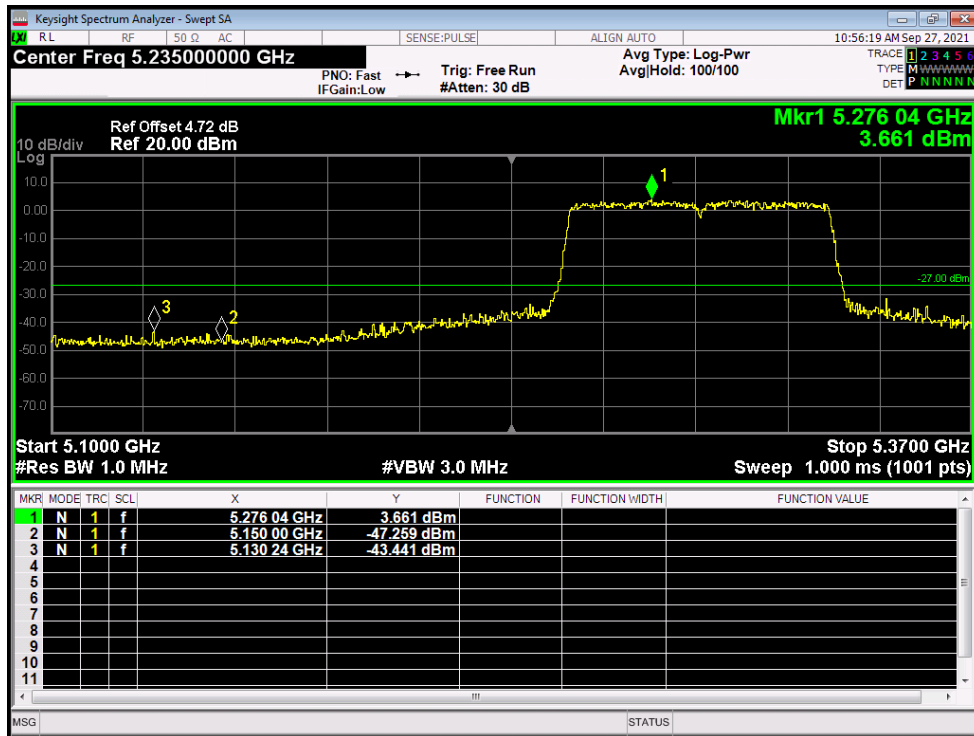


Band Edge NVNT ac80 5290MHz Low Ant2

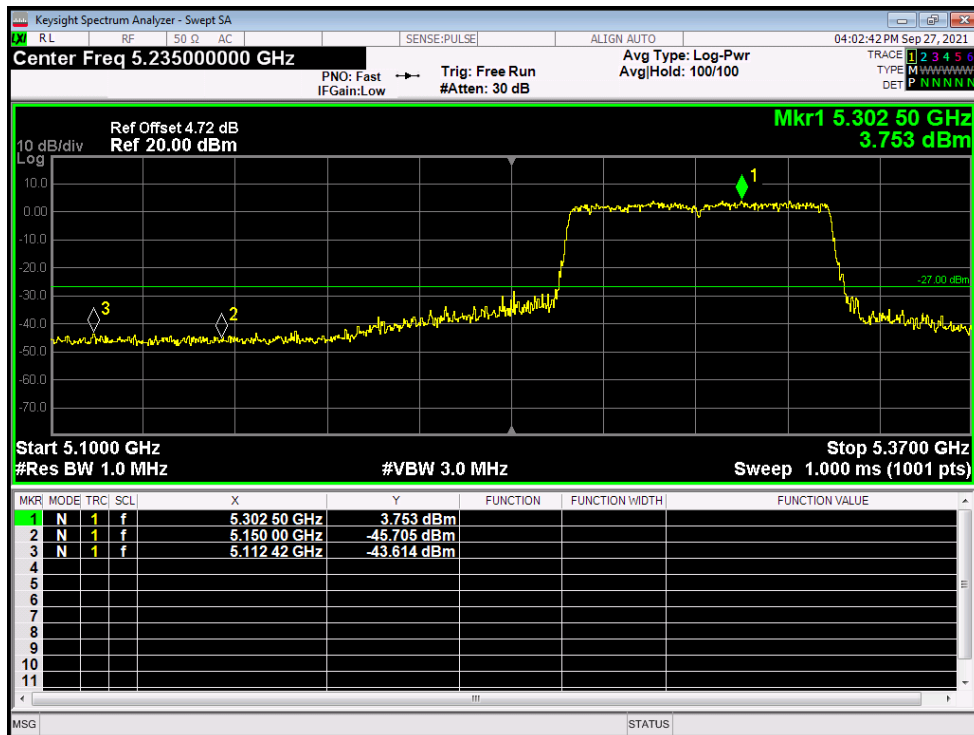


Band Edge NVNT n20 5260MHz Low Ant1

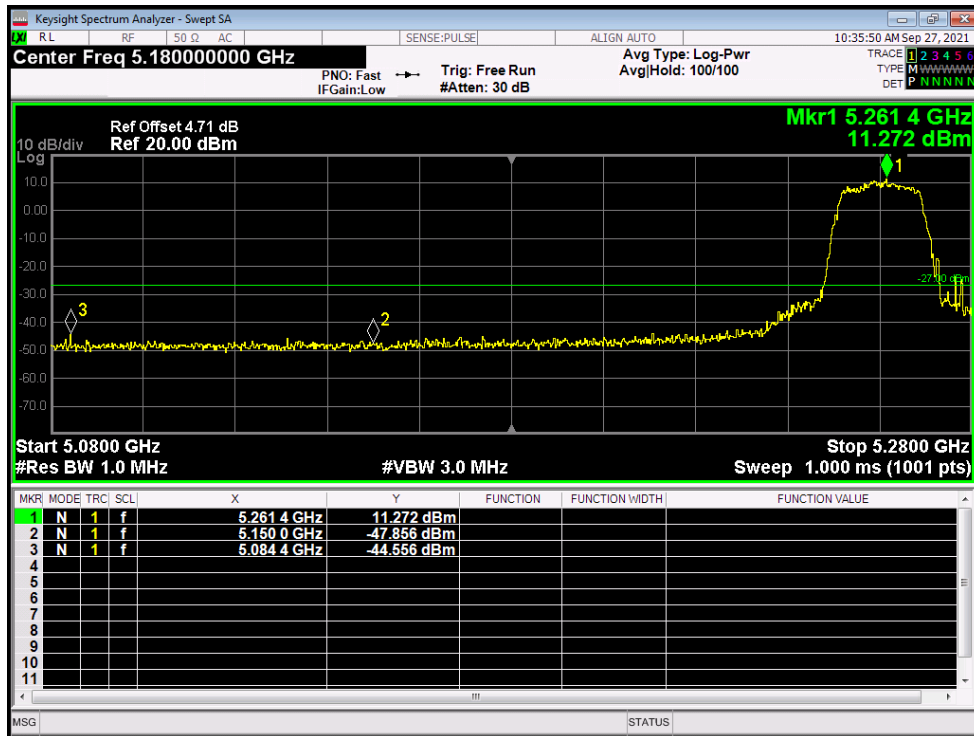


Band Edge NVNT n20 5320MHz High Ant1

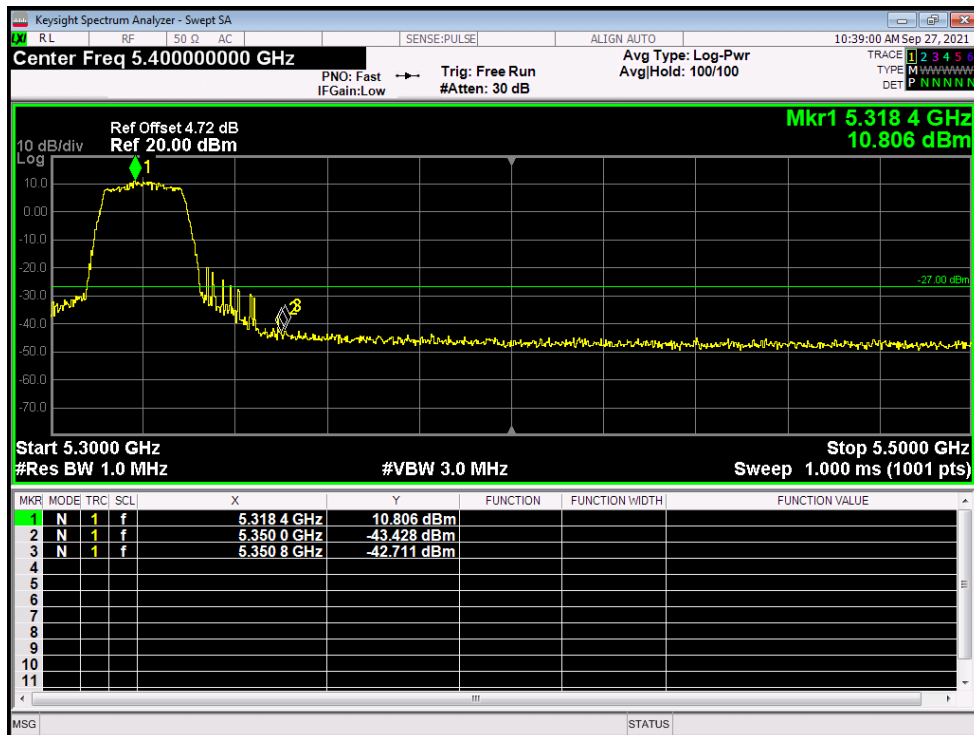


Band Edge NVNT n20 5260MHz Low Ant2

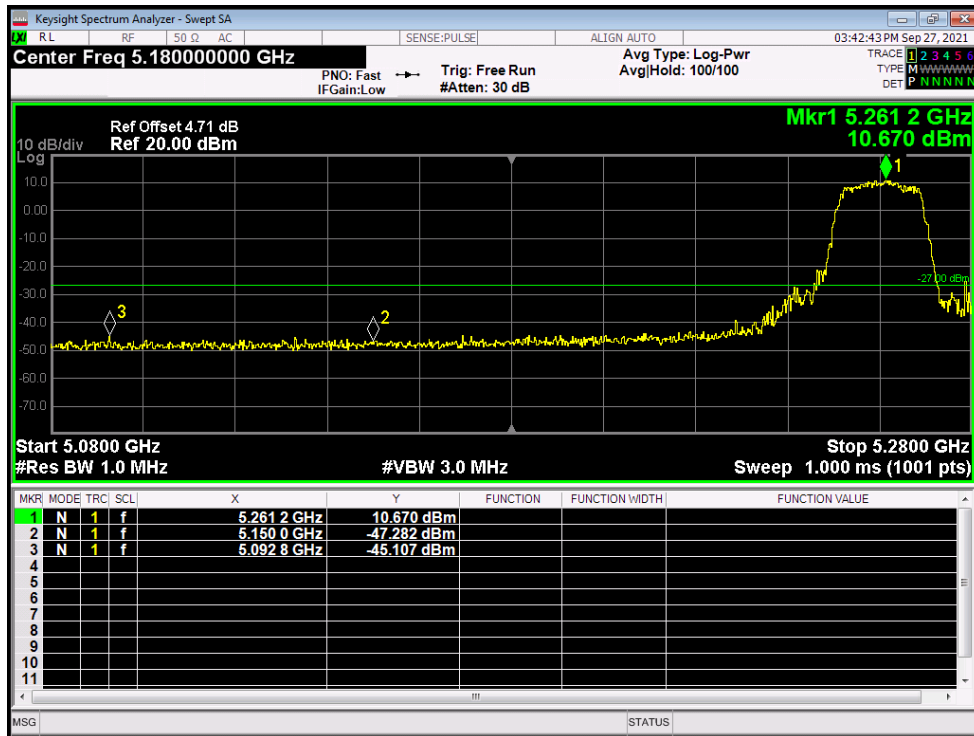


Band Edge NVNT n20 5320MHz High Ant2

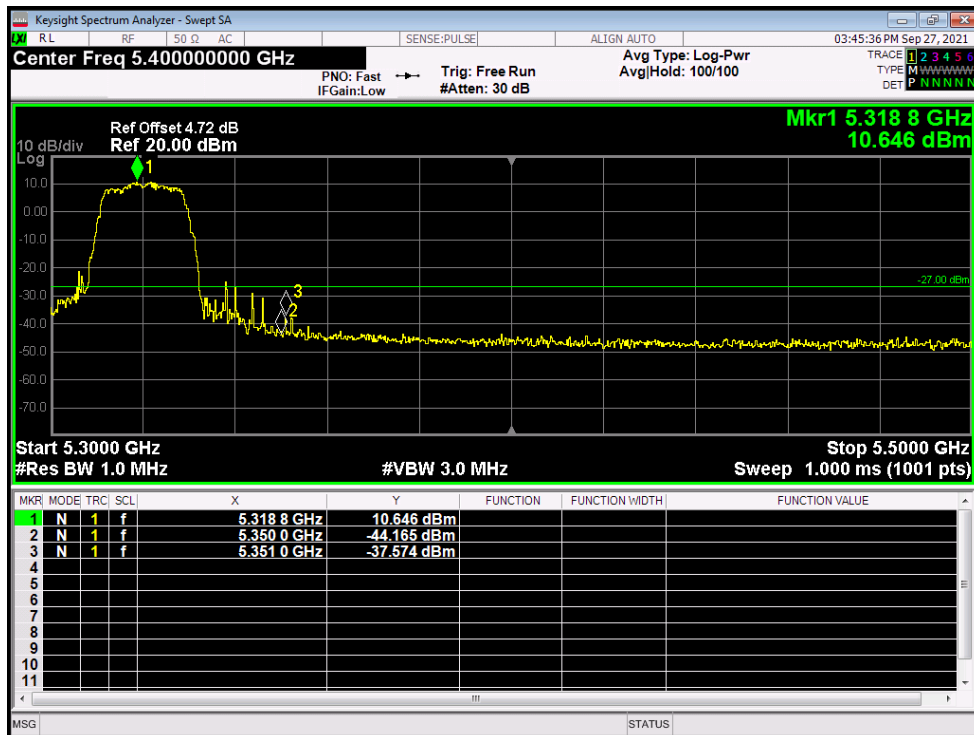


Band Edge NVNT n40 5270MHz Low Ant1

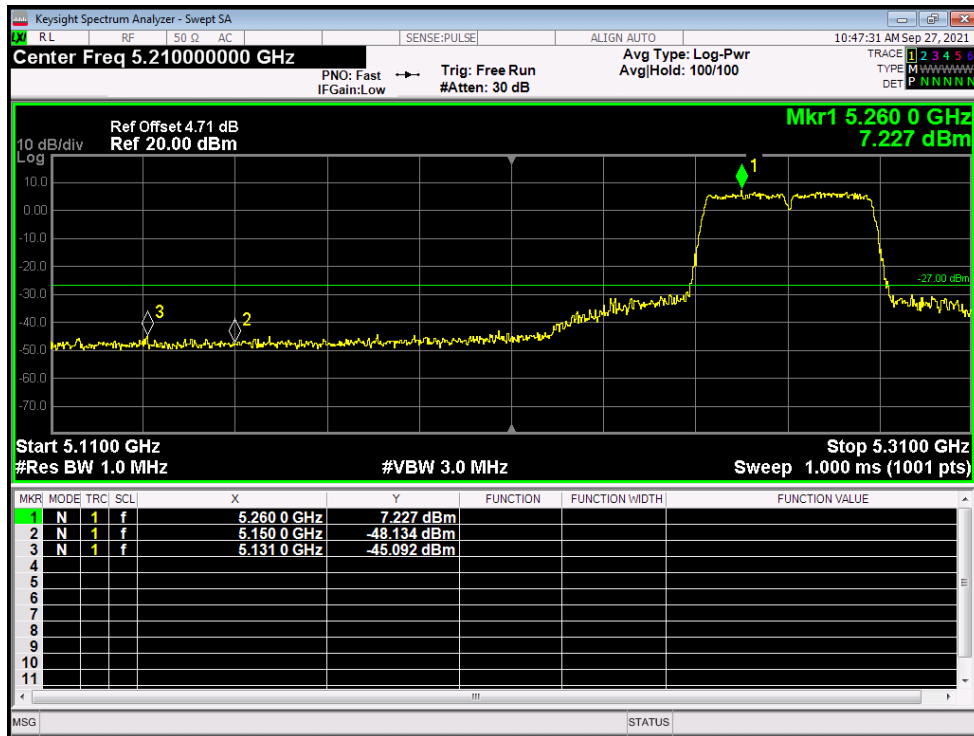


Band Edge NVNT n40 5310MHz High Ant1

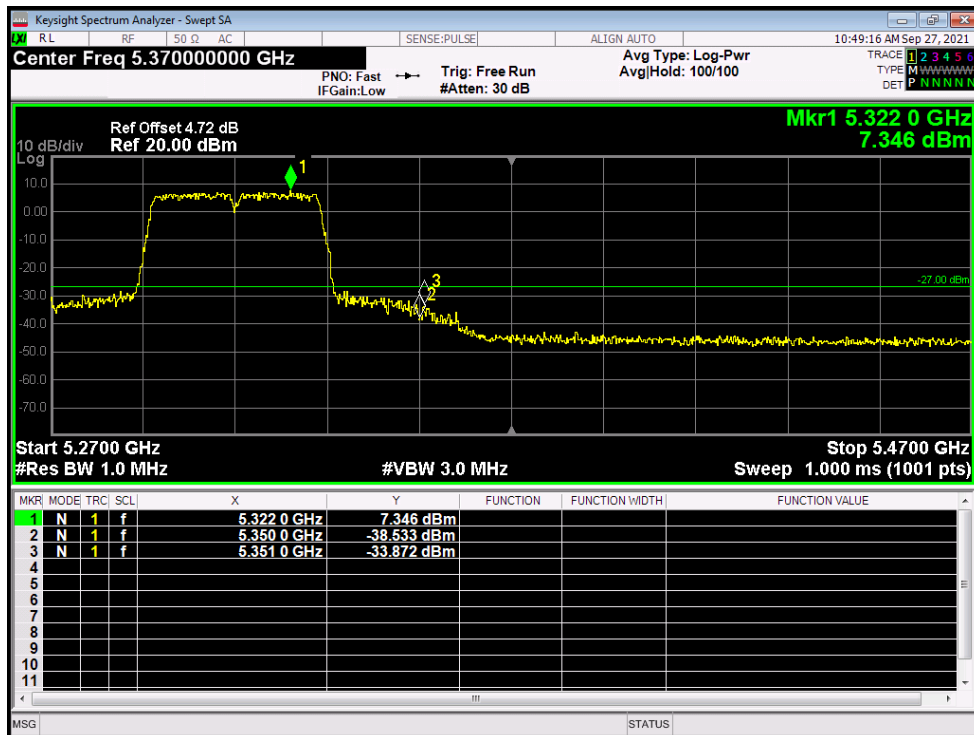

Band Edge NVNT n40 5270MHz Low Ant2

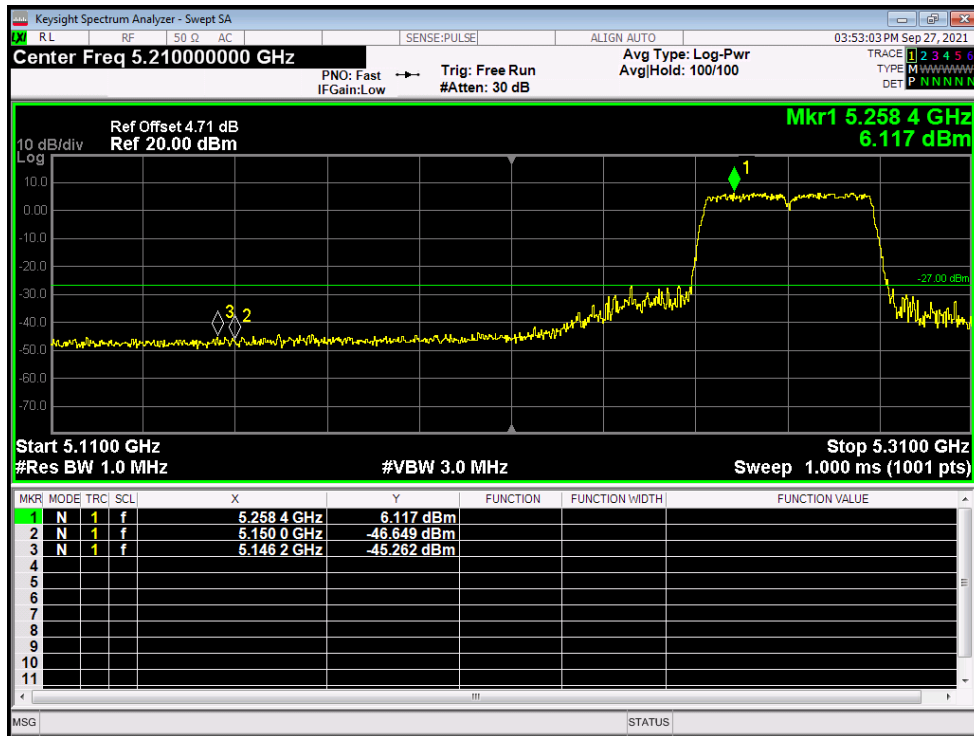


Band Edge NVNT n40 5310MHz High Ant2

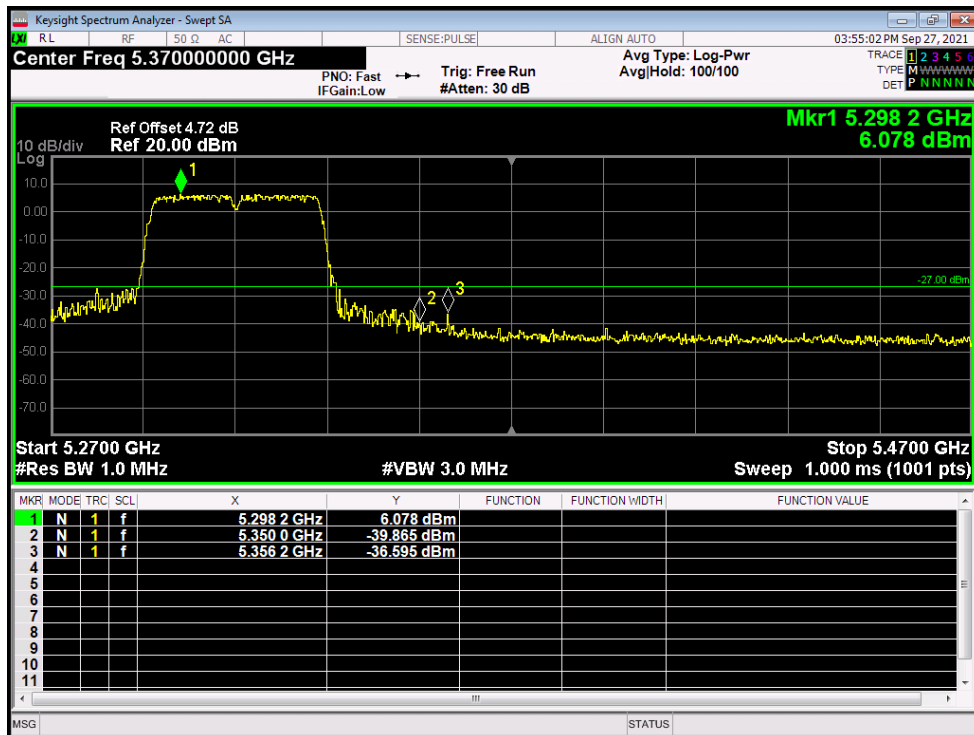


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5260	Ant1	-32.52	-27	Pass
NVNT	a	5280	Ant1	-32.35	-27	Pass
NVNT	a	5320	Ant1	-32.62	-27	Pass
NVNT	a	5260	Ant2	-31.83	-27	Pass
NVNT	a	5280	Ant2	-32.68	-27	Pass
NVNT	a	5320	Ant2	-32.26	-27	Pass
NVNT	ac20	5260	Ant1	-32.4	-27	Pass
NVNT	ac20	5280	Ant1	-32.42	-27	Pass
NVNT	ac20	5320	Ant1	-32.55	-27	Pass
NVNT	ac20	5260	Ant2	-31.91	-27	Pass
NVNT	ac20	5280	Ant2	-32.37	-27	Pass
NVNT	ac20	5320	Ant2	-31.73	-27	Pass
NVNT	ac40	5270	Ant1	-32.28	-27	Pass
NVNT	ac40	5310	Ant1	-32.29	-27	Pass
NVNT	ac40	5270	Ant2	-31.97	-27	Pass
NVNT	ac40	5310	Ant2	-32.65	-27	Pass
NVNT	ac80	5290	Ant1	-32.37	-27	Pass
NVNT	ac80	5290	Ant2	-32.44	-27	Pass
NVNT	n20	5260	Ant1	-32.82	-27	Pass
NVNT	n20	5280	Ant1	-31.84	-27	Pass
NVNT	n20	5320	Ant1	-31.95	-27	Pass
NVNT	n20	5260	Ant2	-32.33	-27	Pass
NVNT	n20	5280	Ant2	-32.49	-27	Pass
NVNT	n20	5320	Ant2	-32.67	-27	Pass
NVNT	n40	5270	Ant1	-31.85	-27	Pass
NVNT	n40	5310	Ant1	-32.49	-27	Pass
NVNT	n40	5270	Ant2	-32.42	-27	Pass
NVNT	n40	5310	Ant2	-31.78	-27	Pass

Tx. Spurious NVNT a 5260MHz Ant1 Emission

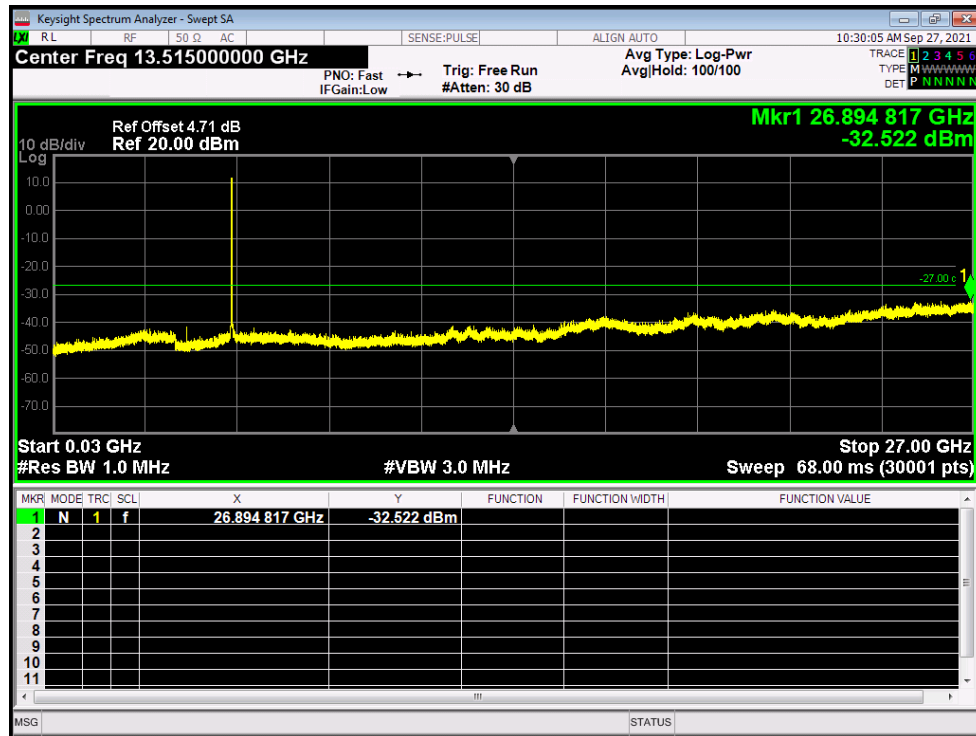

Tx. Spurious NVNT a 5280MHz Ant1 Emission

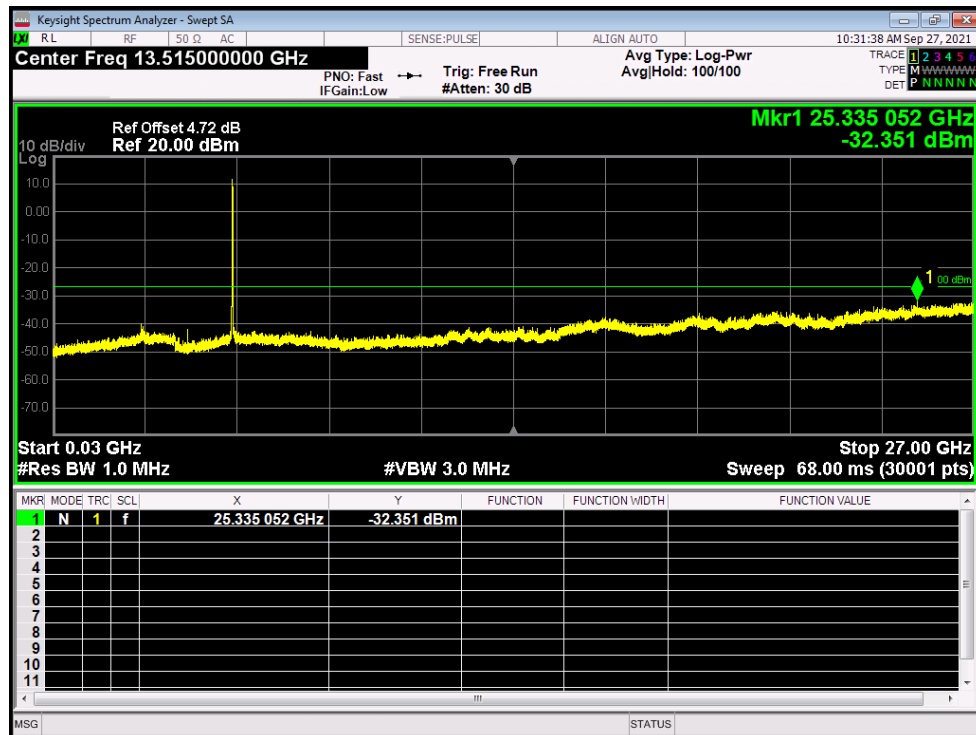

Keysight Spectrum Analyzer - Swept SA

Center Freq 13.51500000 GHz

PNO: Fast IFGain: Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHold: 100/100

10:33:30 AM Sep 27, 2021

Ref Offset 4.72 dB Ref 20.00 dBm

Mkr1 26.554 096 GHz -32.623 dBm

10 dB/div Log

Start 0.03 GHz Stop 27.00 GHz


#Res BW 1.0 MHz #VBW 3.0 MHz Sweep 68.00 ms (30001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	26.554 096 GHz	-32.623 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								


MSG STATUS

[illegible]


Tx. Spurious NVNT a 5280MHz Ant2 Emission

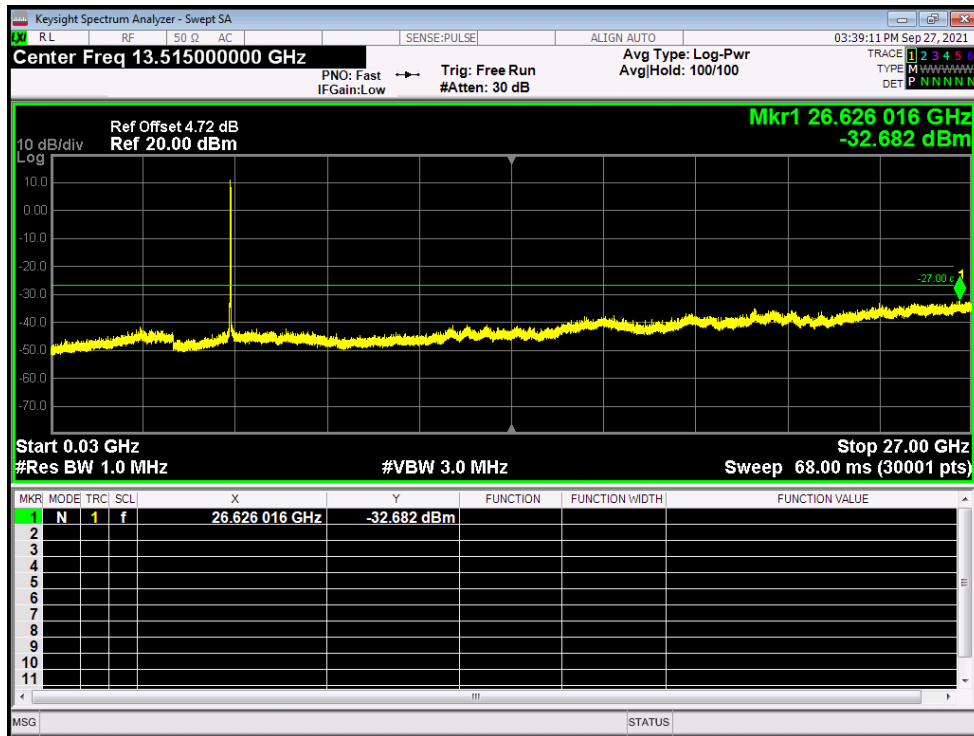


Tx. Spurious NVNT a 5320MHz Ant2 Emission

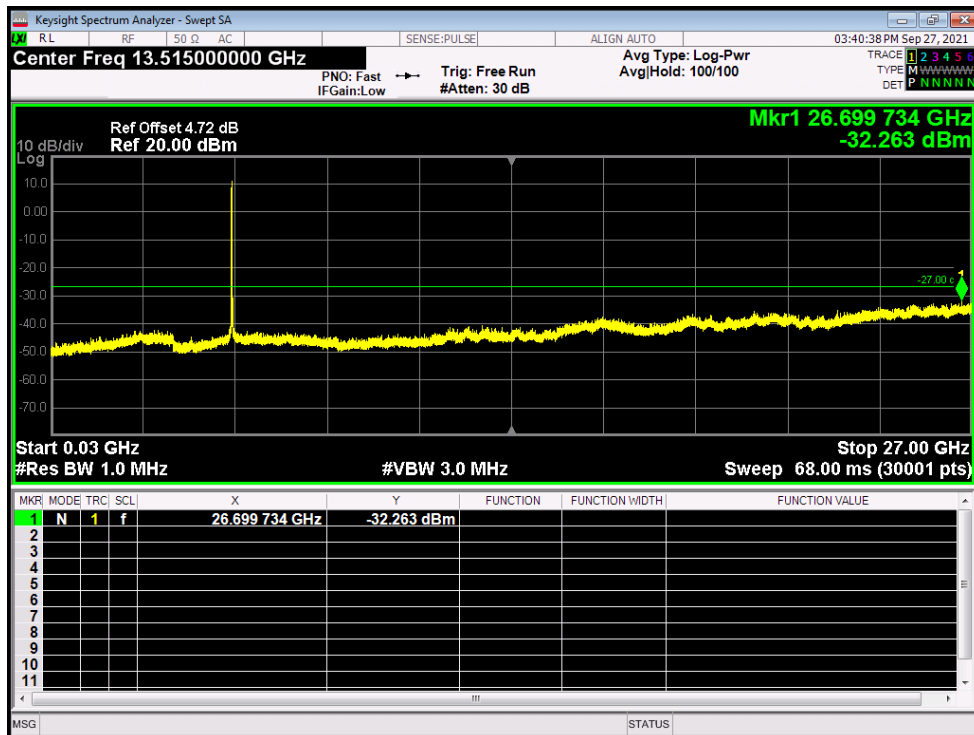

Tx. Spurious NVNT ac20 5260MHz Ant1 Emission

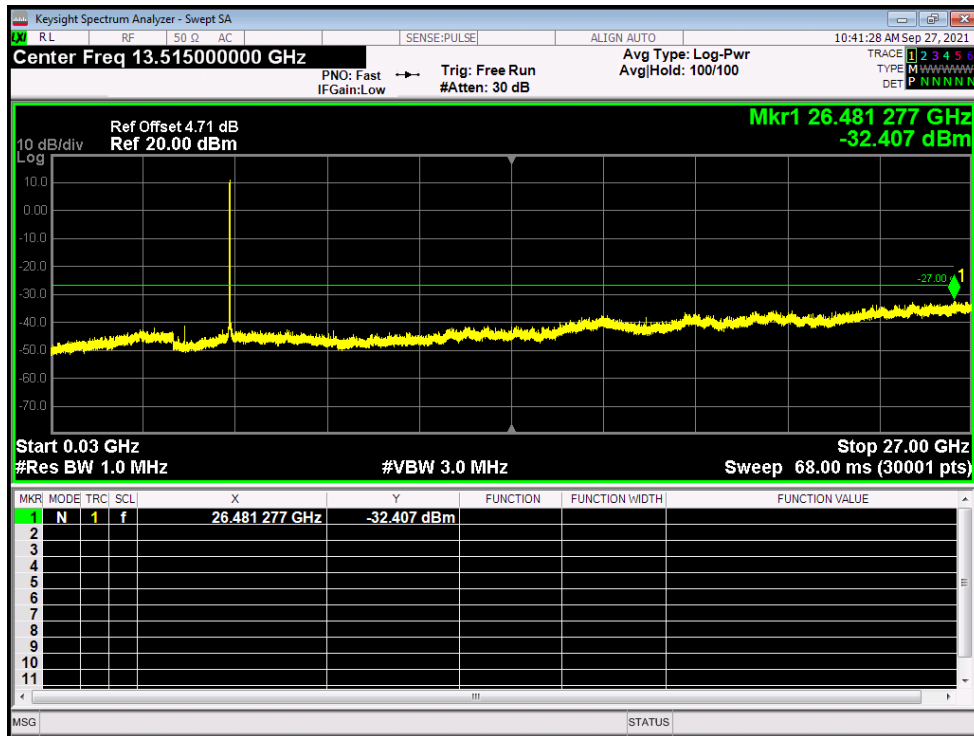

Tx. Spurious NVNT ac20 5280MHz Ant1 Emission

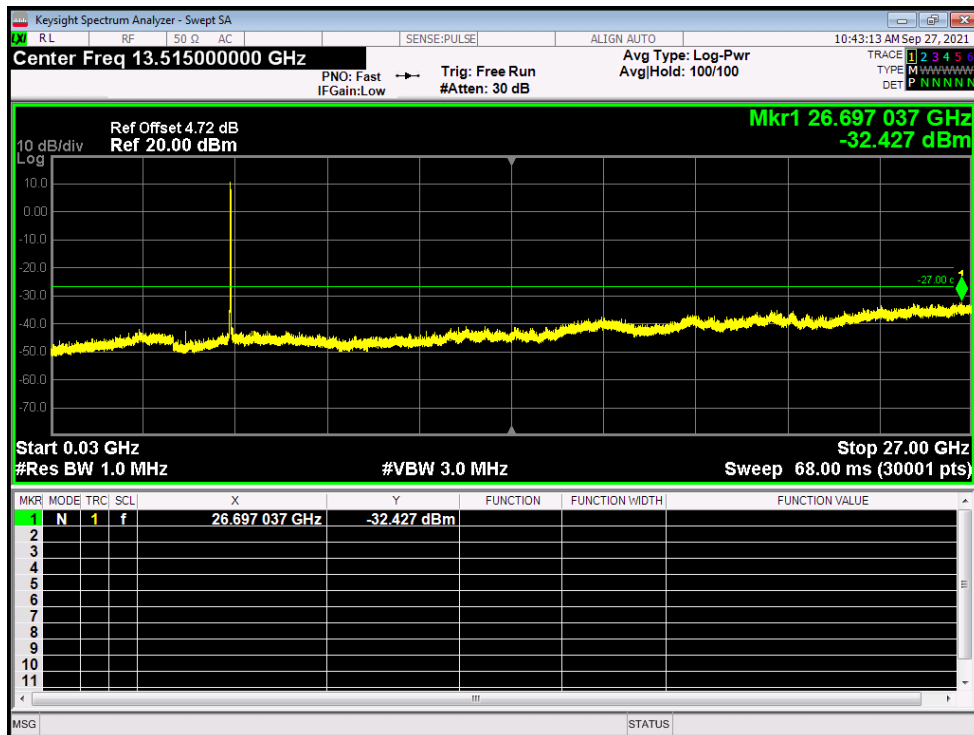

[illegible]

Keysight Spectrum Analyzer - Swept SA

RL 50 Ω AC SENSE:PULSE ALIGN AUTO 03:48:19 PM Sep 27, 2021

Center Freq 13.51500000 GHz

PNO: Fast IFGain:Low Trig: Free Run #Atten: 30 dB Avg Type: Log-Pwr AvgHld: 100/100

TRACE 1 2 3 4 5 TYPE M DET P NNNN

Ref Offset 4.71 dB
Ref 20.00 dBm

Mkr1 26.502 853 GHz
-31.913 dBm

10 dB/div
Log

Start 0.03 GHz
#Res BW 1.0 MHz


Stop 27.00 GHz
Sweep 68.00 ms (30001 pts)

#VBW 3.0 MHz


MRK	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	26.502 853 GHz	-31.913 dBm			
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								

MSG STATUS


Tx. Spurious NVNT ac20 5280MHz Ant2 Emission

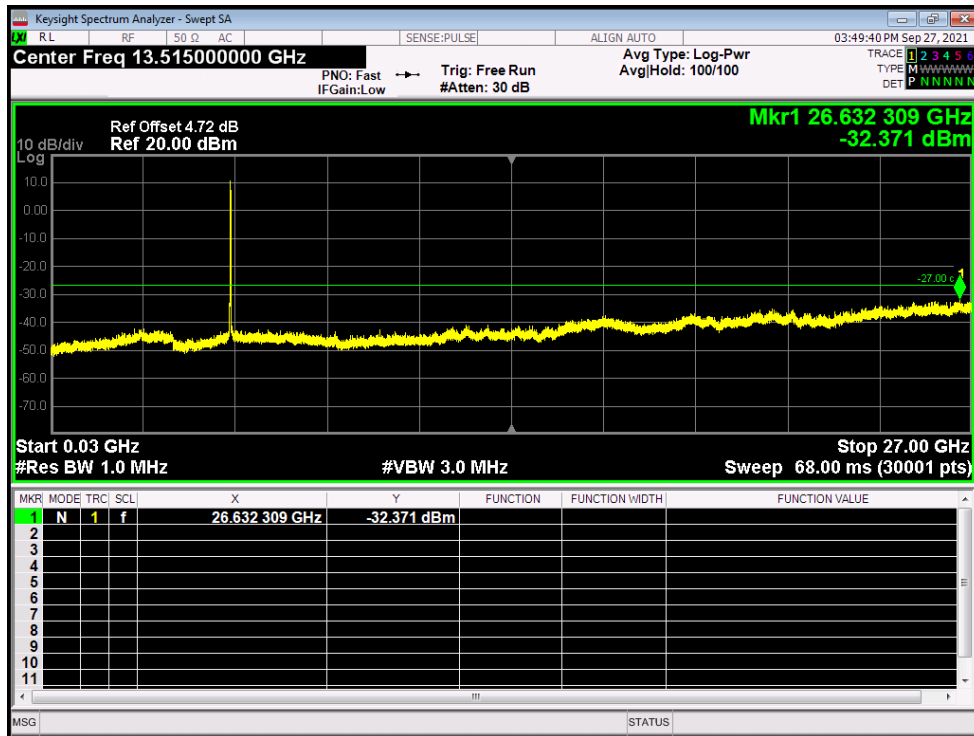


Tx. Spurious NVNT ac20 5320MHz Ant2 Emission

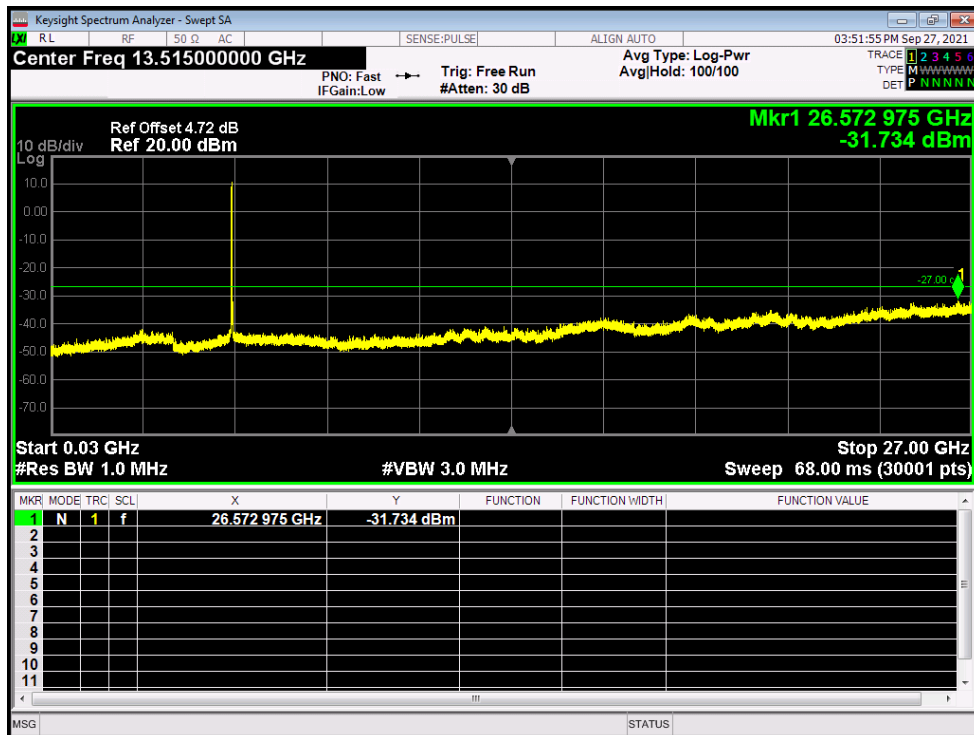


Tx. Spurious NVNT ac40 5270MHz Ant1 Emission

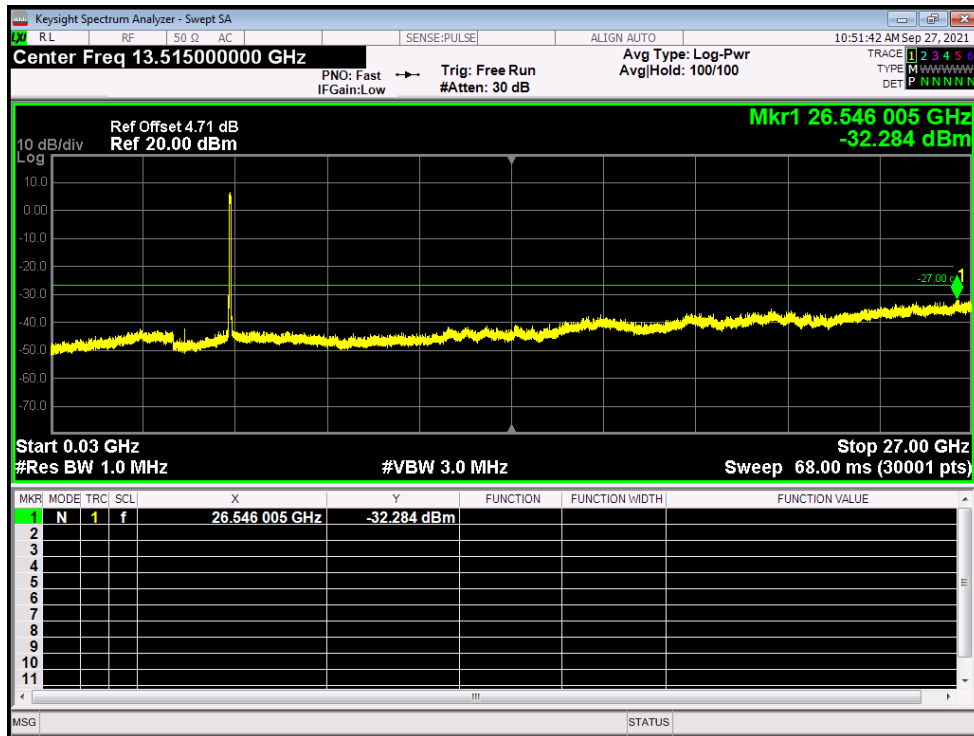


Tx. Spurious NVNT ac40 5310MHz Ant1 Emission

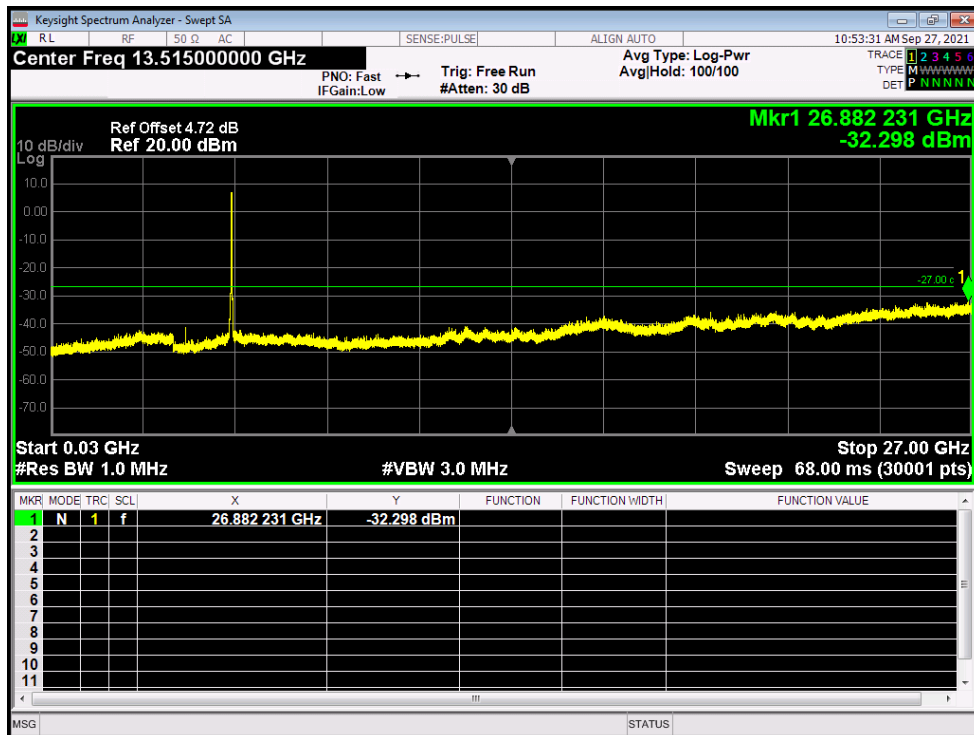


Tx. Spurious NVNT ac40 5270MHz Ant2 Emission

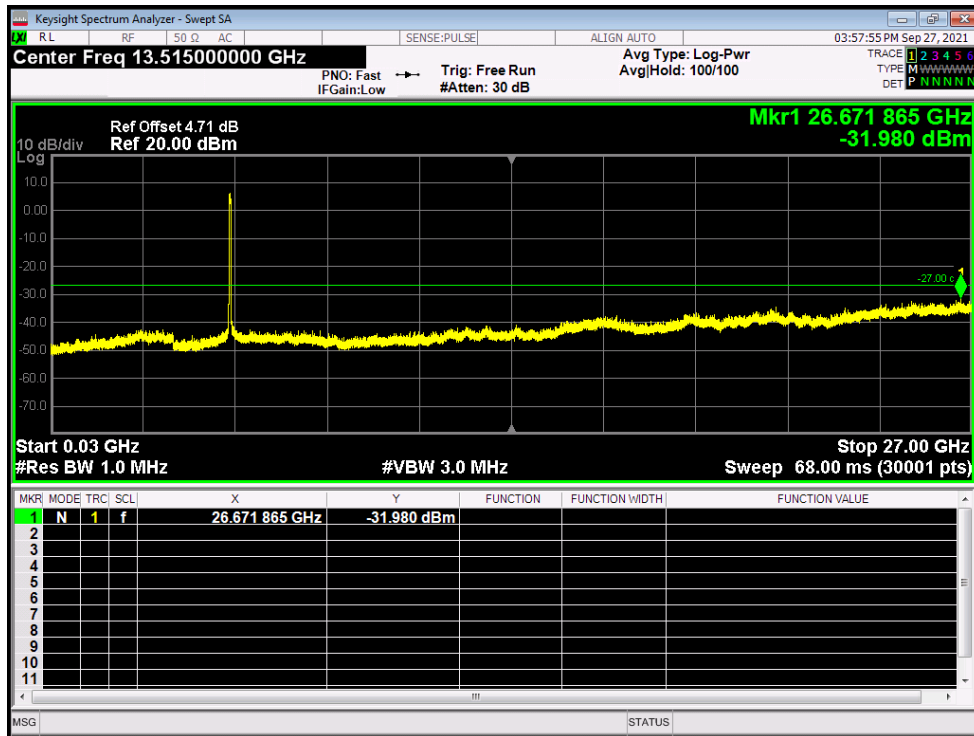


Tx. Spurious NVNT ac40 5310MHz Ant2 Emission

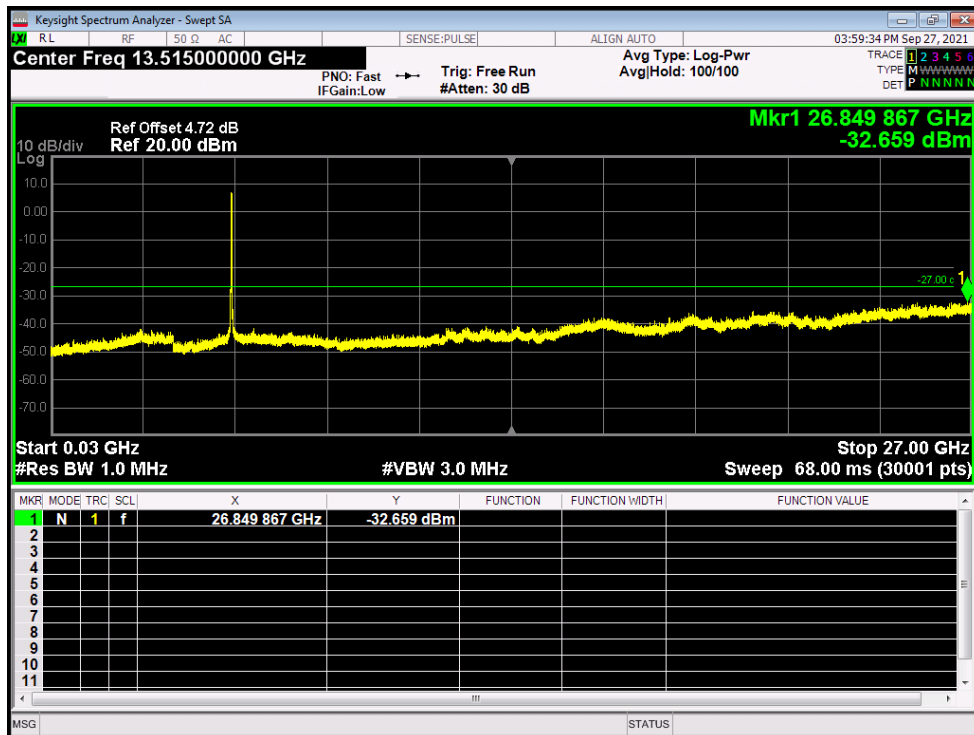

Tx. Spurious NVNT ac80 5290MHz Ant1 Emission

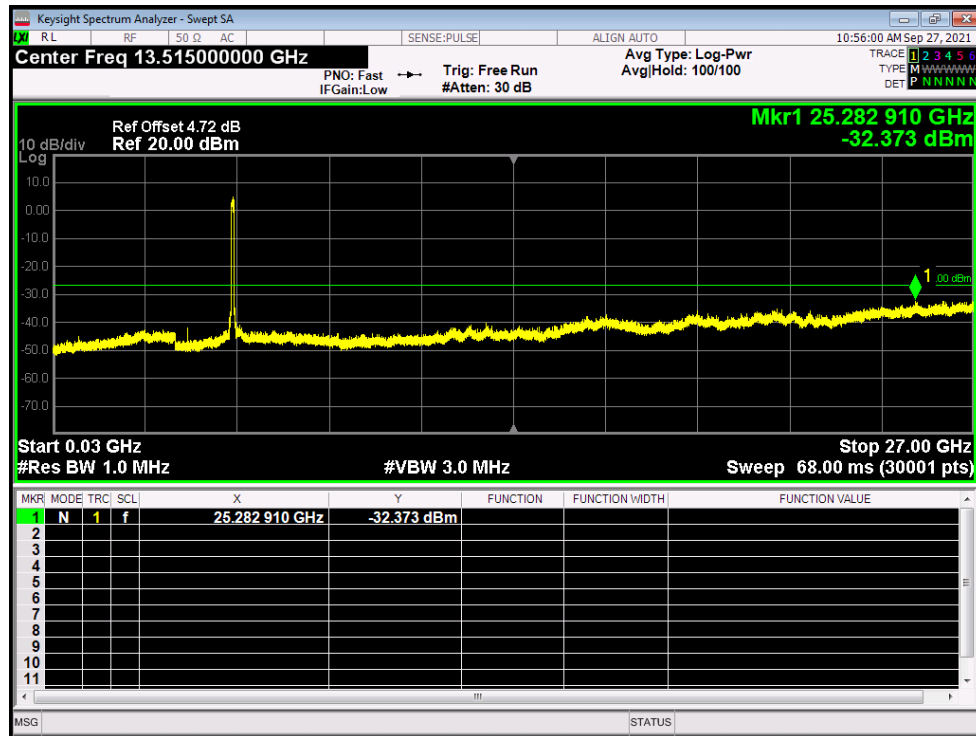


Tx. Spurious NVNT ac80 5290MHz Ant2 Emission

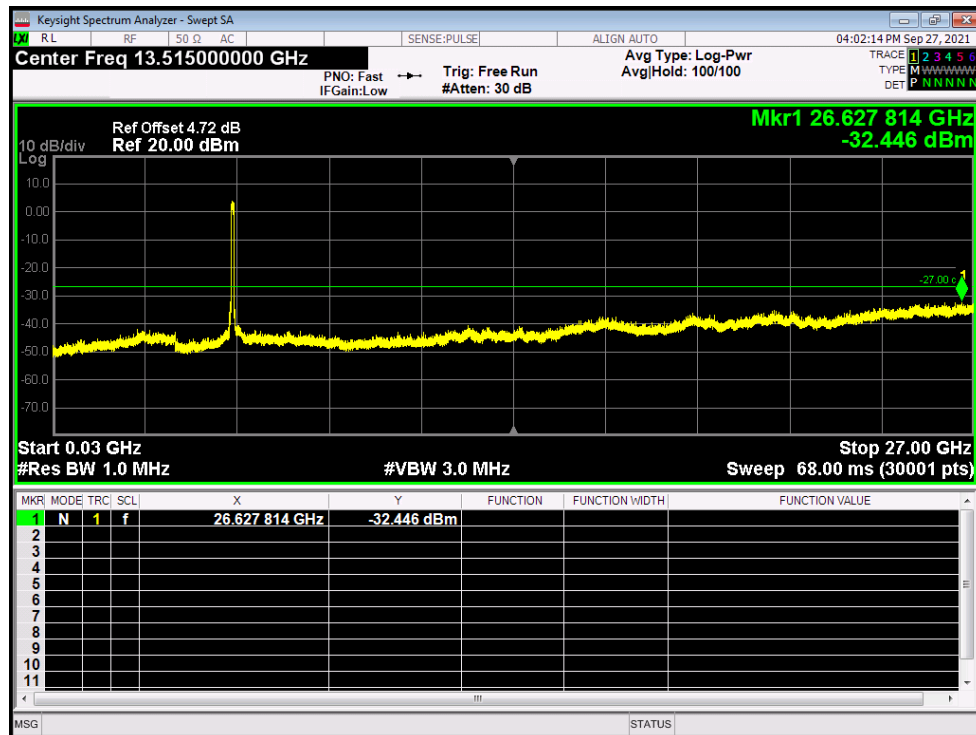


[illegible][illegible]

[illegible][illegible]


Tx. Spurious NVNT n20 5280MHz Ant2 Emission

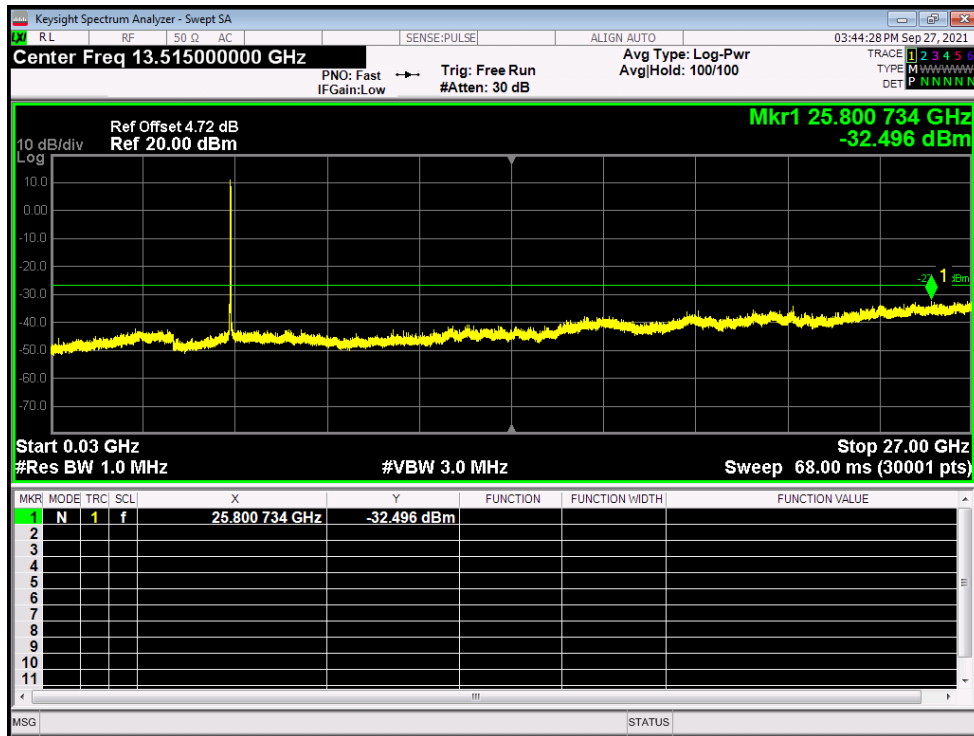


Tx. Spurious NVNT n20 5320MHz Ant2 Emission

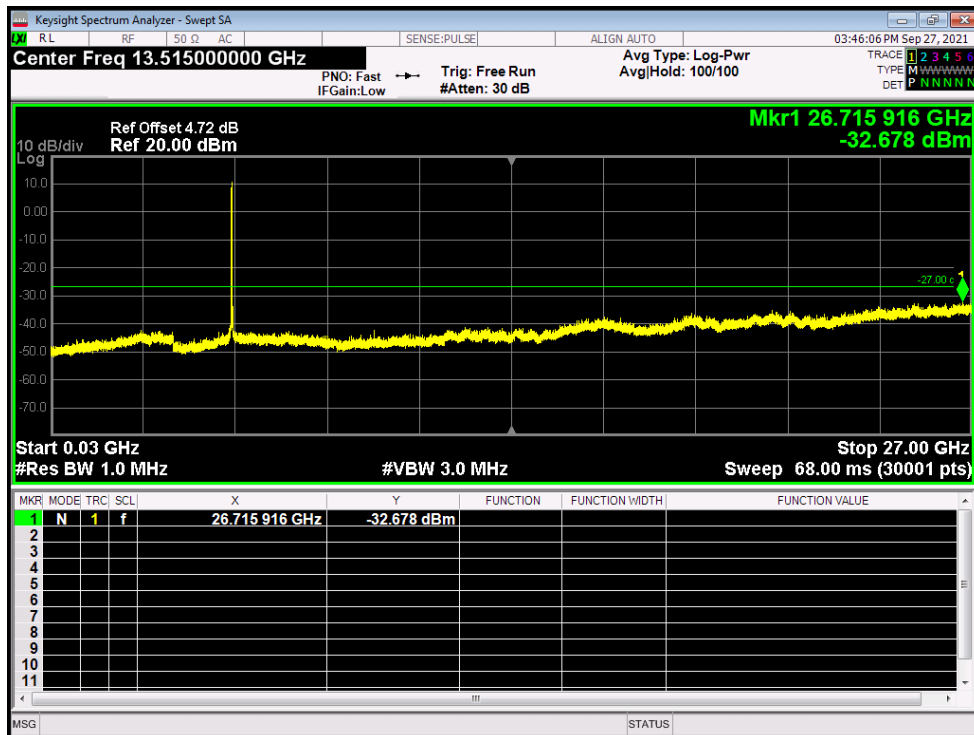


Tx. Spurious NVNT n40 5270MHz Ant1 Emission

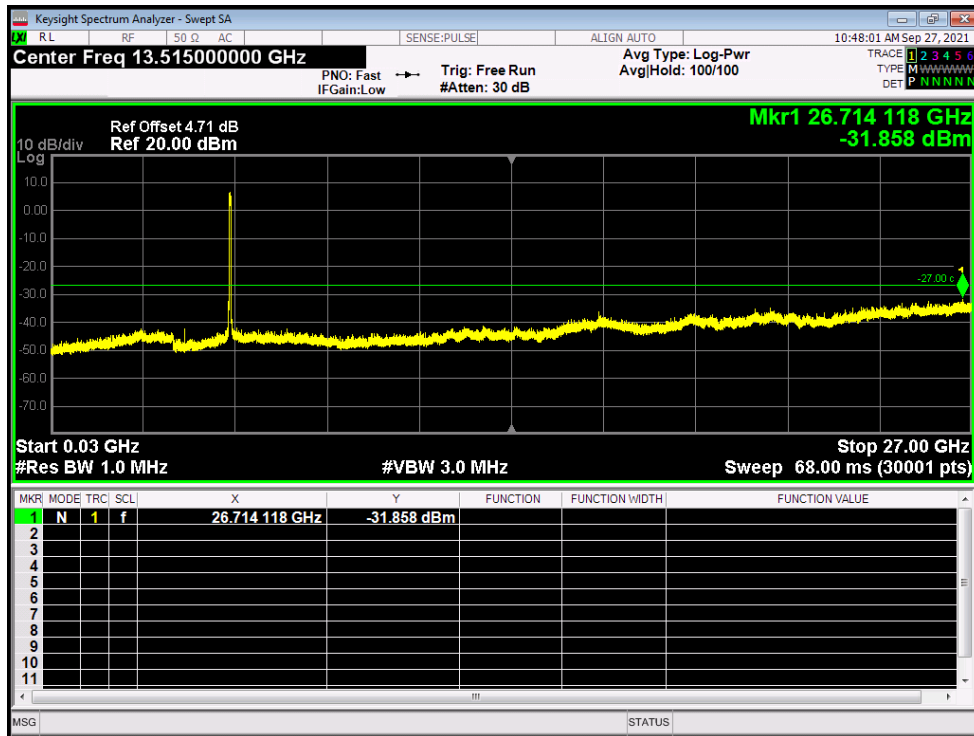


Tx. Spurious NVNT n40 5310MHz Ant1 Emission

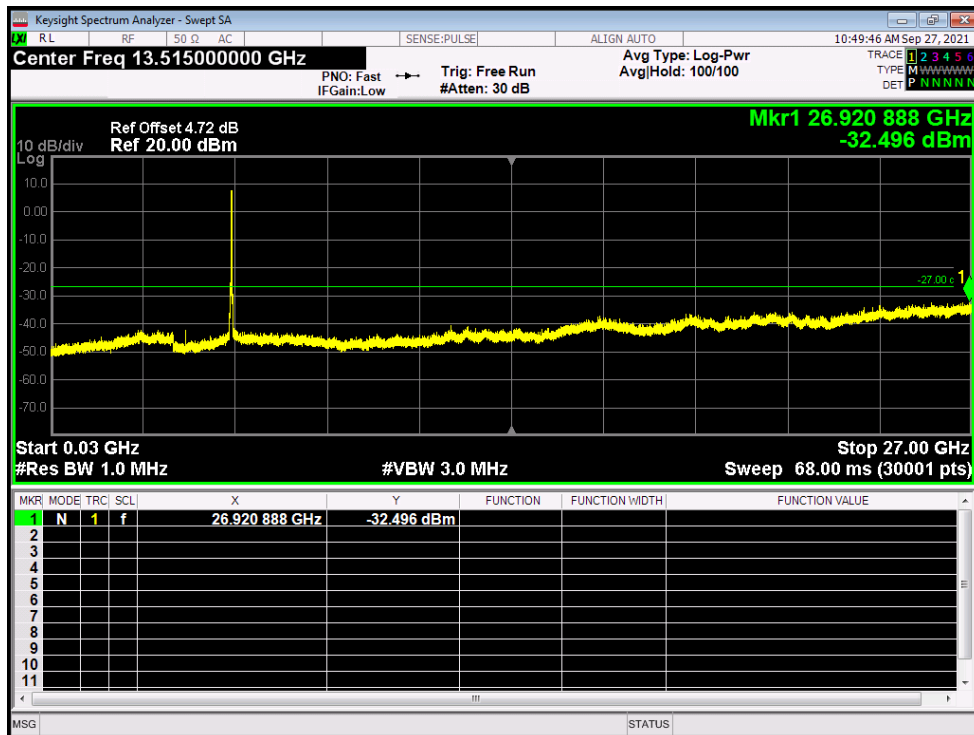

Tx. Spurious NVNT n40 5270MHz Ant2 Emission

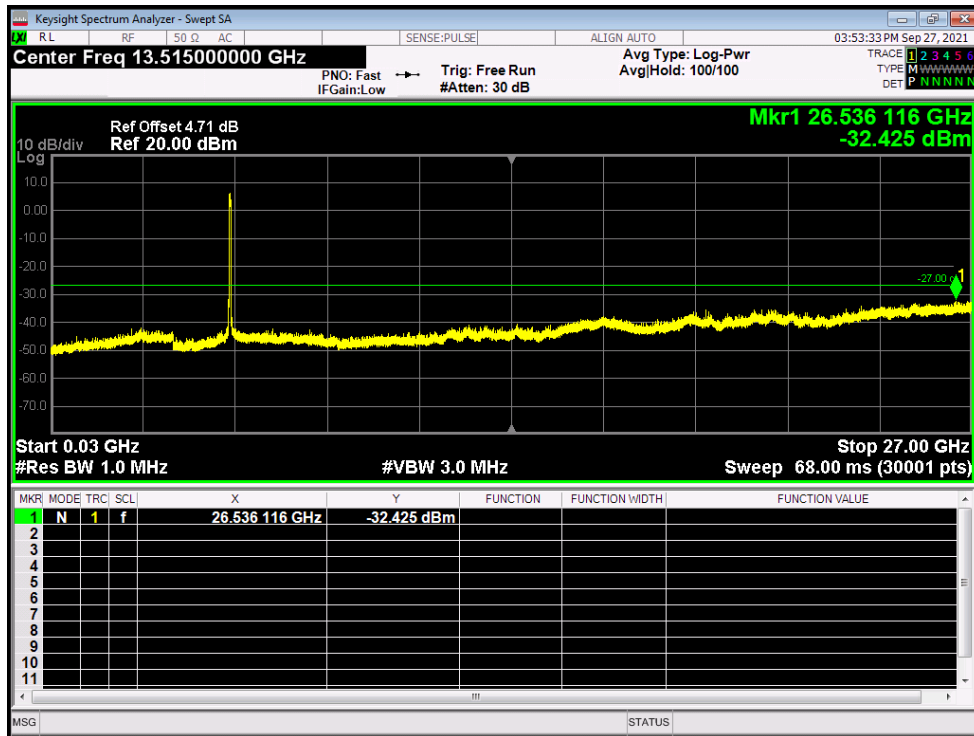

Tx. Spurious NVNT n40 5310MHz Ant2 Emission

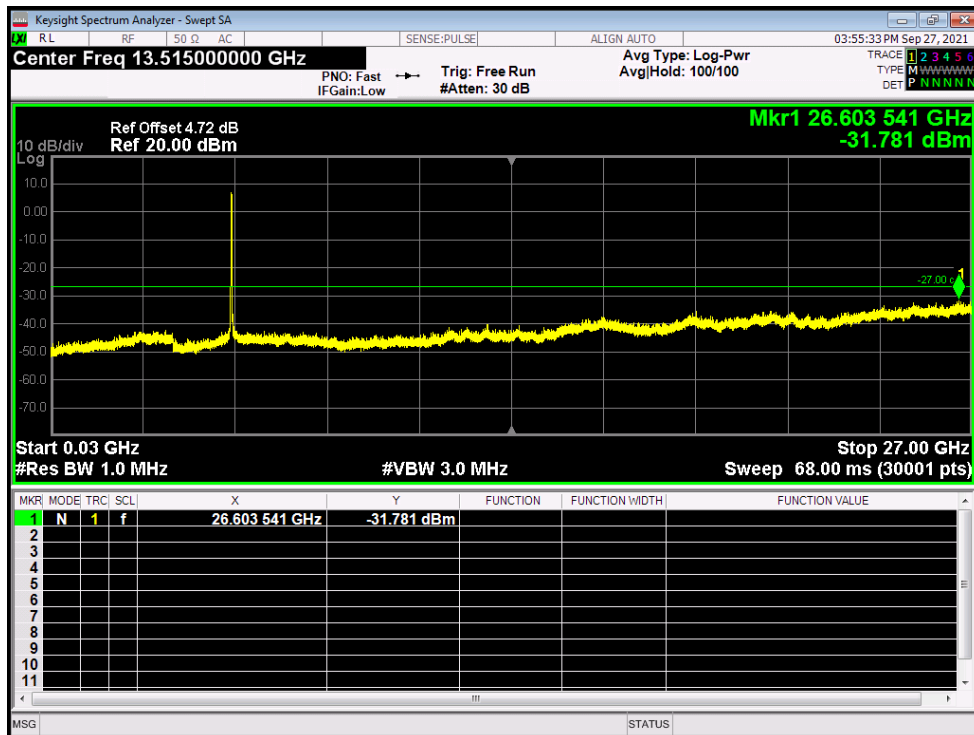


MIMO 5.3G:


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	802.11ac20	5260	Ant 1	7.2	10.49	Pass
NVNT	802.11ac20	5260	Ant 2	3.992	10.49	Pass
NVNT	802.11ac20	5260	Sum	8.896	10.49	Pass
NVNT	802.11ac20	5280	Ant 1	6.033	10.49	Pass
NVNT	802.11ac20	5280	Ant 2	3.99	10.49	Pass
NVNT	802.11ac20	5280	Sum	8.141	10.49	Pass
NVNT	802.11ac20	5320	Ant 1	5.504	10.49	Pass
NVNT	802.11ac20	5320	Ant 2	3.26	10.49	Pass
NVNT	802.11ac20	5320	Sum	7.536	10.49	Pass
NVNT	802.11ac40	5270	Ant 1	2.112	10.49	Pass
NVNT	802.11ac40	5270	Ant 2	0.688	10.49	Pass
NVNT	802.11ac40	5270	Sum	4.468	10.49	Pass
NVNT	802.11ac40	5310	Ant 1	1.533	10.49	Pass
NVNT	802.11ac40	5310	Ant 2	0.157	10.49	Pass
NVNT	802.11ac40	5310	Sum	3.91	10.49	Pass
NVNT	802.11ac80	5290	Ant 1	-0.311	10.49	Pass
NVNT	802.11ac80	5290	Ant 2	-2.804	10.49	Pass
NVNT	802.11ac80	5290	Sum	1.629	10.49	Pass
NVNT	802.11n(HT20)	5260	Ant 1	7.218	10.49	Pass
NVNT	802.11n(HT20)	5260	Ant 2	3.239	10.49	Pass
NVNT	802.11n(HT20)	5260	Sum	8.679	10.49	Pass
NVNT	802.11n(HT20)	5280	Ant 1	5.915	10.49	Pass
NVNT	802.11n(HT20)	5280	Ant 2	3.375	10.49	Pass
NVNT	802.11n(HT20)	5280	Sum	7.838	10.49	Pass
NVNT	802.11n(HT20)	5320	Ant 1	5.286	10.49	Pass
NVNT	802.11n(HT20)	5320	Ant 2	2.409	10.49	Pass
NVNT	802.11n(HT20)	5320	Sum	7.092	10.49	Pass
NVNT	802.11n(HT40)	5270	Ant 1	2.239	10.49	Pass
NVNT	802.11n(HT40)	5270	Ant 2	-0.368	10.49	Pass
NVNT	802.11n(HT40)	5270	Sum	4.139	10.49	Pass
NVNT	802.11n(HT40)	5310	Ant 1	1.672	10.49	Pass
NVNT	802.11n(HT40)	5310	Ant 2	-0.613	10.49	Pass
NVNT	802.11n(HT40)	5310	Sum	3.688	10.49	Pass


PSD NVNT 802.11ac20 5260MHz Ant1

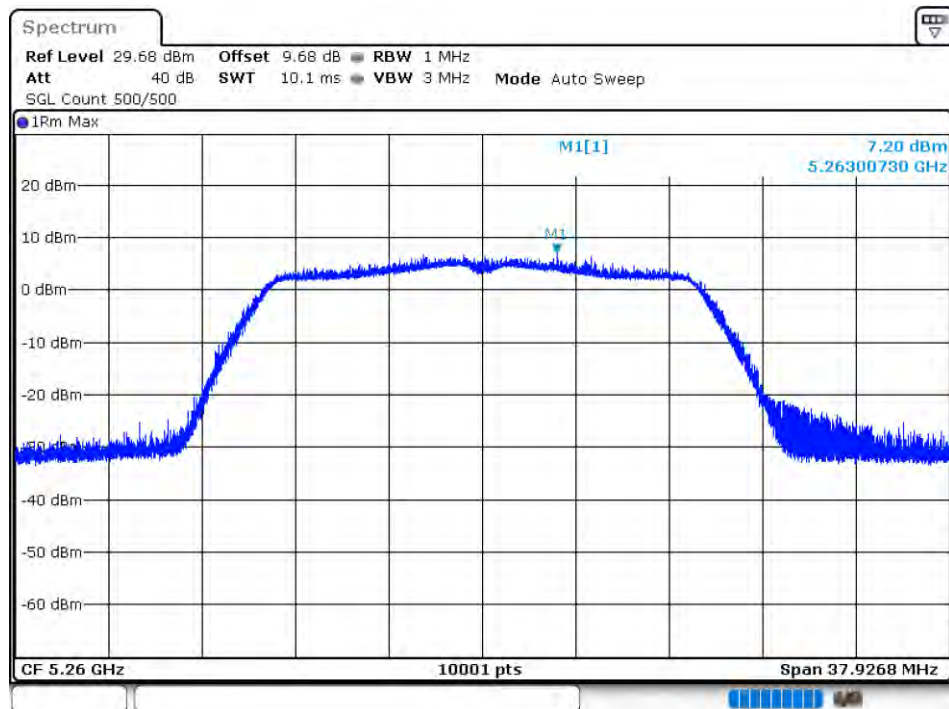


PSD NVNT 802.11ac20 5260MHz Ant2

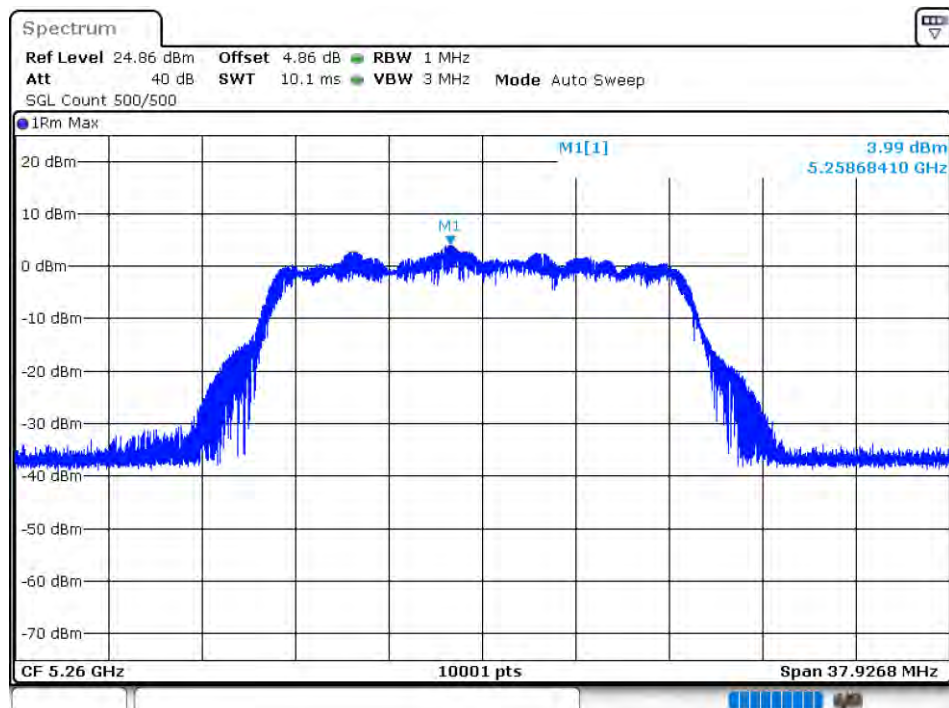


PSD NVNT 802.11ac20 5280MHz Ant1

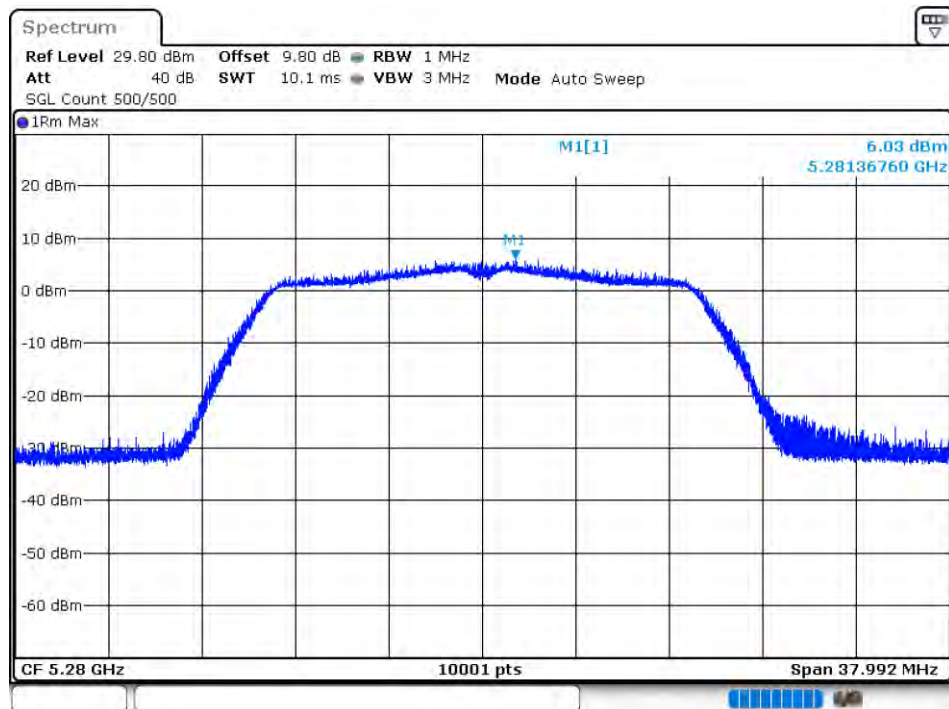


PSD NVNT 802.11ac20 5280MHz Ant2

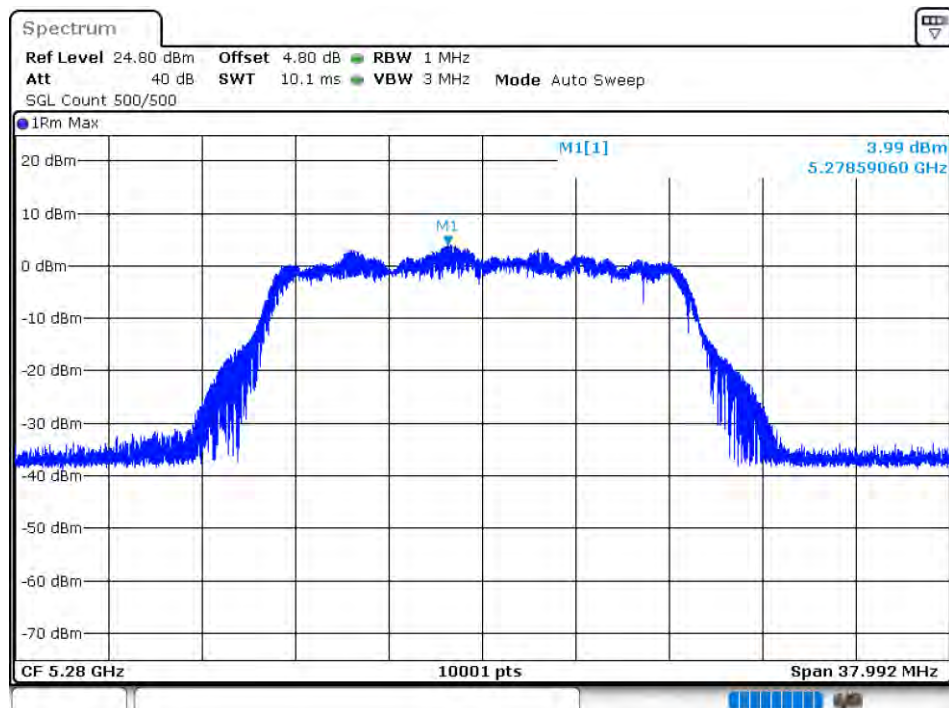


PSD NVNT 802.11ac20 5320MHz Ant1

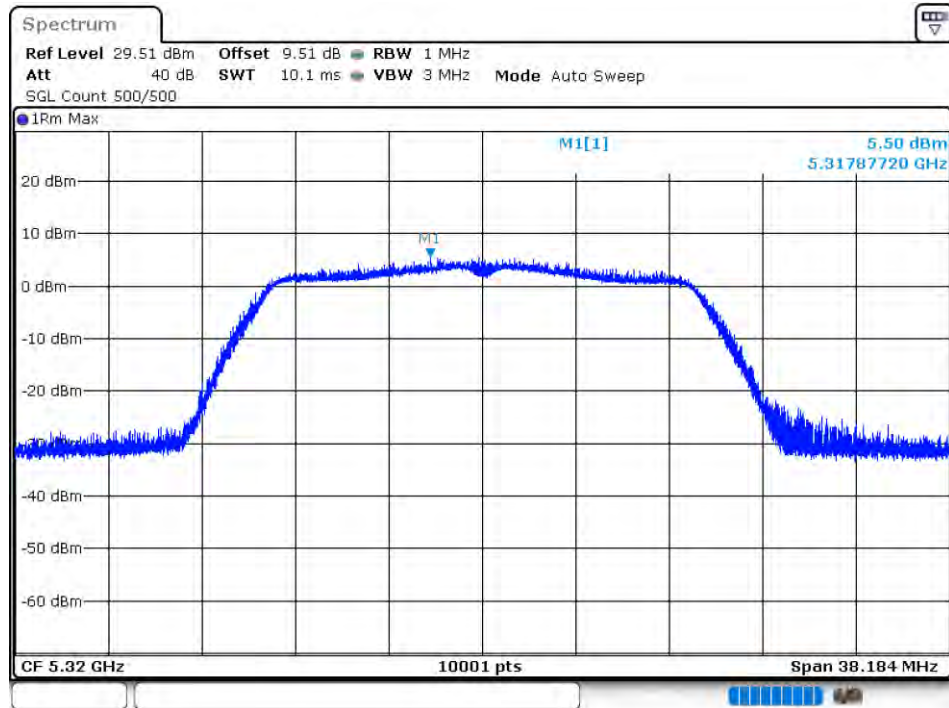


PSD NVNT 802.11ac20 5320MHz Ant2

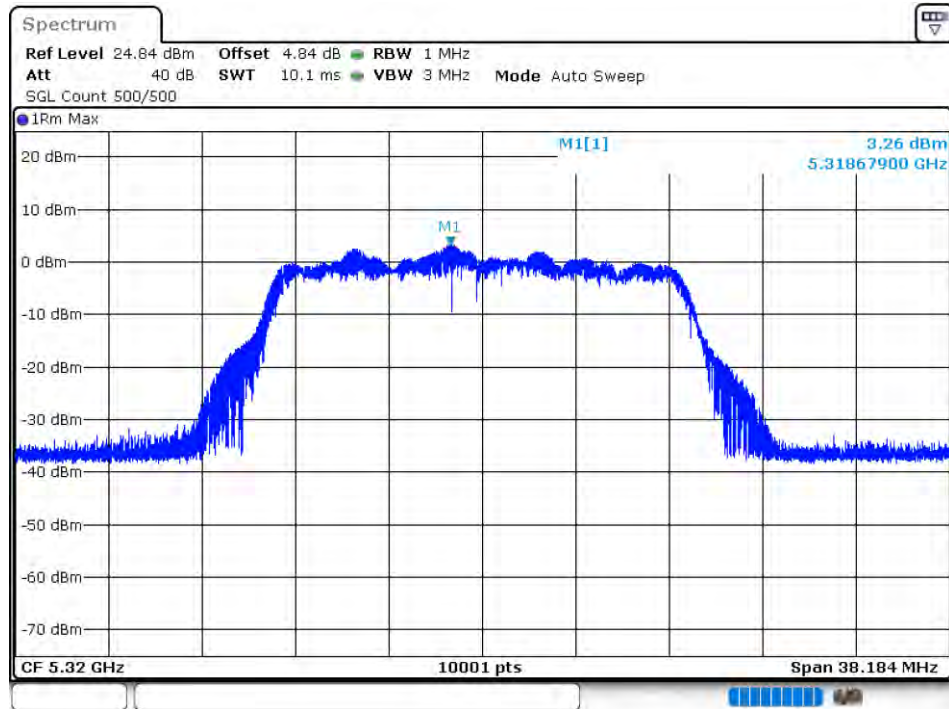


PSD NVNT 802.11ac40 5270MHz Ant1

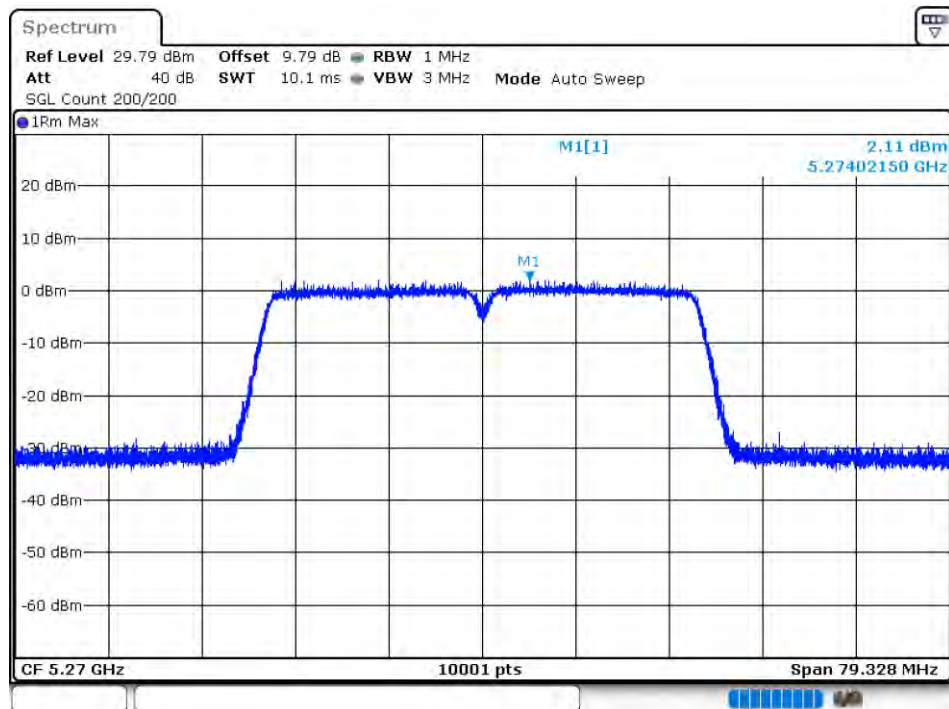


PSD NVNT 802.11ac40 5270MHz Ant2

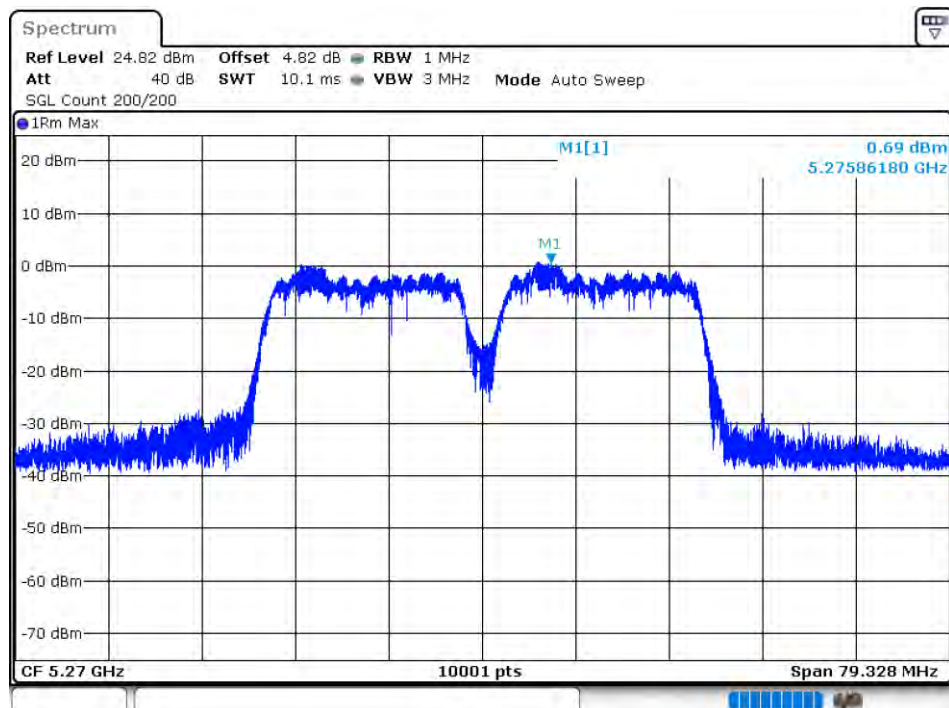


PSD NVNT 802.11ac40 5310MHz Ant1

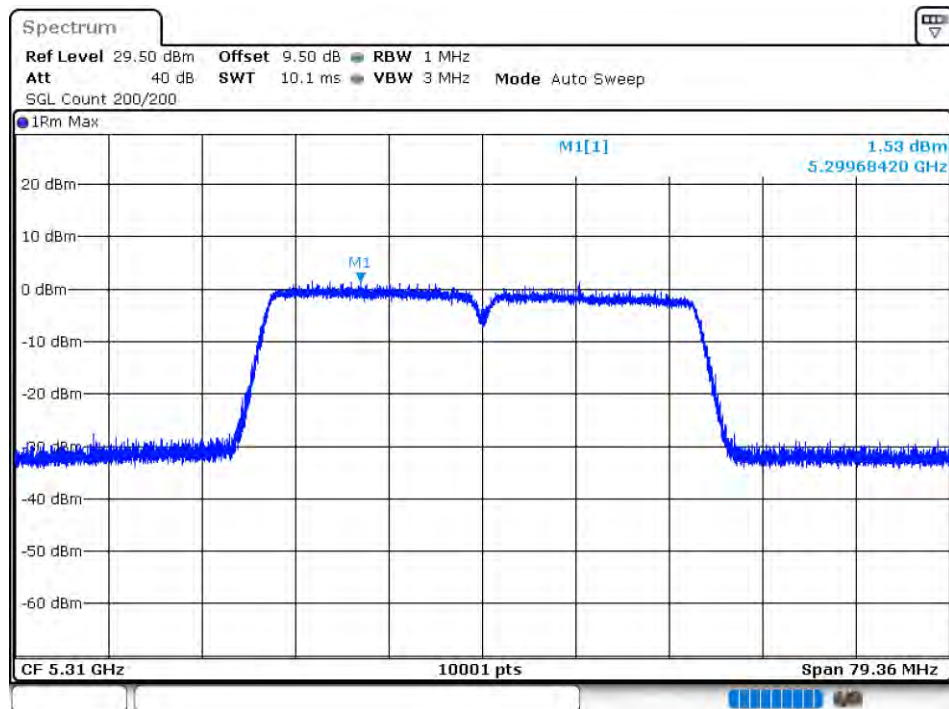


PSD NVNT 802.11ac40 5310MHz Ant2

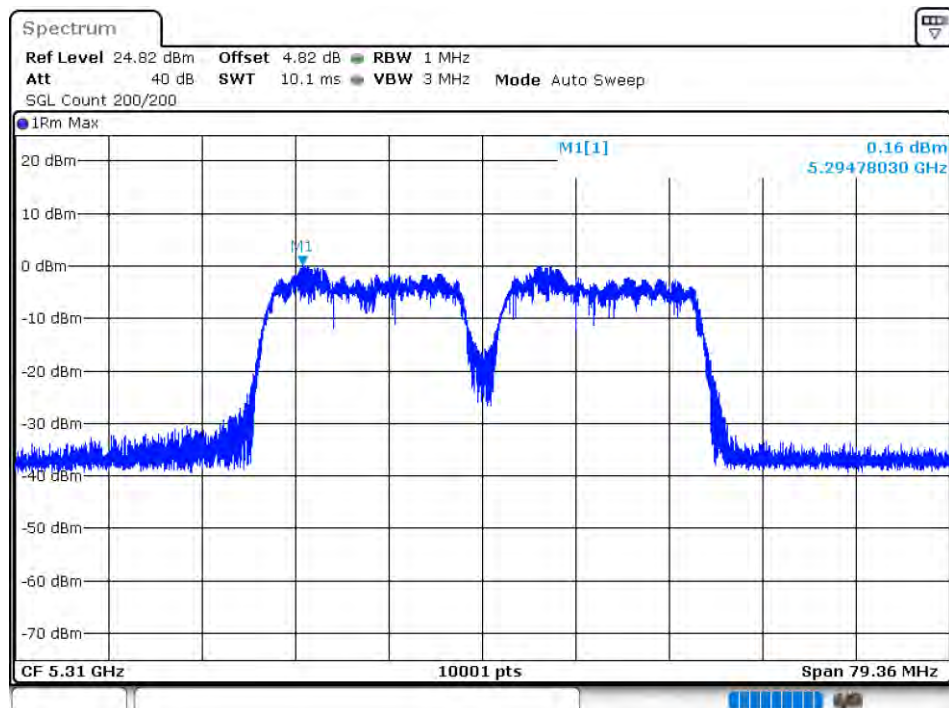


PSD NVNT 802.11ac80 5290MHz Ant1

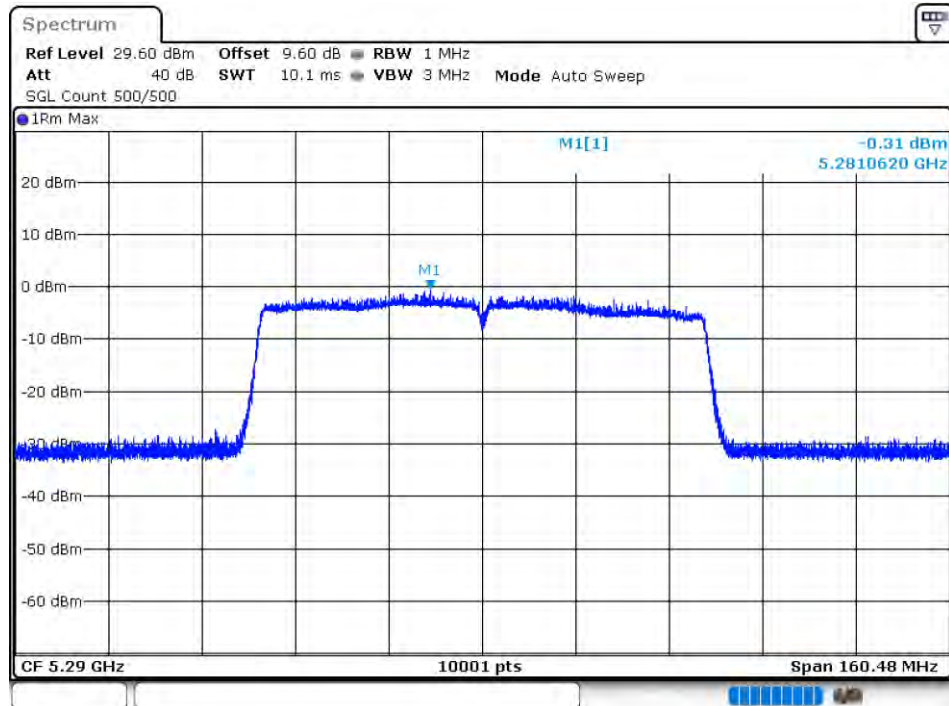


PSD NVNT 802.11ac80 5290MHz Ant2

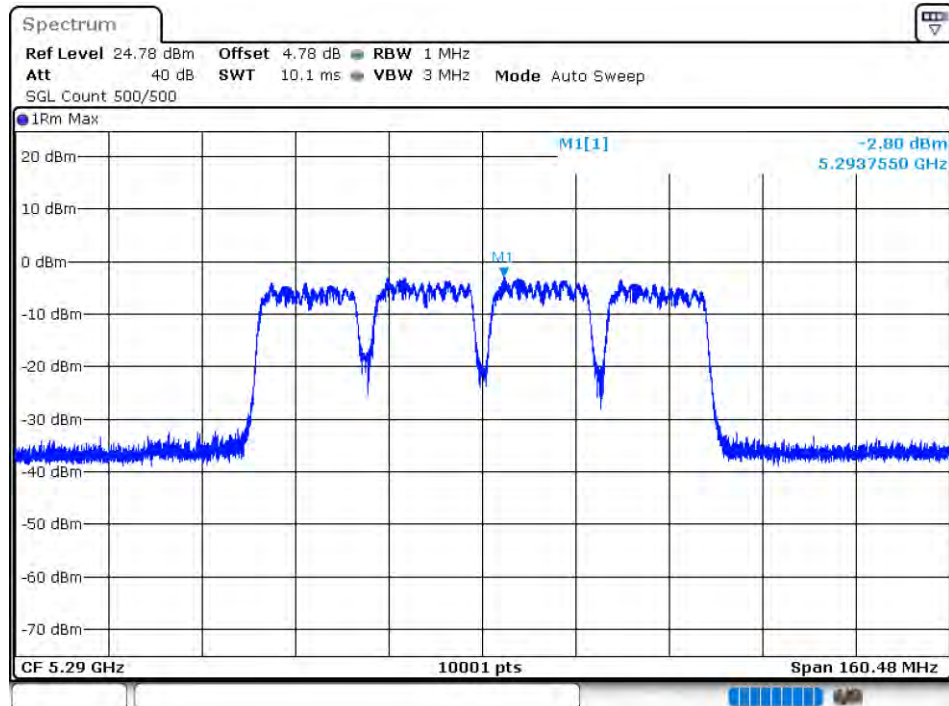


PSD NVNT 802.11n(HT20) 5260MHz Ant1

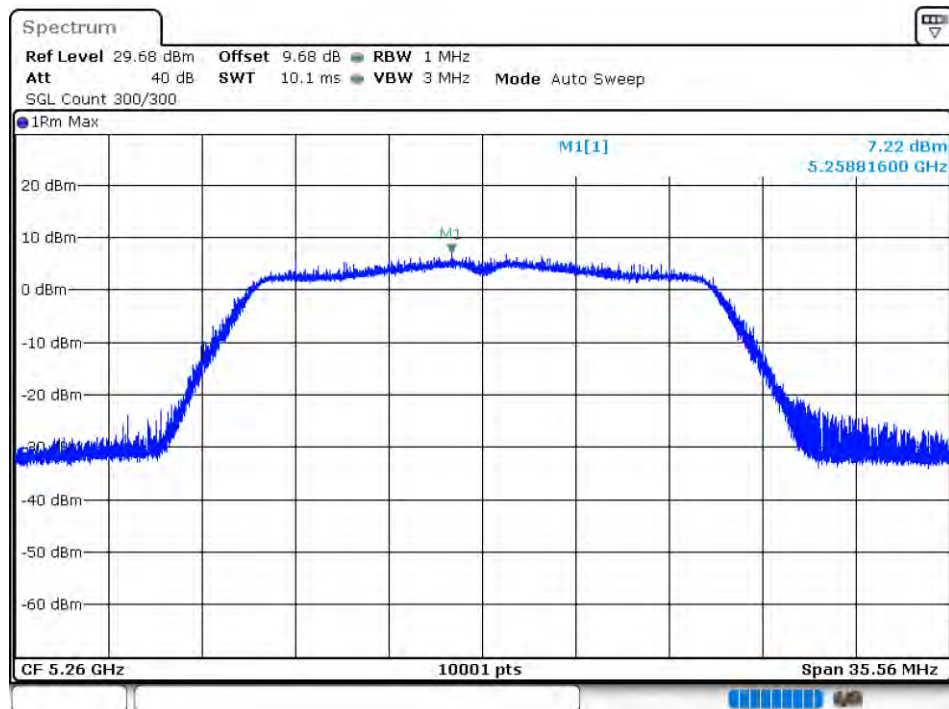


PSD NVNT 802.11n(HT20) 5260MHz Ant2

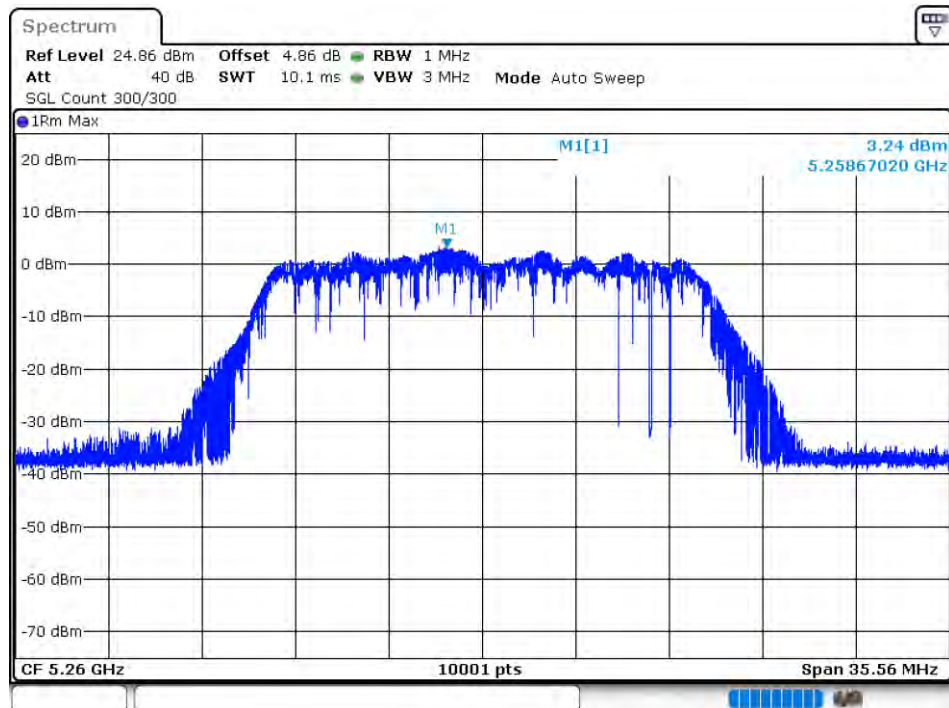


PSD NVNT 802.11n(HT20) 5280MHz Ant1

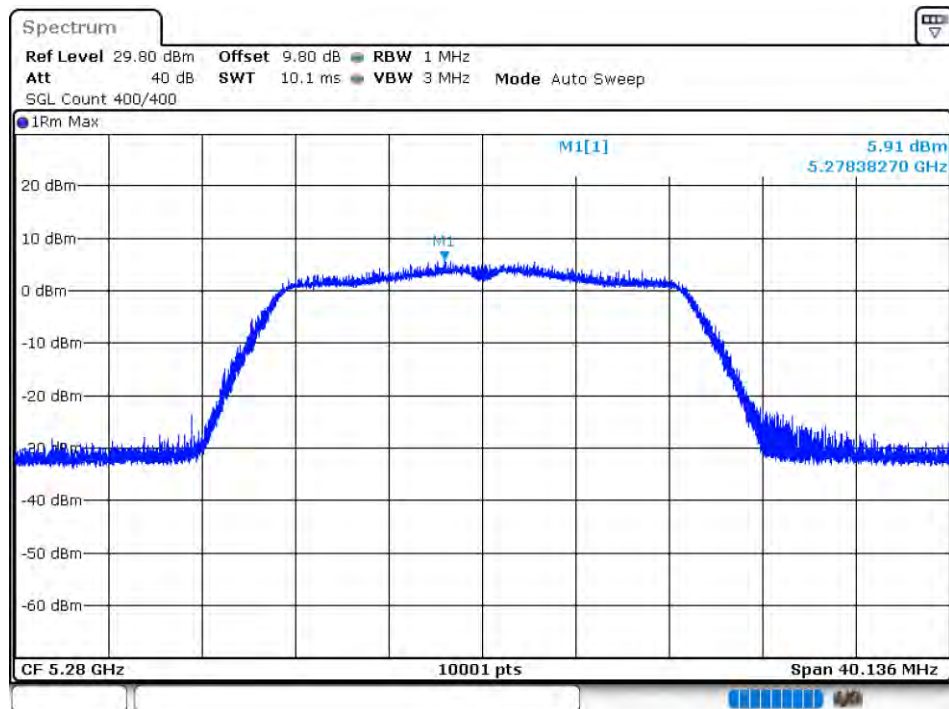


PSD NVNT 802.11n(HT20) 5280MHz Ant2

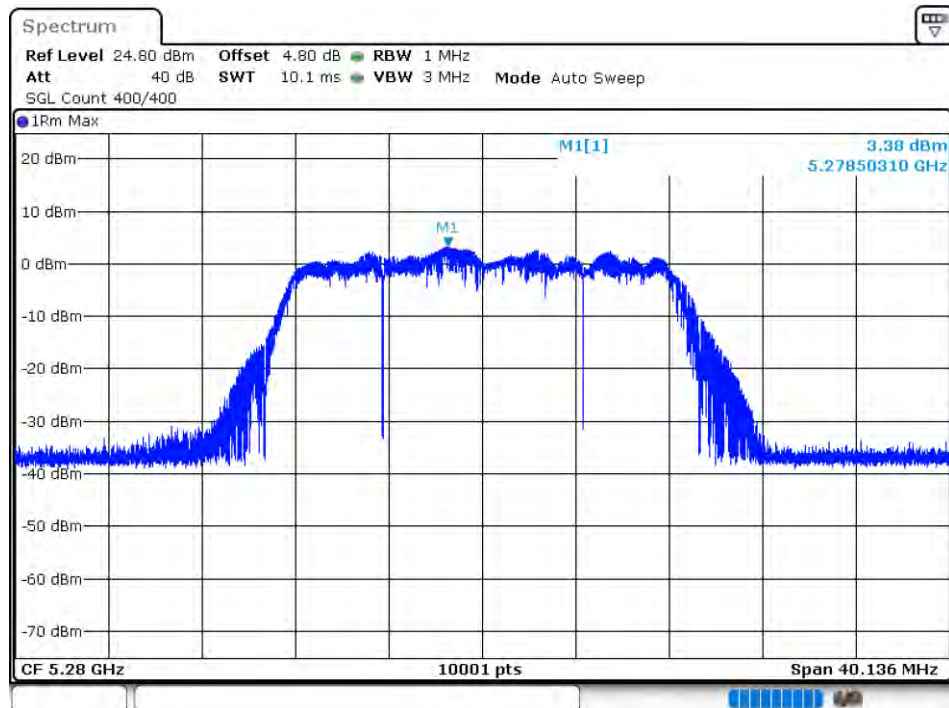


PSD NVNT 802.11n(HT20) 5320MHz Ant1

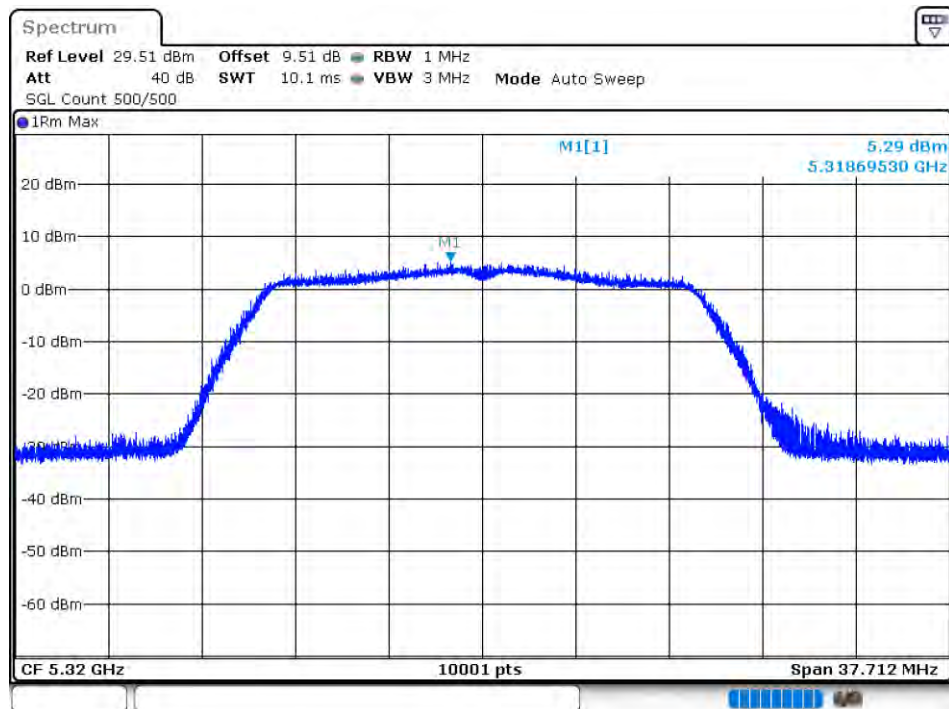


PSD NVNT 802.11n(HT20) 5320MHz Ant2

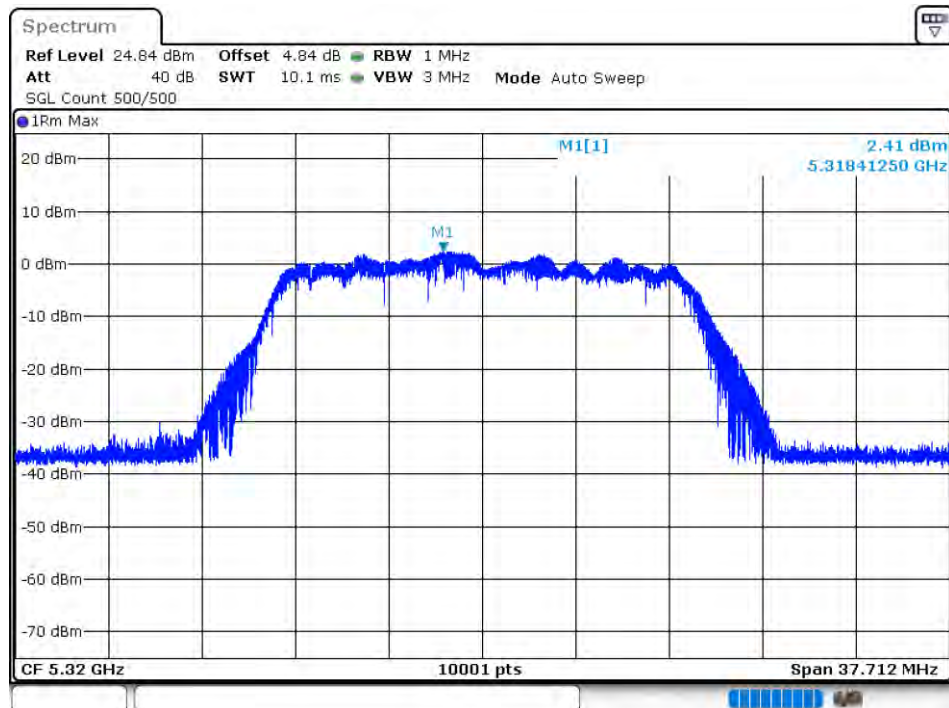


PSD NVNT 802.11n(HT40) 5270MHz Ant1

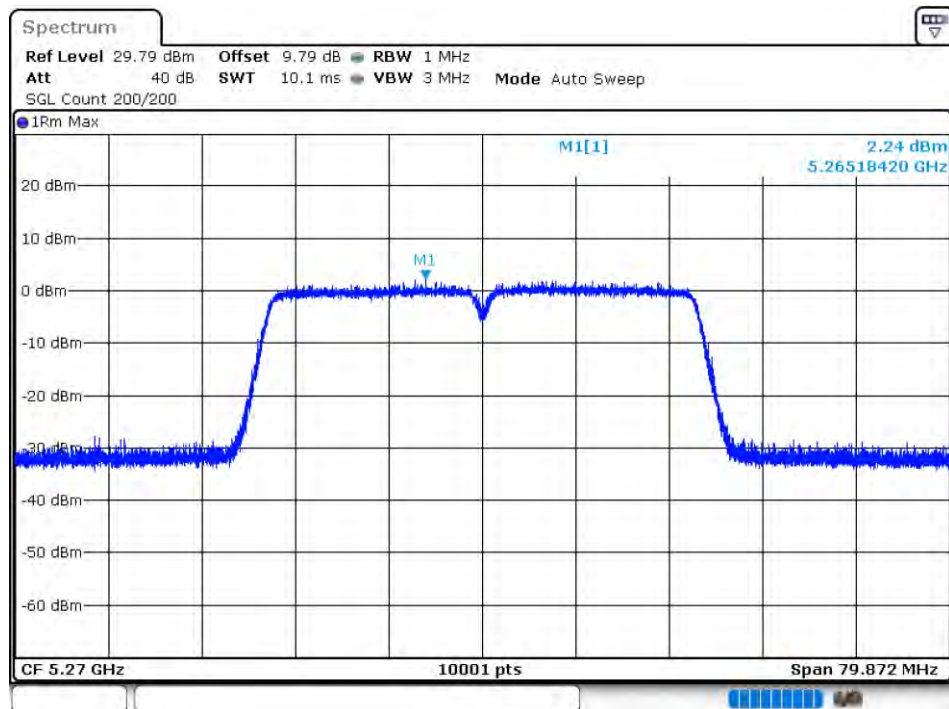


PSD NVNT 802.11n(HT40) 5270MHz Ant2

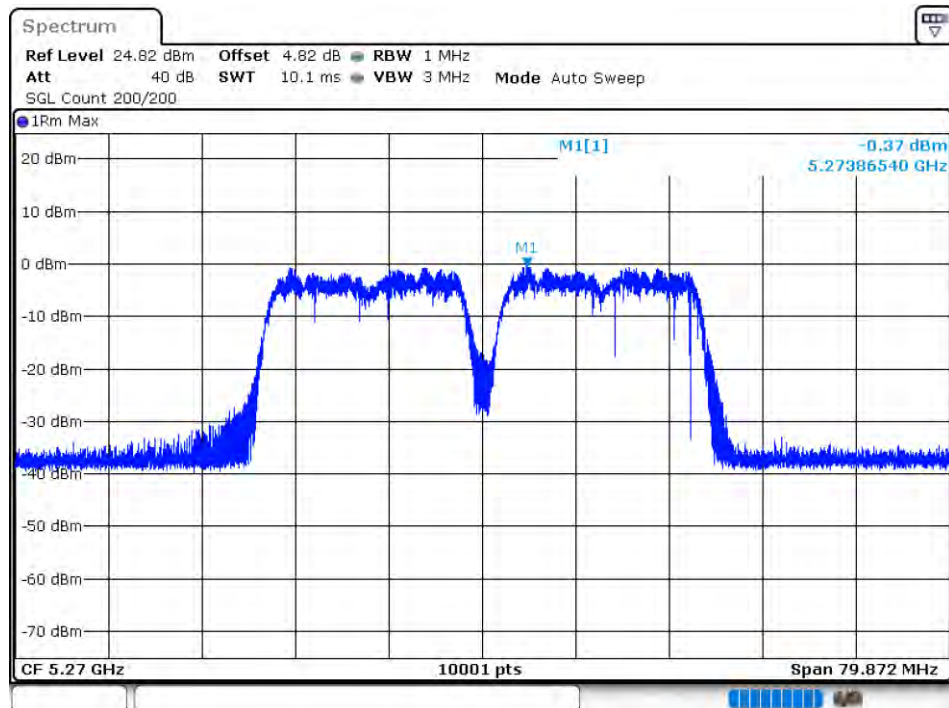

PSD NVNT 802.11n(HT40) 5310MHz Ant1

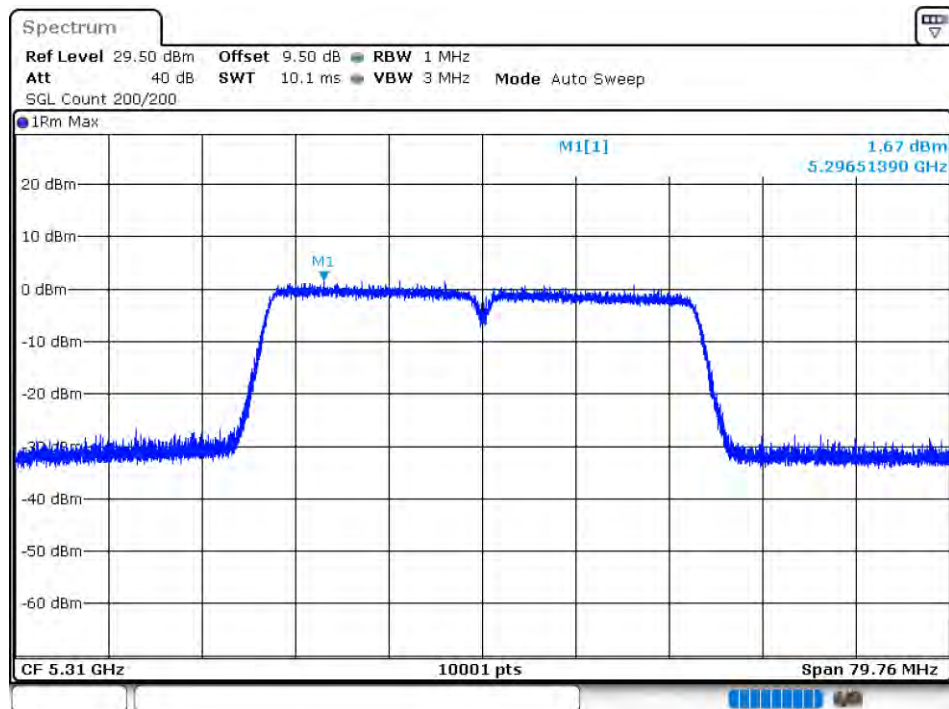


PSD NVNT 802.11n(HT40) 5310MHz Ant2

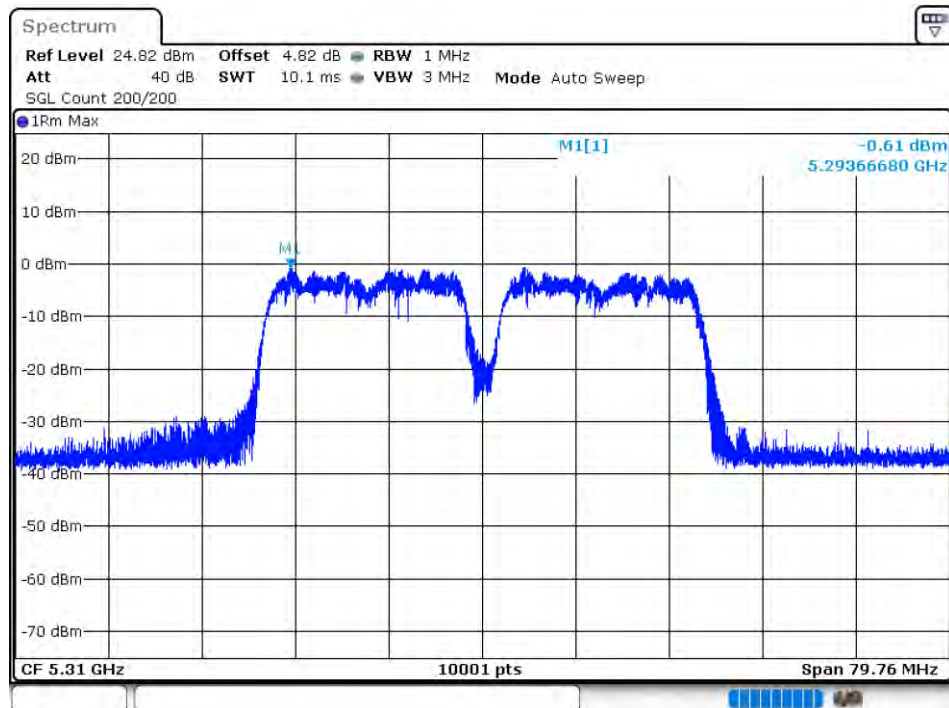


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	802.11ac20	5260	Sum	-43	-27	Pass
NVNT	802.11ac20	5320	Sum	-38.55	-27	Pass
NVNT	802.11ac40	5270	Sum	-42.62	-27	Pass
NVNT	802.11ac40	5310	Sum	-40.6	-27	Pass
NVNT	802.11ac80	5290	Sum	-32.2	-27	Pass
NVNT	802.11ac80	5290	Sum	-27.09	-27	Pass
NVNT	802.11n(HT20)	5260	Sum	-42.78	-27	Pass
NVNT	802.11n(HT20)	5320	Sum	-39.89	-27	Pass
NVNT	802.11n(HT40)	5270	Sum	-42.72	-27	Pass
NVNT	802.11n(HT40)	5310	Sum	-31.7	-27	Pass

Band Edge NVNT 802.11ac20 5260MHz Low Sum

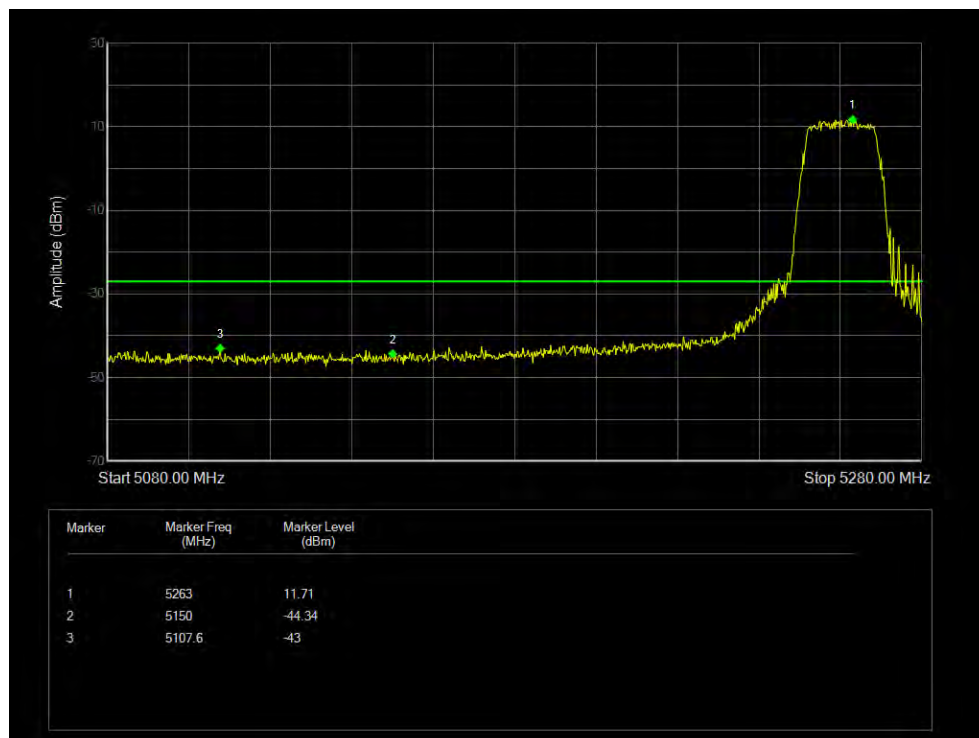

Band Edge NVNT 802.11ac20 5320MHz High Sum

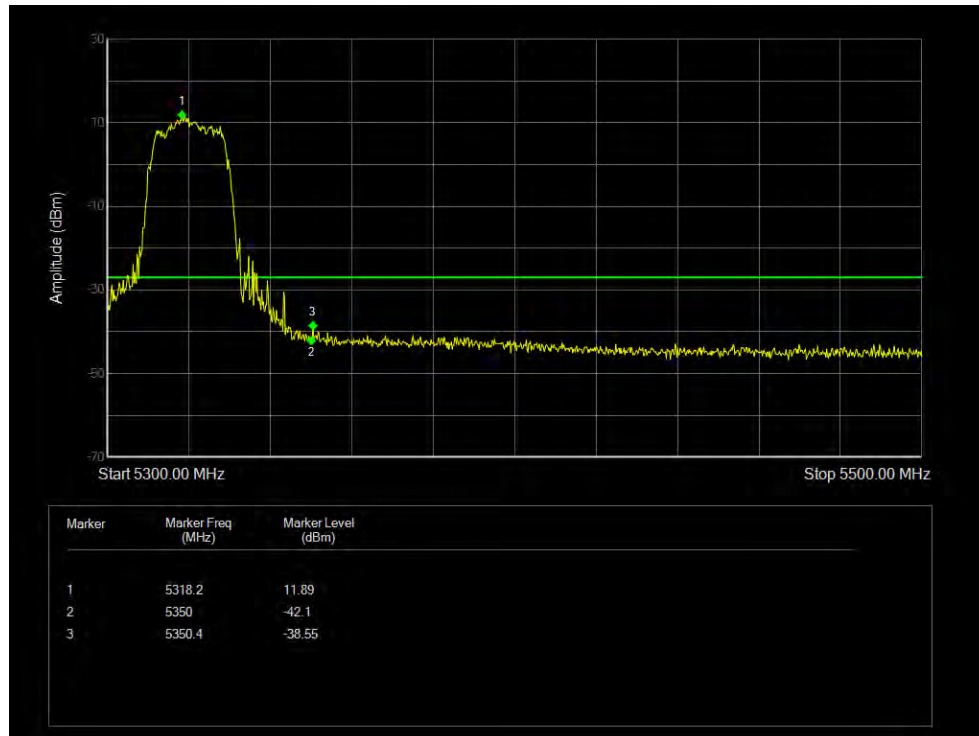


Band Edge NVNT 802.11ac40 5270MHz Low Sum



Band Edge NVNT 802.11ac40 5310MHz High Sum




Band Edge NVNT 802.11ac80 5290MHz High Sum

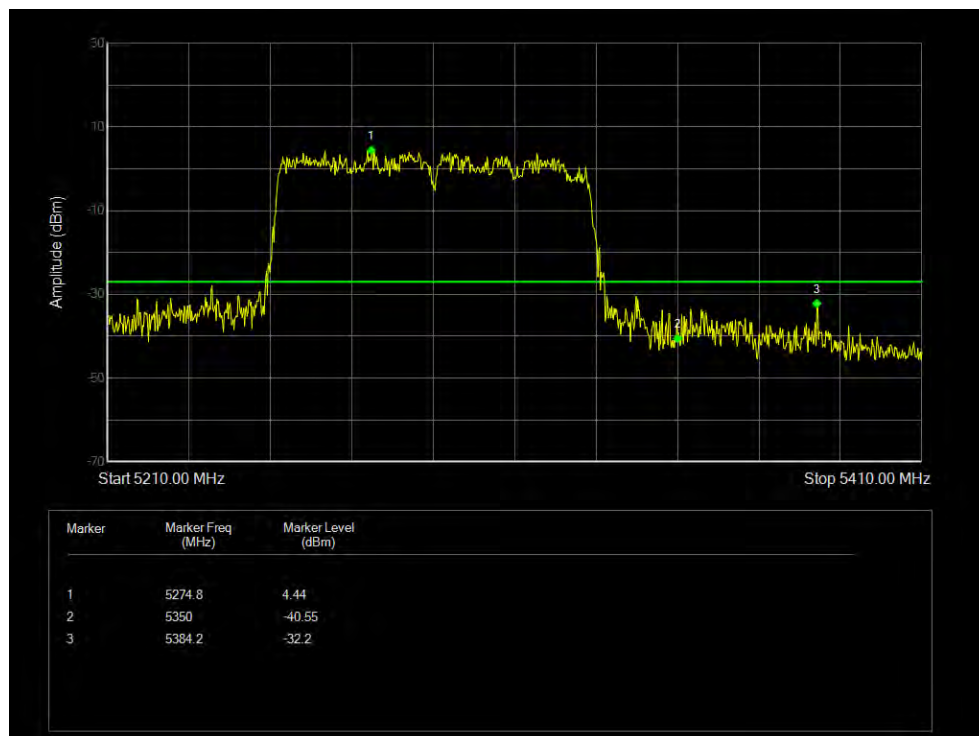


Band Edge NVNT 802.11ac80 5290MHz Low Sum




Band Edge NVNT 802.11n(HT20) 5260MHz Low Sum

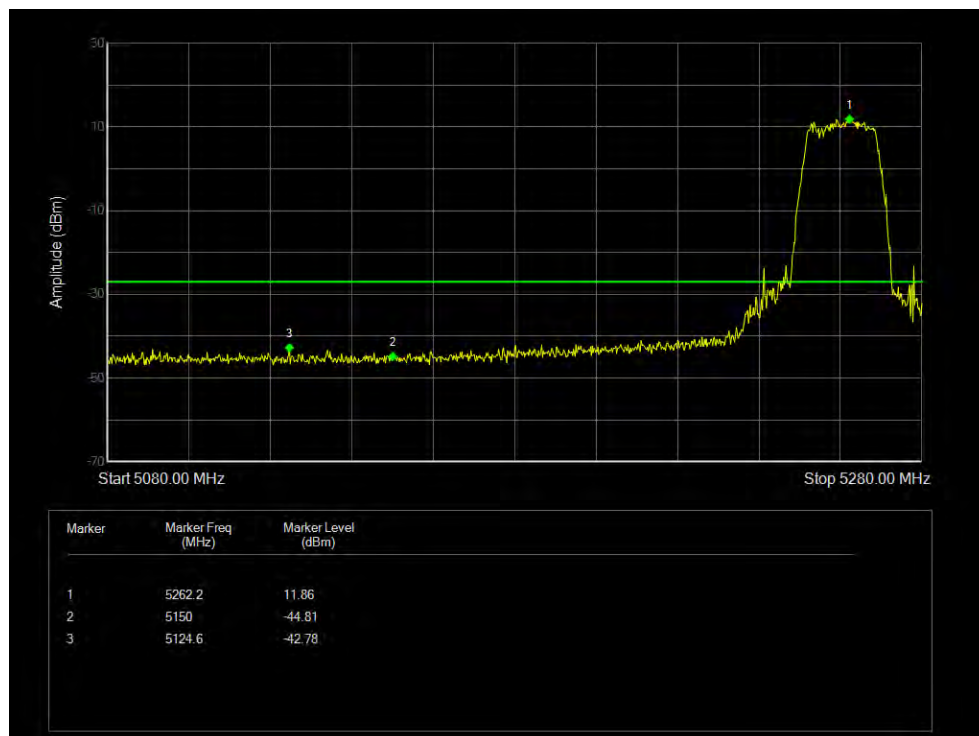

Band Edge NVNT 802.11n(HT20) 5320MHz High Sum

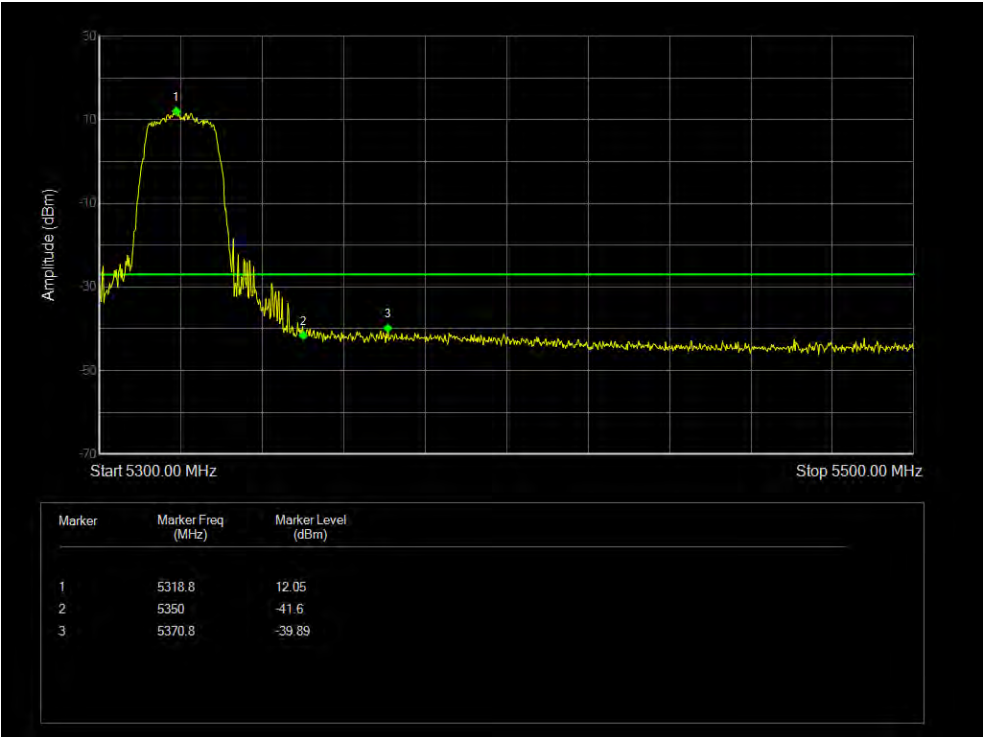

Band Edge NVNT 802.11n(HT40) 5270MHz Low Sum

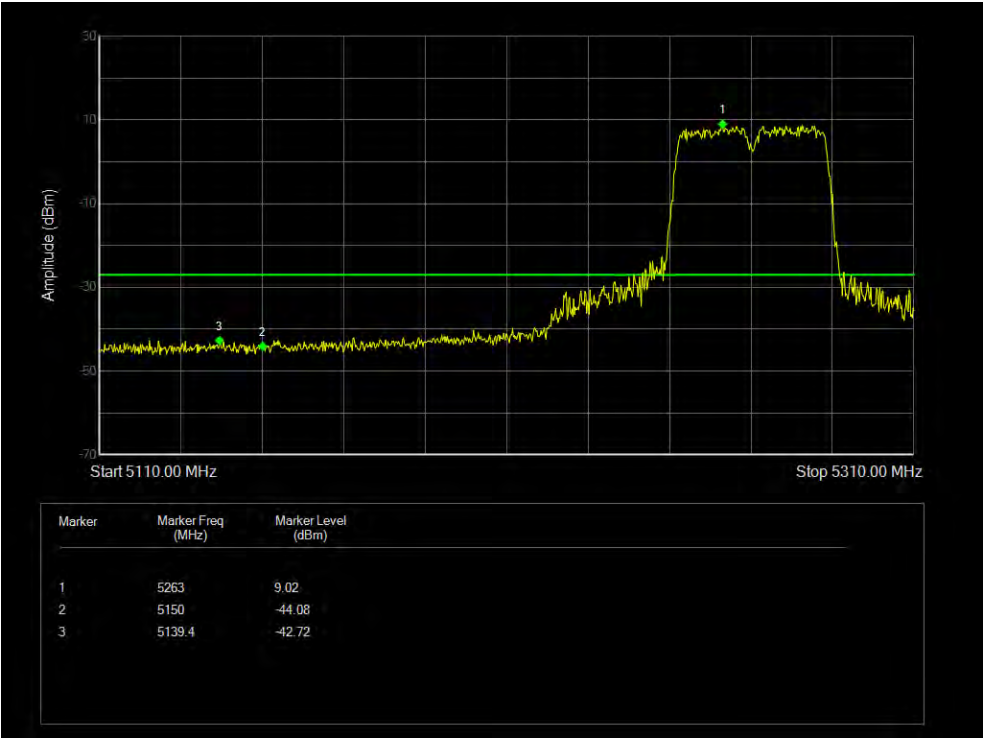


Band Edge NVNT 802.11n(HT40) 5310MHz High Sum




Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11ac20	5260	Sum	-32.97	-27	Pass
NVNT	802.11ac20	5280	Sum	-33.13	-27	Pass
NVNT	802.11ac20	5320	Sum	-34.13	-27	Pass
NVNT	802.11ac40	5270	Sum	-33.02	-27	Pass
NVNT	802.11ac40	5310	Sum	-33.85	-27	Pass
NVNT	802.11ac80	5290	Sum	-33.61	-27	Pass
NVNT	802.11n(HT20)	5260	Sum	-33.91	-27	Pass
NVNT	802.11n(HT20)	5280	Sum	-33.68	-27	Pass
NVNT	802.11n(HT20)	5320	Sum	-33.83	-27	Pass
NVNT	802.11n(HT40)	5270	Sum	-33.64	-27	Pass
NVNT	802.11n(HT40)	5310	Sum	-33.75	-27	Pass


Tx. Spurious NVNT 802.11ac20 5260MHz Sum Emission

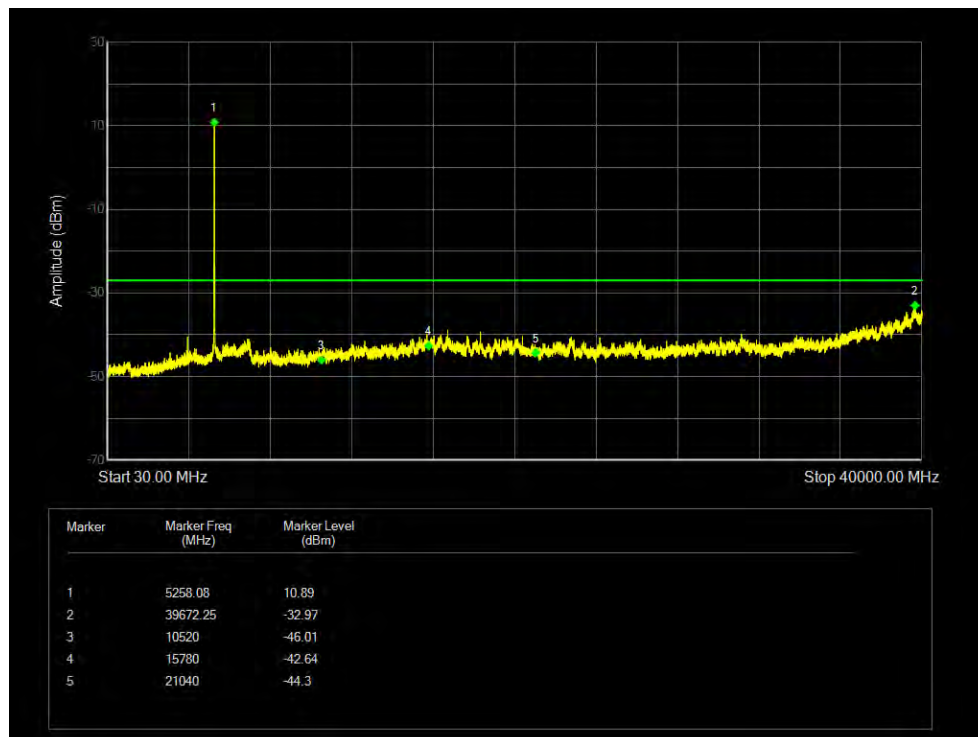


Tx. Spurious NVNT 802.11ac20 5280MHz Sum Emission

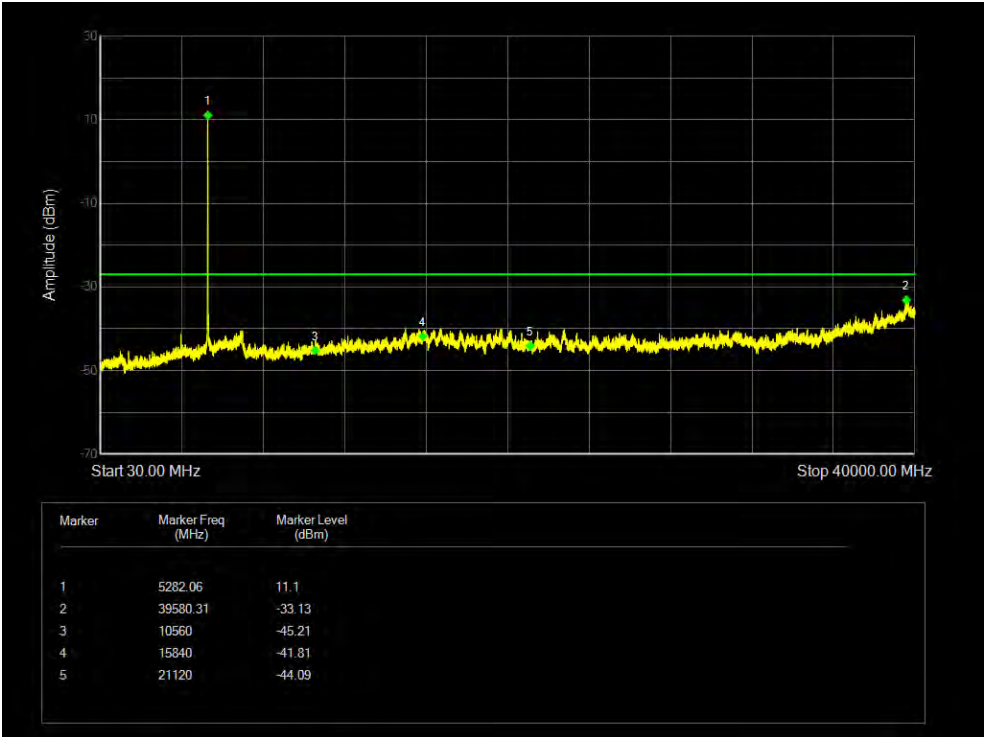


Tx. Spurious NVNT 802.11ac20 5320MHz Sum Emission

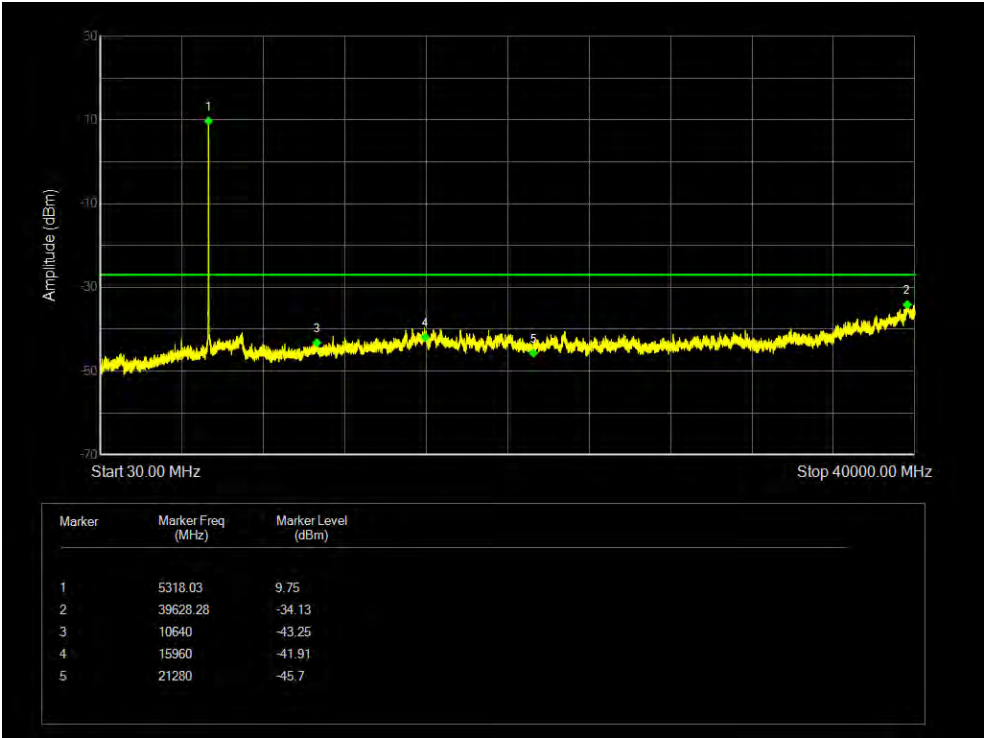


Tx. Spurious NVNT 802.11ac40 5270MHz Sum Emission

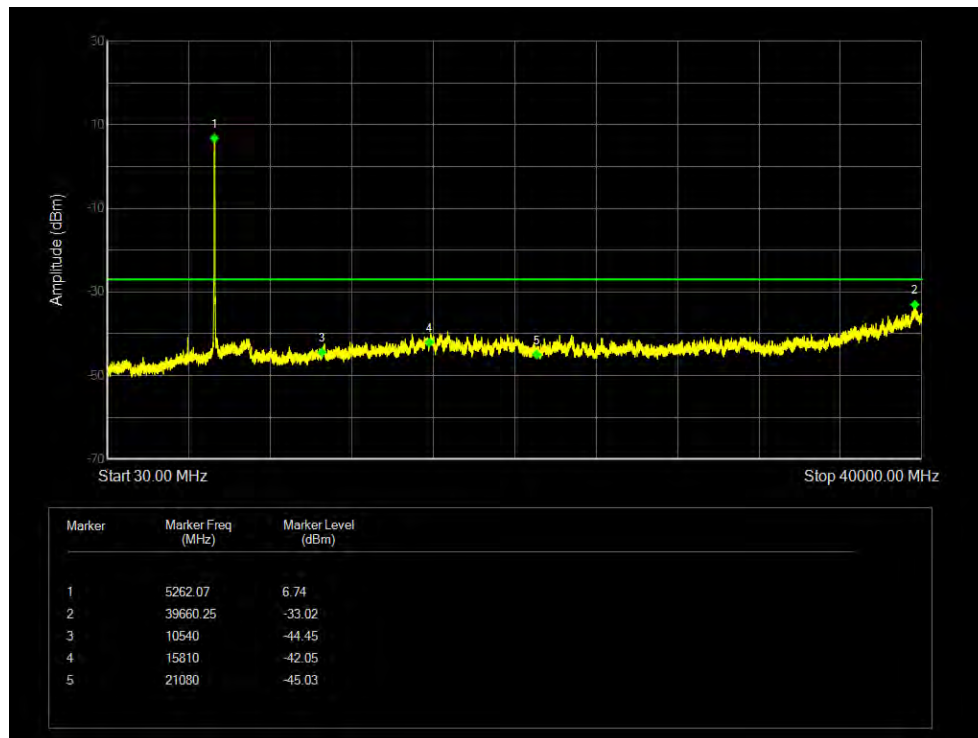


Tx. Spurious NVNT 802.11ac40 5310MHz Sum Emission

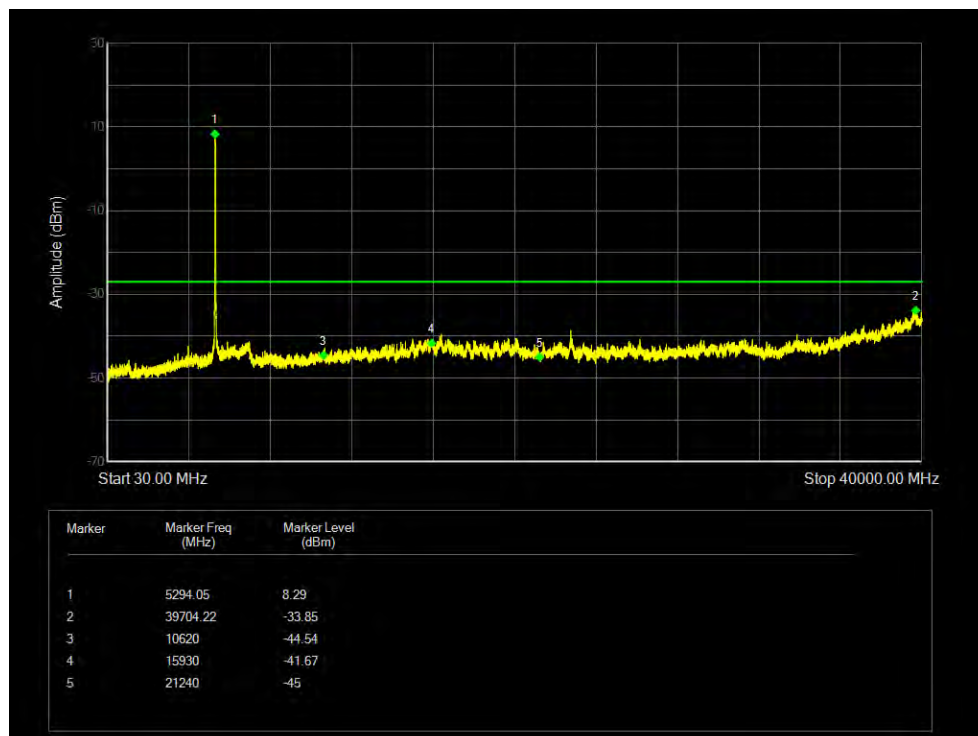


Tx. Spurious NVNT 802.11ac80 5290MHz Sum Emission

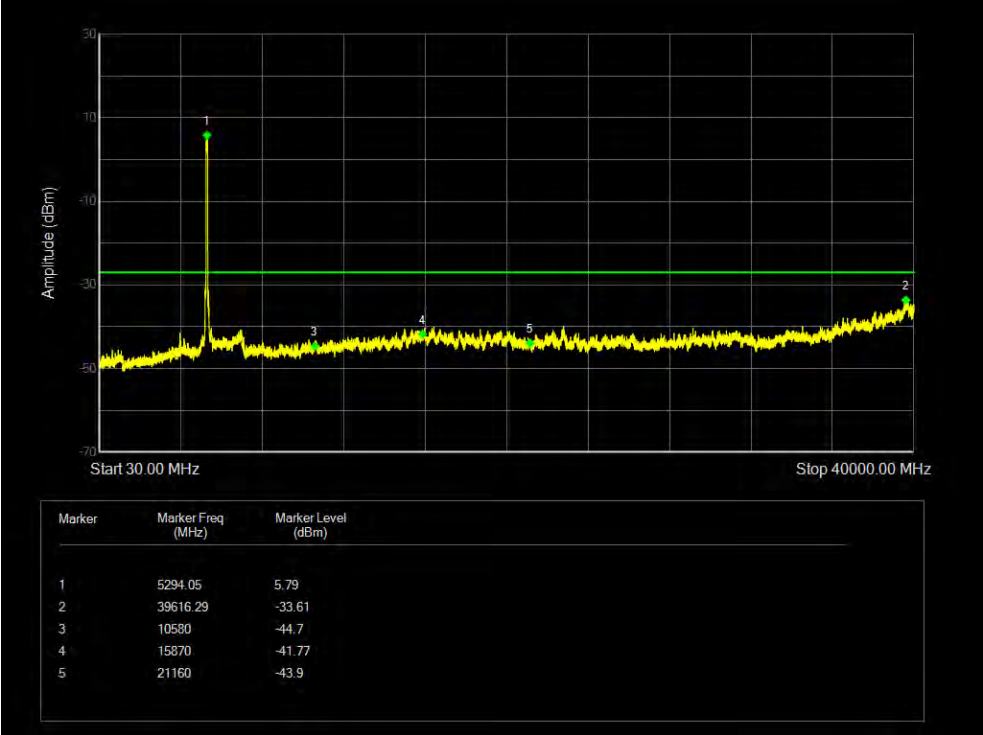


Tx. Spurious NVNT 802.11n(HT20) 5260MHz Sum Emission

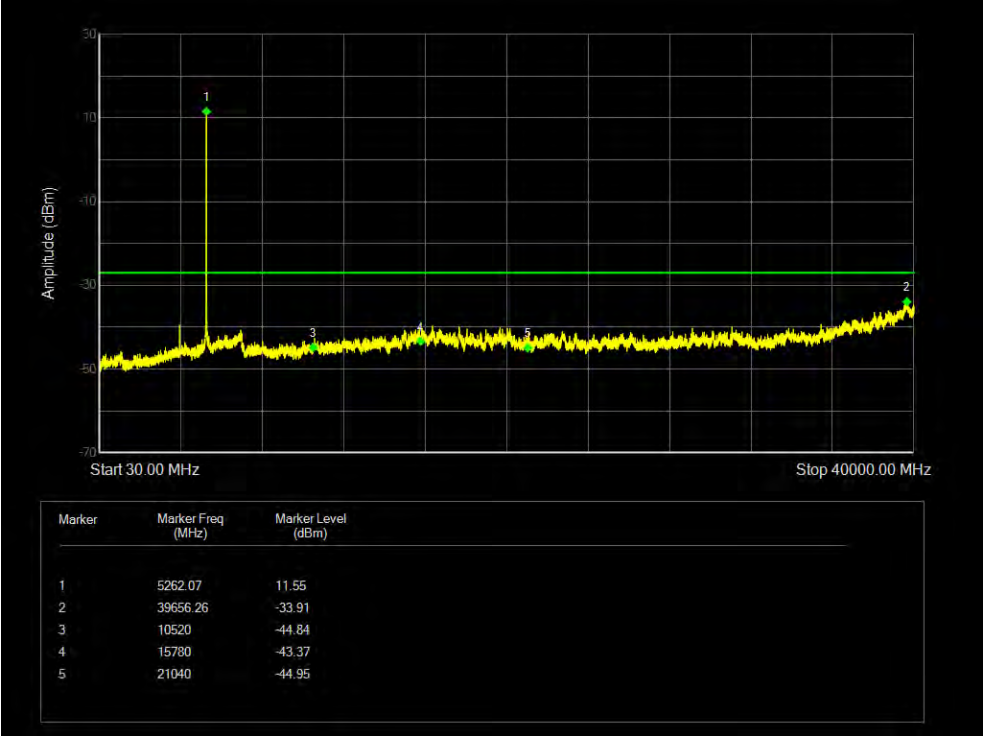


Tx. Spurious NVNT 802.11n(HT20) 5280MHz Sum Emission

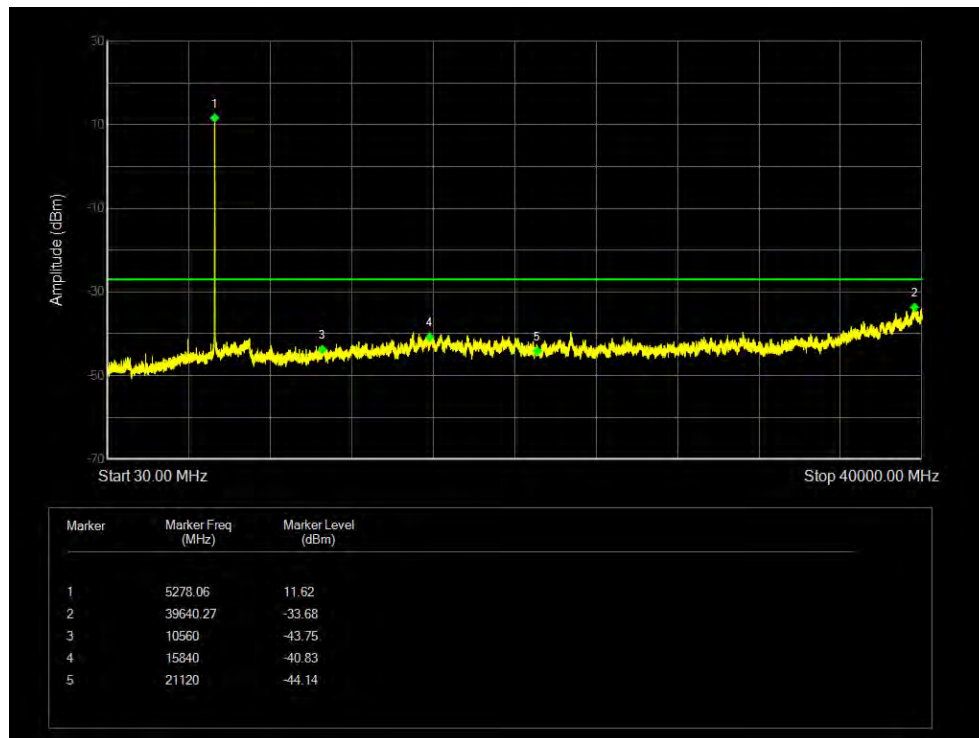


Tx. Spurious NVNT 802.11n(HT20) 5320MHz Sum Emission

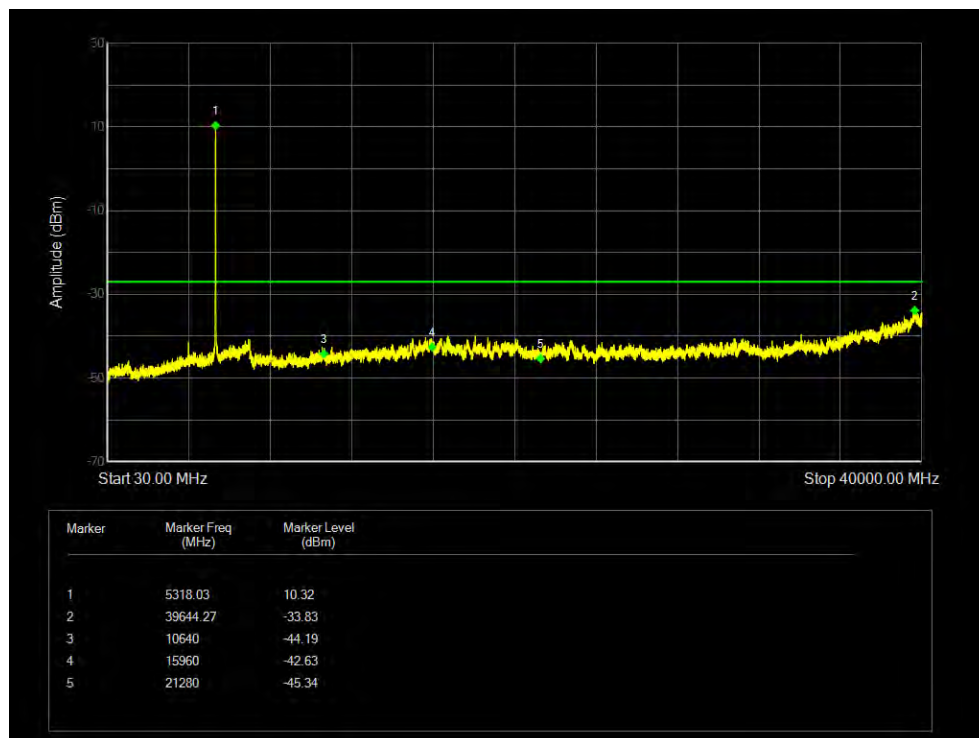

Tx. Spurious NVNT 802.11n(HT40) 5270MHz Sum Emission

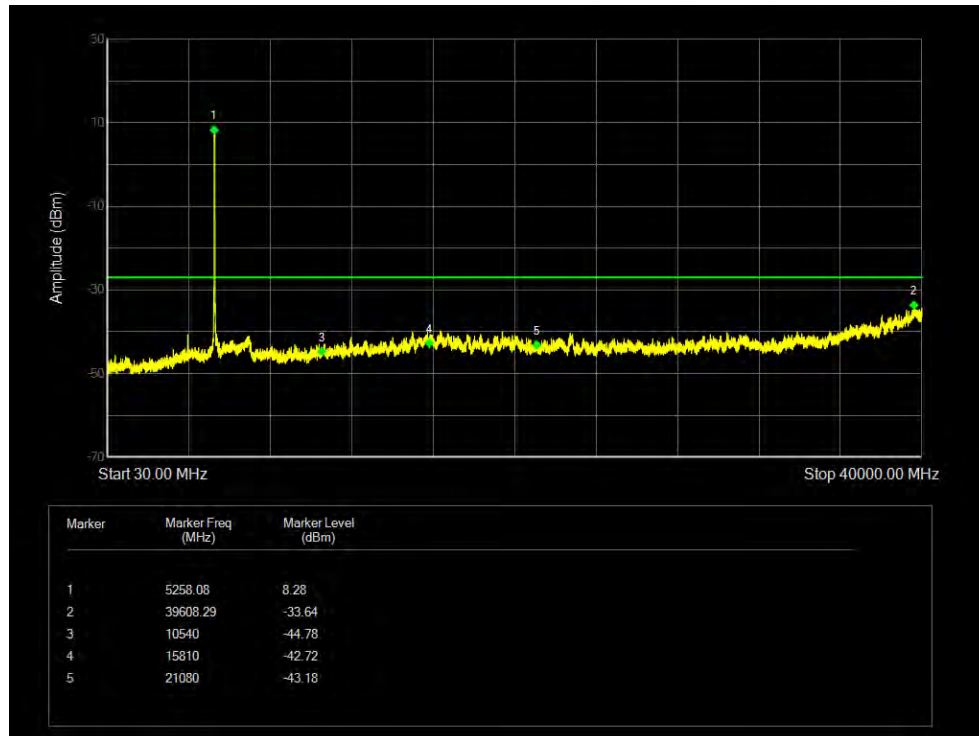

Tx. Spurious NVNT 802.11n(HT40) 5310MHz Sum Emission

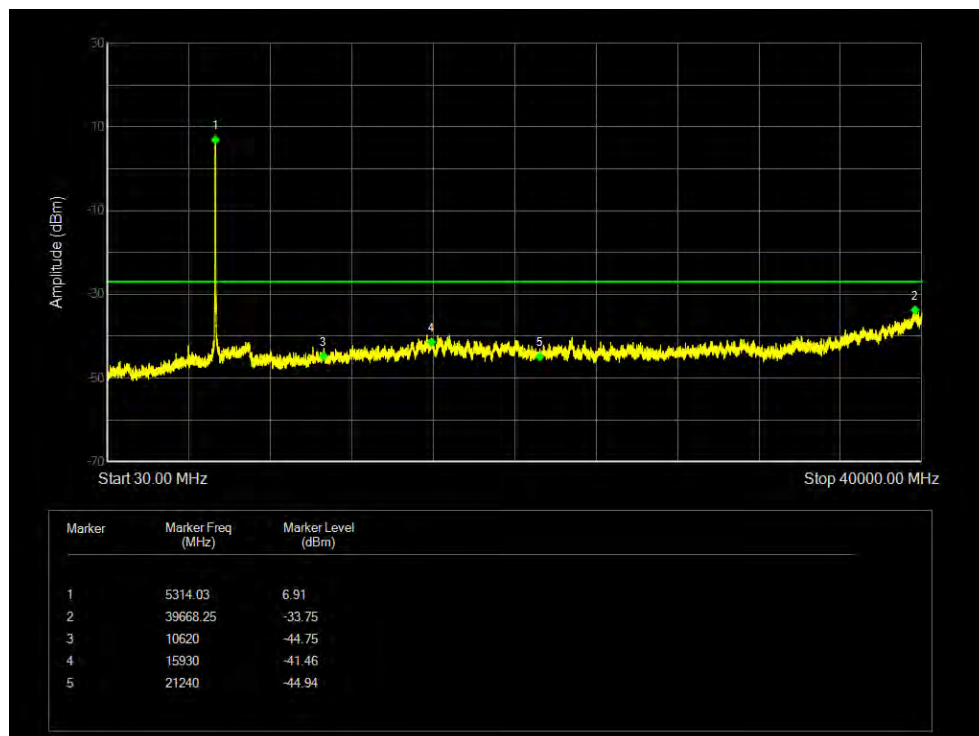

5.6G:

Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)
NVNT	a	5500	Ant1	98	0.09
NVNT	a	5600	Ant1	98	0.09
NVNT	a	5700	Ant1	98.01	0.09
NVNT	a	5500	Ant2	98	0.09
NVNT	a	5600	Ant2	97.77	0.1
NVNT	a	5700	Ant2	98.01	0.09
NVNT	ac20	5500	Ant1	97.86	0.09
NVNT	ac20	5600	Ant1	97.87	0.09
NVNT	ac20	5700	Ant1	97.87	0.09
NVNT	ac20	5500	Ant2	97.86	0.09
NVNT	ac20	5600	Ant2	97.86	0.09
NVNT	ac20	5700	Ant2	97.86	0.09
NVNT	ac40	5510	Ant1	95.81	0.19
NVNT	ac40	5590	Ant1	95.84	0.18
NVNT	ac40	5670	Ant1	95.83	0.18
NVNT	ac40	5510	Ant2	95.81	0.19
NVNT	ac40	5590	Ant2	95.82	0.19
NVNT	ac40	5670	Ant2	95.8	0.19
NVNT	ac80	5530	Ant1	91.92	0.37
NVNT	ac80	5610	Ant1	91.93	0.37
NVNT	ac80	5530	Ant2	91.85	0.37
NVNT	ac80	5610	Ant2	91.87	0.37
NVNT	n20	5500	Ant1	97.88	0.09
NVNT	n20	5600	Ant1	97.84	0.09
NVNT	n20	5700	Ant1	97.87	0.09
NVNT	n20	5500	Ant2	97.88	0.09
NVNT	n20	5600	Ant2	97.84	0.09
NVNT	n20	5700	Ant2	97.84	0.09
NVNT	n40	5510	Ant1	95.78	0.19
NVNT	n40	5590	Ant1	95.74	0.19
NVNT	n40	5670	Ant1	95.77	0.19
NVNT	n40	5510	Ant2	95.8	0.19
NVNT	n40	5590	Ant2	95.77	0.19
NVNT	n40	5670	Ant2	95.76	0.19