

TEST REPORT

CBSD-SAS Interoperability

Applicant Name:

EUCAST Co., Ltd.

(13595) 4th FI Sungok Bldg. 262,

Hwangsaoul-ro Bundang-Gu, Seongnam-si,

Gyeonggi-do, Korea

Date of Testing:

11/17/2020 - 12/15/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

3M2011170083

FCC ID:

2AXTR-ECL2248-2723

APPLICANT:

EUCAST Co., Ltd.

Application Type:

Certification

Model:

ECL2248-2723

EUT Type:

LTE enterprise small cell base station

Frequency Range:

3550 – 3700 MHz

FCC Classification:

Citizens Band Category A and B Devices (CBD)

FCC Rule Part(s):


Part 96

Test Procedure(s):

KDB 940660 D01 v03, WINNF-TS-0122-V1.0.0, CBRSA-TS-9001 V.1.0.0

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in the test procedures listed above. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President



FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 1 of 57

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	PCTEST Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Modifications.....	4
3.0	TEST EQUIPMENT CALIBRATION DATA.....	5
4.0	ENVIRONMENTAL CONDITIONS	6
5.0	EVALUATION PROCEDURE	7
6.0	TEST Summary.....	8
6.1	Summary	8
7.0	CONCLUSION	10
APPENDIX A – TEST RESULT AND DATA		11
A1	[WINNF.FT.C.REG.1] MULTI-STEP REGISTRATION	11
A3	[WINNF.FT.C.REG.8] MISSING REQUIRED PARAMETERS (RESPONSECODE 102)	13
A4	[WINNF.FT.C.REG.10] PENDING REGISTRATION (RESPONSECODE 200)	14
A5	[WINNF.FT.C.REG.12] INVALID PARAMETER (RESPONSECODE 103)	15
A6	[WINNF.FT.C.REG.14] BLACKLISTED CBSD (RESPONSECODE 101)	16
A7	[WINNF.FT.C.REG.16] UNSUPPORTED SAS PROTOCOL VERSION (RESPONSECODE 100)	17
A8	[WINNF.FT.C.REG.18] GROUP ERROR (RESPONSECODE 201)	18
A9	[WINNF.FT.C.GRA.1] UNSUCCESSFUL GRANT RESPONSECODE=400 (INTERFERENCE)	19
A10	[WINNF.FT.C.GRA.2] UNSUCCESSFUL GRANT RESPONSECODE=401 (GRANT_CONFLICT)	20
A11	[WINNF.FT.C.HBT.1] HEARTBEAT SUCCESS CASE (FIRST HEARTBEAT RESPONSE).....	21
A12	[WINNF.FT.C.HBT.3] HEARTBEAT RESPONSECODE=105 (DEREGISTER)	24
A13	[WINNF.FT.C.HBT.4] HEARTBEAT RESPONSECODE=500 (TERMINATED_GRANT)	26
A14	[WINNF.FT.C.HBT.5] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN FIRST HEARTBEAT RESPONSE ..	28
A15	[WINNF.FT.C.HBT.6] HEARTBEAT RESPONSECODE=501 (SUSPENDED_GRANT) IN SUBSEQUENT HEARTBEAT RESPONSE.....	30
A16	[WINNF.FT.C.HBT.7] HEARTBEAT RESPONSECODE=502 (UNSYNC_OP_PARAM).....	32
A17	[WINNF.FT.C.HBT.9] HEARTBEAT RESPONSE ABSENT (FIRST HEARTBEAT)	34
A18	[WINNF.FT.C.HBT.10] HEARTBEAT RESPONSE ABSENT (SUBSEQUENT HEARTBEAT)	36
A19	[WINNF.FT.C.RLQ.1] SUCCESSFUL RELINQUISHMENT	38
A20	[WINNF.FT.C.DRG.1] SUCCESSFUL DEREGISTRATION.....	40
A21	[WINNF.FT.C.SCS.1] SUCCESSFUL TLS CONNECTION BETWEEN UUT AND SAS TEST HARNESS.....	42
A22	[WINNF.FT.C.SCS.2] TLS FAILURE DUE TO REVOKED CERTIFICATE	44
A23	[WINNF.FT.C.SCS.3] TLS FAILURE DUE TO EXPIRED SERVER CERTIFICATE.....	46
A24	[WINNF.FT.C.SCS.4] TLS FAILURE WHEN SAS TEST HARNESS CERTIFICATE IS ISSUED BY AN UNKNOWN CA.....	48
A25	[WINNF.FT.C.SCS.5] TLS FAILURE WHEN CERTIFICATE AT THE SAS TEST HARNESS IS CORRUPTED	50
A26	[WINNF.PT.C.HBT.1] UUT RF TRANSMIT POWER MEASUREMENT.....	52
Appendix B – Test Setup		57

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station	Page 2 of 57	

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility located at 7185 Oakland Mills Road, Columbia, MD 21046.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21046, U.S.A.

- PCTEST is a CBRS Alliance (OnGo) Approved Test Lab
- PCTEST is a WinnForum Approved Test Lab
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for CBRS Alliance Certification Test Plan and WinnForum Conformance and Performance Test Technical Standard.
- PCTEST is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: 2AXTR-ECL2248-2723		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 3 of 57

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **EUCAST Co., Ltd., Cat A LTE enterprise small cell base station FCC ID: 2AXTR-ECL2248-2723**. The test data contained in this report pertains only to CBSD-SAS interoperability. The EUT is not a Domain Proxy.

Test Device Serial Number(s): EE001100200900002

Test Device Hardware Version: Ver. 0.1

Test Device Software Version: Ver. 2.4.1

Equipment Category: Cat A

2.2 Device Capabilities

This device contains the following capabilities:

LTE Band 48

This device supports the following conditional features:

	Conditional Test Case Definitions	Supported
C1	Mandatory for UUT which supports multi-step registration message	☒
C2	Mandatory for UUT which supports single-step registration with no CPI-signed data in the registration message. By definition, this is a subset of Category A devices which determine all registration information, including location, without CPI intervention.	☐
C3	Mandatory for UUT which supports single-step registration containing CPI-signed data in the registration message.	☐
C4	Mandatory for UUT which supports RECEIVED_POWER_WITHOUT_GRANT measurement report type.	☐
C5	Mandatory for UUT which supports RECEIVED_POWER_WITH_GRANT measurement report type.	☐
C6	Mandatory for UUT which supports parameter change being made at the UUT and prior to sending a deregistration	☐

Table 2-1. Conditional Features

2.3 Test Configuration

The EUT was connected to the SAS Test Harness developed by WINNF WG4-CBSD. The latest version of the SAS Test Harness (V1.0.0.2) provided by CBRS Alliance was used. The SAS Test Harness is synchronized to UTC time.

2.4 Modifications

No modifications were made to EUT during testing.

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 4 of 57

3.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Dell	Latitude 5580	Test Harness Laptop	N/A	N/A	N/A	N/A

Table 3-1 Annual Test Equipment Calibration Schedule

FCC ID: 2AXTR-ECL2248-2723		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 5 of 57

4.0 ENVIRONMENTAL CONDITIONS

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2AXTR-ECL2248-2723	 Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 6 of 57

5.0 EVALUATION PROCEDURE

The measurement procedure described in KDB 940660 D01 v03 and WINNF-TS-0122-V1.0.0 was used in the measurement of the EUT.

Deviation from measurement procedure.....None

FCC ID: 2AXTR-ECL2248-2723	 PCTEST® Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	 EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 7 of 57

6.0 TEST SUMMARY

6.1 Summary

Company Name: EUCAST Co., Ltd.
FCC ID: 2AXTR-ECL2248-2723

Table 6-1. Summary of Test Results

FCC Part Section(s)	KDB940660 D01 Section 3.3 a)	Test Case Description	WinnForum Test Case	Test Result
96.39 (c)	1	Confirm that the device will only transmit after it receives authorization from a SAS	WINNF.FT.C.REG.1 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18 WINNF.FT.C.GRA.1 WINNF.FT.C.GRA.2 WINNF.FT.C.HBT.5	Pass
96.39 (c)	2	Check the device registration and authorization with the SAS – determine if the device behaves appropriately for successful and unsuccessful registrations. The device should not be transmitting without authorization from the SAS.	WINNF.FT.C.REG.1 WINNF.FT.C.REG.8 WINNF.FT.C.REG.10 WINNF.FT.C.REG.12 WINNF.FT.C.REG.14 WINNF.FT.C.REG.16 WINNF.FT.C.REG.18	Pass
96.39(c)(1)	3	Confirm that the device changes its operating power and/or channel in response to a command from the SAS.	WINNF.FT.C.HBT.1	Pass
96.39	4	Confirm that the device correctly configures based on the different license classes	N/A	Pass
96.39(c)(1)	5	Confirm that the device transmits at a power level less than or equal to the maximum power level approved by the SAS.	WINNF.PT.C.HBT	Pass
96.39(b)(c)	6	Confirm that the device transmits with a bandwidth less than or equal to the SAS specified bandwidth.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	7	Confirm that the device transmits on the SAS specified frequency.	WINNF.FT.C.HBT.1	Pass
96.39(c)(2)	8	Confirm that the device stops transmission in response to a command from the SAS, within a period as required by Part 96.	WINNF.FT.C.HBT.3 WINNF.FT.C.HBT.4 WINNF.FT.C.HBT.6 WINNF.FT.D.HBT.7 WINNF.FT.C.HBT.10 WINNF.FT.C.RLQ.1 WINNF.FT.C.DRG.1	Pass

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 8 of 57

Table 6-2. Summary of Test Results (continued)

96.39 (c)	9	Confirm that the device sends measurements data in response to the command from the SAS.	N/A	N/A
96.39(a)	10	For devices with geo-location, confirm that it notifies the SAS of a new location when it is beyond the required distance parameter (± 50 m) within the required time frame.	N/A	N/A
96.39 (c)	11	Confirm that the device is capable of reporting the signal level (measurement data) and frequency to SAS.	N/A	N/A
	12	For a device that operates as a Category A CBSD and then desires to operate as a Category B CBSD (or vice versa), confirm that it re-registers with the SAS for the updated authorization status.	N/A	N/A
96 E	13	When CBSDs communicate through a management system, confirm compliance with all requirements.	N/A	N/A
96.39	14	When communication between the CBSD and SAS is lost: i) Describe how the CBSD would react if the communications between the device and the SAS is lost. Confirm that the CBSD stops transmission once it loses the link to the SAS. ii) Describe the process for re-establishment of the communications and confirm that the CBSD acts accordingly. iii) Confirm power-on restart process for registration (re-registration) occurs as expected. iv) Confirm the process for de-registration occurs as expected.	WINNF.FT.C.HBT.9 WINNF.FT.C.HBT.10	Pass
96.39(f)	KDB940660 D01 Section 4	SAS and Device Security Requirements	WINNF.FT.C.SCS.1 WINNF.FT.C.SCS.2 WINNF.FT.C.SCS.3 WINNF.FT.C.SCS.4 WINNF.FT.C.SCS.5	Pass

Notes:

- Test cases denoted as “N/A” in the table above are not applicable to the EUT and are either Optional or Conditional per Section 6 of WINNF-TS-0122.
- Please see Appendices for test data.

FCC ID: 2AXTR-ECL2248-2723		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 9 of 57

7.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **EUCAST Co., Ltd., Cat A LTE enterprise small cell base station FCC ID: 2AXTR-ECL2248-2723** has been tested to show compliance with Part 96 and KDB 940660 D01 v03.

FCC ID: 2AXTR-ECL2248-2723	 Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 10 of 57


APPENDIX A – TEST RESULT AND DATA

A1 [WINNF.FT.C.REG.1] Multi-Step registration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT is in the Unregistered state CBSD sends correct Registration request information, as specified in [n.5], to the SAS Test Harness:	--	--
2	• The required userId, fcId and cbsdSerialNumber registration parameters shall be sent from the CBSD and conform to proper format and acceptable ranges. • Any REG-conditional or optional registration parameters that may be included in the message shall be verified that they conform to proper format and are within acceptable ranges. Note: It is outside the scope of this document to test the Registration information that is supplied via another means.	☒	☐
3	• SAS Test Harness sends a CBSD Registration Response as follows: - cbsdId = Ci - measReportConfig shall not be included - responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

FCC ID: 2AXTR-ECL2248-2723		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 11 of 57

Test Plots:

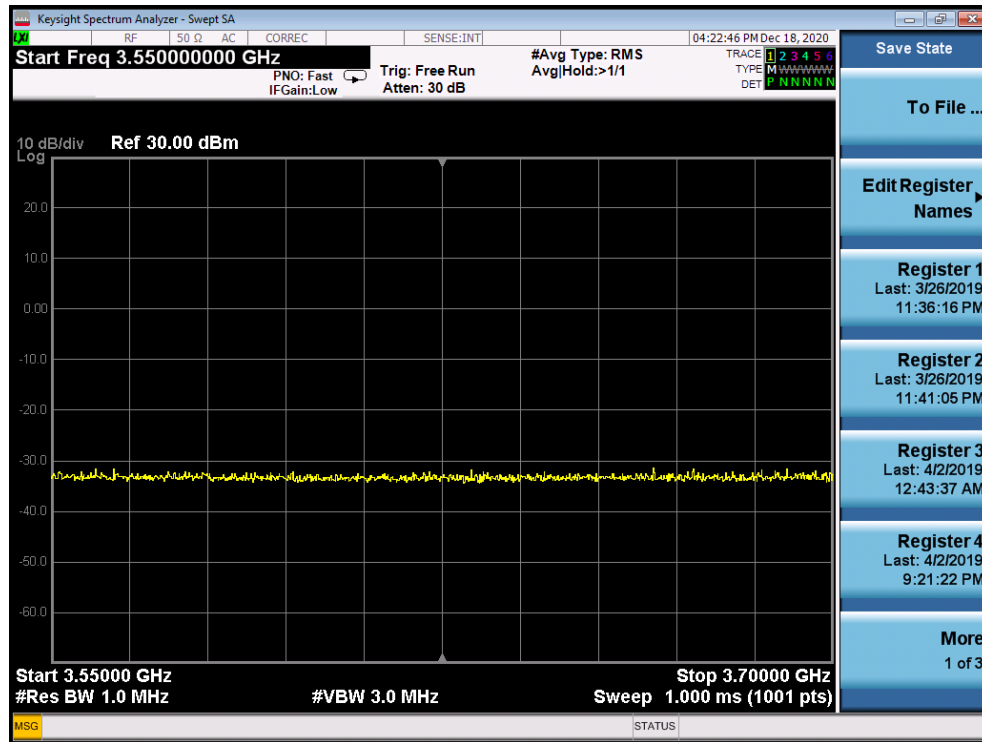


Plot 1. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.1)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 12 of 57

A3 [WINNF.FT.C.REG.8] Missing Required parameters (responseCode 102)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

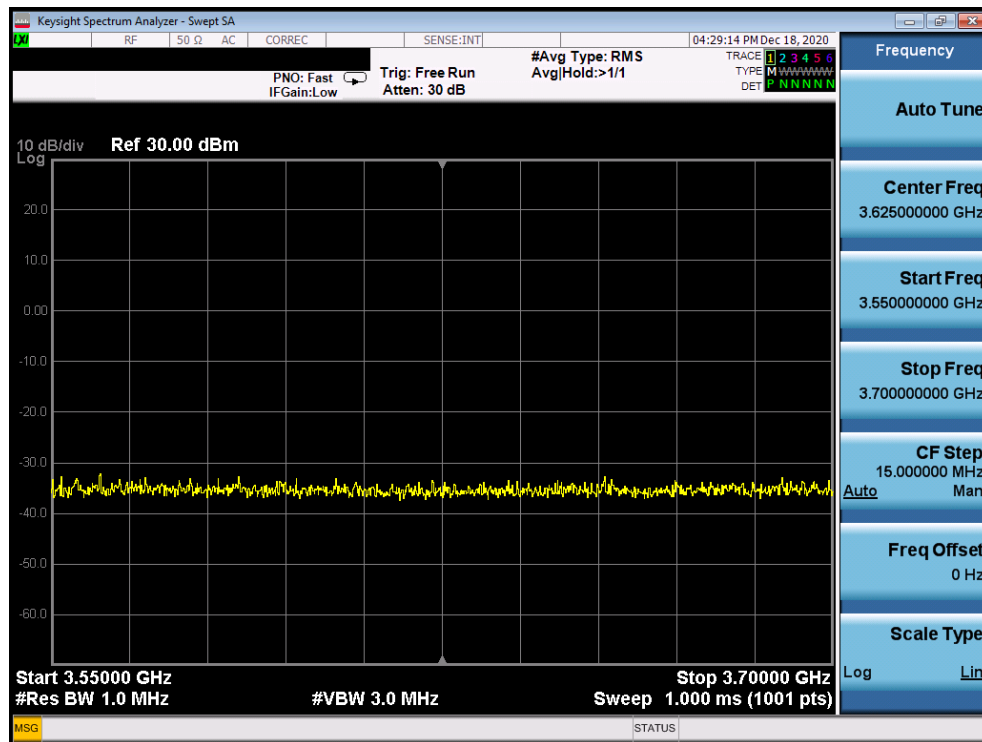


Plot 2. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.8)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 13 of 57

A4 [WINNF.FT.C.REG.10] Pending registration (responseCode 200)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

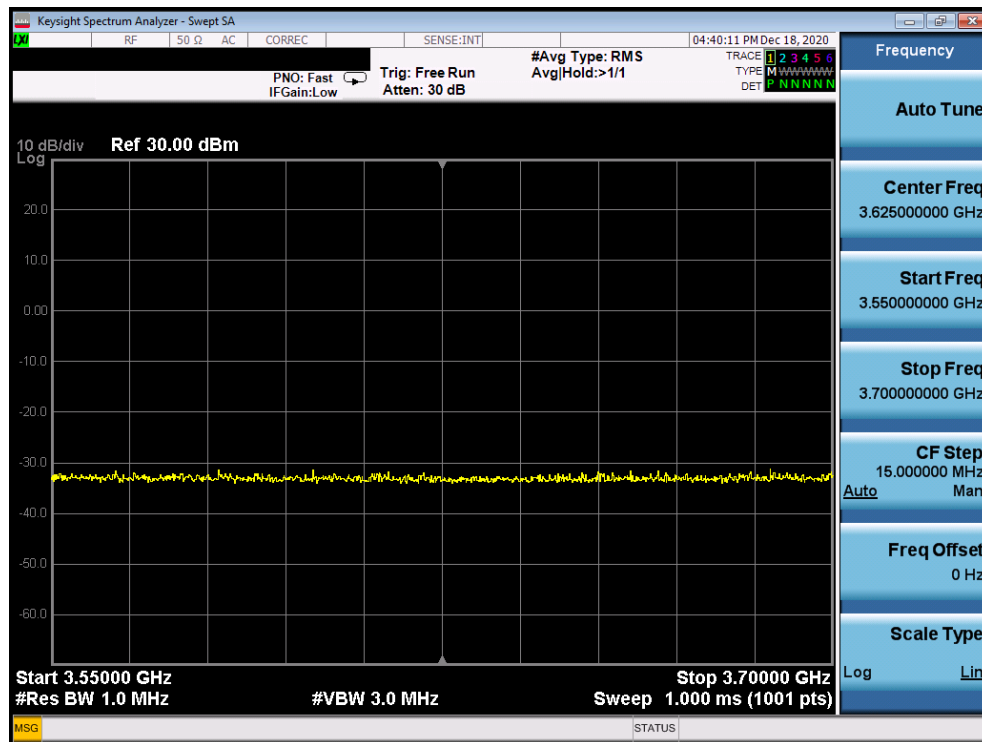


Plot 3. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.10)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 14 of 57

A5 [WINNF.FT.C.REG.12] Invalid parameter (responseCode 103)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

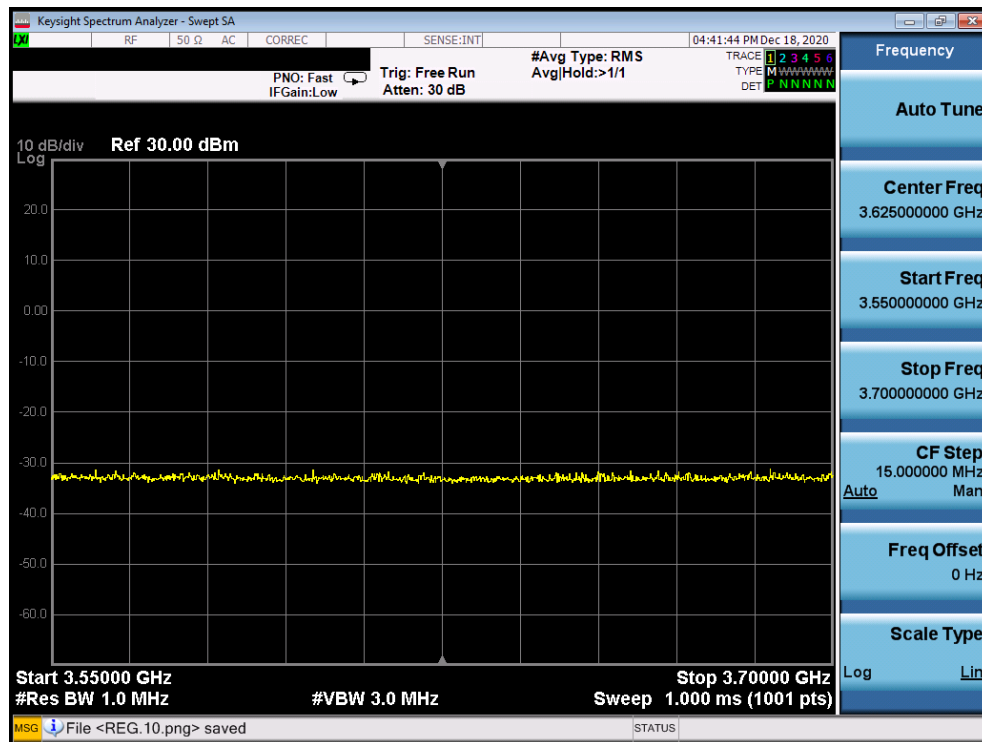


Plot 4. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.12)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 15 of 57

A6 [WINNF.FT.C.REG.14] Blacklisted CBSD (responseCode 101)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

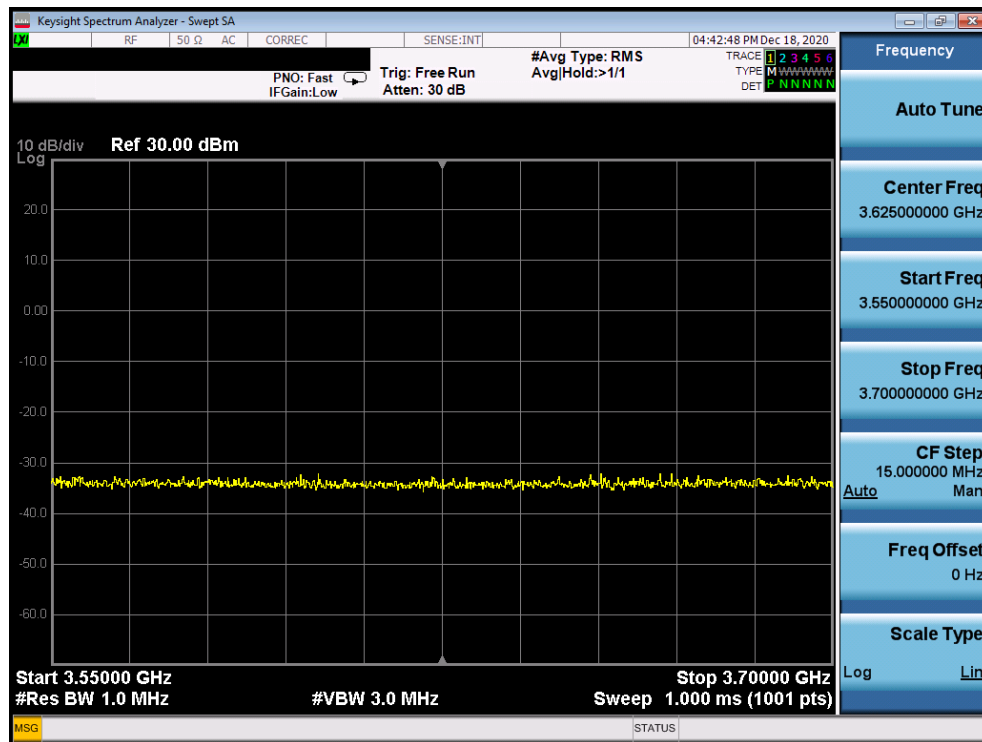


Plot 5. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.14)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 16 of 57

A7 [WINNF.FT.C.REG.16] Unsupported SAS protocol version (responseCode 100)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsdId - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

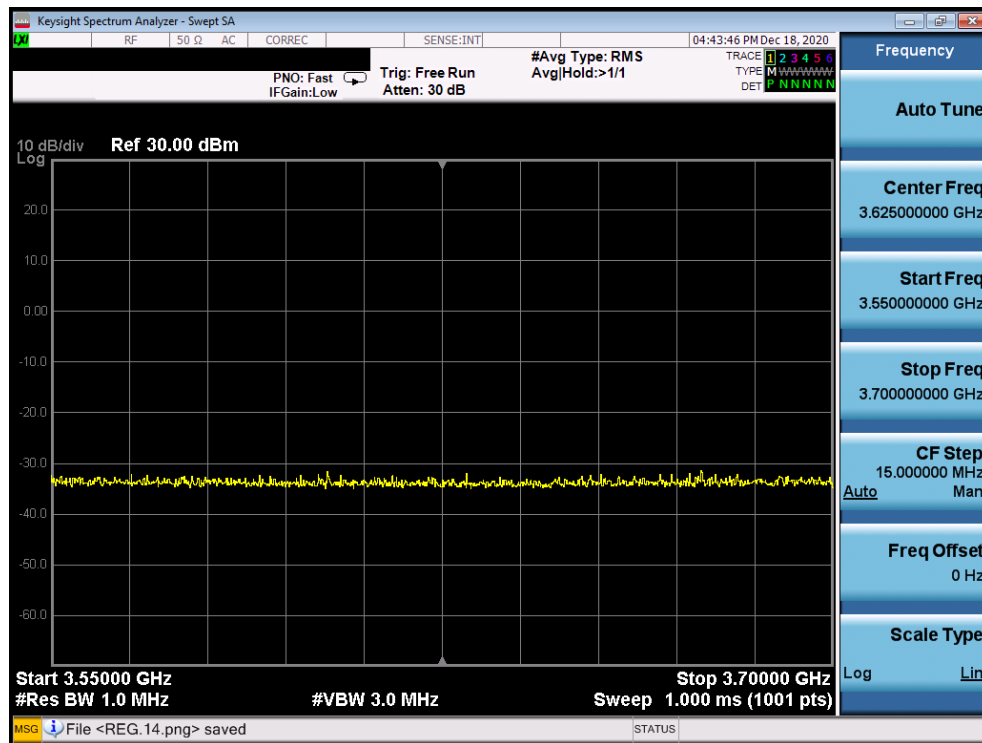


Plot 6. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.16)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 17 of 57

A8 [WINNF.FT.C.REG.18] Group Error (responseCode 201)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT is in the Unregistered state	--	--
2	CBSD sends a Registration request to SAS Test Harness.	--	--
3	SAS Test Harness rejects the request by sending a CBSD Registration Response as follows: - SAS response does not include cbsddl - responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

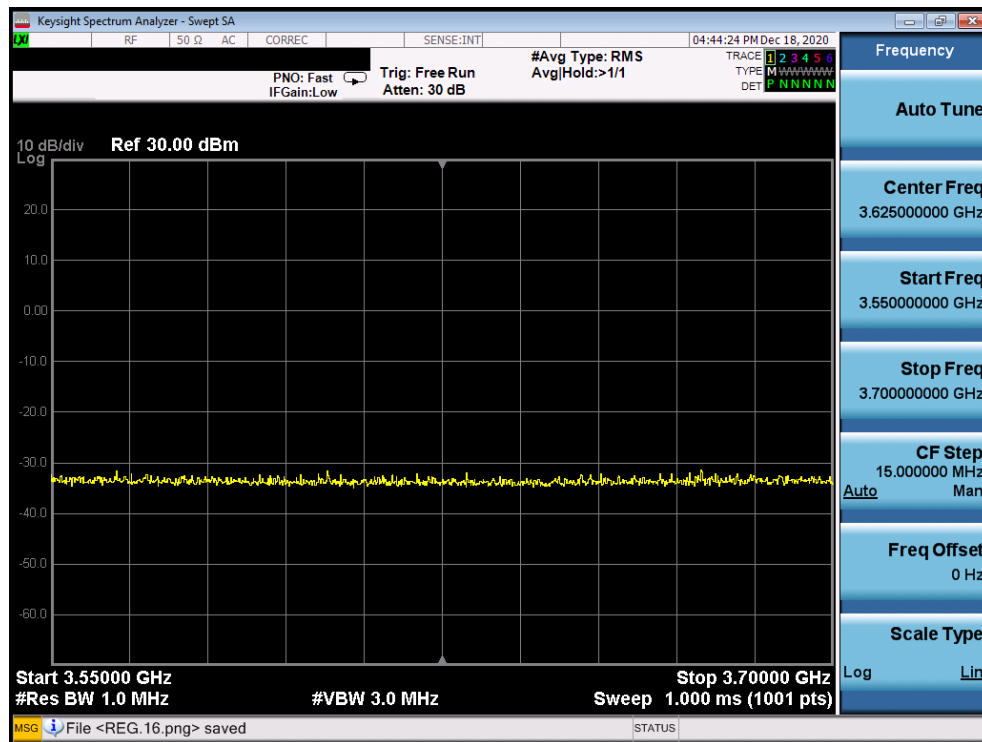


Plot 7. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.REG.18)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 18 of 57

A9 [WINNF.FT.C.GRA.1] Unsuccessful Grant responseCode=400 (INTERFERENCE)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

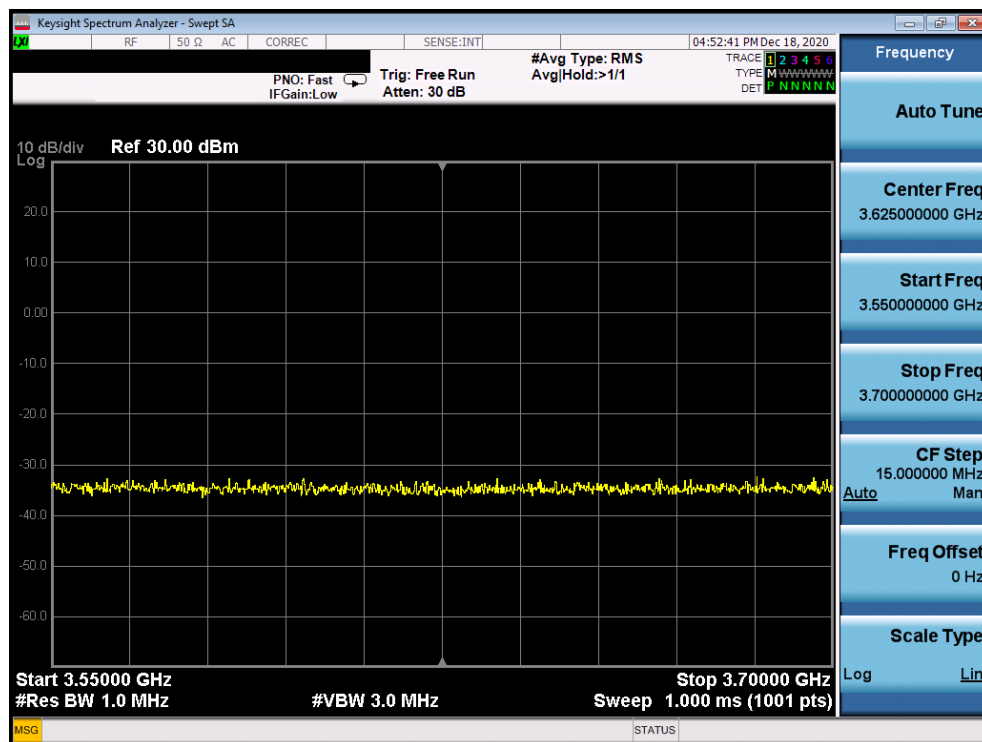


Plot 8. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.1)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 19 of 57

A10 [WINNF.FT.C.GRA.2] Unsuccessful Grant responseCode=401 (GRANT_CONFLICT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends valid Grant Request.	--	--
3	SAS Test Harness sends a Grant Response message, including • cbsdId=C • responseCode = R	--	--
4	After completion of step 3, SAS Test Harness will not provide any positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

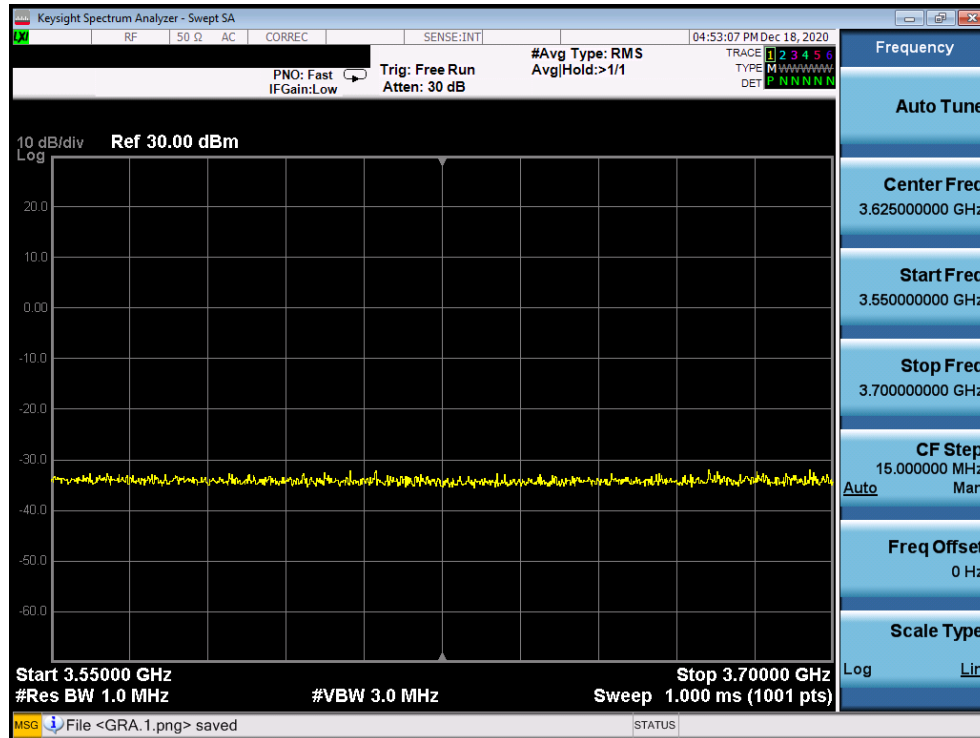

Plot 9. Conducted Measurement – No RF transmission in entire band for 60s of elapsed time (WINNF.FT.C.GRA.2)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 20 of 57


A11 [WINNF.FT.C.HBT.1] Heartbeat Success Case (first Heartbeat Response)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness, with cbsdId = C	--	--
2	UUT sends a message: • If message is type Spectrum Inquiry Request, go to step 3, or • If message is type Grant Request, go to step 5	--	--
3	UUT sends Spectrum Inquiry Request. Validate: • cbsdId = C • List of frequencyRange objects sent by UUT are within the CBRS frequency range	☒	☐
4	SAS Test Harness sends a Spectrum Inquiry Response message, including the following parameters: • cbsdId = C • availableChannel is an array of availableChannel objects • responseCode = 0	--	--
5	UUT sends Grant Request message. Validate: • cbsdId = C • maxEIRP is at or below the limit appropriate for CBSD category as defined by Part 96 • operationFrequencyRange, F, sent by UUT is a valid range within the CBRS band	☒	☐
6	SAS Test Harness sends a Grant Response message, including the parameters: • cbsdId = C • grantId = G = a valid grant ID • grantExpireTime = UTC time greater than duration of the test • responseCode = 0	--	--
7	UUT sends a first Heartbeat Request message. Verify Heartbeat Request message is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
8	SAS Test Harness sends a Heartbeat Response message, with the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
9	For further Heartbeat Request messages sent from UUT after completion of step 8, validate message is sent within latest specified heartbeatInterval, and: • cbsdId = C • grantId = G • operationState = "AUTHORIZED" and SAS Test Harness responds with a Heartbeat Response message including the following parameters:	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 21 of 57


	• cbsId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0		
10	Monitor the RF output of the UUT from start of test until UUT transmission commences. Verify: • UUT does not transmit at any time prior to completion of the first heartbeat response • UUT transmits after step 8 is complete, and its transmission is limited to within the bandwidth range F	☒	☐

Test Plots:

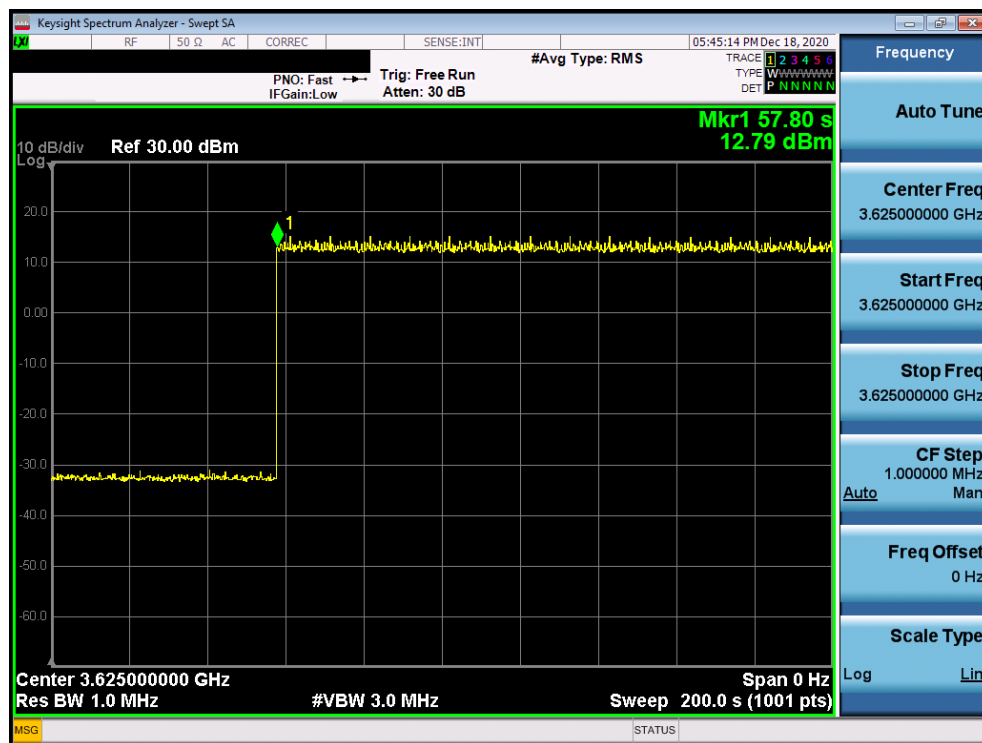

Plot 10. Conducted Measurement - RF transmission after SAS heartbeat response (WINNF.FT.C.HBT.1)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 22 of 57

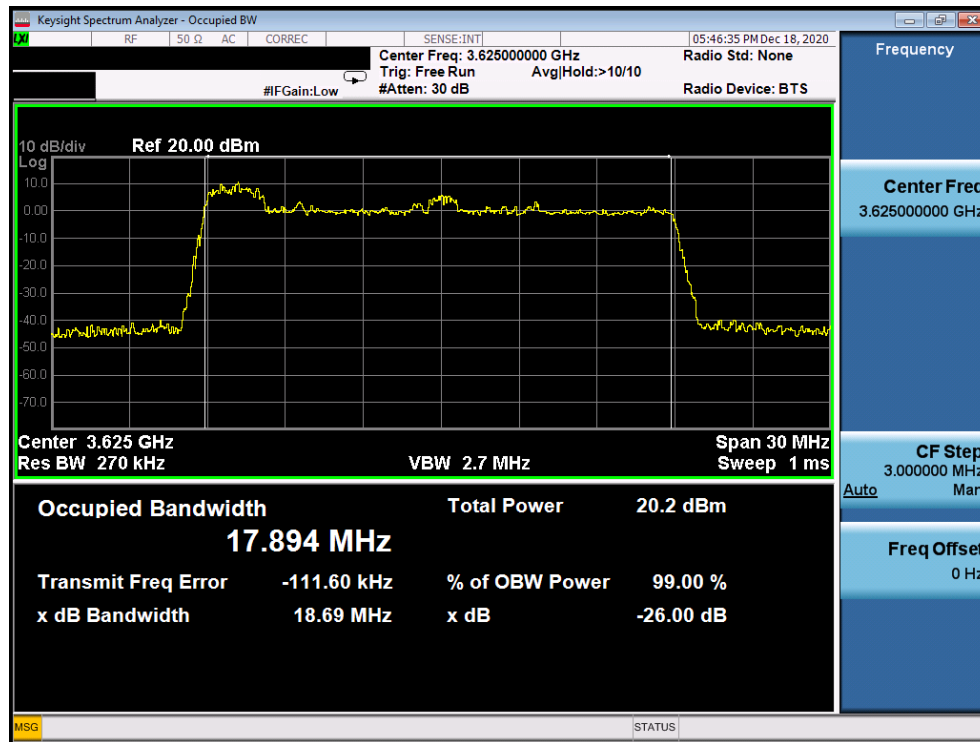

Plot 11. Conducted Measurement Occupied Bandwidth for 20MHz (WINNF.FT.C.HBT.1)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 23 of 57

A12 [WINNF.FT.C.HBT.3] Heartbeat responseCode=105 (DEREGISTER)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 105 (DEREGISTER)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 24 of 57

Test Plots:

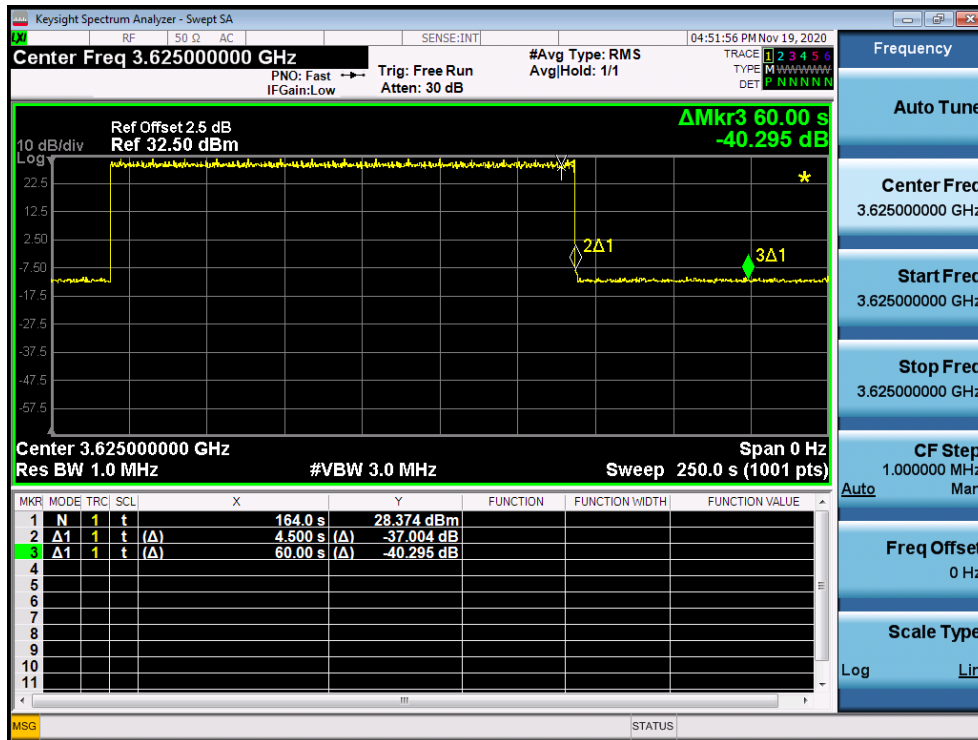

Plot 12. Conducted Measurement - RF transmission stops within 60s of SAS message indicated by Marker 1 (WINNF.FT.C.HBT.3)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 25 of 57

A13 [WINNF.FT.C.HBT.4] Heartbeat responseCode=500 (TERMINATED_GRANT)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 500 (TERMINATED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 26 of 57

Test Plots:

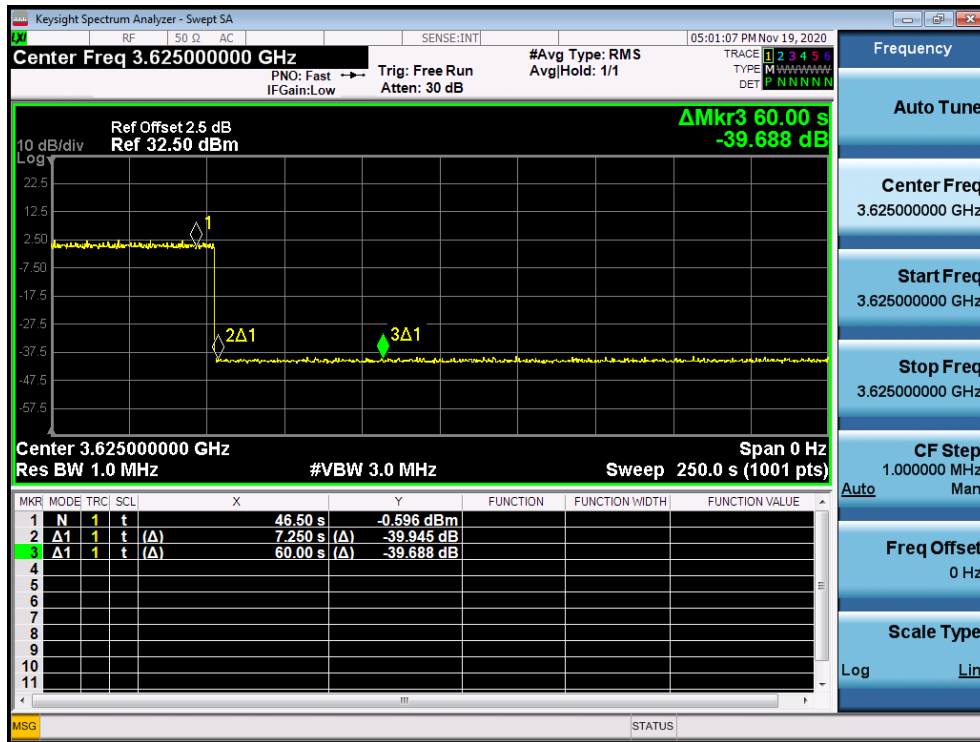

Plot 13. Conducted Measurement - RF transmission stops within 60s of SAS message indicated by Marker 1 (WINNF.FT.C.HBT.4)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 27 of 57

A14 [WINNF.FT.C.HBT.5] Heartbeat responseCode=501 (SUSPENDED_GRANT) in First Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: • UUT does not transmit at any time	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 28 of 57

Test Plots:

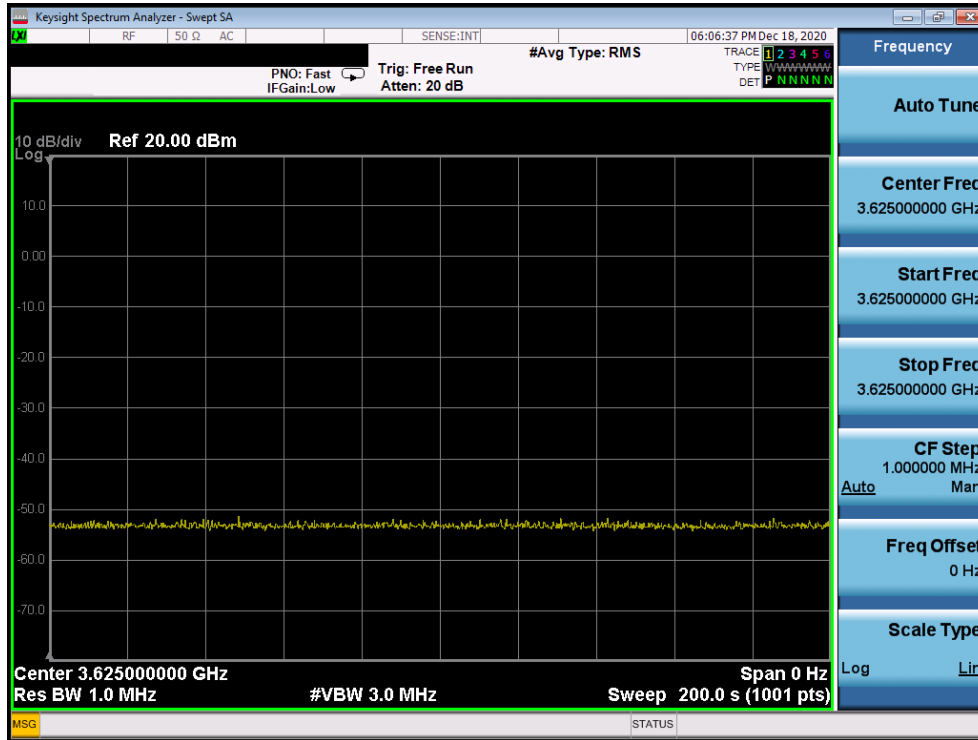

Plot 14. Conducted Measurement – No RF transmission in entire band (WINNF.FT.C.HBT.5)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 29 of 57

A15 [WINNF.FT.C.HBT.6] Heartbeat responseCode=501 (SUSPENDED_GRANT) in Subsequent Heartbeat Response

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 501 (SUSPENDED_GRANT)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify either A OR B occurs: A. UUT sends a Heartbeat Request message. Ensure message is sent within latest specified heartbeatInterval, and is correctly formatted with parameters: • cbsdId = C • grantId = G • operationState = "GRANTED" B. UUT sends a Relinquishment request message. Ensure message is correctly formatted with parameters: • cbsdId = C • grantId = G Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T + 60 seconds) of completion of step 3	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 30 of 57

Test Plots:

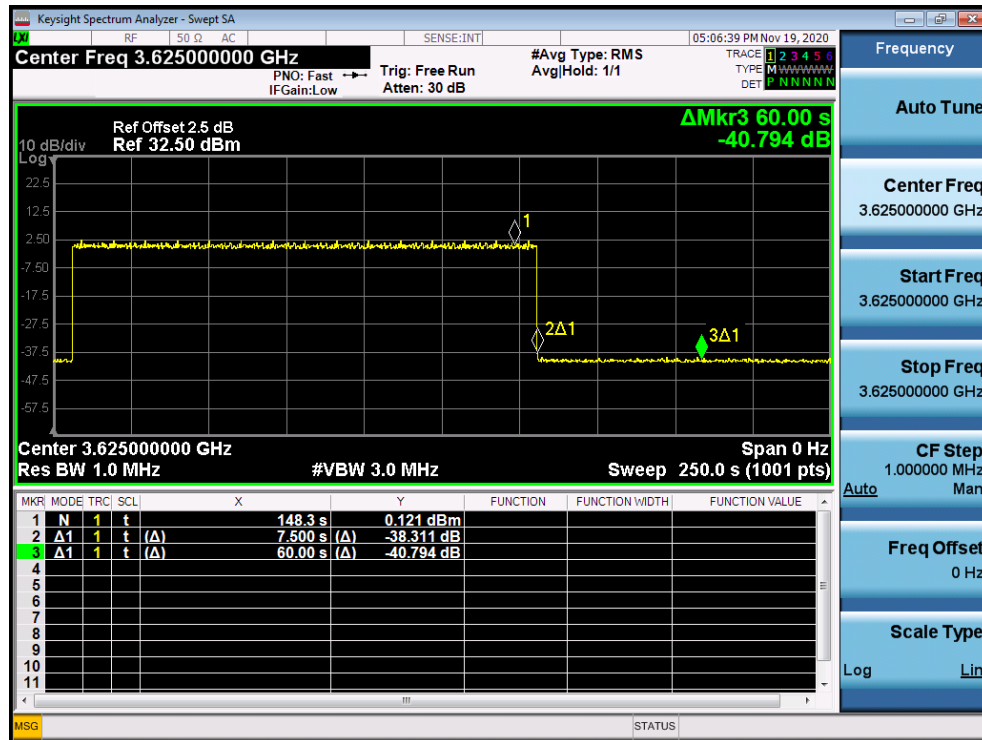

Plot 15. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (WINNF.FT.C.HBT.6)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 31 of 57

A16 [WINNF.FT.C.HBT.7] Heartbeat responseCode=502 (UNSYNC_OP_PARAM)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within Heartbeat Interval specified in the latest Heartbeat Response, and formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = T = Current UTC time • responseCode = 502 (UNSYNC_OP_PARAM)	--	--
4	After completion of step 3, SAS Test Harness shall not allow any further grants to the UUT.	--	--
5	Monitor the SAS-CBSD interface. Verify: • UUT sends a Grant Relinquishment Request message. Verify message is correctly formatted with parameters: - o cbsdId = C - o grantId = G Monitor the RF output of the UUT. Verify: • UUT shall stop transmission within (T+60) seconds of completion of step 3.	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 32 of 57

Test Plots:

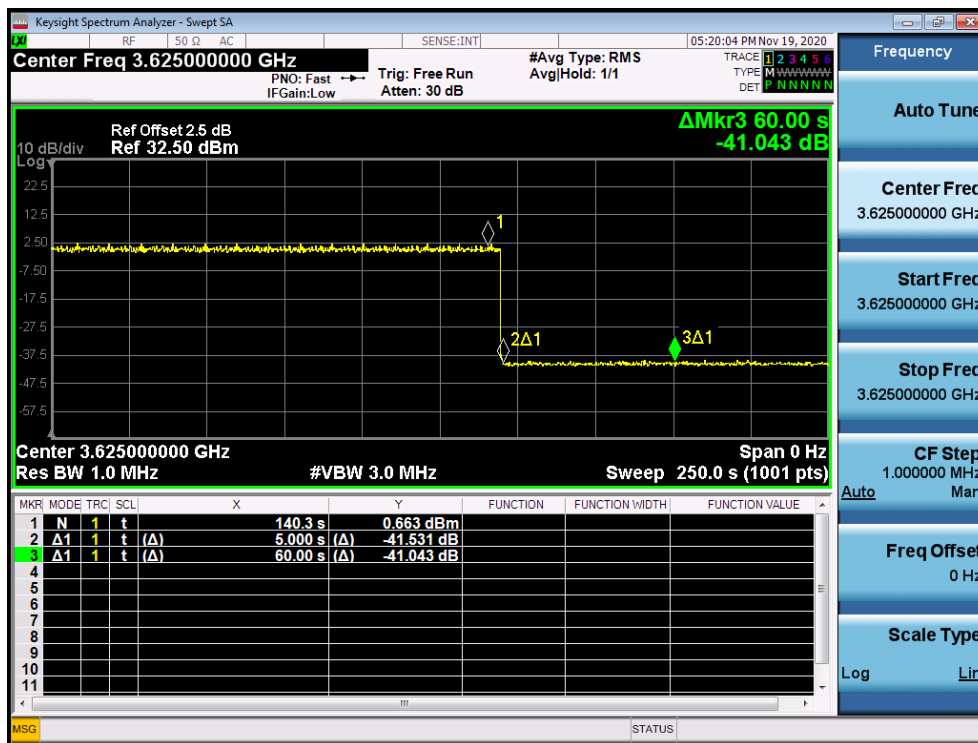

Plot 16. Conducted Measurement - RF transmission stops within 60s of SAS message. The SAS message is indicated by Marker 1 (WINNF.FT.C.HBT.7)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 33 of 57

A17 [WINNF.FT.C.HBT.9] Heartbeat Response Absent (First Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in GRANTED, but not AUTHORIZED state (i.e. has not performed its first Heartbeat Request)	--	--
2	UUT sends a Heartbeat Request message. Ensure Heartbeat Request message is sent within latest specified heartbeatInterval, and is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "GRANTED"	☒	☐
3	After completion of Step 2, SAS Test Harness does not respond to any further messages from UUT to simulate loss of network connection	--	--
4	Monitor the RF output of the UUT from start of test to 60 seconds after step 3. Verify: • At any time during the test, UUT shall not transmit on RF interface	☒	☐


FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 34 of 57

A18 [WINNF.FT.C.HBT.10] Heartbeat Response Absent (Subsequent Heartbeat)

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has registered successfully with SAS Test Harness • UUT has a valid single grant as follows: - o valid cbsdId = C - o valid grantId = G - o grant is for frequency range F, power P - o grantExpireTime = UTC time greater than duration of the test • UUT is in AUTHORIZED state and is transmitting within the grant bandwidth F on RF interface	--	--
2	UUT sends a Heartbeat Request message. Verify Heartbeat Request message is sent within the latest specified heartbeatInterval, and is formatted correctly, including: • cbsdId = C • grantId = G • operationState = "AUTHORIZED"	☒	☐
3	SAS Test Harness sends a Heartbeat Response message, including the following parameters: • cbsdId = C • grantId = G • transmitExpireTime = current UTC time + 200 seconds • responseCode = 0	--	--
4	After completion of Step 3, SAS Test Harness does not respond to any further messages from UUT	--	--
5	Monitor the RF output of the UUT. Verify: • UUT shall stop all transmission on RF interface within (transmitExpireTime + 60 seconds), using the transmitExpireTime sent in Step 3.	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 36 of 57

Test Plots:

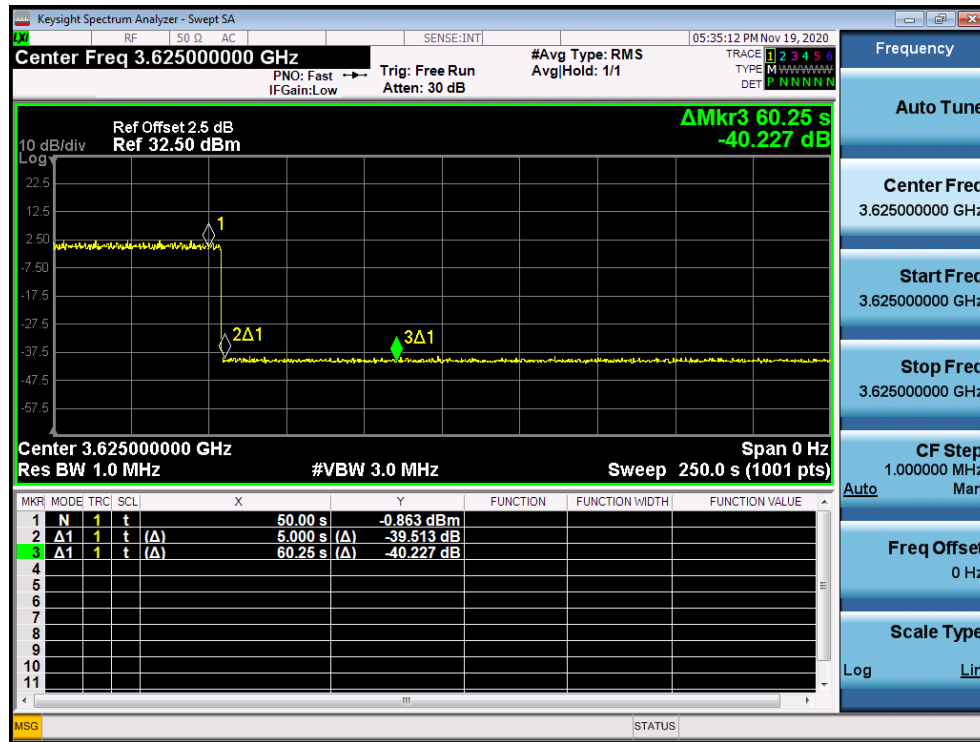

Plot 18. Conducted Measurement - RF transmission stops within transmitExpireTime + 60s. The last SAS heartbeat message is indicated by Marker 1 (WINNF.FT.C.HBT.10)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 37 of 57

A19 [WINNF.FT.C.RLQ.1] Successful Relinquishment

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to relinquish UUT Grant from the SAS Test Harness	--	--
2	UUT sends a Relinquishment Request message. Verify message contains all required parameters properly formatted, and specifically: • cbsdId = C • grantId = G	☒	☐
3	SAS Test Harness shall approve the request with a Relinquishment Response message with parameters: • cbsdId = C • grantId = G • responseCode = 0	--	--
4	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall stop RF transmission at any time between triggering the relinquishment and UUT sending the relinquishment request	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 38 of 57

Test Plots:

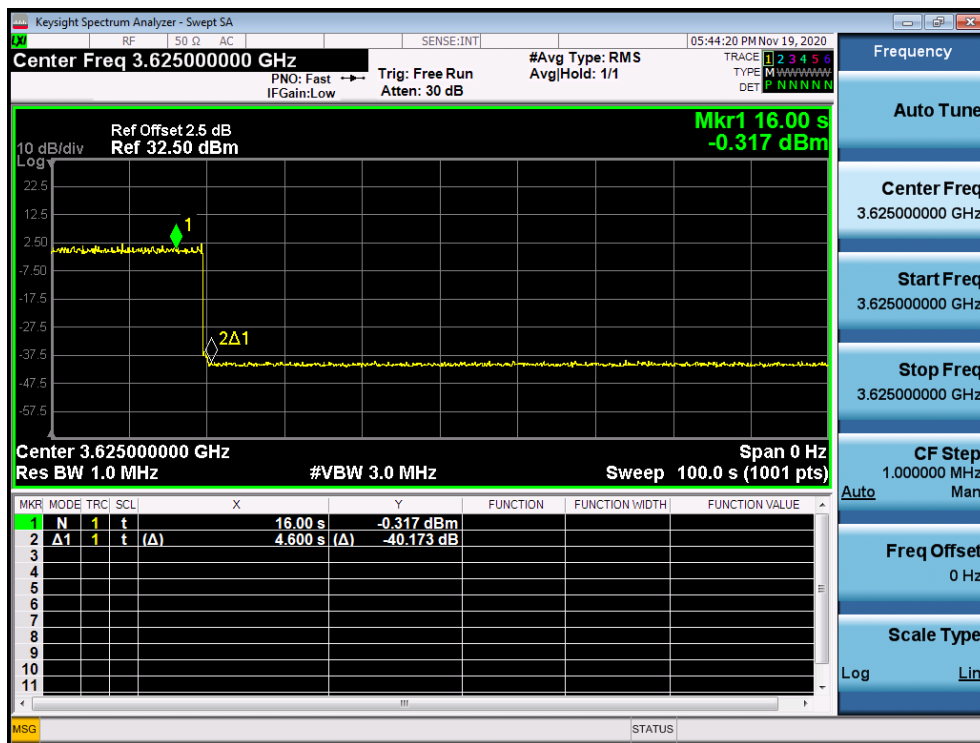

Plot 19. Conducted Measurement - RF transmission stops (WINNF.FT.C.RLQ.1)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 39 of 57

A20 [WINNF.FT.C.DRG.1] Successful Deregistration

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with SAS Test Harness • UUT has successfully registered with SAS Test Harness, with cbsdId=C • UUT has received a valid grant with grantId = G • UUT is in Grant State AUTHORIZED and is actively transmitting within the bounds of its grant. Invoke trigger to deregister UUT from the SAS Test Harness	--	--
2	UUT sends a Relinquishment request and receives Relinquishment response with responseCode=0	--	--
3	UUT sends Deregistration Request to SAS Test Harness with cbsdId = C.	☒	☐
4	SAS Test Harness shall approve the request with a Deregistration Response message with parameters: • cbsdId = C • responseCode = 0	--	--
5	After completion of step 3, SAS Test Harness will not provide any additional positive response (responseCode=0) to further request messages from the UUT	--	--
6	Monitor the RF output of the UUT from start of test until 60 seconds after Step 4 is complete. This is the end of the test. Verify: • UUT stopped RF transmission at any time between triggering the deregistration and either A OR B occurs: A. UUT sending a Registration Request message, as this is not mandatory B. UUT sending a Deregistration Request message	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of  element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 40 of 57

Test Plots:

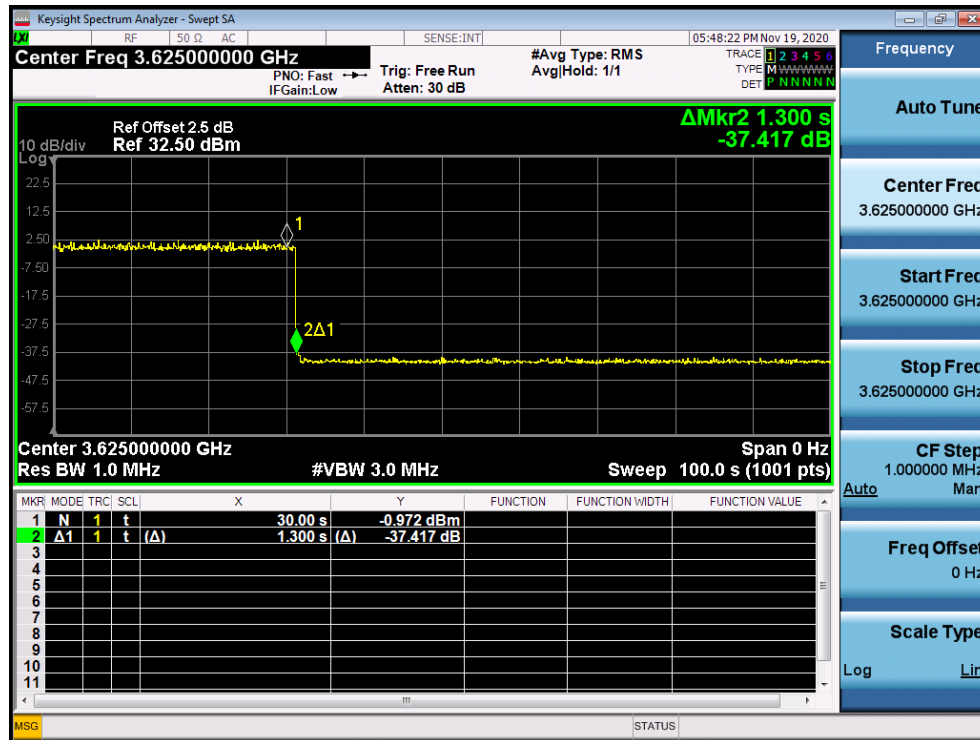

Plot 20. Conducted Measurement - RF transmission stops within 60s. The SAS message is indicated by Marker 1 (WINNF.FT.C.DRG.1)


FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 41 of 57

A21 [WINNF.FT.C.SCS.1] Successful TLS connection between UUT and SAS Test Harness


	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure • The UUT shall establish a TLS handshake with the SAS Test Harness using configured certificate. • Configure the SAS Test Harness to accept the security procedure and establish the connection	☒	☐
2	• Make sure that Mutual authentication happens between UUT and the SAS Test Harness. • Make sure that UUT uses TLS v1.2 • Make sure that cipher suites from one of the following is selected, • TLS_RSA_WITH_AES_128_GCM_SHA256 • TLS_RSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256 • TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384 • TLS_ECDHE_RSA_WITH_AES_128_GCM_SHA256	☒	☐
3	A successful registration is accomplished using one of the test cases described in section 6.1.4.1, depending on CBSD capability. • UUT sends a registration request to the SAS Test Harness and the SAS Test Harness sends a Registration Response with responseCode = 0 and cbsdId.	☒	☐
4	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 42 of 57

Test Plots:

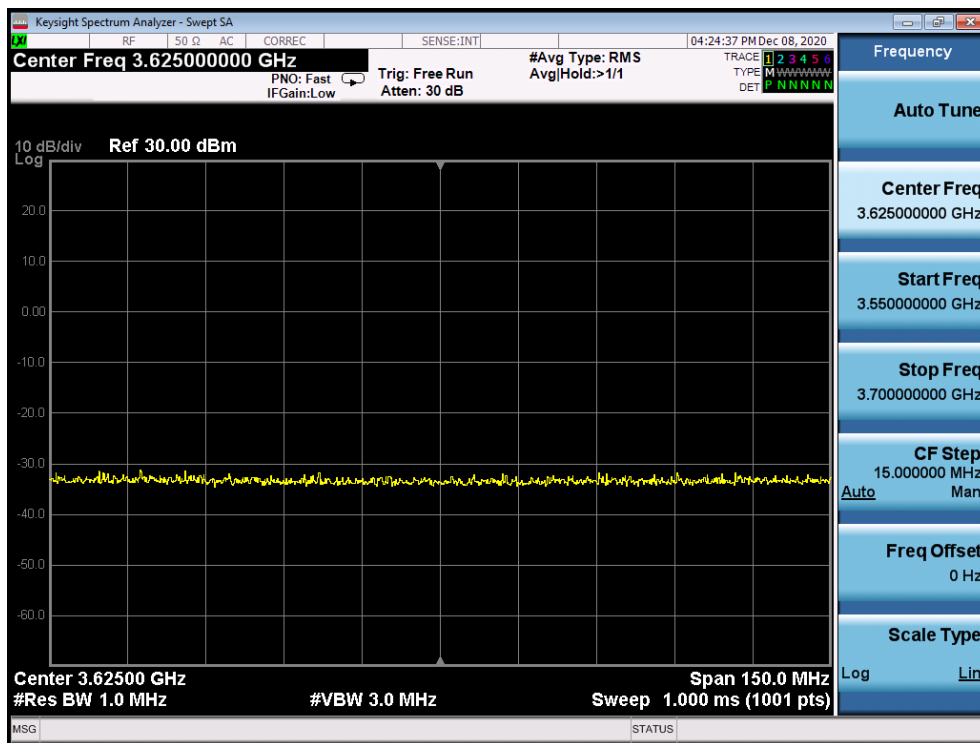

Plot 21. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.1)

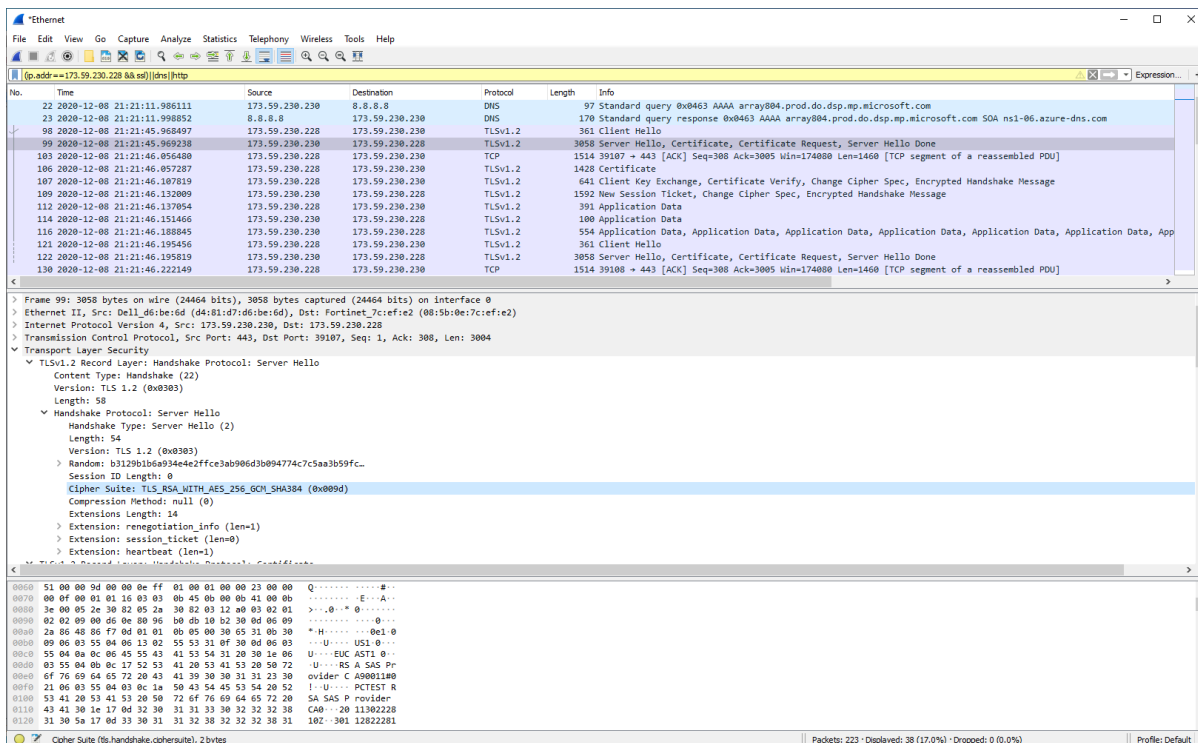


Plot 22. WireShark Screenshot (WINNF.FT.C.SCS.1)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 43 of 57

A22 [WINNF.FT.C.SCS.2] TLS failure due to revoked certificate

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

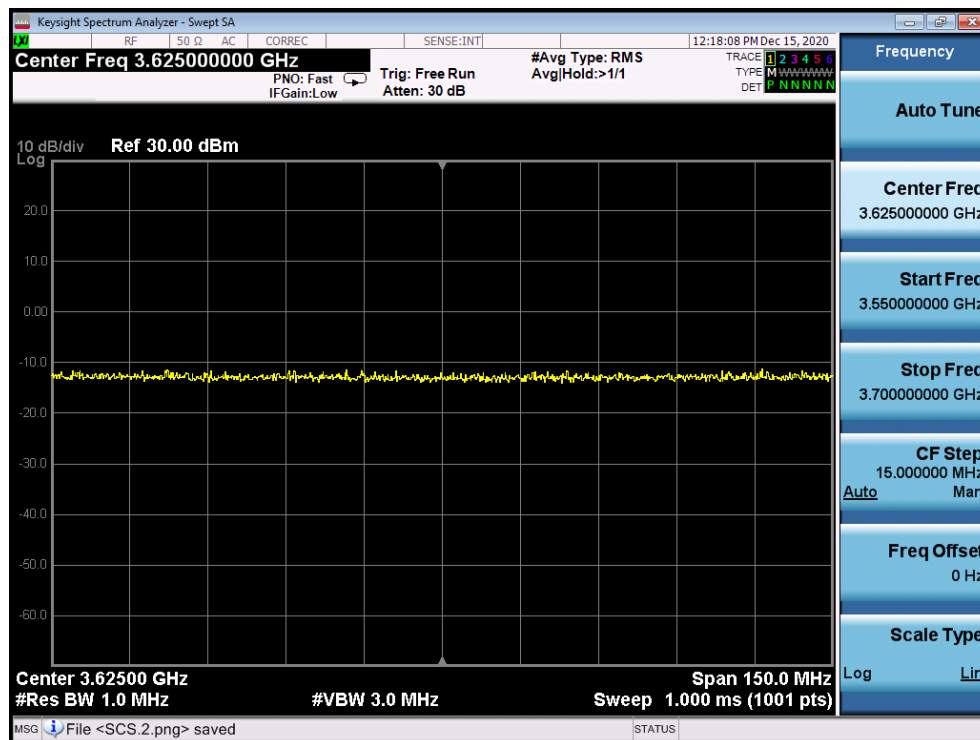

Plot 23. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.2)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 44 of 57

SCS.2.pcapng						
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help						
[p.addr==173.59.230.228 && ssl] dns http						
No.	Time	Source	Destination	Protocol	Length	Info
290	2020-12-15 17:07:35.360469	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
291	2020-12-15 17:07:35.360906	173.59.230.230	173.59.230.228	TLSv1.2	3175	Server Hello, Certificate, Certificate Request, Server Hello Done
298	2020-12-15 17:07:35.458908	173.59.230.228	173.59.230.230	HTTP	108	GET /crlserver.crl HTTP/1.1
300	2020-12-15 17:07:35.880697	173.59.230.230	173.59.230.228	PKIX-CRL	1339	Certificate Revocation List
305	2020-12-15 17:07:35.883839	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
310	2020-12-15 17:07:36.680468	173.59.230.230	8.8.8.8	DNS	97	Standard query 0x0d30 AAAA array810.prod.do.dsp.mp.microsoft.com
311	2020-12-15 17:07:36.690573	8.8.8.8	173.59.230.230	DNS	170	Standard query response 0x0d30 AAAA array810.prod.do.dsp.mp.microsoft.com SOA ns1-06
361	2020-12-15 17:07:45.234901	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
362	2020-12-15 17:07:45.235054	173.59.230.230	173.59.230.228	TLSv1.2	3175	Server Hello, Certificate, Certificate Request, Server Hello Done
369	2020-12-15 17:07:45.279526	173.59.230.228	173.59.230.230	HTTP	108	GET /crlserver.crl HTTP/1.1
370	2020-12-15 17:07:45.280457	173.59.230.230	173.59.230.228	PKIX-CRL	1339	Certificate Revocation List
375	2020-12-15 17:07:45.298261	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
398	2020-12-15 17:07:55.234873	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
399	2020-12-15 17:07:55.235194	173.59.230.230	173.59.230.228	TLSv1.2	3175	Server Hello, Certificate, Certificate Request, Server Hello Done
406	2020-12-15 17:07:55.268936	173.59.230.228	173.59.230.230	HTTP	108	GET /crlserver.crl HTTP/1.1
407	2020-12-15 17:07:55.269127	173.59.230.230	173.59.230.228	PKIX-CRL	1339	Certificate Revocation List
412	2020-12-15 17:07:55.271857	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)

<	>
Frame 298: 108 bytes on wire (864 bits), 108 bytes captured (864 bits) on interface 0 Ethernet II, Src: Fortinet7c:ef:e2 (08:5b:0e:7c:ef:e2), Dst: Dell_d6:be:6d (d4:81:d7:d6:be:6d) Internet Protocol Version 4, Src: 173.59.230.228, Dst: 173.59.230.230 Transmission Control Protocol, Src Port: 58639, Dst Port: 80, Seq: 1, Ack: 1, Len: 54 Hypertext Transfer Protocol	

SCS.2.pcapng	Packets: 427 · Displayed: 17 (4.0%) · Dropped: 0 (0.0%)	Profile: Default
--------------	---	------------------


Plot 24. WireShark Screenshot (WINNF.FT.C.SCS.2)

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 45 of 57

A23 [WINNF.FT.C.SCS.3] TLS failure due to expired server certificate


	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

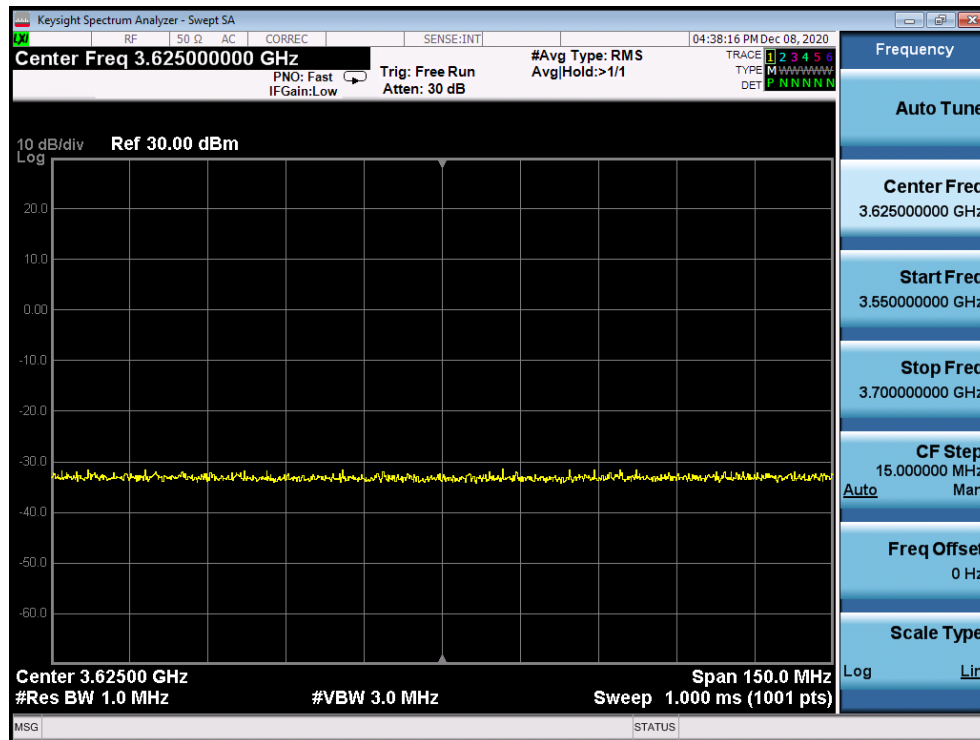

Plot 25. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.3)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 46 of 57

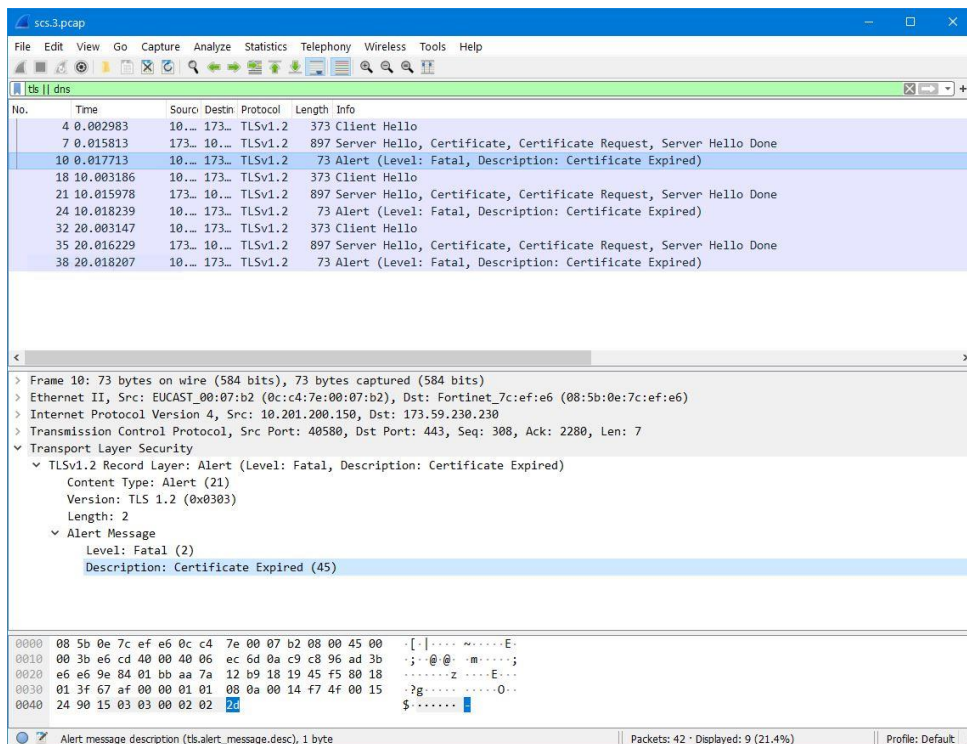


Plot 26. Wireshark Screenshot (WINNF.FT.C.SCS.3)

FCC ID: 2AXTR-ECL2248-2723	Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 47 of 57

A24 [WINNF.FT.C.SCS.4] TLS failure when SAS Test Harness certificate is issued by an unknown CA

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

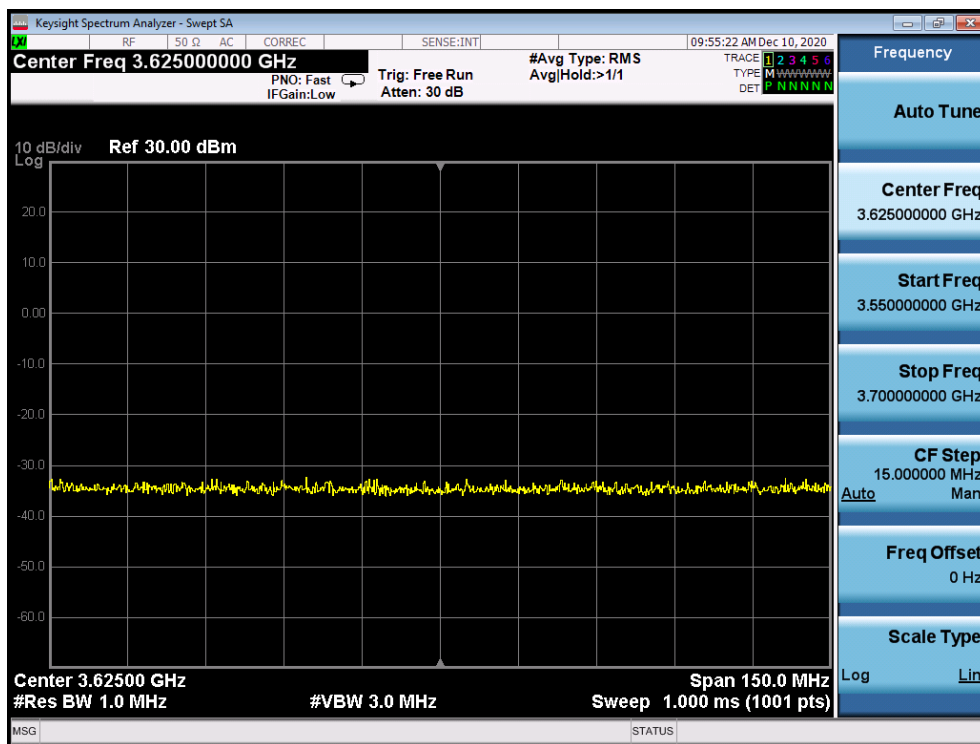

Plot 27. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.4)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 48 of 57

SCS4.pcapng						
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help						
(p.addr==173.59.230.228 && ssl) dns http						
No.	Time	Source	Destination	Protocol	Length	Info
8	2020-12-10 14:52:20.458174	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
9	2020-12-10 14:52:20.458662	173.59.230.230	173.59.230.228	TLSv1.2	3067	Server Hello, Certificate, Certificate Request, Server Hello Done
13	2020-12-10 14:52:20.472242	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)
58	2020-12-10 14:52:25.939925	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
59	2020-12-10 14:52:25.940194	173.59.230.230	173.59.230.228	TLSv1.2	3067	Server Hello, Certificate, Certificate Request, Server Hello Done
63	2020-12-10 14:52:25.951326	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Unknown CA)

> Frame 13: 61 bytes on wire (488 bits), 61 bytes captured (488 bits) on interface 0
> Ethernet II, Src: Fortinet_7c:ef:e2 (08:5b:0e:7c:ef:e2), Dst: Dell_d6:be:6d (d4:81:d7:d6:be:6d)
> Internet Protocol Version 4, Src: 173.59.230.228, Dst: 173.59.230.230
> Transmission Control Protocol, Src Port: 58948, Dst Port: 443, Seq: 308, Ack: 3014, Len: 7
> Transport Layer Security

"ssl" is deprecated or may have unexpected results. See the User's Guide.
 Packets: 100 · Displayed: 6 (6.0%) · Dropped: 0 (0.0%)
 Profile: Default


Plot 28. WireShark Screenshot (WINNF.FT.C.SCS.4)

FCC ID: 2AXTR-ECL2248-2723	 Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 49 of 57

A25 [WINNF.FT.C.SCS.5] TLS failure when certificate at the SAS Test Harness is corrupted

	Test Execution Steps	PASS	FAIL
1	• UUT shall start CBSD-SAS communication with the security procedure	☒	☐
2	• Make sure that UUT uses TLS v1.2 for security establishment. • Make sure UUT selects the correct cipher suite. • UUT shall use CRL or OCSP to verify the validity of the server certificate. • Make sure that Mutual authentication does not happen between UUT and the SAS Test Harness.	☒	☐
3	UUT may retry for the security procedure which shall fail	☒	☐
4	SAS Test-Harness shall not receive any Registration request or any application data.	--	--
5	Monitor the RF output of the UUT from start of test until 60 seconds after Step 3 is complete. This is the end of the test. Verify: • UUT shall not transmit RF	☒	☐

Test Plots:

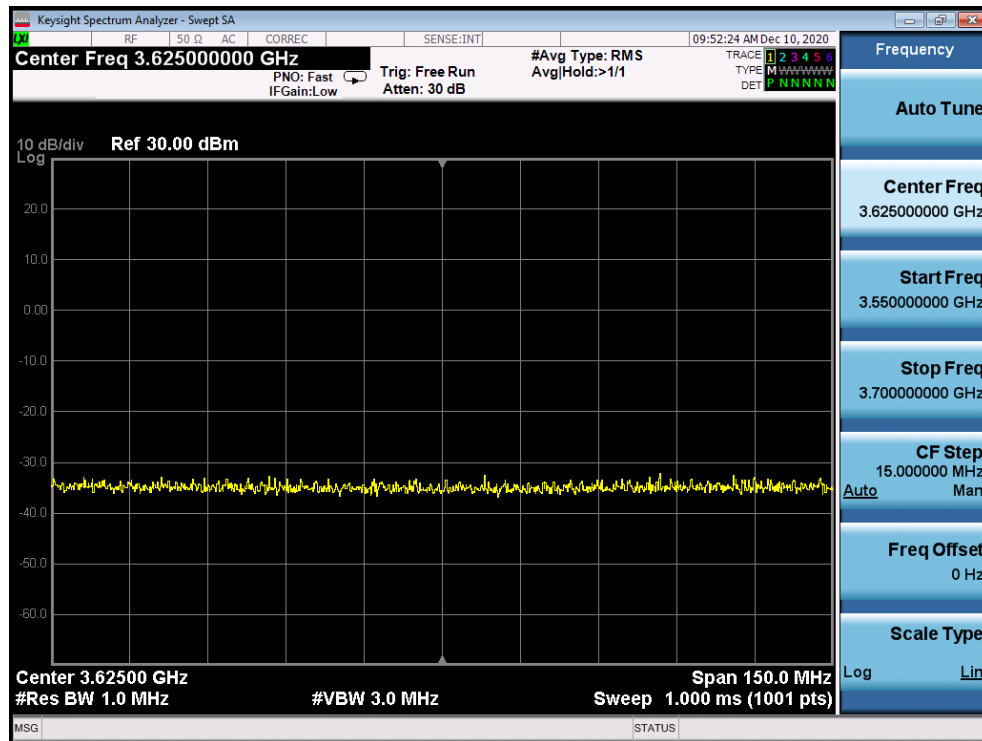

Plot 29. Conducted Measurement – No RF transmission in entire band at anytime (WINNF.FT.C.SCS.5)

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 50 of 57

*Ethernet						
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help						
(p.addr==173.59.230.228 && ssl) dns http						
No.	Time	Source	Destination	Protocol	Length	Info
11	2020-12-10 14:46:10.472747	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
12	2020-12-10 14:46:10.473200	173.59.230.230	173.59.230.228	TLSv1.2	3058	Server Hello, Certificate, Certificate Request, Server Hello Done
16	2020-12-10 14:46:10.491325	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Decrypt Error)
34	2020-12-10 14:46:15.977830	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
35	2020-12-10 14:46:15.978175	173.59.230.230	173.59.230.228	TLSv1.2	3058	Server Hello, Certificate, Certificate Request, Server Hello Done
39	2020-12-10 14:46:15.995306	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Decrypt Error)
56	2020-12-10 14:46:20.472554	173.59.230.228	173.59.230.230	TLSv1.2	361	Client Hello
57	2020-12-10 14:46:20.472884	173.59.230.230	173.59.230.228	TLSv1.2	3058	Server Hello, Certificate, Certificate Request, Server Hello Done
61	2020-12-10 14:46:20.491533	173.59.230.228	173.59.230.230	TLSv1.2	61	Alert (Level: Fatal, Description: Decrypt Error)

<	>
Frame 39: 61 bytes on wire (488 bits), 61 bytes captured (488 bits) on interface 0 > Ethernet II, Src: Fortinet_7c:ef:e2 (08:5b:0e:7c:ef:e2), Dst: Dell_d6:be:6d (d4:81:d7:d6:be:6d) > Internet Protocol Version 4, Src: 173.59.230.228, Dst: 173.59.230.230 > Transmission Control Protocol, Src Port: 58875, Dst Port: 443, Seq: 308, Ack: 3085, Len: 7 > Transport Layer Security	

wireshark_Ethernet_20201210094606_a10660.pcapng	Packets: 72 · Displayed: 9 (12.5%)	Profile: Default
---	------------------------------------	------------------

Plot 30. WireShark Screenshot (WINNF.FT.C.SCS.5)

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station	Page 51 of 57	

A26 [WINNF.PT.C.HBT.1] UUT RF Transmit Power Measurement

	Test Execution Steps	PASS	FAIL
1	Ensure the following conditions are met for test entry: • UUT has successfully completed SAS Discovery and Authentication with the SAS Test Harness • UUT has registered with the SAS, with CBSID ID = C • UUT has a single valid grant G with parameters {lowFrequency = FL, highFrequency = FH, maxEirp = Pi}, with grant in AUTHORIZED state, and grantExpireTime set to a value far past the duration of this test case <i>Note: in order for the UUT to request a grant with the parameters {lowFrequency, highFrequency, maxEirp}, the SAS Test Harness may need to provide appropriate guidance in the availableChannel object of the spectrumInquiry response message, and the operationParam object of the grant response message. Alternately, the UUT vendor may provide the ability to set those parameters on the UUT so that the UUT will request a grant with those parameters.</i>	--	--
2	UUT and SAS Test Harness perform a series of Heartbeat Request/Response cycles, which continues until the other test steps are complete. Messaging for each cycle is as follows: • UUT sends Heartbeat Request, including: - o cbsdId = C - o grantId = G • SAS Test Harness responds with Heartbeat Response, including: - o cbsdId = C - o grantId = G - o transmitExpireTime = current UTC time + 200 seconds - o responseCode = 0	--	--
3	Tester performs power measurement on RF interface(s) of UUT, and verifies it complies with the maxEirp setting, Pi. The RF measurement method is out of scope of this document, but may include additional configuration of the UUT, as required, to fulfil the requirements of the power measurement method. <i>Note: it may be required for the vendor to provide a method or configuration to bring the UUT to a mode which is required by the measurement methodology. Any such mode is vendor-specific and depends upon UUT behavior and the measurement methodology.</i>	☒	☐

FCC ID: 2AXTR-ECL2248-2723	 PCTEST Proud to be part of 	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 52 of 57

RF Power Measurements:

Testing is performed per KDB 971168 D01 and across the transmit dynamic range of 19dBm/MHz to 20dBm/MHz for 20MHz Bandwidth.


The UUT was configured to transmit on a fully loaded channel in MIMO mode with both Antenna1 and Antenna2 active. The EIRP of both antennas were calculated and then summed for Total MIMO EIRP.

Freq [MHz]	SAS Granted maxEIRP [dBm/MHz]	Tx1 Conducted PSD [dBm/MHz]	Tx1 Ant Gain [dBi]	Tx1 EIRP [dBm/MHz]	Tx2 Conducted PSD [dBm/MHz]	Tx2 Ant Gain [dBi]	Tx2 EIRP [dBm/MHz]	Total MIMO maxEIRP [dBm/MHz]	Margin [dB]
3625	19	7.926	5.79	13.716	7.641	5.98	13.621	16.68	-2.32
3625	15	3.406	5.79	9.196	4.757	5.98	10.737	13.04	-1.96
3625	10	-0.995	5.79	4.795	-1.126	5.98	4.854	7.83	-2.17


Table 7-1 RF Output Power Measurements (WINNF.PT.C.HBT)

FCC ID: 2AXTR-ECL2248-2723		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 53 of 57

Test Plots:

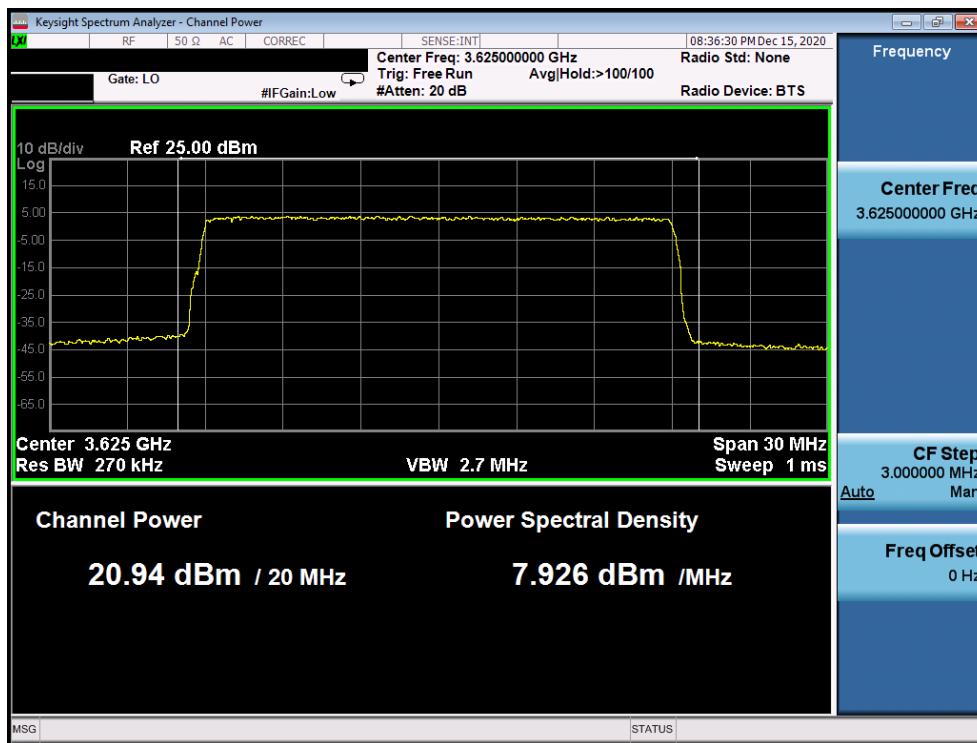


Plot 31. Conducted PSD, Mid-Channel SAS Granted maxEIRP 19 – Antenna 1

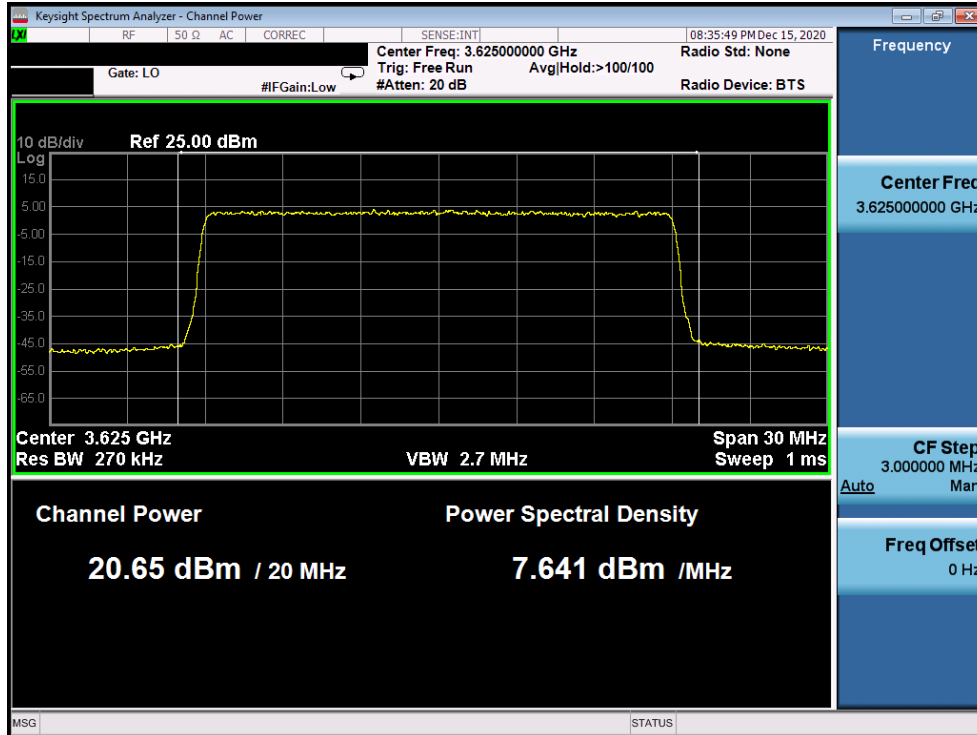


Plot 32. Conducted PSD, Mid-Channel SAS Granted maxEIRP 19 – Antenna 2

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 54 of 57

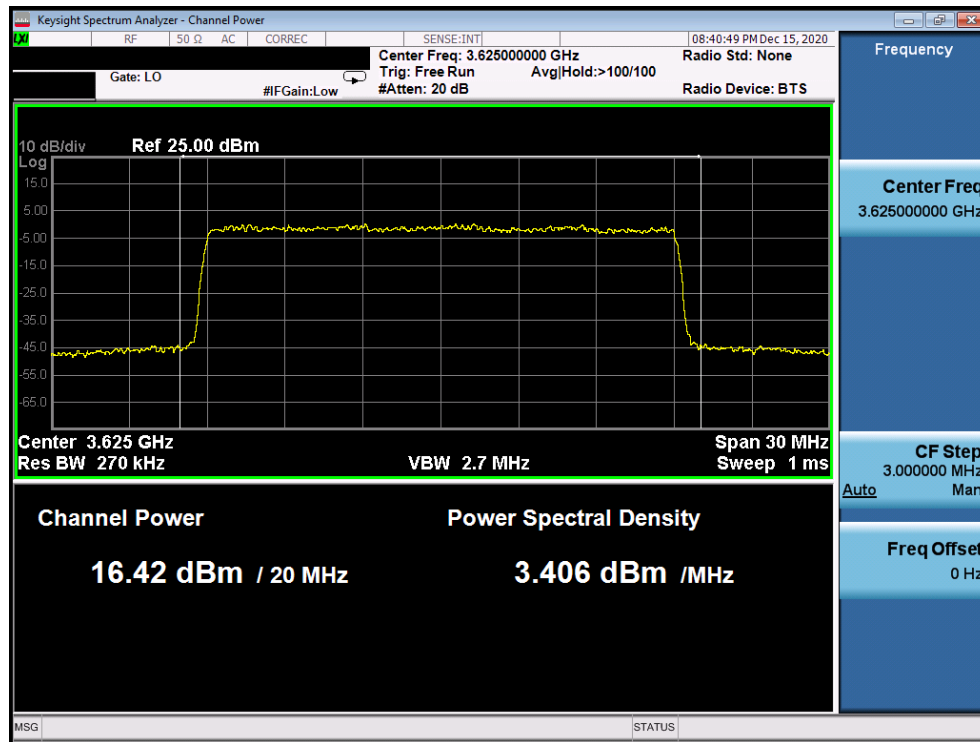


Plot 33. Conducted PSD, Mid-Channel SAS Granted maxEIRP 15 – Antenna 1

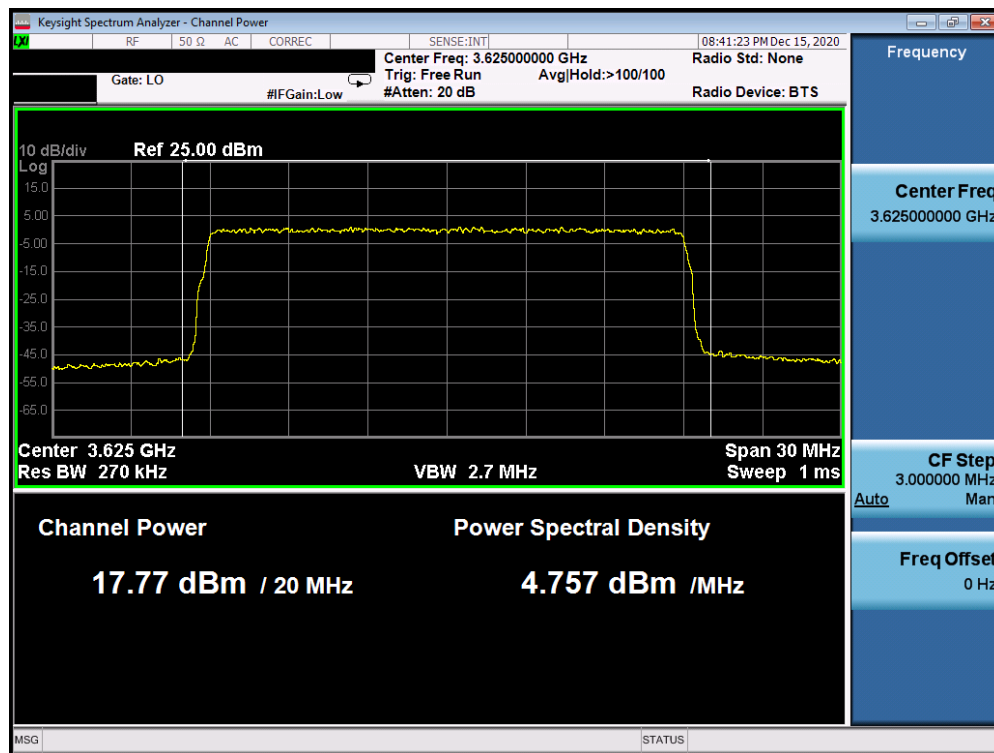


Plot 34. Conducted PSD, Mid-Channel SAS Granted maxEIRP 15 – Antenna 2

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 55 of 57

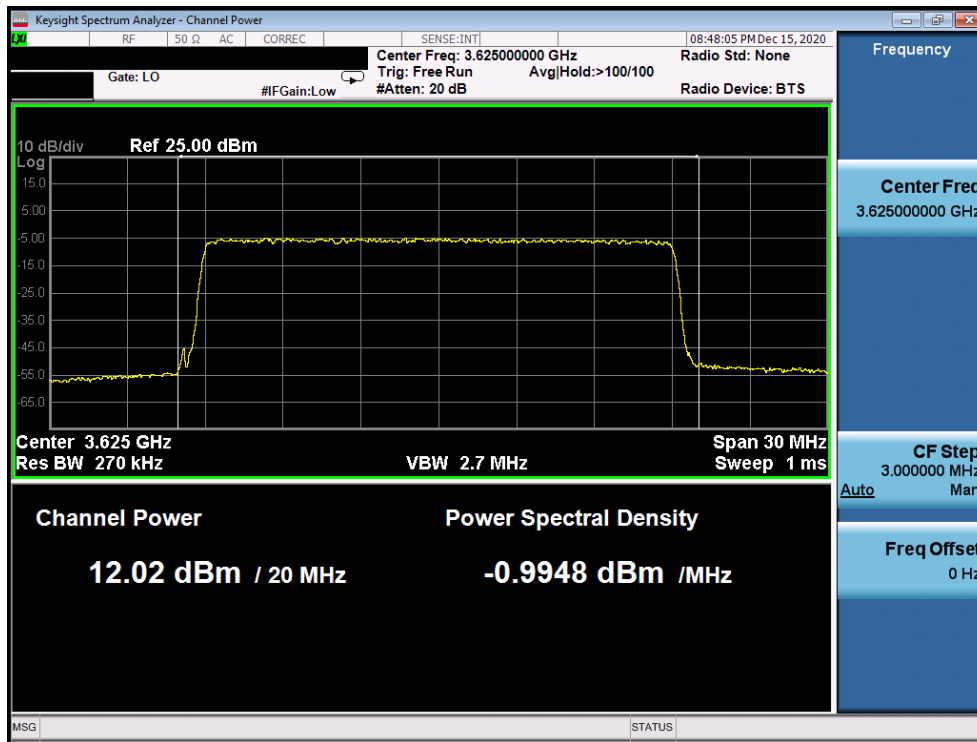

Plot 35. Conducted PSD, Mid-Channel SAS Granted maxEIRP 10 – Antenna 1

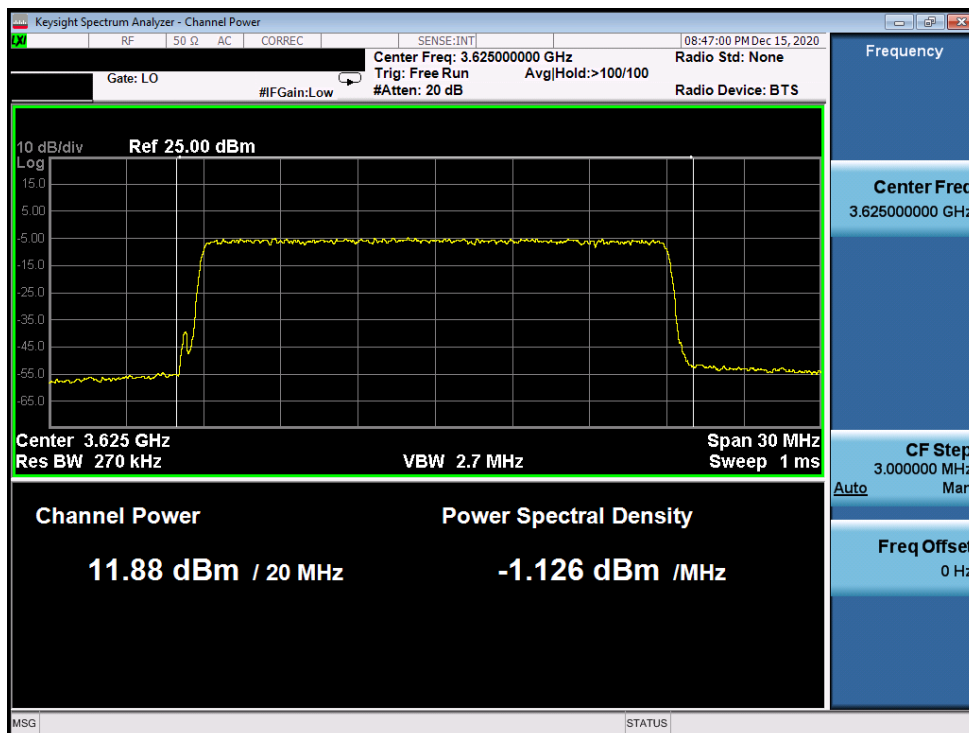

Plot 36. Conducted PSD, Mid-Channel SAS Granted maxEIRP 10 – Antenna 2

FCC ID: 2AXTR-ECL2248-2723	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	EUCAST	Approved by: Quality Manager
Test Report S/N: 3M2011170083	Test Dates: 11/17/2020 - 12/15/2020	EUT Type: Ct A LTE enterprise small cell base station		Page 56 of 57