



Antenna test report

● ● ● Test report ● ● ●

2023.03.29



(catalogue) :



(Model Information)

(Company profile)

(Passive and Matching)

(3D Active Test Data)



(Environmental treatment)

(Summary)





1、 (Model Information)

Project name	S8	RF	
Model Name		LTE:	
Antenna Type		Band	
Model pictures :			

2、 (Passive and Matching)


2.1A diagram of a passive test

S11 test method description

Testing equipment:

Network analyzer(E5071C 30k-8.5Ghz)

Test method: a 50 ohm CABLE is used to export from the instrument test port. After calibration, the sample machine and SMA joint of the instrument are connected.

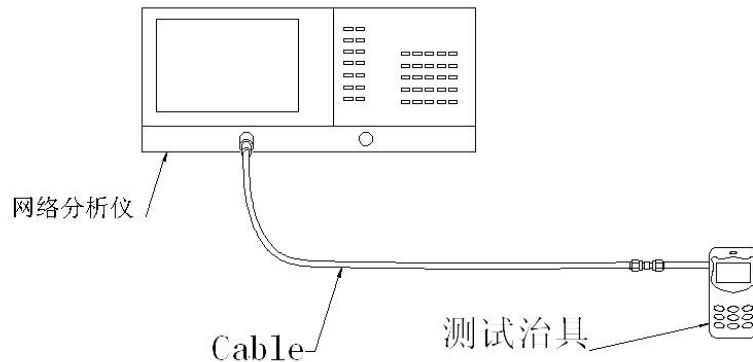

2.2 Active test schematic

3D testing system: SHIELDED ANECHOIC chamber
testing environment: temperature $22^{\circ}\text{C} \pm 3^{\circ}\text{C}$, humidity $50\% \pm 15\%$
testing equipment: testing passive data, using the Network analyzer Agilent E5071C testing active data, using the synthesis instrument 8960cmw500

总全向辐射功率 (TIRP)

$$TIRP \equiv \frac{\pi}{2NM} \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} [Eirp_{\theta}(\theta_i, \phi_j) + Eirp_{\phi}(\theta_i, \phi_j)] \sin(\theta_i)$$


总全向辐射灵敏度 (TIRS)

$$TIRS \equiv \frac{2NM}{\pi \sum_{i=1}^{N-1} \sum_{j=0}^{M-1} \left[\frac{1}{EIS_{\theta}(\theta_i, \phi_j)} + \frac{1}{EIS_{\phi}(\theta_i, \phi_j)} \right]} \sin(\theta_i)$$

E1: XZ的切面 PHI=0


E2: YZ的切面 PHI=90

H: XY的切面 Theta=90



以喇叭天线为参考

2.3 (Matching Circuit)

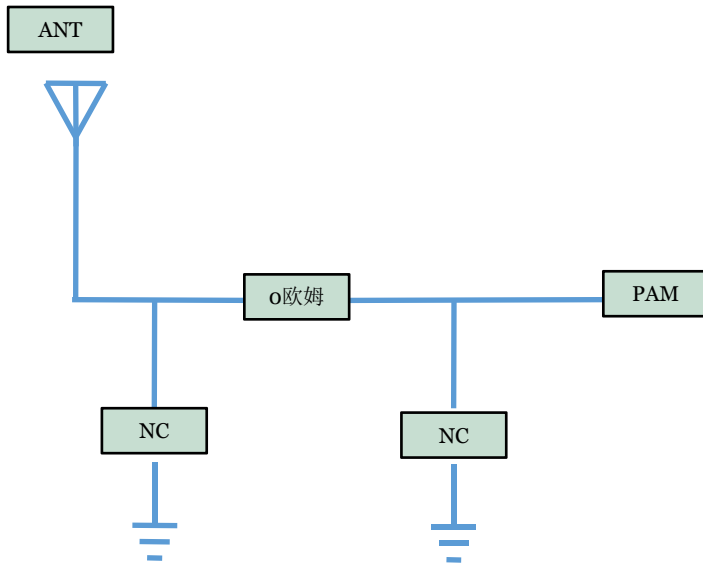

Motherboard matching
has not changed.

Note: original string 0 ohm from
antenna string 0 ohm resistor pa









Frequency Band	802.11B			802.11G		
channel	L	M	H	L	M	H
TRP	11.4	12.5	11.8	10.2	10.3	10.8
TIS			-80.5			-68.1
Frequency Band	802.11N					
channel	L	M	H			
TRP	10.5	11.1	10.3			
TIS			-66.5			

4.2 passive antenna test data

WIFI 2.4G		
Freq(MHz)	Efficiency (%)	Gain (dBi)
2400	48.4	0.02
2410	49.5	0.45
2420	50.2	0.25
2430	41.5	0.36
2440	43.5	0.74
2450	41.5	0.51
2460	49.6	0.66
2470	48.7	0.74
2480	49.3	0.93

4.2 passive antenna test data

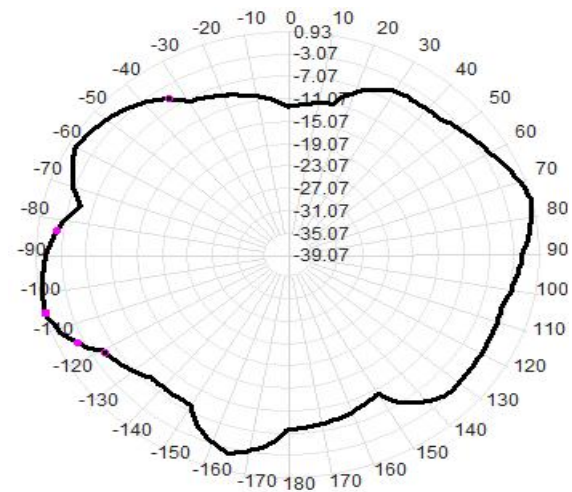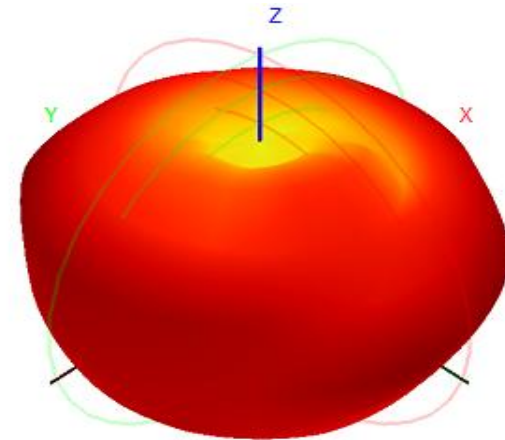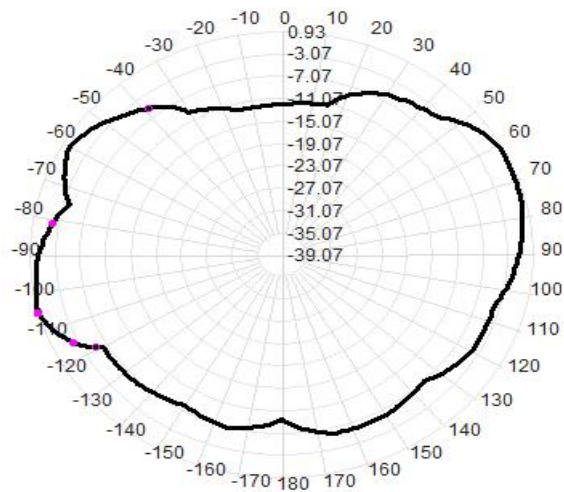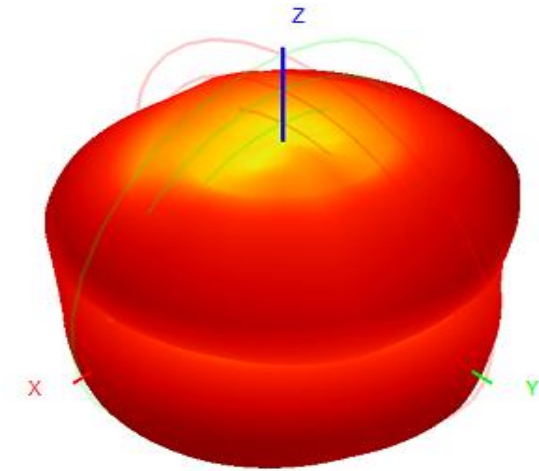

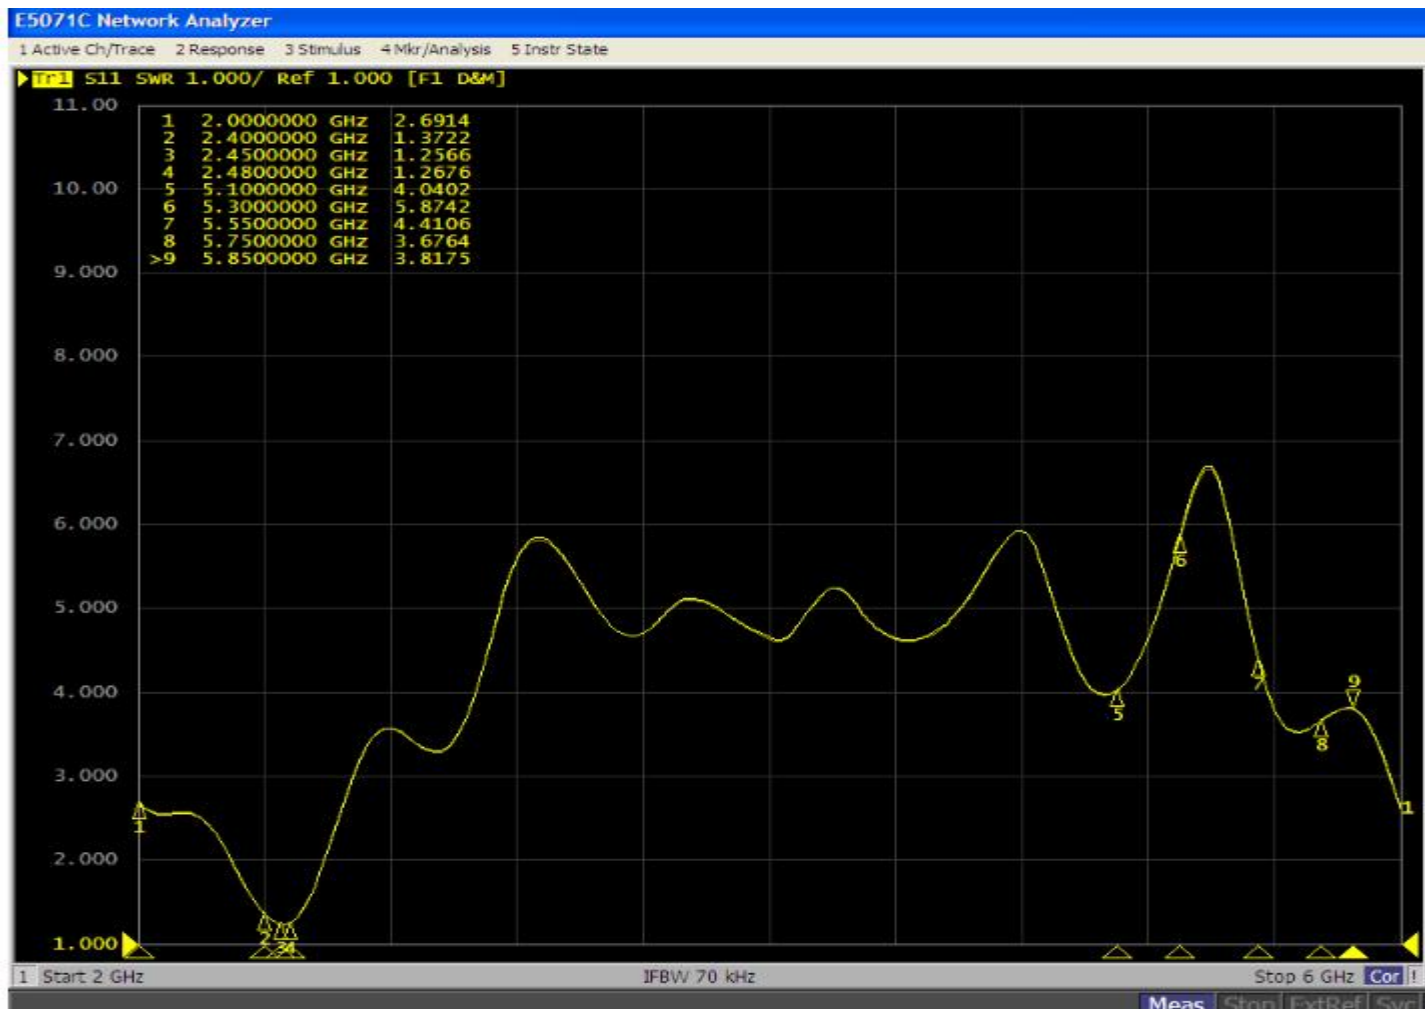

5. WiFi measurements

Distance
router 10
meters,
signal full
grid, internet
normal



6. Antenna position





6、 (Summary)

Combined with the active, passive antenna, measured results, have reached the best state.



Note: 1. This report is based on the actual debugging and testing of the prototype, in which the environment processing, antenna position and the assembly position of each component can not be changed at will. 2. If there is any change in the materials used in the prototype, we need to make a timely feedback to revalidate. 3. List of sensitive devices: TP (material, coating, wiring, etc.) screen (amplifier circuit, LED, wiring design, etc.) shell material (antenna assembly mode, structural interference, shell material, antenna position height and area, etc.) motherboard (motherboard conduction, RF circuit matching, PA, dual-power, filter, LNA, power circuit, etc.) camera, battery, motor, MIC, fingerprint identification module, etc. 4. Because there are few or only one prototype, some probability problems can not be found out completely. It is suggested to check the problem points in small batch before mass production (such as flashing screen, loudspeaker noise, TP Jump Point, black screen death, signal diving, etc.)

Thank you