

TEST REPORT

Applicant: Wyrestorm Technologies LLC
Address of Applicant: 23 Wood Rd, Round Lake, New York 12151, United States
Manufacturer/Factory: Shen Zhen Proitav Technology Co.,Ltd
Address of Manufacturer/Factory: 301-401, Building 16, Hejing Industrial Park, No.87, Hexiu West Road, Zhancheng Community, Fuhai St., Baoan District, Shenzhen, China
Equipment Under Test (EUT)
Product Name: Video Bar
Model No.: APO-VX20-UC(VB10-A00)
Trade Mark: WyreStorm
FCC ID: 2A2CW-APO-VX20
Applicable standards: FCC CFR Title 47 Part 15 Subpart E Section 15.407
Date of sample receipt: June 06, 2022
Date of Test: June 07, 2022-August 29, 2022
Date of report issue: August 29, 2022
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Luo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	August 29, 2022	Original

Prepared By:




Date:

August 29, 2022

Project Engineer

Check By:



Date:

August 29, 2022

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	6
5.3 TEST FACILITY	6
5.4 TEST LOCATION	6
5.5 DESCRIPTION OF SUPPORT UNITS	6
5.6 DEVIATION FROM STANDARDS	6
6 TEST INSTRUMENTS LIST	7
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT:	9
7.2 CONDUCTED EMISSIONS	10
7.3 EMISSION BANDWIDTH	13
7.4 MAXIMUM CONDUCTED OUTPUT POWER	14
7.5 POWER SPECTRAL DENSITY	15
7.6 BAND EDGE	16
7.7 RADIATED EMISSION	19
7.8 FREQUENCY STABILITY	36
8 TEST SETUP PHOTO	37
9 EUT CONSTRUCTIONAL DETAILS	37

4 Test Summary

Test Item	Section	Result
Antenna requirement	FCC part 15.203	PASS
AC Power Line Conducted Emission	FCC part 15.207	PASS
Emission Bandwidth	FCC part 15.407	PASS
Maximum Conducted Output Power	FCC part 15.407(a)(1)	PASS
Power Spectral Density	FCC part 15.407(a)(1)	PASS
Undesirable Emission	FCC part 15.407(b), 15.205/15.209	PASS
Radiated Emission	FCC part 15.205/15.209	PASS
Band Edge	FCC part 15.407(b)(1)	PASS
Frequency Stability	FCC part 15.407(g)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

Test Method: KDB 662911 D01 Multiple Transmitter Output v02r01

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz-30MHz	3.1dB	(1)
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Video Bar			
Model No.:	APO-VX20-UC(VB10-A00)			
Serial No.:	WS1635000001			
Test sample(s) ID:	GTS202206000036-1			
Sample(s) Status:	Engineer sample			
Operation Frequency:	Band	Mode	Frequency Range(MHz)	Number of channels
	U-NII Band I	IEEE 802.11ac 20MHz	5180-5240	4
Modulation technology:	OFDM			
Antenna Type:	Integral Antenna			
Antenna gain:	ANT 1: 2.34dBi ANT 2: 0.78dBi			
Power supply:	Switch mode power supply: Model: S120-1A240500M2 Input: AC 100-240V, 50/60Hz, 2.0A Output: DC 24.0V, 5.0A, 120.0W			

Channel list for 802.11ac(VHT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180MHz	40	5200MHz	44	5220MHz	48	5240MHz

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting with modulation..
-------------------	--

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.

Mode	Data rate
802.11ac(VHT20)	6/6.5 Mbps

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC—Registration No.: 381383**

Designation Number: CN5029

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files.

- **IC —Registration No.: 9079A**

CAB identifier: CN0091

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).

5.4 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, sBaoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

5.5 Description of Support Units

Manufacturer	Description	Model	Serial Number
Lenovo	Notebook PC	E40-80	N/A

5.6 Deviation from Standards

None.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 02, 2020	July 01, 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April 22, 2022	April 21, 2023
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9168	GTS640	March 21, 2022	March 20, 2023
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June 12, 2022	June 11, 2023
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 23, 2022	June 22, 2023
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	April 22, 2022	April 21, 2023
9	Coaxial Cable	GTS	N/A	GTS211	April 22, 2022	April 21, 2023
10	Coaxial cable	GTS	N/A	GTS210	April 22, 2022	April 21, 2023
11	Coaxial Cable	GTS	N/A	GTS212	April 22, 2022	April 21, 2023
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	April 22, 2022	April 21, 2023
13	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 23, 2022	June 22, 2023
14	Band filter	Amindeon	82346	GTS219	June 23, 2022	June 22, 2023
15	Power Meter	Anritsu	ML2495A	GTS540	June 23, 2022	June 22, 2023
16	Power Sensor	Anritsu	MA2411B	GTS541	June 23, 2022	June 22, 2023
17	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April 22, 2022	April 21, 2023
18	Splitter	Agilent	11636B	GTS237	June 23, 2022	June 22, 2023
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 30, 2021	Nov. 29, 2022
20	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April 22, 2022	April 21, 2023
21	Breitband hornantenna	SCHWARZBECK	BBHA 9170	GTS579	Oct. 17, 2021	Oct. 16, 2022
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 17, 2021	Oct. 16, 2022
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 17, 2021	Oct. 16, 2022
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June 23, 2022	June 22, 2023
25	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April 22, 2022	April 21, 2023

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May 14, 2022	May 13, 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 24, 2022	April 23, 2023
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 23, 2022	June 22, 2023
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	April 22, 2022	April 21, 2023
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	JINCHUANG	GSP-8A	GTS639	April 28, 2022	April 27, 2023
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April 15, 2022	April 14, 2023
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	April 22, 2022	April 21, 2023
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	April 22, 2022	April 21, 2023

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April 22, 2022	April 21, 2023
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April 22, 2022	April 21, 2023
3	Spectrum Analyzer	Agilent	E4440A	GTS536	April 22, 2022	April 21, 2023
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April 22, 2022	April 21, 2023
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April 22, 2022	April 21, 2023
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April 22, 2022	April 21, 2023
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April 22, 2022	April 21, 2023
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April 22, 2022	April 21, 2023

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April 25, 2022	April 24, 2023
2	Barometer	KUMAO	SF132	GTS647	July 26, 2022	July 25, 2023

7 Test results and Measurement Data

7.1 Antenna requirement:

Standard requirement:	FCC Part15 C Section 15.203
<i>15.203 requirement:</i> An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
E.U.T Antenna:	
The antenna is integral antenna, reference to the appendix II for details.	

7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test setup:	Reference Plane <i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i>					
Test Instruments:	Refer to section 5.10 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.

Measurement data:


All antennas have test, only the worst case ANT 1 report.

Line:

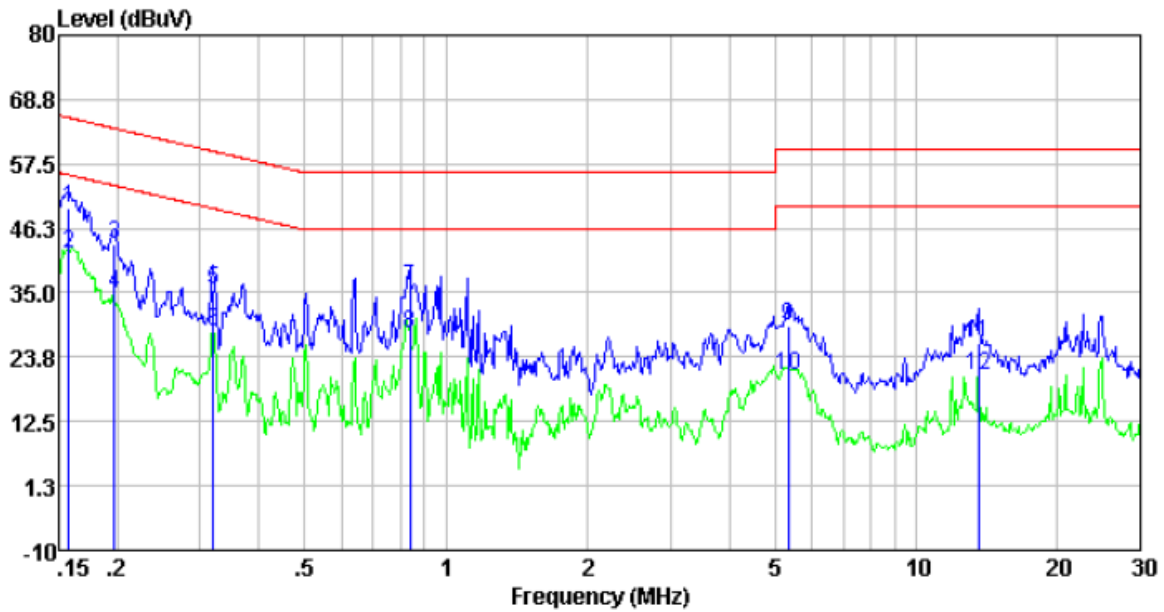

Freq	Reading	LISN/ISN	Cable		Limit	Over	
level	factor	loss	Level	level	limit	Remark	
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.16	39.31	10.40	0.01	49.72	65.60	-15.88	QP
0.16	31.40	10.40	0.01	41.81	55.60	-13.79	Average
0.20	32.93	10.40	0.01	43.34	63.76	-20.42	QP
0.20	24.27	10.40	0.01	34.68	53.76	-19.08	Average
0.32	25.11	10.39	0.01	35.51	59.71	-24.20	QP
0.32	17.75	10.39	0.01	28.15	49.71	-21.56	Average
0.84	25.51	10.23	0.03	35.77	56.00	-20.23	QP
0.84	17.59	10.23	0.03	27.85	46.00	-18.15	Average
5.33	18.94	10.20	0.07	29.21	60.00	-30.79	QP
5.33	10.42	10.20	0.07	20.69	50.00	-29.31	Average
13.55	15.87	10.20	0.15	26.22	60.00	-33.78	QP
13.55	10.08	10.20	0.15	20.43	50.00	-29.57	Average

Neutral:

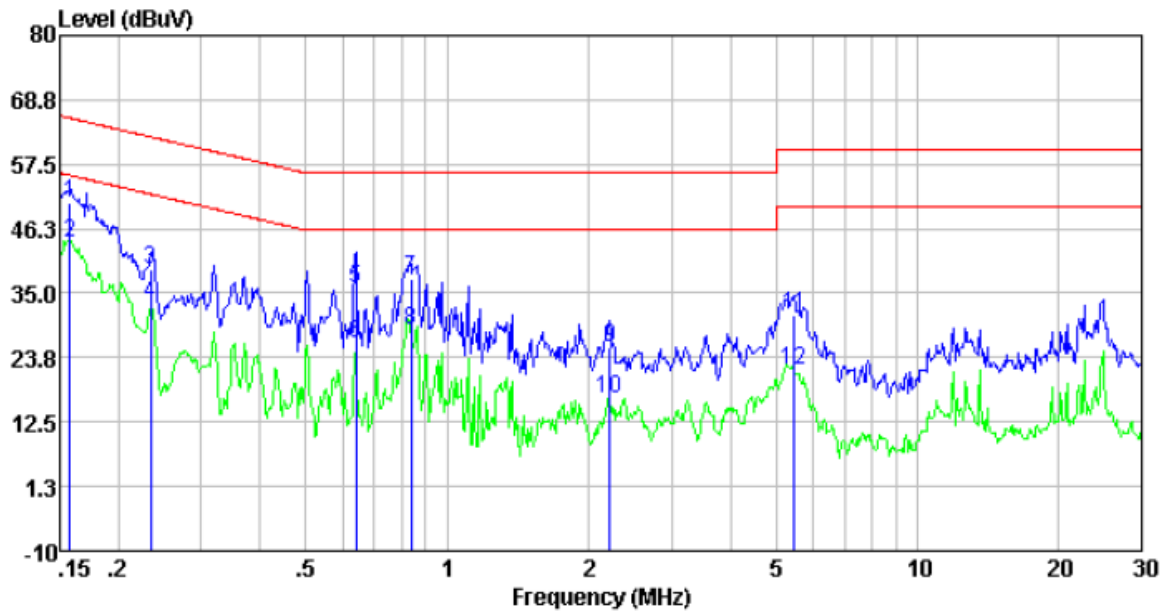


Freq	Reading	LISN/ISN	Cable	Level	Limit	Over	Remark
MHz	dBuV	dB	dB	dBuV	dBuV	dB	
0.16	40.31	10.40	0.01	50.72	65.60	-14.88	QP
0.16	33.37	10.40	0.01	43.78	55.60	-11.82	Average
0.23	28.85	10.40	0.01	39.26	62.30	-23.04	QP
0.23	22.63	10.40	0.01	33.04	52.30	-19.26	Average
0.64	25.49	10.27	0.02	35.78	56.00	-20.22	QP
0.64	15.83	10.27	0.02	26.12	46.00	-19.88	Average
0.84	27.16	10.23	0.03	37.42	56.00	-18.58	QP
0.84	18.12	10.23	0.03	28.38	46.00	-17.62	Average
2.21	15.17	10.20	0.05	25.42	56.00	-30.58	QP
2.21	6.24	10.20	0.05	16.49	46.00	-29.51	Average
5.48	21.04	10.20	0.07	31.31	60.00	-28.69	QP
5.48	11.37	10.20	0.07	21.64	50.00	-28.36	Average

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Emission Bandwidth

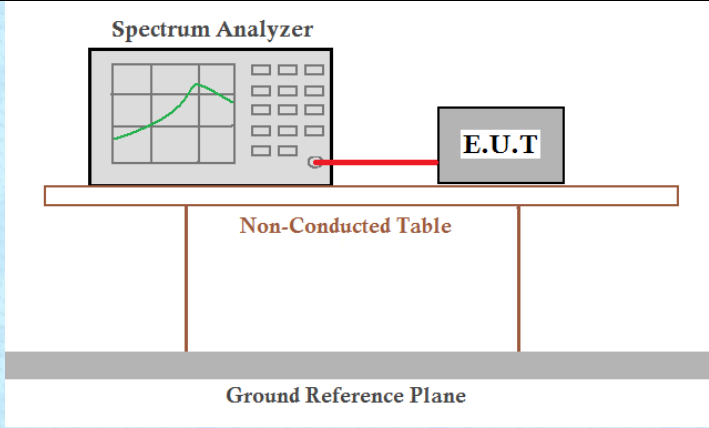Test Requirement :	FCC Part15 E Section 15.407
Test Method :	ANSI C63.10 & KDB 789033 D02 v02r01
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test procedure:	According to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for WIFI_5G.

7.4 Maximum Conducted Output Power

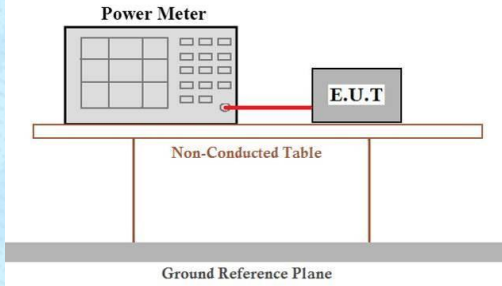Test Requirement	FCC Part15 E Section 15.407	
Test Method :	ANSI C63.10 & KDB 789033 D02 v02r01	
FCC Limit:	Frequency band (MHz)	Limit
	5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
		$\leq 250\text{Mw}(23.98\text{dBm})$ for client device
	5250-5350	$\leq 250\text{Mw}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
	5470-5725	$\leq 250\text{Mw}(23.98\text{dBm})$ for client device or $11\text{dBm}+10\log B^*$
Remark: *Where B is the 26Db emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.		
IC Limit:	the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz	
Test setup:		
Test procedure:	Measurement using an RF average power meter (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding $10 \log(1/x)$ where x is the duty cycle (e.g., $10\log(1/0.25)$ if the duty cycle is 25 percent).	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data: The detailed test data see Appendix for WIFI_5G.


7.5 Power Spectral Density

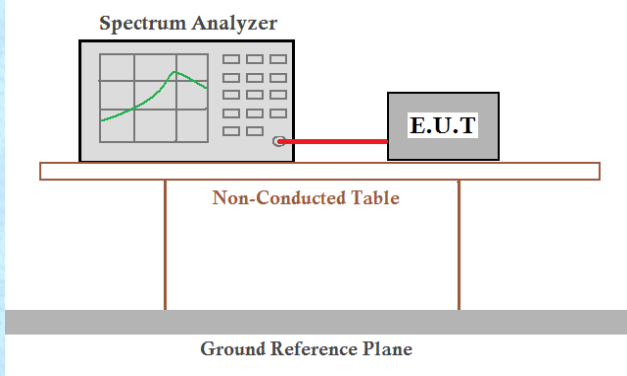Test Requirement:	FCC Part15 E Section 15.407	
Test Method :	ANSI C63.10 & KDB 789033 D02 v02r01	
FCC Limit:	Frequency band (MHz)	Limit
	5150-5250	≤17dBm in 1MHz for master device
		≤11dBm in 1MHz for client device
	5250-5350	≤11dBm in 1MHz for client device
	5470-5725	≤11dBm in 1MHz for client device
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.		
IC Limit:	e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	
Test setup:		
Test procedure:	1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". 2) Use the peak search function on the instrument to find the peak of the spectrum. 3) Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum. b) If Method SA-3 Alternative was used and the linear mode was used in step E2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging. 4) The result is the PSD.	
Test Instruments:	Refer to section 6.0 for details	
Test mode:	Refer to section 5.2 for details	
Test results:	Pass	

Measurement Data: The detailed test data see Appendix for WIFI_5G.

7.6 Band Edge

Test Requirement:	FCC Part15 E Section 15.407 and 15.205																								
Test Method:	ANSI C63.10																								
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																								
Receiver setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr><tr><td>AV</td><td>1MHz</td><td>3MHz</td><td>Average Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	AV	1MHz	3MHz	Average Value	
Frequency	Detector	RBW	VBW	Remark																					
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																					
Above 1GHz	Peak	1MHz	3MHz	Peak Value																					
	AV	1MHz	3MHz	Average Value																					
Limit:	<table><tr><td>Frequency</td><td>Limit (dBuV/m @3m)</td><td>Remark</td></tr><tr><td>30MHz-88MHz</td><td>40.0</td><td>Quasi-peak Value</td></tr><tr><td>88MHz-216MHz</td><td>43.5</td><td>Quasi-peak Value</td></tr><tr><td>216MHz-960MHz</td><td>46.0</td><td>Quasi-peak Value</td></tr><tr><td>960MHz-1GHz</td><td>54.0</td><td>Quasi-peak Value</td></tr><tr><td rowspan="2">Above 1GHz</td><td>54.0</td><td>Average Value</td></tr><tr><td>68.2</td><td>Peak Value</td></tr></table> Undesirable emission limits: (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5.15-5.25 GHz band. (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.					Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	68.2	Peak Value
Frequency	Limit (dBuV/m @3m)	Remark																							
30MHz-88MHz	40.0	Quasi-peak Value																							
88MHz-216MHz	43.5	Quasi-peak Value																							
216MHz-960MHz	46.0	Quasi-peak Value																							
960MHz-1GHz	54.0	Quasi-peak Value																							
Above 1GHz	54.0	Average Value																							
	68.2	Peak Value																							
Test Procedure:	a. The EUT was placed on the top of a rotating table 1.5 m above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																								

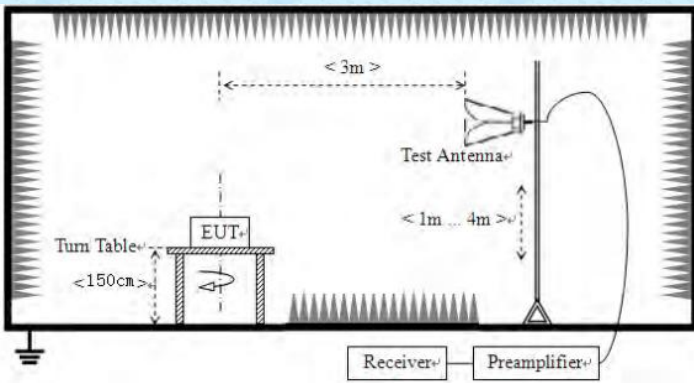Test setup:	For radiated emissions above 1GHz 
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remarks:

- Only the worst case Main Antenna test data.
- Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.
- The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
- According to KDB 789033 D02 v02r01 section G) 1) (d), for For measurements above 1000 MHz @ 3m distance, the limit of field strength is computed as follows:
 $E[\text{dBuV/m}] = \text{EIRP}[\text{dBm}] + 95.2;$
For example, if $\text{EIRP} = -27\text{dBm}$
 $E[\text{dBuV/m}] = -27 + 95.2 = 68.2\text{dBuV/m}.$

Measurement Data:

Above 1GHz

ANT 1:

Worse case mode:		802.11ac(VHT20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	50.05	-3.63	45.56	68.20	-22.64	peak	H
5150	45.88	-3.63	41.71	54.00	-12.29	AVG	H
5150	51.89	-3.63	47.87	68.20	-20.33	peak	V
5150	45.14	-3.63	40.79	54.00	-13.21	AVG	V

Worse case mode:		802.11ac(VHT20)		Test Frequency:		5240MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	48.76	-3.59	45.17	68.20	-23.03	peak	H
5350	45.33	-3.59	41.74	54.00	-12.26	AVG	H
5350	50.23	-3.59	46.64	68.20	-21.56	peak	V
5350	43.93	-3.59	40.34	54.00	-13.66	AVG	V


ANT 2:



Worse case mode:		802.11ac(VHT20)		Test Frequency:		5180MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5150	49.76	-3.63	46.13	68.20	-22.07	peak	H
5150	45.78	-3.63	42.15	54.00	-11.85	AVG	H
5150	52.47	-3.63	48.84	68.20	-19.36	peak	V
5150	45.07	-3.63	41.44	54.00	-12.56	AVG	V

Worse case mode:		802.11ac(VHT20)		Test Frequency:		5240MHz	
Frequency	Meter Reading	Factor	Emission Level	Limits	Over	Detector Type	Ant. Pol.
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)		H/V
5350	48.39	-3.59	44.80	68.20	-23.40	peak	H
5350	45.78	-3.59	42.19	54.00	-11.81	AVG	H
5350	50.02	-3.59	46.43	68.20	-21.77	peak	V
5350	43.84	-3.59	40.25	54.00	-13.75	AVG	V

7.7 Radiated Emission

Test Requirement :	FCC Part15 C Section 15.209 and 15.205																												
Test Method :	ANSI C63.10																												
Test Frequency Range:	9kHz to 40GHz																												
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																												
Receiver setup:	Frequency	Detector	RBW	VBW	Value																								
	9kHz-150KHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																								
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																								
AV		1MHz	3MHz	Average Value																									
FCC Limit:	<table><tr><th>Frequency (MHz)</th><th>Field strength (microvolts/meter)</th><th>Measurement distance (meters)</th></tr><tr><td>0.009-0.490</td><td>2400/F(kHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(kHz)</td><td>30</td></tr><tr><td>1.705-30.0</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100**</td><td>3</td></tr><tr><td>88-216</td><td>150**</td><td>3</td></tr><tr><td>216-960</td><td>200**</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>					Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	0.009-0.490	2400/F(kHz)	300	0.490-1.705	24000/F(kHz)	30	1.705-30.0	30	30	30-88	100**	3	88-216	150**	3	216-960	200**	3	Above 960	500	3
	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)																										
	0.009-0.490	2400/F(kHz)	300																										
	0.490-1.705	24000/F(kHz)	30																										
	1.705-30.0	30	30																										
	30-88	100**	3																										
	88-216	150**	3																										
	216-960	200**	3																										
	Above 960	500	3																										
	The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.																												
Test Procedure:	Substitution method was performed to determine the actual ERP emission levels of the EUT.																												
	The following test procedure as below:																												
	1>.Below 1GHz test procedure:																												
	1. The EUT was placed on the top of a rotating table (0.8m for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.																												
	2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.																												
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.																												
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.																												
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																												
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																												
	2>.Above 1GHz test procedure:																												
	1. On the test site as test setup graph above,the EUT shall be placed at the 0.8m support on the turntable and in the position closest to normal																												

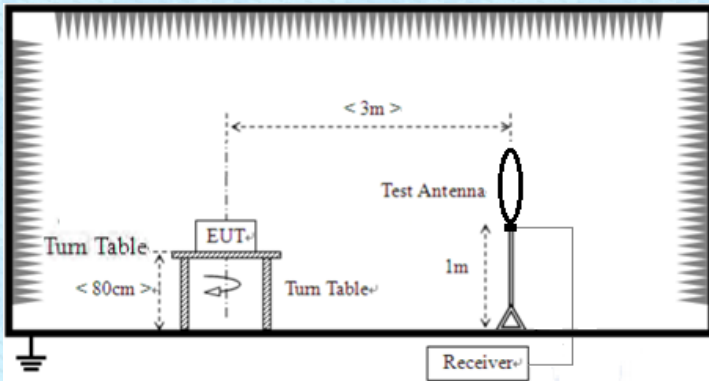	use as declared by the provider. - The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver. - The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test. - The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver. - Repeat step 4 for test frequency with the test antenna polarized horizontally. - Remove the transmitter and replace it with a substitution antenna - Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output. - Repeat step 7 with both antennas horizontally polarized for each test frequency. - Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula: $\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$ where: Pg is the generator output power into the substitution antenna.
Test setup:	For radiated emissions from 9kHz to 30MHz  For radiated emissions from 30MHz to 1GHz

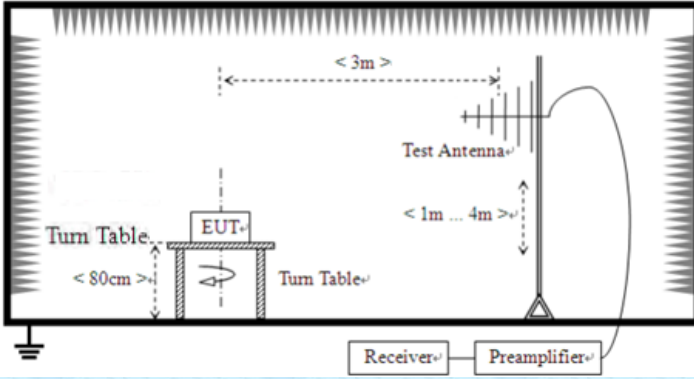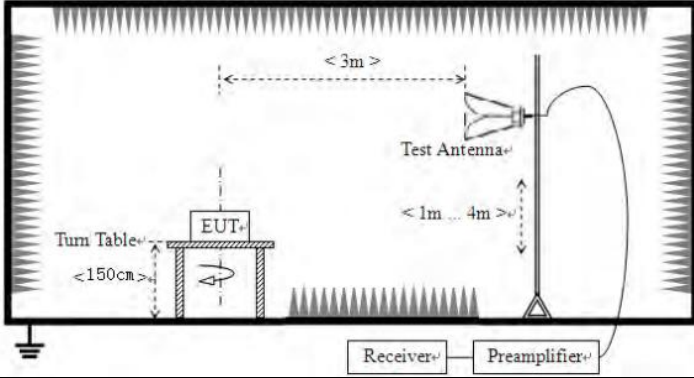	 For radiated emissions above 1GHz 
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1012mbar
Test voltage:	AC 120V, 60Hz
Test results:	Pass

Remarks:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data:


9 kHz ~ 30 MHz

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

ANT 1:


30MHz~ 1GH

Test mode:	802.11ac(VHT20)	Test channel:	Lowest	Polarization:	Horizontal
------------	-----------------	---------------	--------	---------------	------------

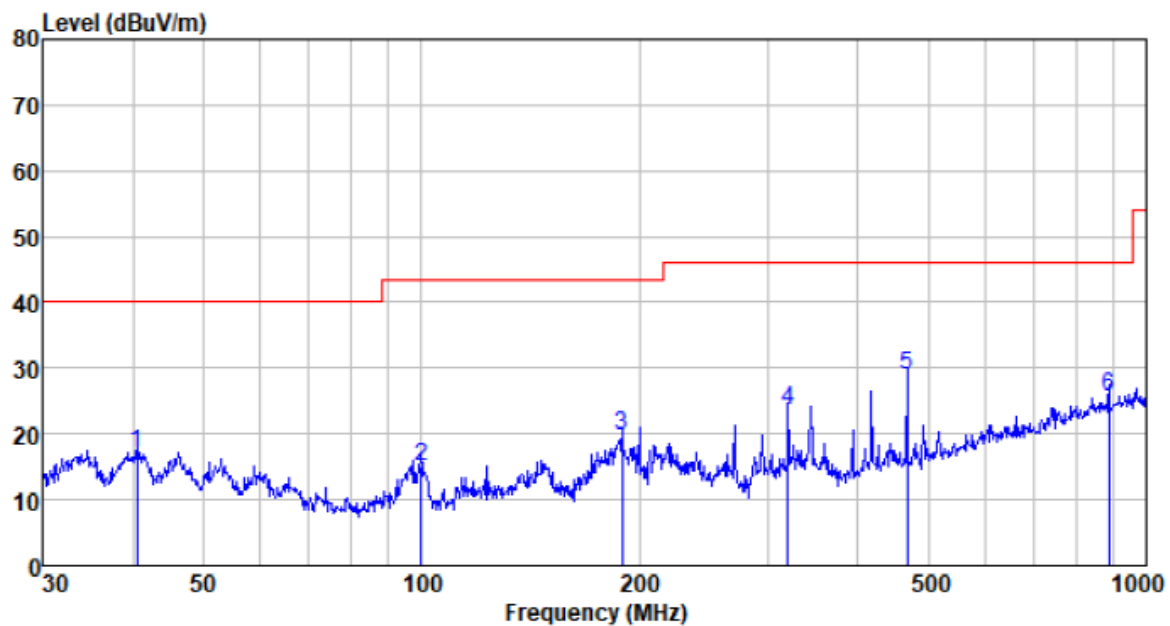


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.559	38.78	13.23	0.67	35.70	16.98	40.00	-23.02	QP
99.878	41.59	9.10	1.19	36.72	15.16	43.50	-28.34	QP
189.074	45.40	9.94	1.78	37.28	19.84	43.50	-23.66	QP
319.937	45.71	12.97	2.47	37.44	23.71	46.00	-22.29	QP
467.235	46.95	16.22	3.17	37.51	28.83	46.00	-17.17	QP
887.610	35.52	22.86	4.80	37.60	25.58	46.00	-20.42	QP

Test mode:	802.11ac(VHT20)	Test channel:	Lowest	Polarization:	Vertical
------------	-----------------	---------------	--------	---------------	----------

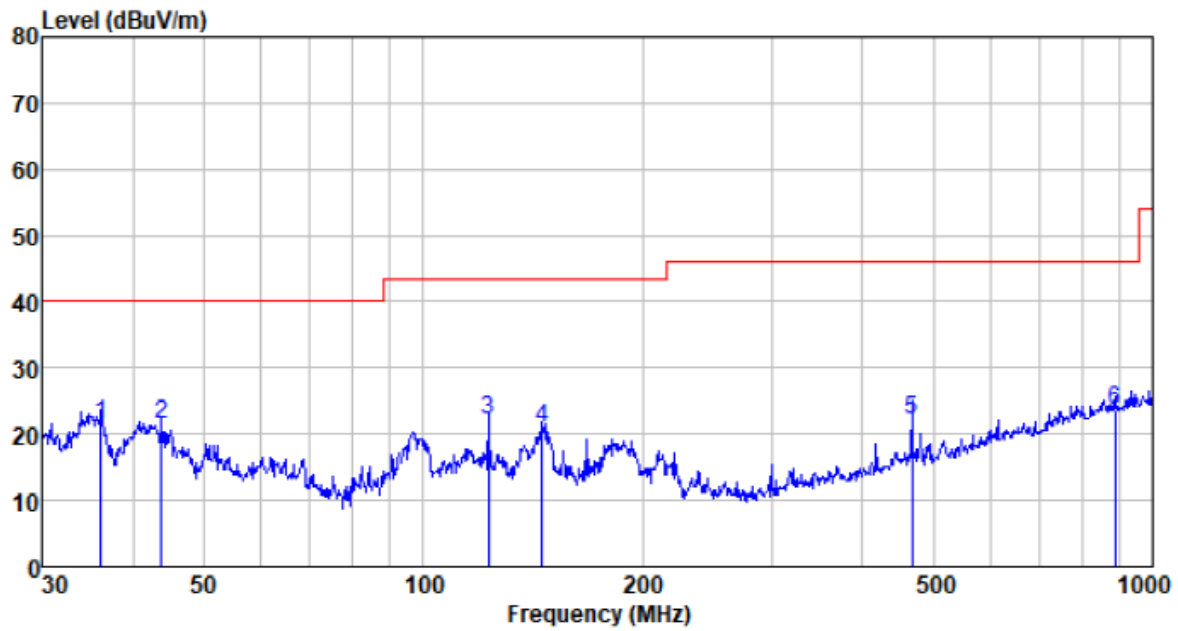


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
36.127	43.70	12.67	0.62	35.43	21.56	40.00	-18.44	QP
43.812	43.70	13.03	0.71	35.87	21.57	40.00	-18.43	QP
122.834	46.46	11.17	1.38	36.90	22.11	43.50	-21.39	QP
145.351	43.90	12.44	1.54	37.05	20.83	43.50	-22.67	QP
467.235	40.19	16.22	3.17	37.51	22.07	46.00	-23.93	QP
887.610	33.67	22.86	4.80	37.60	23.73	46.00	-22.27	QP

Test mode:	802.11ac(VHT20)	Test channel:	Middle	Polarization:	Horizontal
------------	-----------------	---------------	--------	---------------	------------

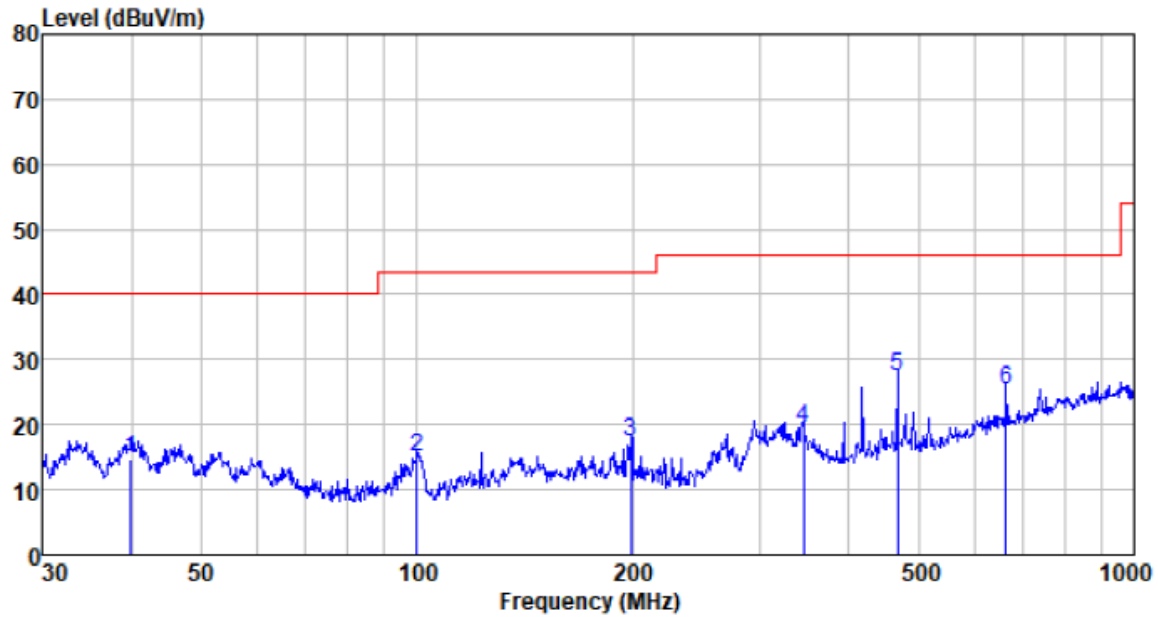


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.854	36.50	13.24	0.66	35.66	14.74	40.00	-25.26	QP
99.878	41.43	9.10	1.19	36.72	15.00	43.50	-28.50	QP
198.588	43.59	9.31	1.83	37.32	17.41	43.50	-26.09	QP
345.595	41.03	13.47	2.60	37.47	19.63	46.00	-26.37	QP
467.235	45.64	16.22	3.17	37.51	27.52	46.00	-18.48	QP
663.473	39.03	20.03	3.96	37.60	25.42	46.00	-20.58	QP

Test mode:	802.11ac(VHT20)	Test channel:	Middle	Polarization:	Vertical
------------	-----------------	---------------	--------	---------------	----------

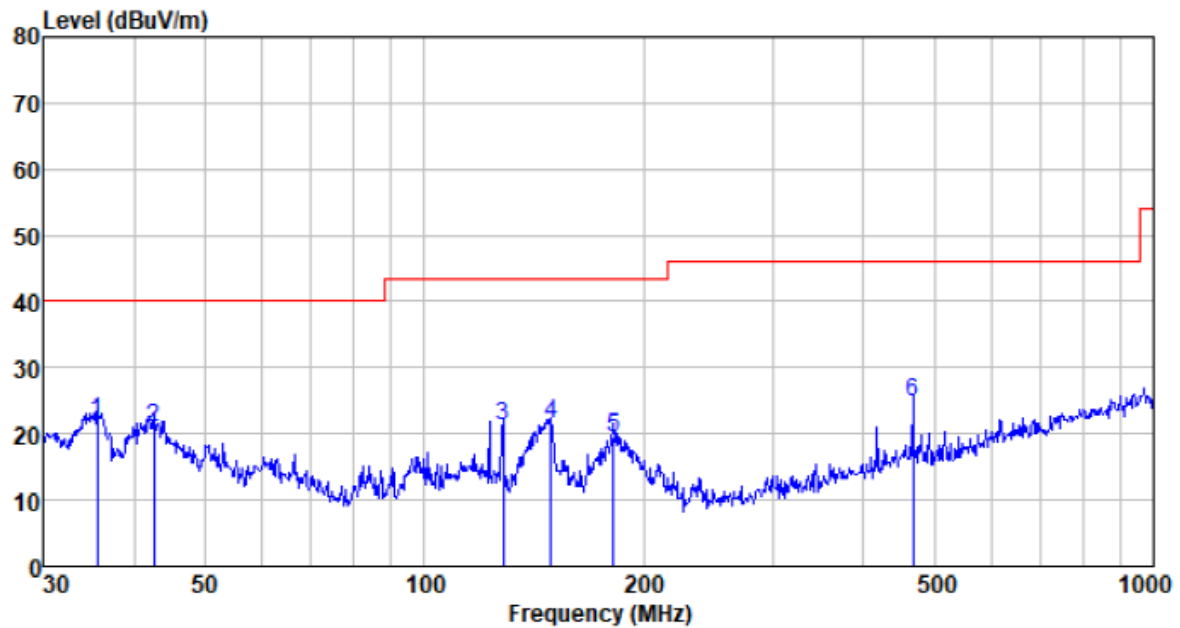


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
35.624	44.02	12.59	0.62	35.40	21.83	40.00	-18.17	QP
42.600	43.10	13.10	0.69	35.81	21.08	40.00	-18.92	QP
128.113	45.35	11.51	1.42	36.94	21.34	43.50	-22.16	QP
148.963	44.20	12.73	1.56	37.07	21.42	43.50	-22.08	QP
181.920	44.35	10.75	1.75	37.25	19.60	43.50	-23.90	QP
467.235	42.89	16.22	3.17	37.51	24.77	46.00	-21.23	QP

Test mode:	802.11ac(VHT20)	Test channel:	Highest	Polarization:	Horizontal
------------	-----------------	---------------	---------	---------------	------------

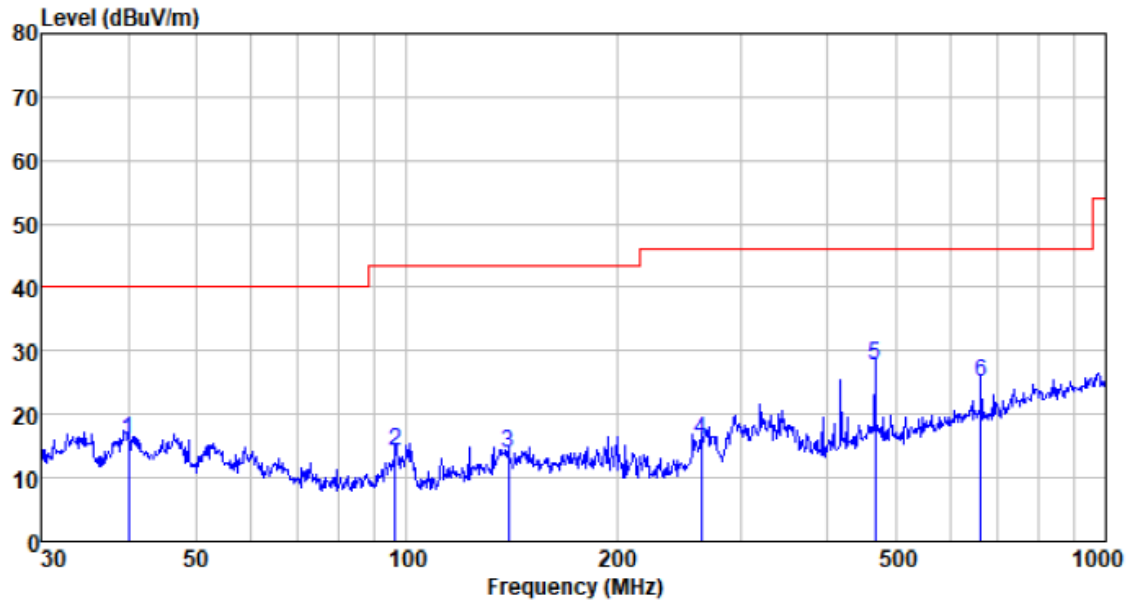

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.994	37.82	13.26	0.66	35.66	16.08	40.00	-23.92	QP
96.436	40.92	8.87	1.16	36.69	14.26	43.50	-29.24	QP
139.851	37.50	12.00	1.50	37.02	13.98	43.50	-29.52	QP
263.819	40.02	11.26	2.19	37.39	16.08	46.00	-29.92	QP
467.235	45.77	16.22	3.17	37.51	27.65	46.00	-18.35	QP
663.473	38.57	20.03	3.96	37.60	24.96	46.00	-21.04	QP

Test mode:	802.11ac(VHT20)	Test channel:	Highest	Polarization:	Vertical
------------	-----------------	---------------	---------	---------------	----------

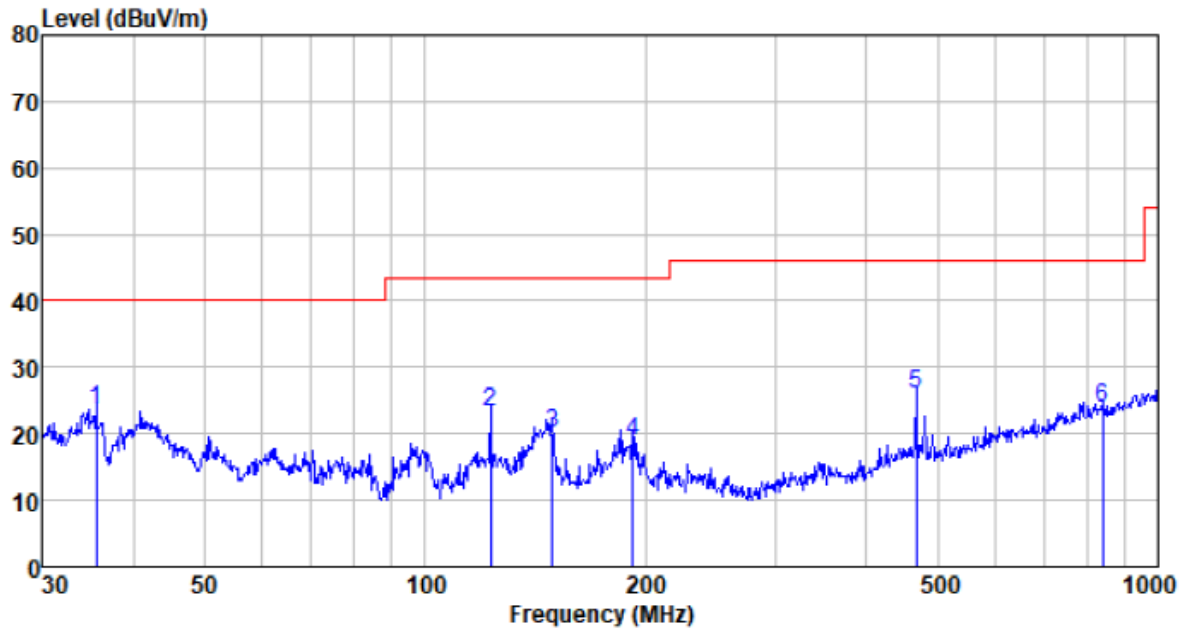


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
35.624	45.90	12.59	0.62	35.40	23.71	40.00	-16.29	QP
122.834	47.73	11.17	1.38	36.90	23.38	43.50	-20.12	QP
148.963	42.93	12.73	1.56	37.07	20.15	43.50	-23.35	QP
191.745	44.56	9.73	1.80	37.29	18.80	43.50	-24.70	QP
467.235	44.09	16.22	3.17	37.51	25.97	46.00	-20.03	QP
839.182	34.29	22.51	4.62	37.61	23.81	46.00	-22.19	QP

ANT 2:


30MHz~ 1GHz

Test mode:	802.11ac(VHT20)	Test channel:	Lowest	Polarization:	Horizontal
------------	-----------------	---------------	--------	---------------	------------

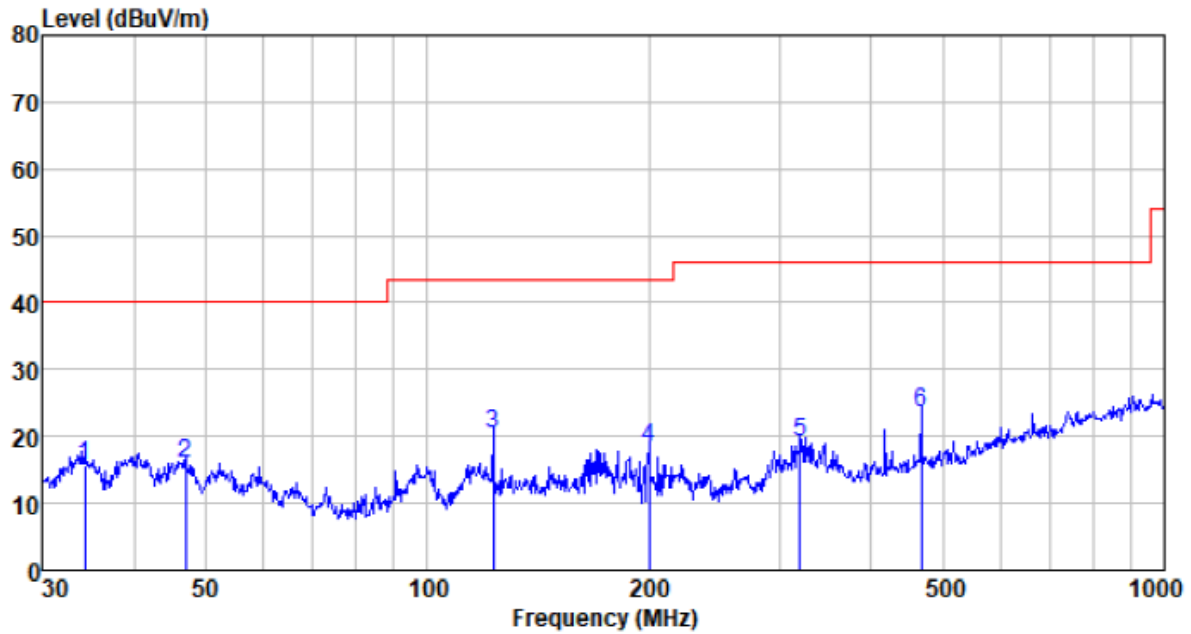


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
34.276	37.89	12.45	0.60	35.31	15.63	40.00	-24.37	QP
46.995	38.25	12.99	0.74	36.04	15.94	40.00	-24.06	QP
122.834	44.67	11.17	1.38	36.90	20.32	43.50	-23.18	QP
199.986	44.59	9.23	1.84	37.33	18.33	43.50	-25.17	QP
319.937	41.19	12.97	2.47	37.44	19.19	46.00	-26.81	QP
467.235	41.85	16.22	3.17	37.51	23.73	46.00	-22.27	QP

Test mode:	802.11ac(VHT20)	Test channel:	Lowest	Polarization:	Vertical
------------	-----------------	---------------	--------	---------------	----------

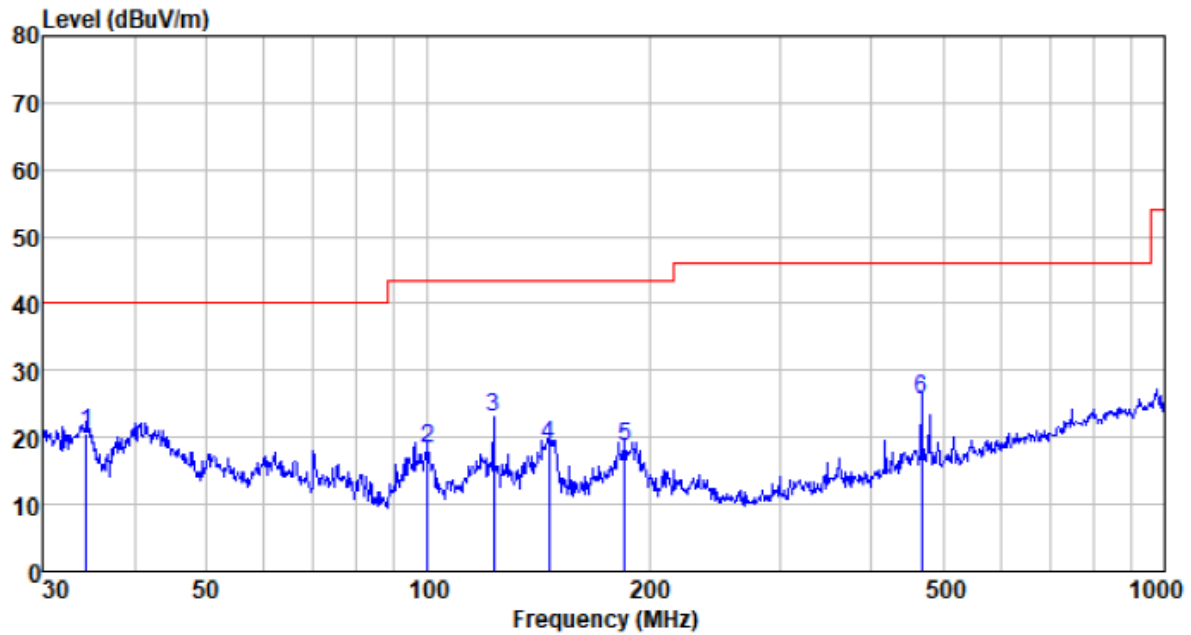


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
34.396	42.82	12.46	0.60	35.32	20.56	40.00	-19.44	QP
99.878	44.79	9.10	1.19	36.72	18.36	43.50	-25.14	QP
122.834	47.51	11.17	1.38	36.90	23.16	43.50	-20.34	QP
145.861	41.87	12.48	1.54	37.05	18.84	43.50	-24.66	QP
185.138	43.71	10.38	1.77	37.26	18.60	43.50	-24.90	QP
467.235	43.75	16.22	3.17	37.51	25.63	46.00	-20.37	QP

Test mode:	802.11ac(VHT20)	Test channel:	Middle	Polarization:	Horizontal
------------	-----------------	---------------	--------	---------------	------------

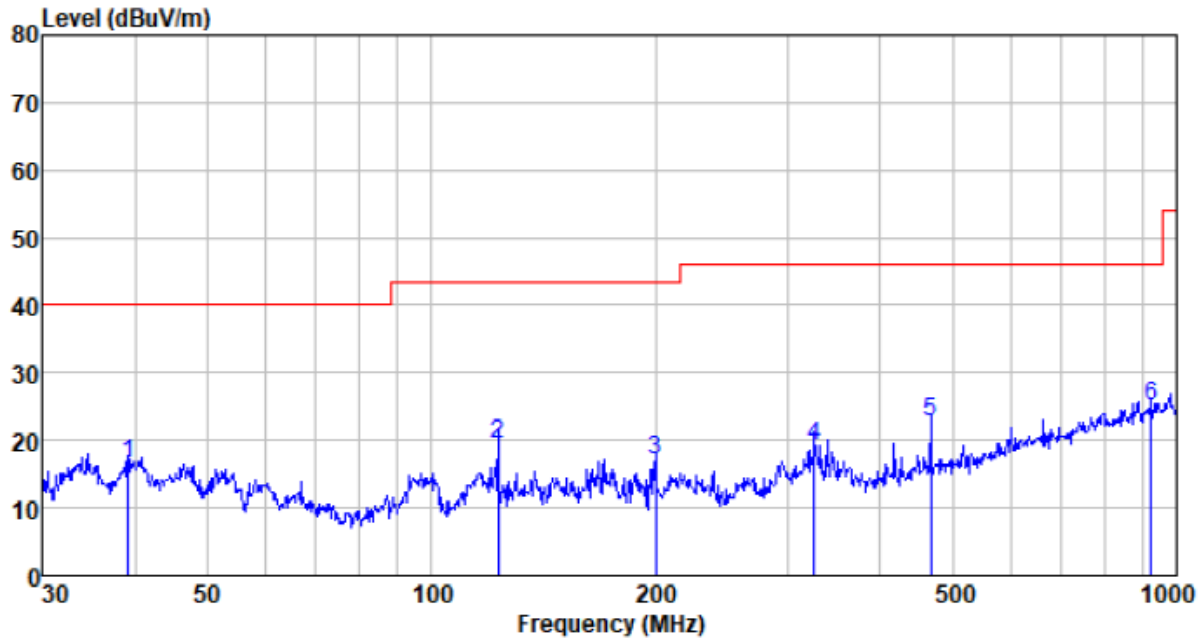


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
39.162	38.51	13.13	0.65	35.62	16.67	40.00	-23.33	QP
122.834	43.82	11.17	1.38	36.90	19.47	43.50	-24.03	QP
199.986	43.25	9.23	1.84	37.33	16.99	43.50	-26.51	QP
326.740	40.98	13.14	2.50	37.45	19.17	46.00	-26.83	QP
467.235	40.98	16.22	3.17	37.51	22.86	46.00	-23.14	QP
925.756	34.29	23.48	4.95	37.58	25.14	46.00	-20.86	QP

Test mode:	802.11ac(VHT20)	Test channel:	Middle	Polarization:	Vertical
------------	-----------------	---------------	--------	---------------	----------

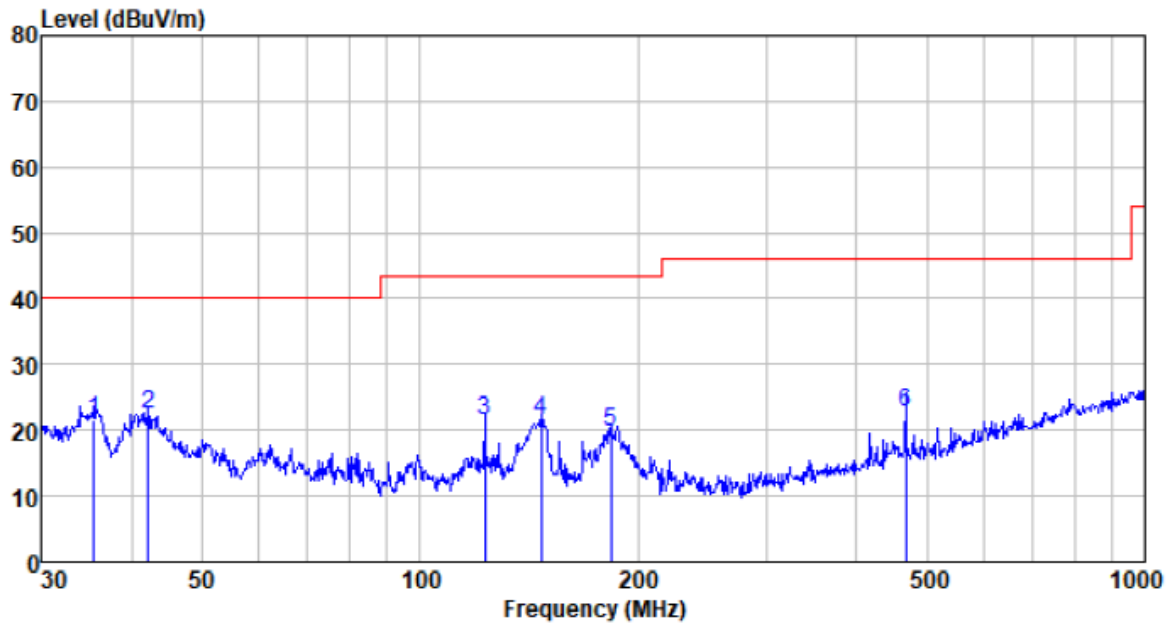


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamplifier factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
35.499	43.70	12.58	0.61	35.39	21.50	40.00	-18.50	QP
42.154	44.45	13.13	0.69	35.79	22.48	40.00	-17.52	QP
122.834	45.78	11.17	1.38	36.90	21.43	43.50	-22.07	QP
146.888	44.48	12.56	1.55	37.06	21.53	43.50	-21.97	QP
183.201	44.55	10.61	1.75	37.25	19.66	43.50	-23.84	QP
467.235	40.73	16.22	3.17	37.51	22.61	46.00	-23.39	QP

Test mode:	802.11ac(VHT20)	Test channel:	Highest	Polarization:	Horizontal
------------	-----------------	---------------	---------	---------------	------------

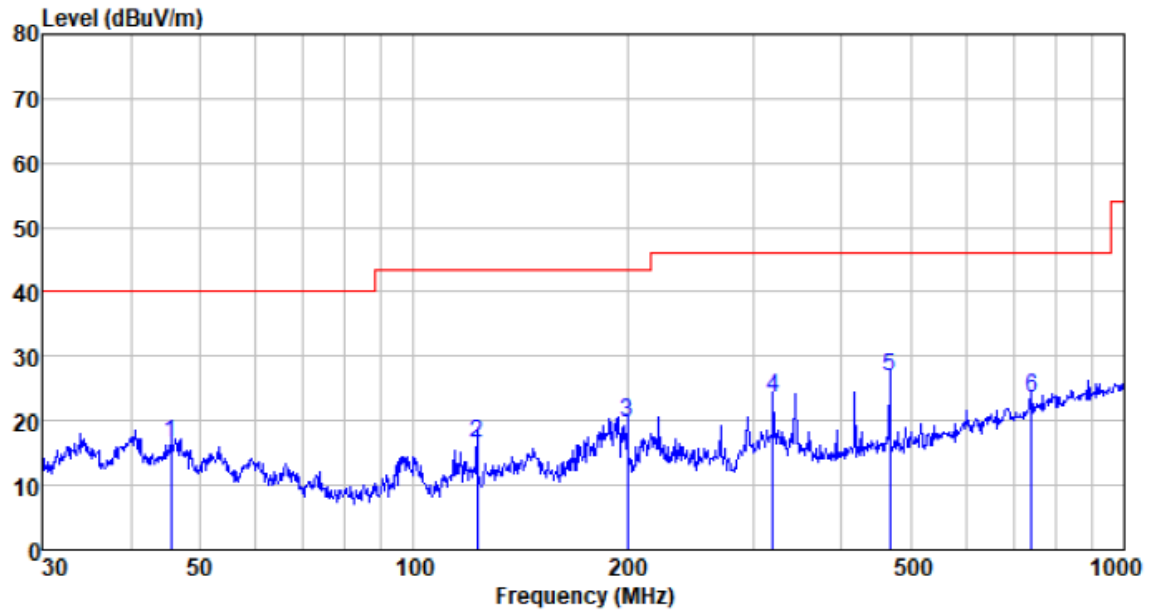

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
45.535	38.82	12.97	0.72	35.96	16.55	40.00	-23.45	QP
122.834	40.89	11.17	1.38	36.90	16.54	43.50	-26.96	QP
199.986	45.96	9.23	1.84	37.33	19.70	43.50	-23.80	QP
319.937	45.55	12.97	2.47	37.44	23.55	46.00	-22.45	QP
467.235	44.90	16.22	3.17	37.51	26.78	46.00	-19.22	QP
739.661	35.62	21.31	4.24	37.63	23.54	46.00	-22.46	QP

Test mode:	802.11ac(VHT20)	Test channel:	Highest	Polarization:	Vertical
------------	-----------------	---------------	---------	---------------	----------

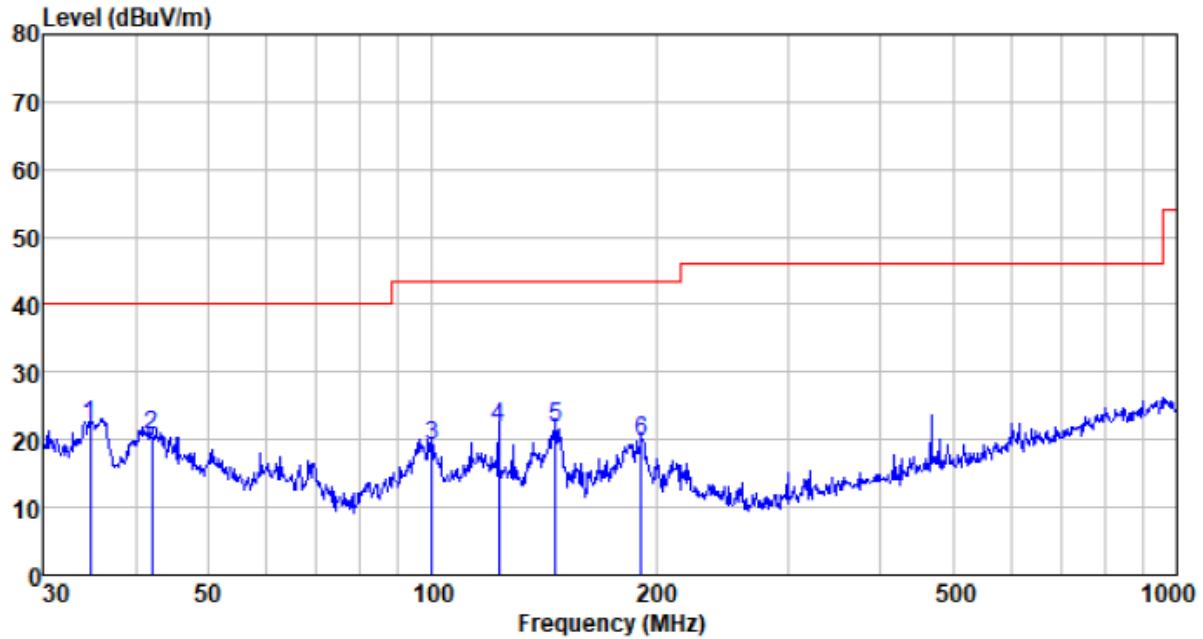

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
34.760	44.50	12.48	0.61	35.34	22.25	40.00	-17.75	QP
42.007	42.66	13.14	0.69	35.78	20.71	40.00	-19.29	QP
99.878	45.56	9.10	1.19	36.72	19.13	43.50	-24.37	QP
122.834	46.18	11.17	1.38	36.90	21.83	43.50	-21.67	QP
146.374	44.98	12.52	1.55	37.06	21.99	43.50	-21.51	QP
191.074	45.41	9.77	1.80	37.29	19.69	43.50	-23.81	QP

Above 1GHz

ANT 1:

802.11ac(VHT20) 5180MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	28.13	38.96	8.27	35.64	39.72	68.20	-28.48	Vertical
15540	29.21	38.40	10.57	35.35	42.83	68.20	-25.37	Vertical
10360	29.12	38.96	8.27	35.64	40.71	68.20	-27.49	Horizontal
15540	27.77	38.40	10.57	35.35	41.39	68.20	-26.81	Horizontal
802.11ac(VHT20) 5180MHz					AV			
10360	18.90	38.96	8.27	35.64	30.49	54.00	-23.51	Vertical
15540	17.64	38.40	10.57	35.35	31.26	54.00	-22.74	Vertical
10360	19.56	38.96	8.27	35.64	31.15	54.00	-22.85	Horizontal
15540	22.57	38.40	10.57	35.35	36.19	54.00	-17.81	Horizontal

802.11ac(VHT20) 5200MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	29.27	39.01	8.29	35.67	40.90	68.20	-27.30	Vertical
15600	29.21	38.30	10.62	35.36	42.77	68.20	-25.43	Vertical
10400	25.16	39.01	8.29	35.67	36.79	68.20	-31.41	Horizontal
15600	26.19	38.30	10.62	35.36	39.75	68.20	-28.45	Horizontal
802.11ac(VHT20) 5200MHz					AV			
10400	20.94	39.01	8.29	35.67	32.57	54.00	-21.43	Vertical
15600	19.06	38.30	10.62	35.36	32.62	54.00	-21.38	Vertical
10400	19.39	39.01	8.29	35.67	31.02	54.00	-22.98	Horizontal
15600	20.71	38.30	10.62	35.36	34.27	54.00	-19.73	Horizontal

802.11ac(VHT20) 5240MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	30.25	39.15	8.32	35.78	41.94	68.20	-26.26	Vertical
15720	27.69	38.00	10.72	35.37	41.04	68.20	-27.16	Vertical
10480	30.02	39.15	8.32	35.78	41.71	68.20	-26.49	Horizontal
15720	29.41	38.00	10.72	35.37	42.76	68.20	-25.44	Horizontal
802.11ac(VHT20) 5240MHz					AV			
10480	20.09	39.15	8.32	35.78	31.78	54.00	-22.22	Vertical
15720	22.19	38.00	10.72	35.37	35.54	54.00	-18.46	Vertical
10480	17.41	39.15	8.32	35.78	29.10	54.00	-24.90	Horizontal
15720	19.43	38.00	10.72	35.37	32.78	54.00	-21.22	Horizontal

ANT 2:

802.11ac(VHT20) 5180MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10360	27.58	38.96	8.27	35.64	39.17	68.20	-29.03	Vertical
15540	29.44	38.40	10.57	35.35	43.06	68.20	-25.14	Vertical
10360	29.21	38.96	8.27	35.64	40.80	68.20	-27.40	Horizontal
15540	27.35	38.40	10.57	35.35	40.97	68.20	-27.23	Horizontal
802.11ac(VHT20) 5180MHz					AV			
10360	19.19	38.96	8.27	35.64	30.78	54.00	-23.22	Vertical
15540	17.76	38.40	10.57	35.35	31.38	54.00	-22.62	Vertical
10360	19.12	38.96	8.27	35.64	30.71	54.00	-23.29	Horizontal
15540	22.78	38.40	10.57	35.35	36.40	54.00	-17.60	Horizontal


802.11ac(VHT20) 5200MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10400	29.76	39.01	8.29	35.67	41.39	68.20	-26.81	Vertical
15600	29.07	38.30	10.62	35.36	42.63	68.20	-25.57	Vertical
10400	25.09	39.01	8.29	35.67	36.72	68.20	-31.48	Horizontal
15600	26.57	38.30	10.62	35.36	40.13	68.20	-28.07	Horizontal
802.11ac(VHT20) 5200MHz					AV			
10400	20.65	39.01	8.29	35.67	32.28	54.00	-21.72	Vertical
15600	18.94	38.30	10.62	35.36	32.50	54.00	-21.50	Vertical
10400	19.83	39.01	8.29	35.67	31.46	54.00	-22.54	Horizontal
15600	20.58	38.30	10.62	35.36	34.14	54.00	-19.86	Horizontal

802.11ac(VHT20) 5240MHz					PK			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
10480	30.20	39.15	8.32	35.78	41.89	68.20	-26.31	Vertical
15720	28.05	38.00	10.72	35.37	41.40	68.20	-26.80	Vertical
10480	29.77	39.15	8.32	35.78	41.46	68.20	-26.74	Horizontal
15720	29.29	38.00	10.72	35.37	42.64	68.20	-25.56	Horizontal
802.11ac(VHT20) 5240MHz					AV			
10480	20.47	39.15	8.32	35.78	32.16	54.00	-21.84	Vertical
15720	22.03	38.00	10.72	35.37	35.38	54.00	-18.62	Vertical
10480	17.32	39.15	8.32	35.78	29.01	54.00	-24.99	Horizontal
15720	19.72	38.00	10.72	35.37	33.07	54.00	-20.93	Horizontal

Notes:

1. Level = Read Level + Antenna Factor+ Cable loss- Preamp Factor.
2. The test trace is same as the ambient noise (the test frequency range: 18GHz~40GHz), therefore no data appear in the report.
3. Test result margin more than 20dB under PK limit, then average measurement needn't be performed.

7.8 Frequency stability

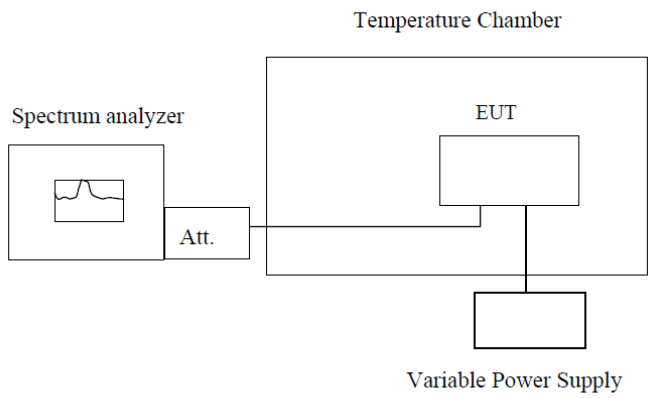Test Requirement:	FCC Part15 C Section 15.407(g)
Test Method:	ANSI C63.10, FCC Part 2.1055
Limit:	Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified
Test Procedure:	The EUT was setup to ANSI C63.4, 2003; tested to 2.1055 for compliance to FCC Part 15.407(g) requirements.
Test setup:	 Note : Measurement setup for testing on Antenna connector
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for WIFI_5G.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---END---