




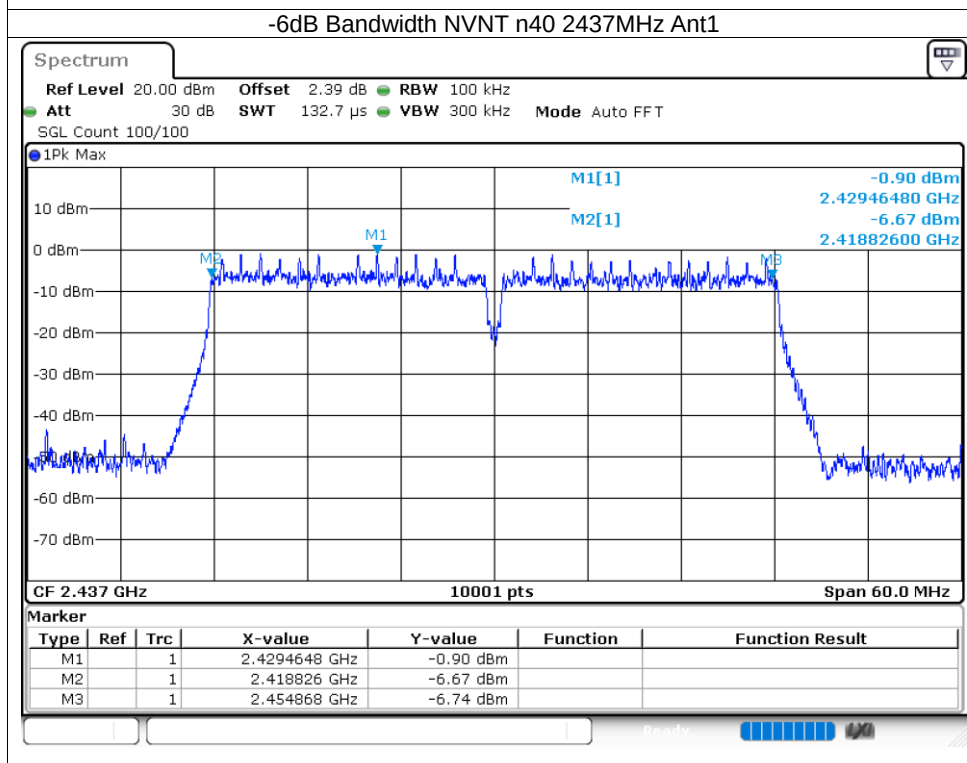
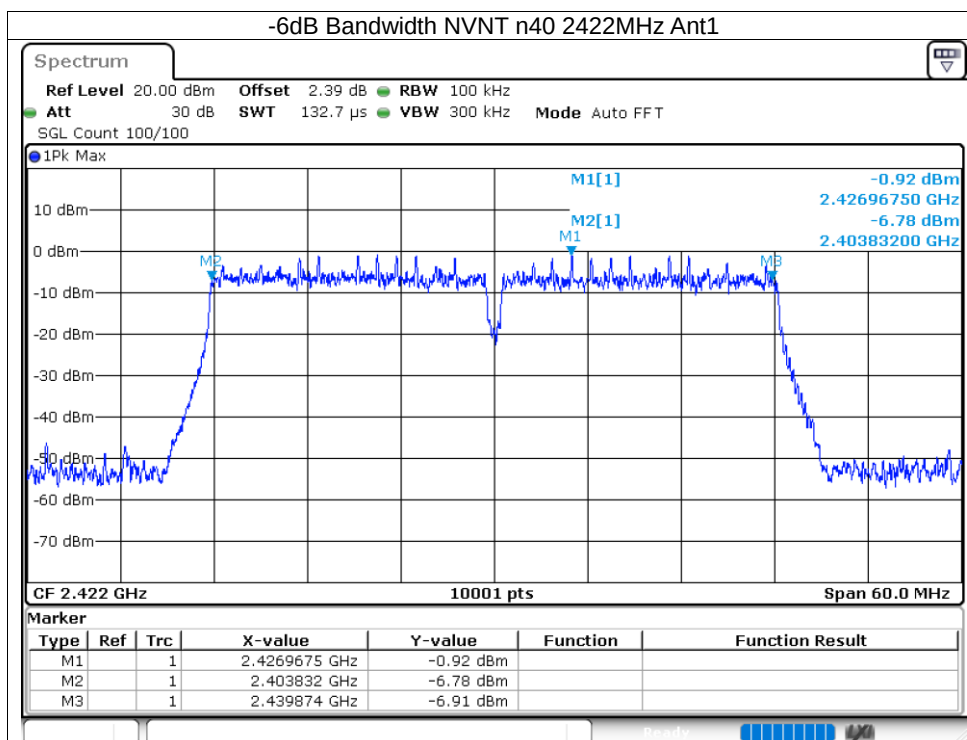
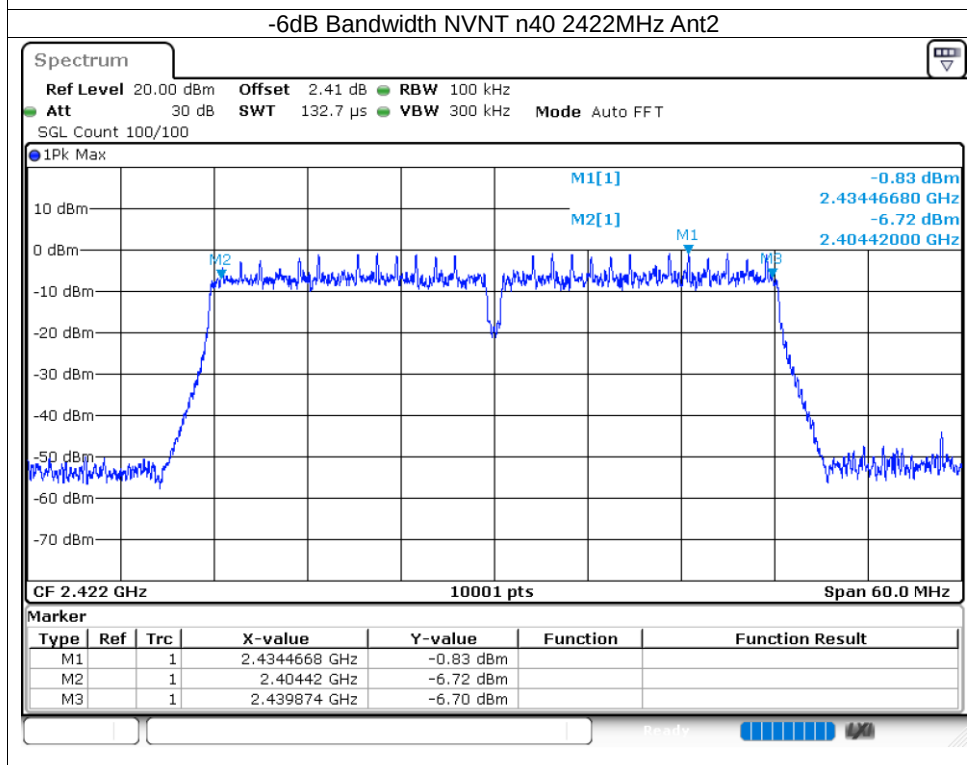
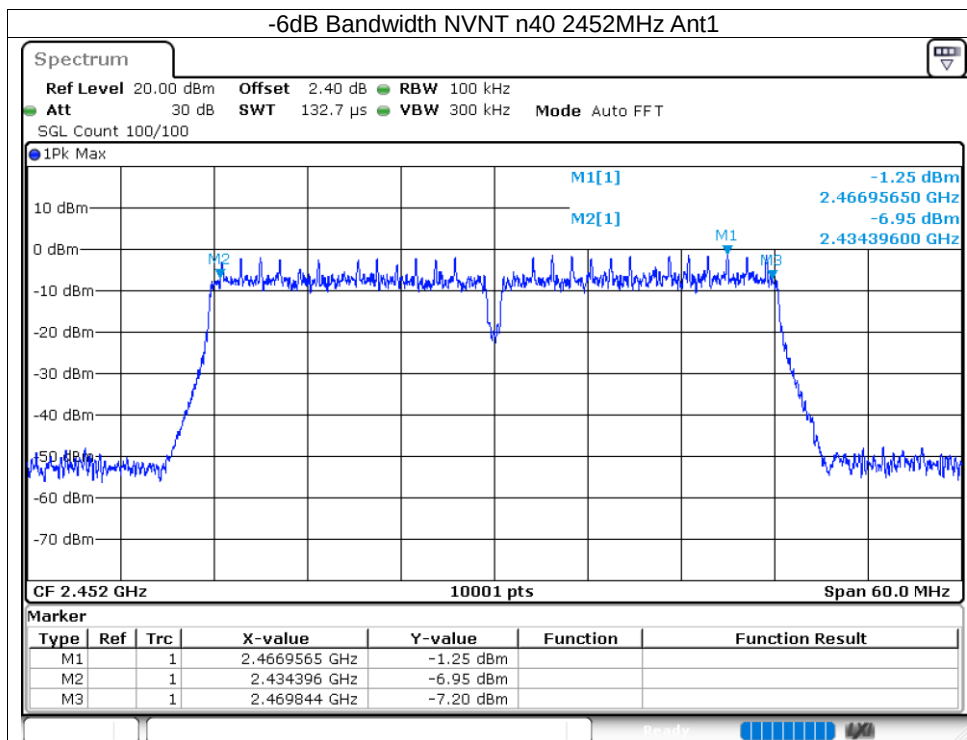
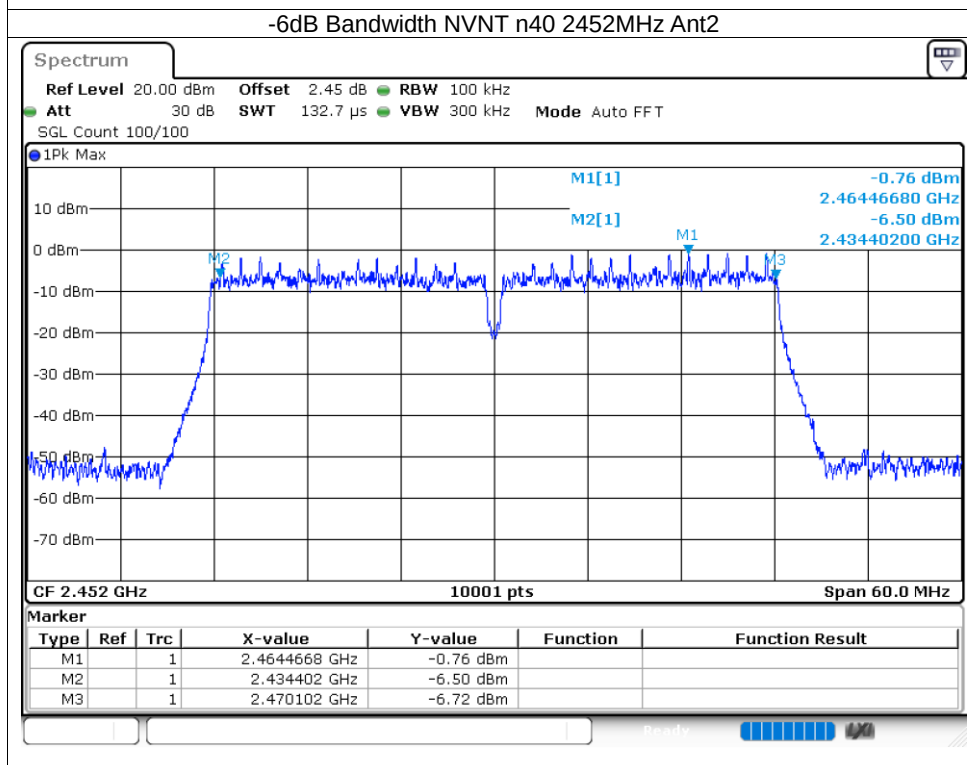



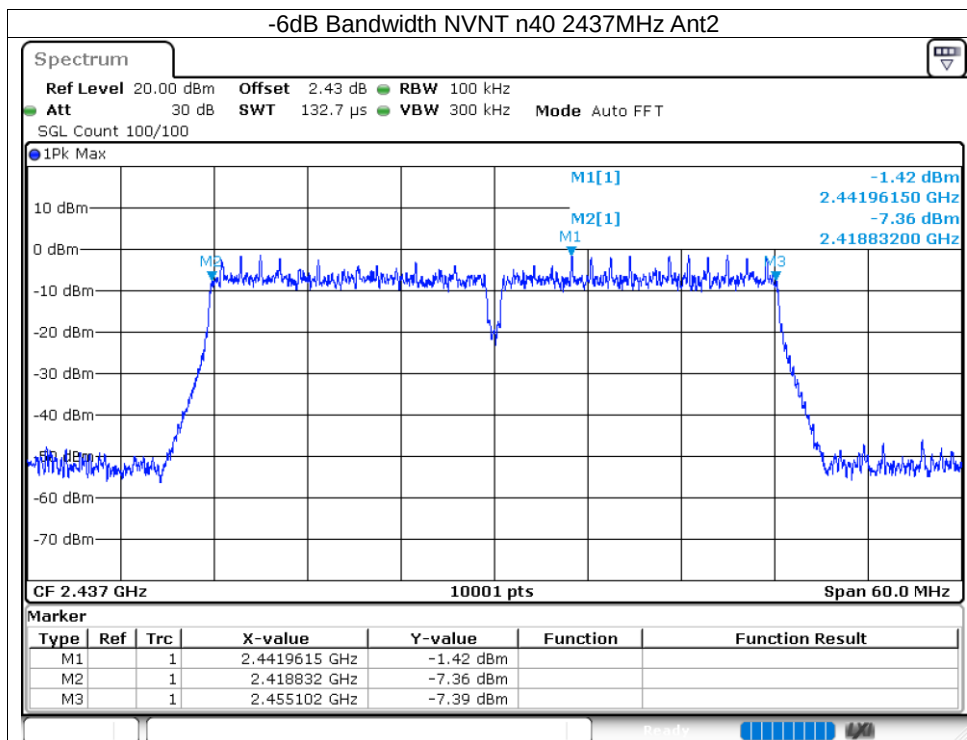



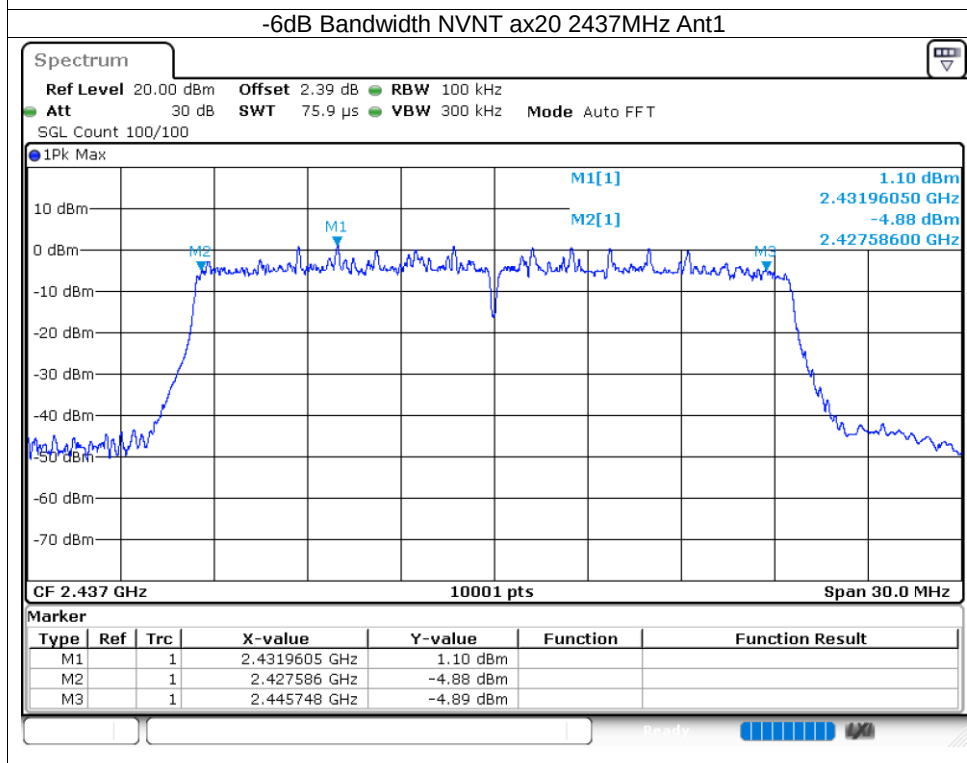



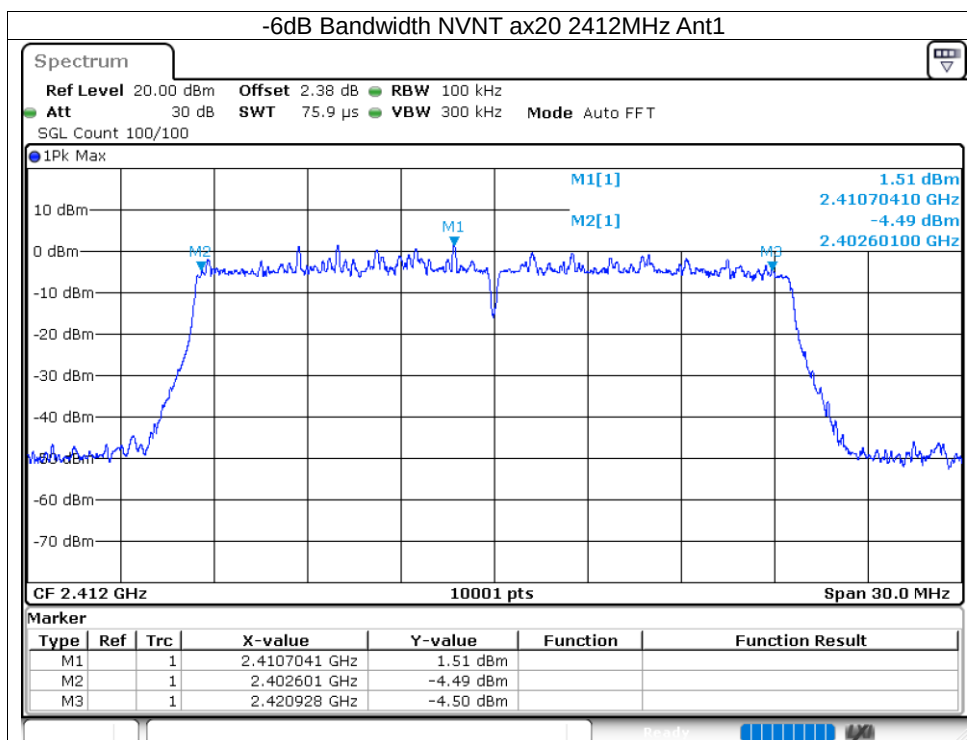



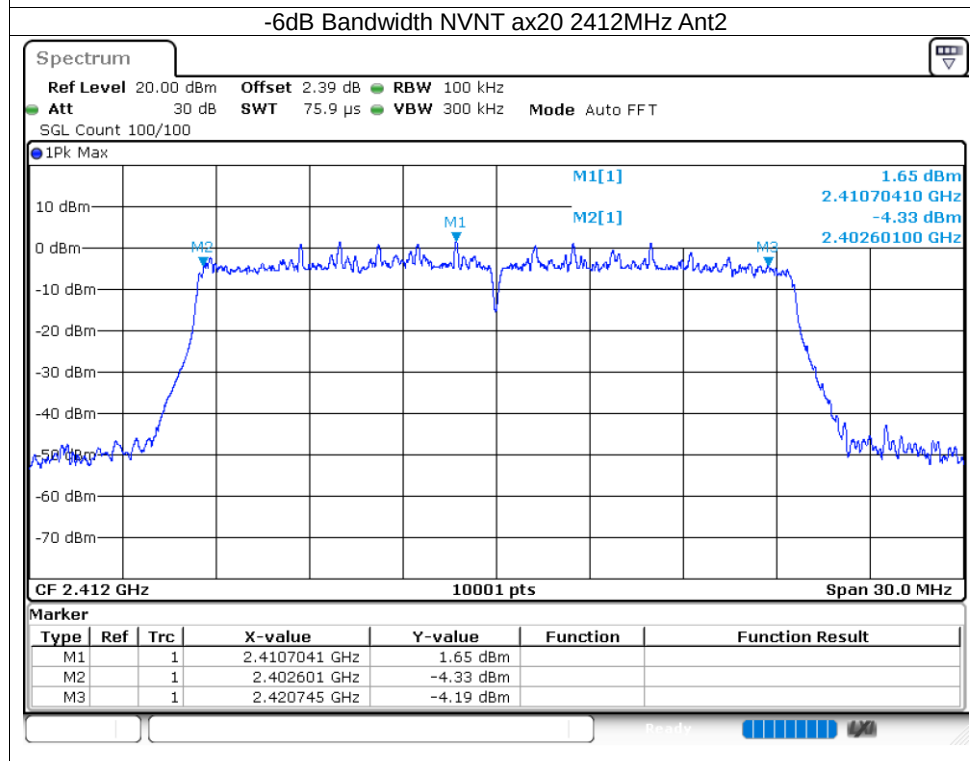


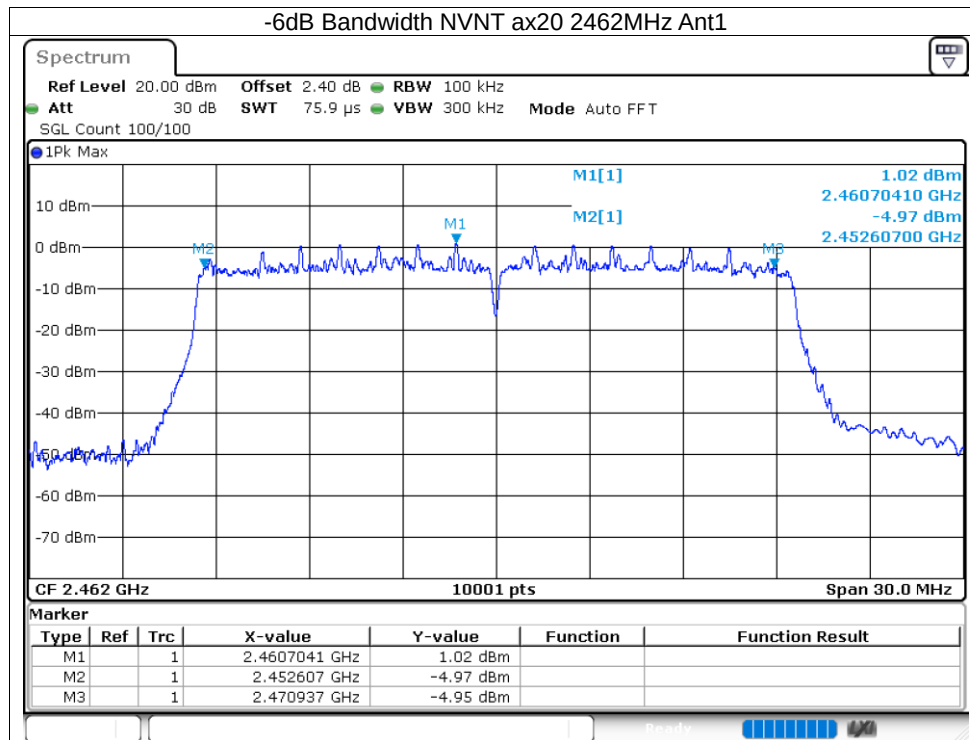

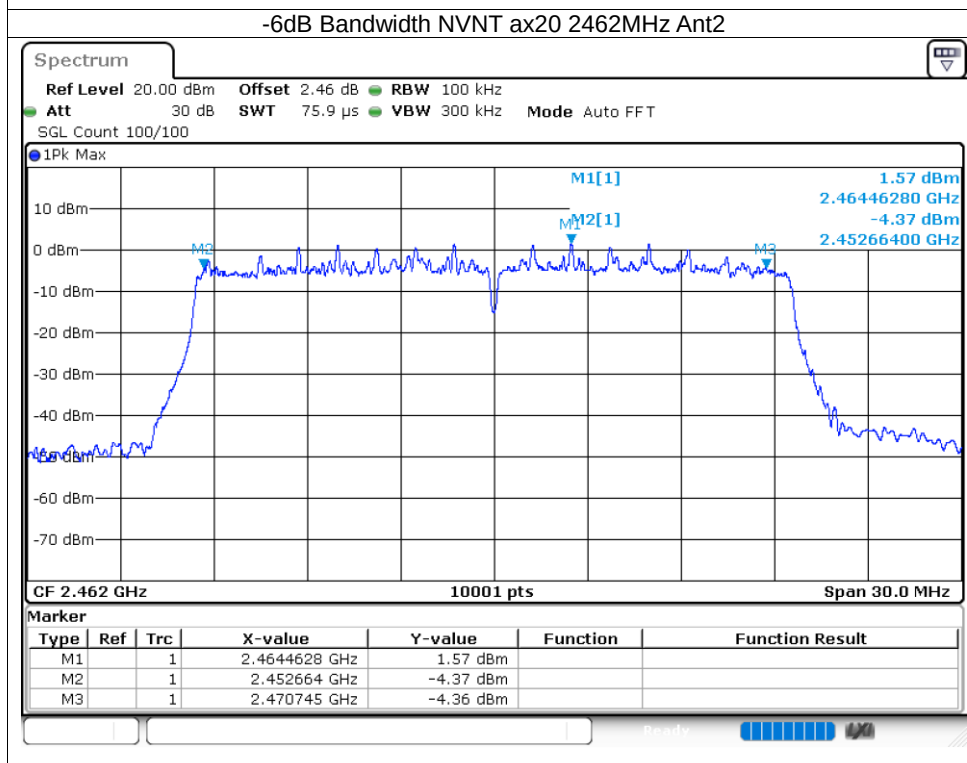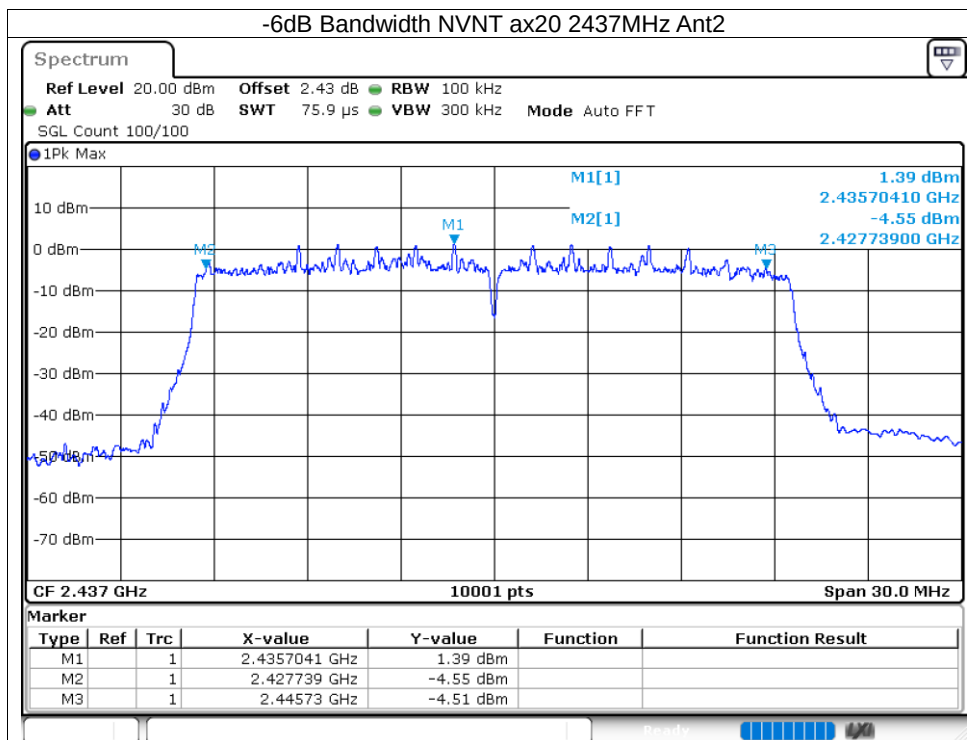

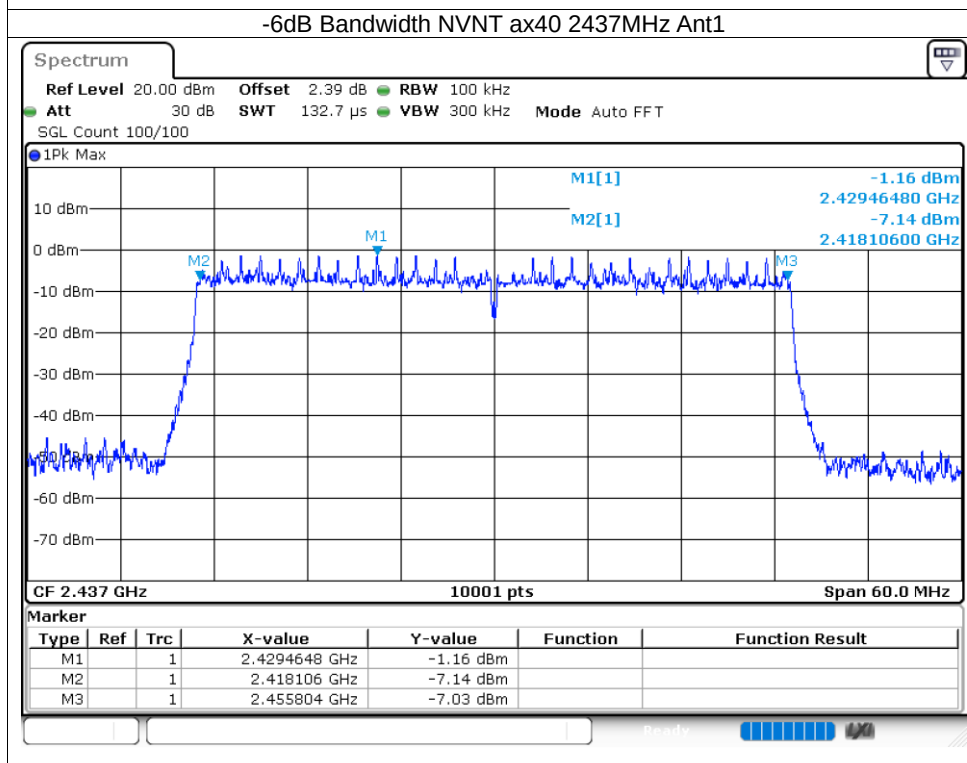
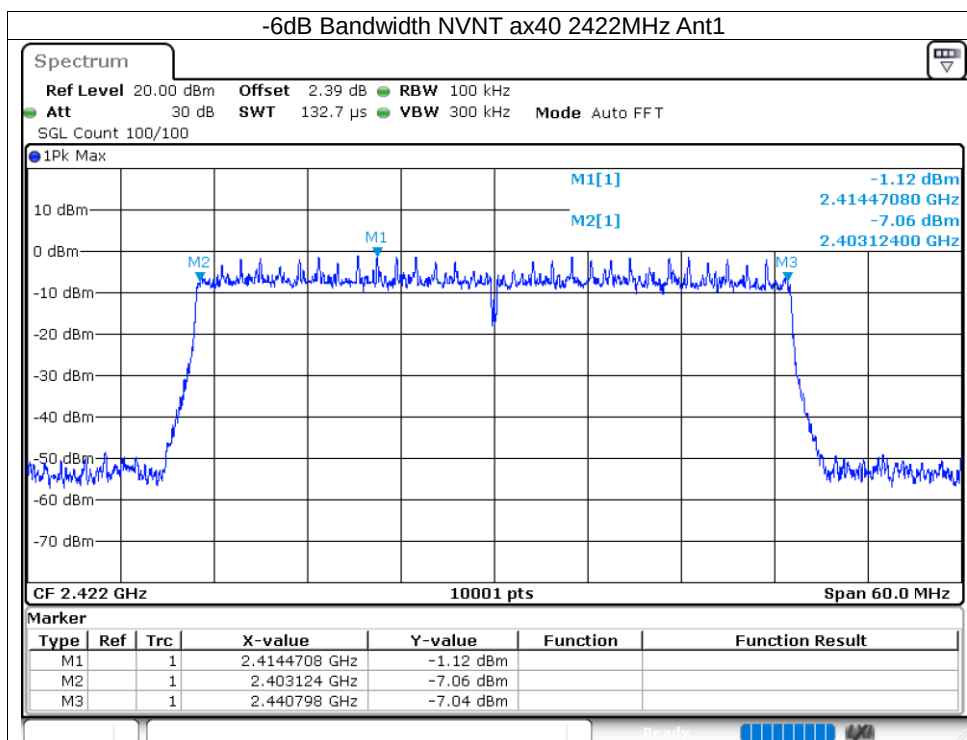


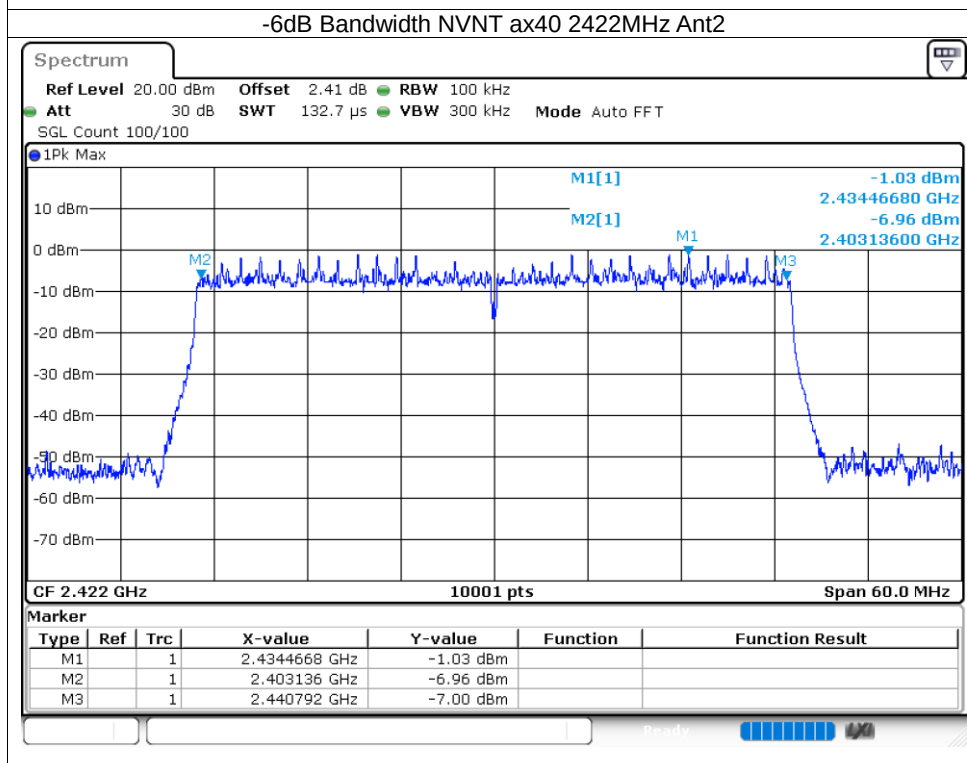
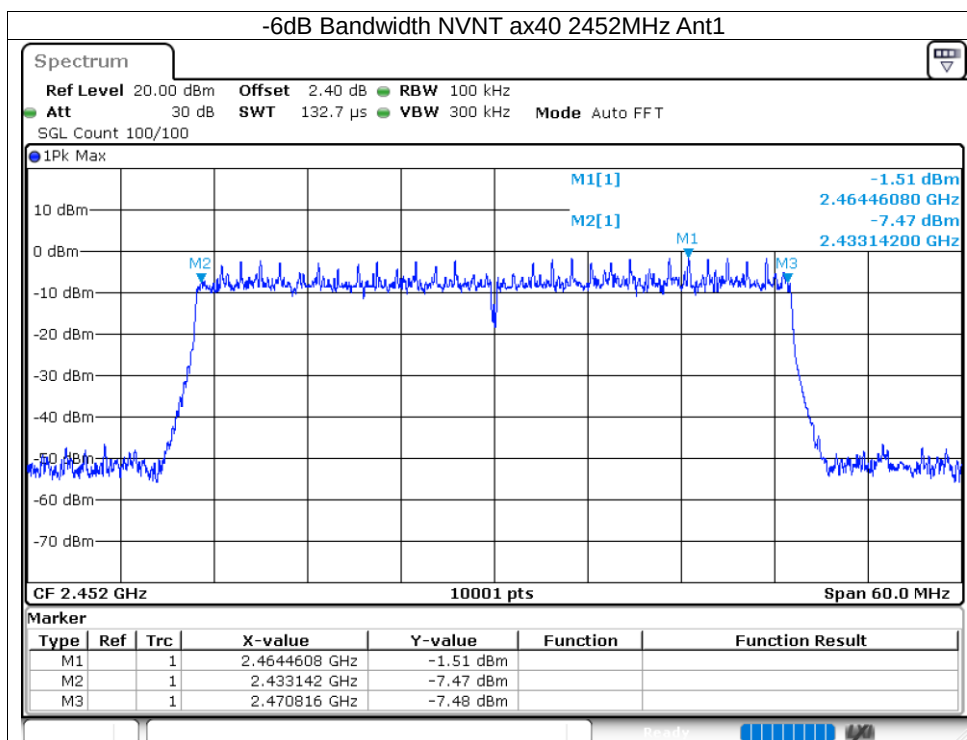


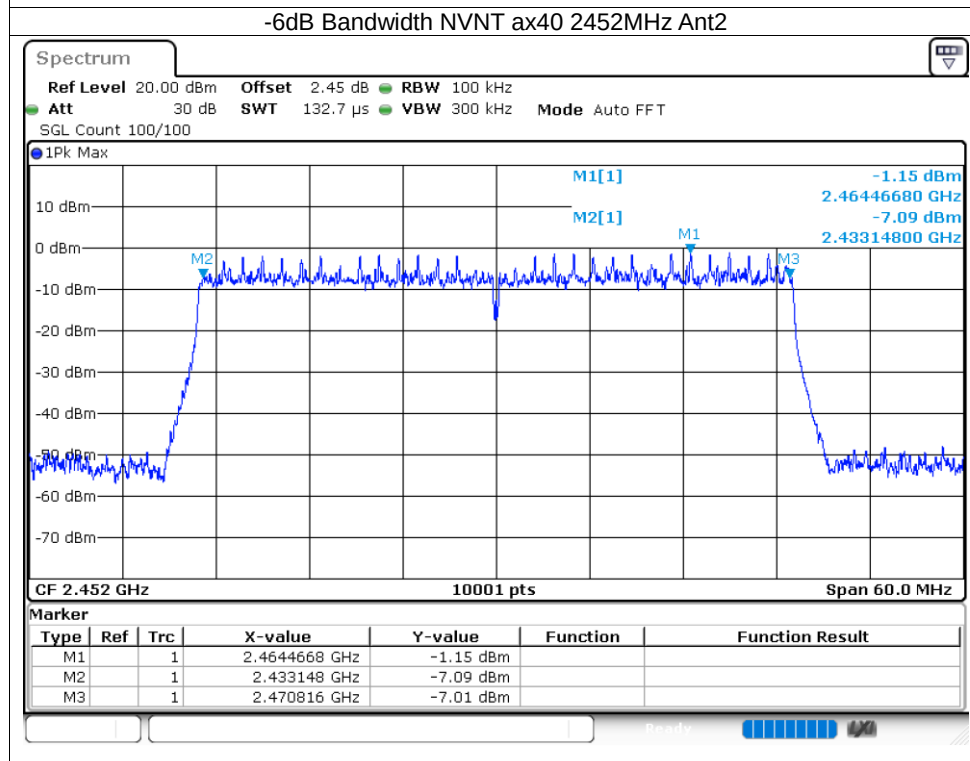
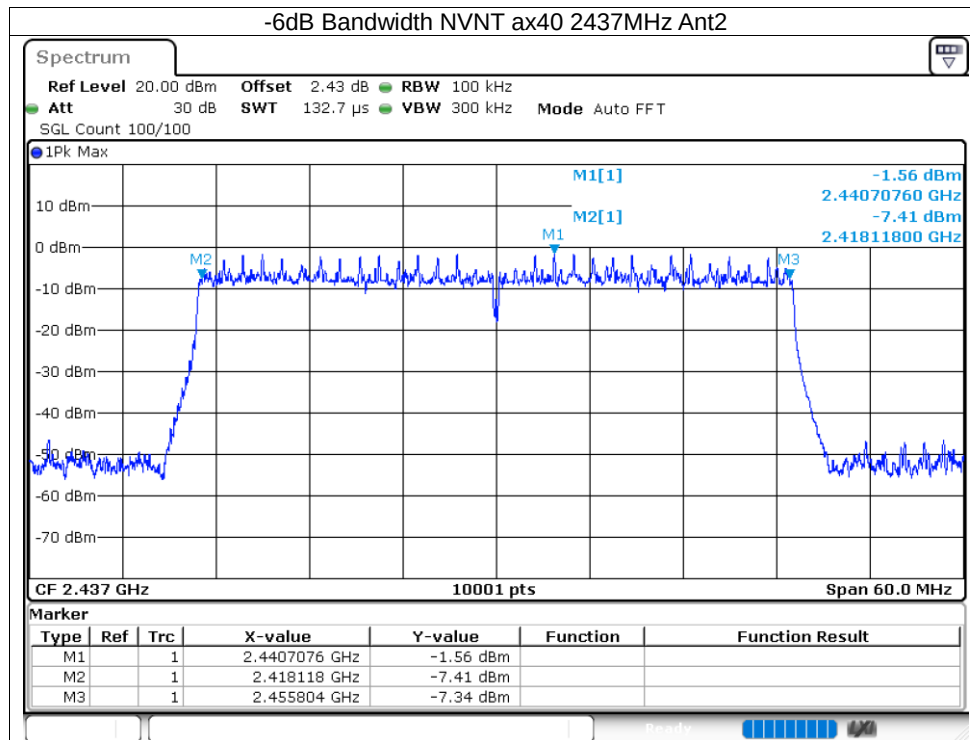




8.1.4 Occupied Channel Bandwidth



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	14.685
NVNT	b	2437	Ant1	14.775
NVNT	b	2462	Ant1	14.655
NVNT	b	2412	Ant2	14.654
NVNT	b	2437	Ant2	14.708
NVNT	b	2462	Ant2	14.741
NVNT	g	2412	Ant1	16.327
NVNT	g	2437	Ant1	16.327
NVNT	g	2462	Ant1	16.348
NVNT	g	2412	Ant2	16.348
NVNT	g	2437	Ant2	16.378
NVNT	g	2462	Ant2	16.366
NVNT	n20	2412	Ant1	17.497
NVNT	n20	2437	Ant1	17.488
NVNT	n20	2462	Ant1	17.503
NVNT	n20	2412	Ant2	17.539
NVNT	n20	2437	Ant2	17.557
NVNT	n20	2462	Ant2	17.569
NVNT	n40	2422	Ant1	36.158
NVNT	n40	2437	Ant1	36.23
NVNT	n40	2452	Ant1	36.224
NVNT	n40	2422	Ant2	36.2
NVNT	n40	2437	Ant2	36.218
NVNT	n40	2452	Ant2	36.236
NVNT	ax20	2412	Ant1	18.943
NVNT	ax20	2437	Ant1	18.88
NVNT	ax20	2462	Ant1	18.928
NVNT	ax20	2412	Ant2	18.892
NVNT	ax20	2437	Ant2	18.895
NVNT	ax20	2462	Ant2	18.934
NVNT	ax40	2422	Ant1	37.712
NVNT	ax40	2437	Ant1	37.778
NVNT	ax40	2452	Ant1	37.748
NVNT	ax40	2422	Ant2	37.724
NVNT	ax40	2437	Ant2	37.772
NVNT	ax40	2452	Ant2	37.766

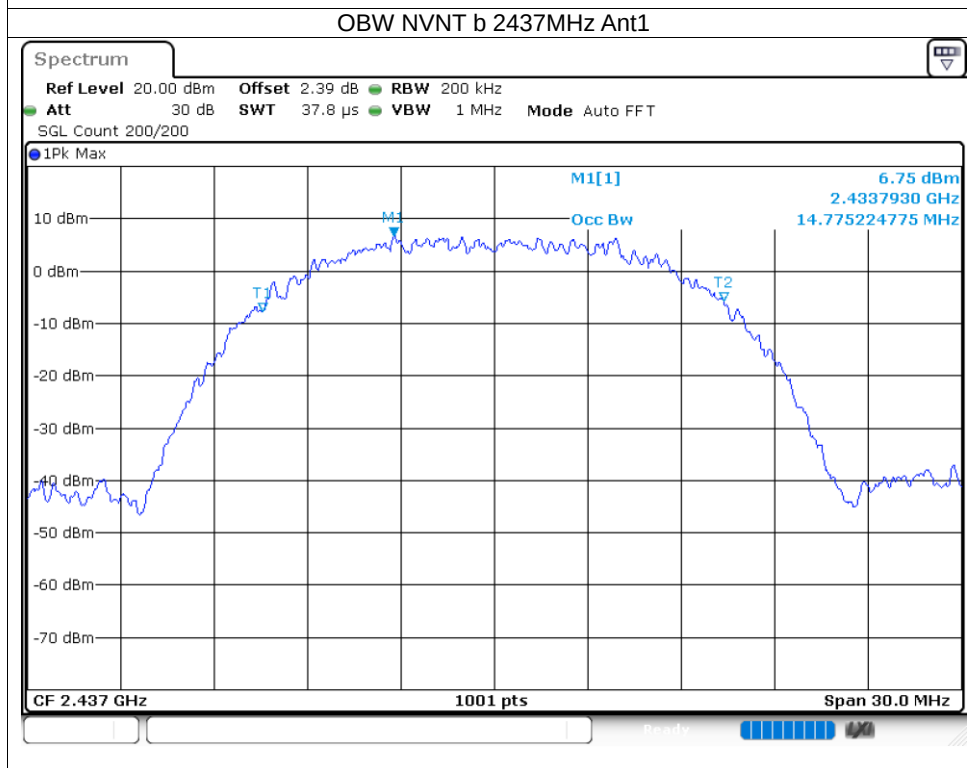
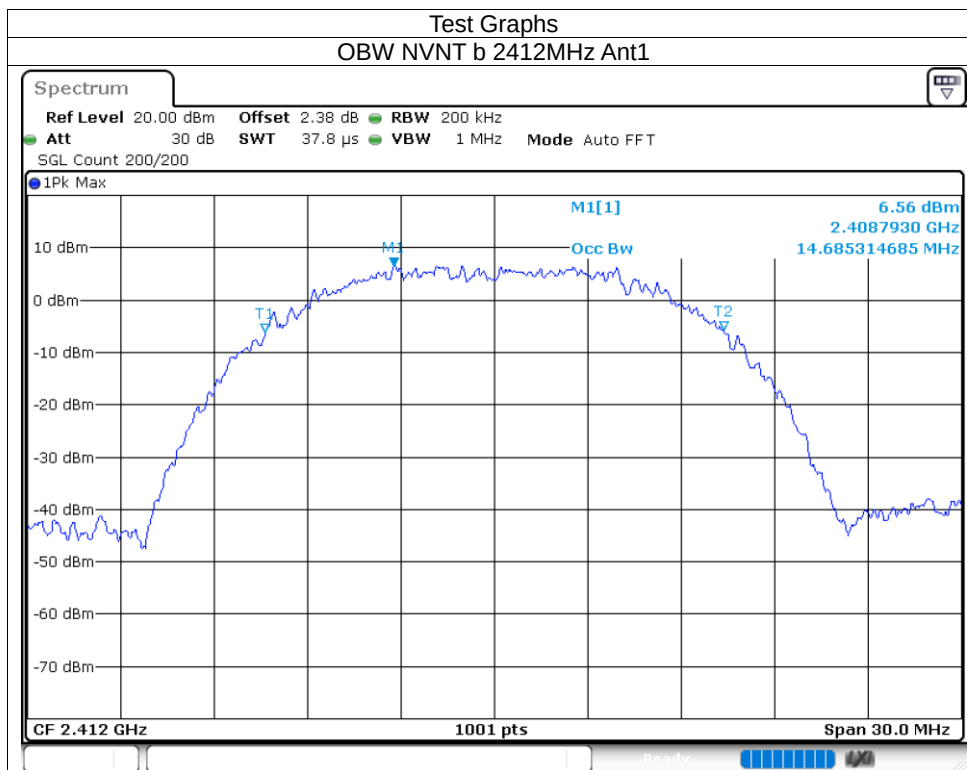


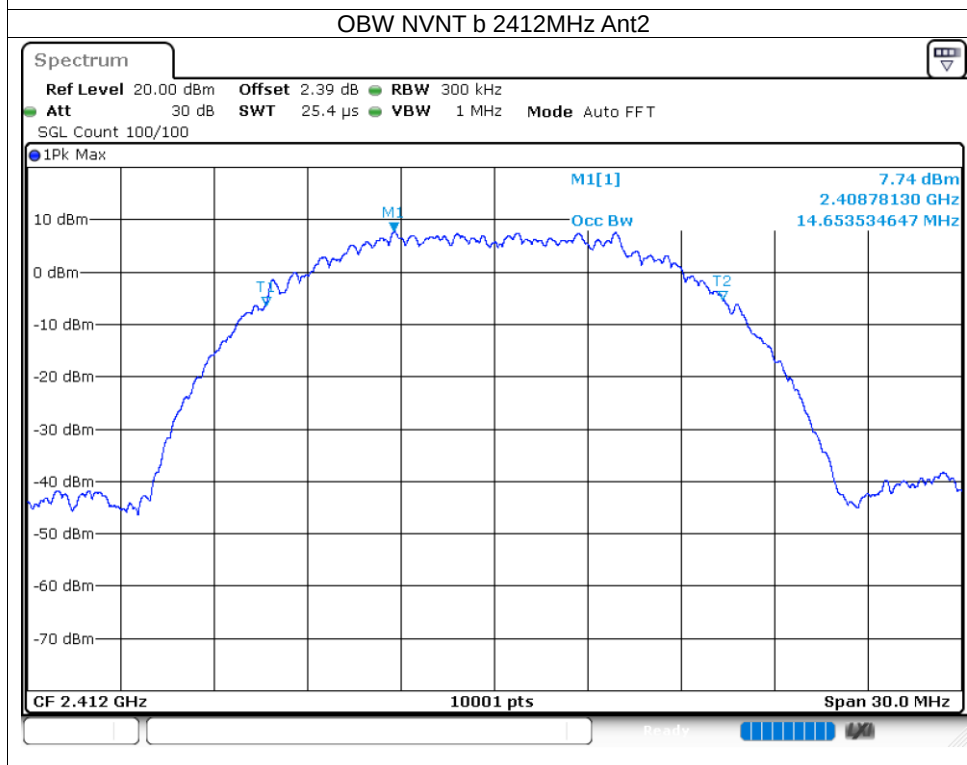
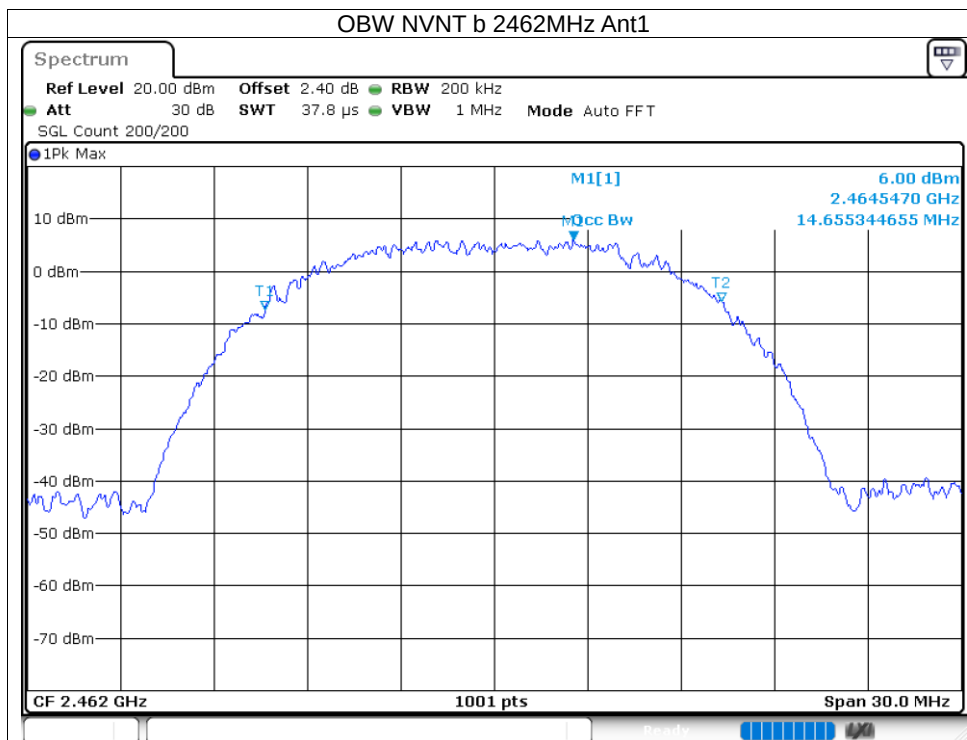


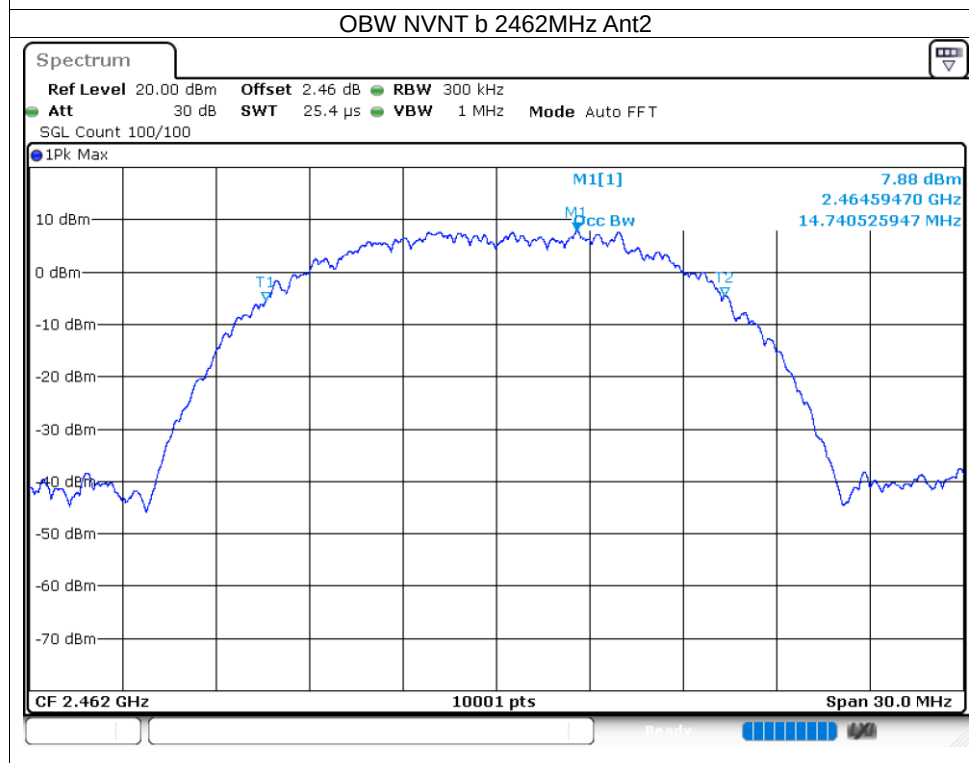
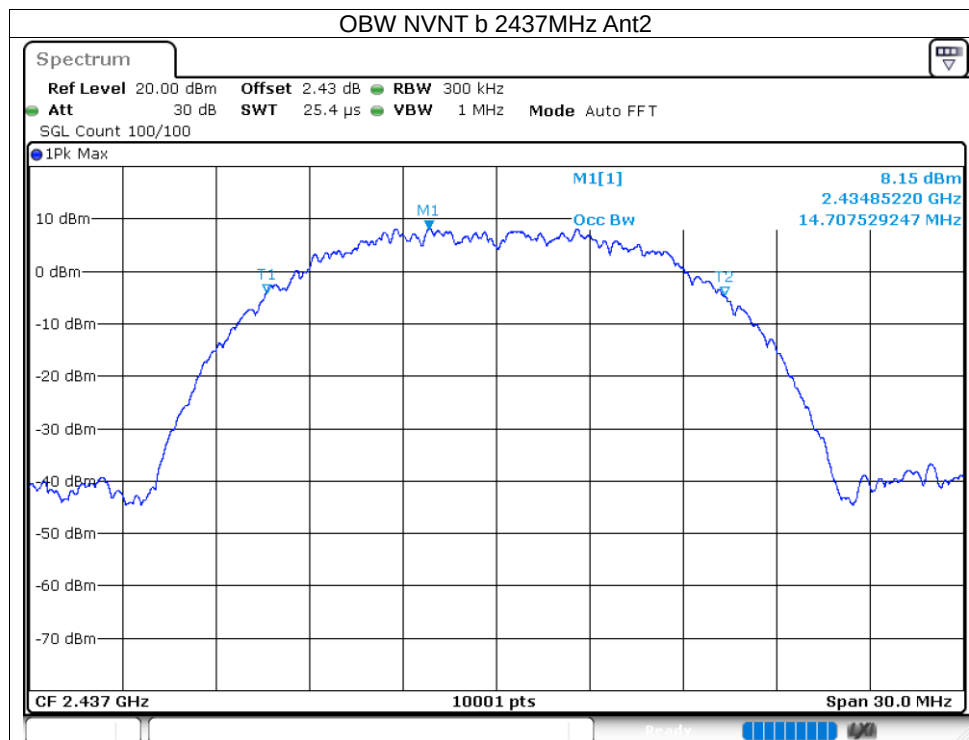


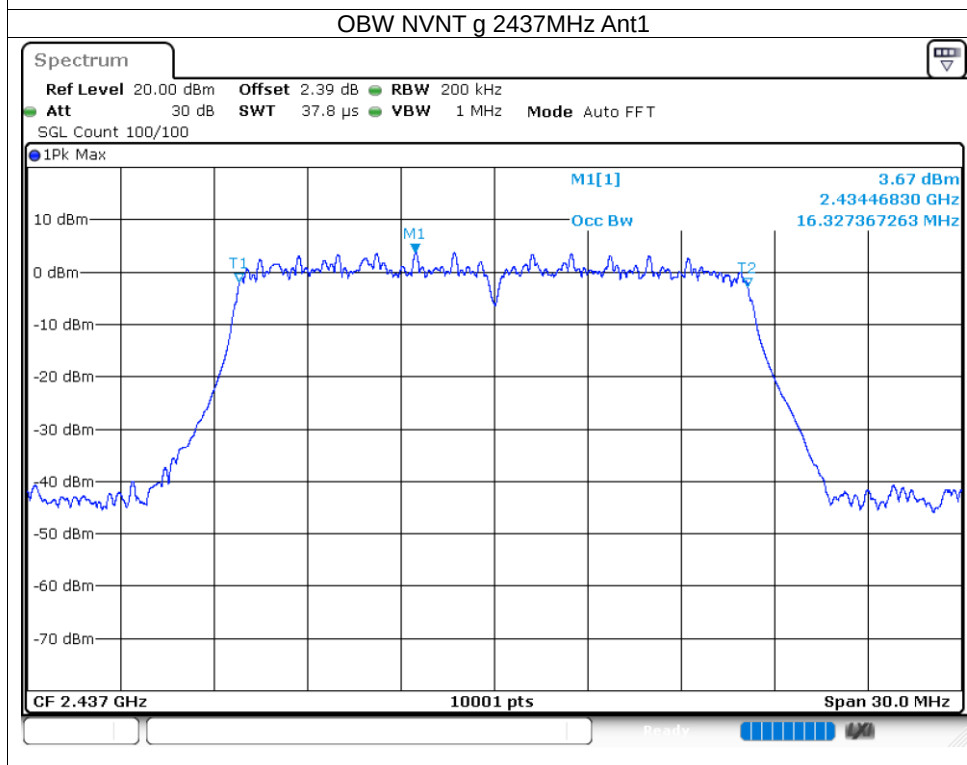
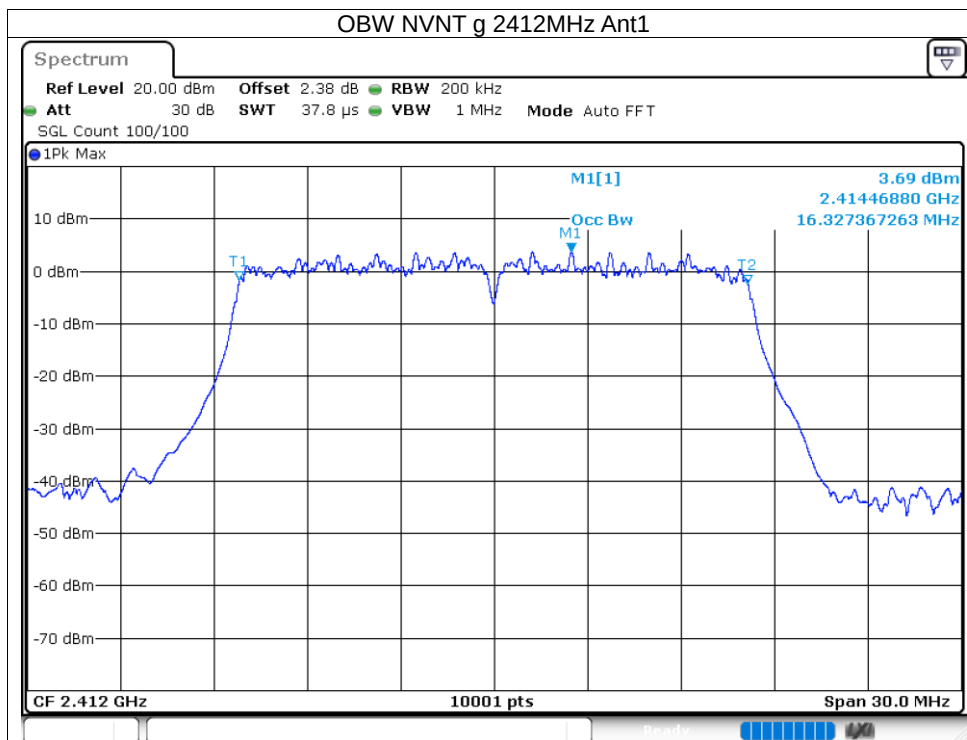


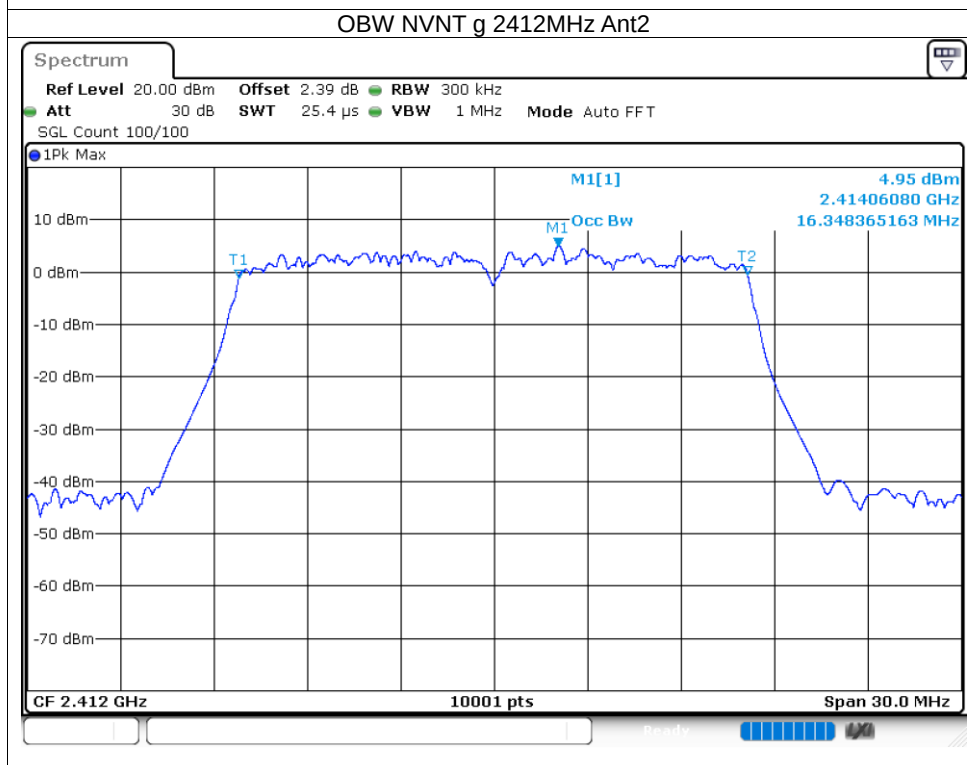
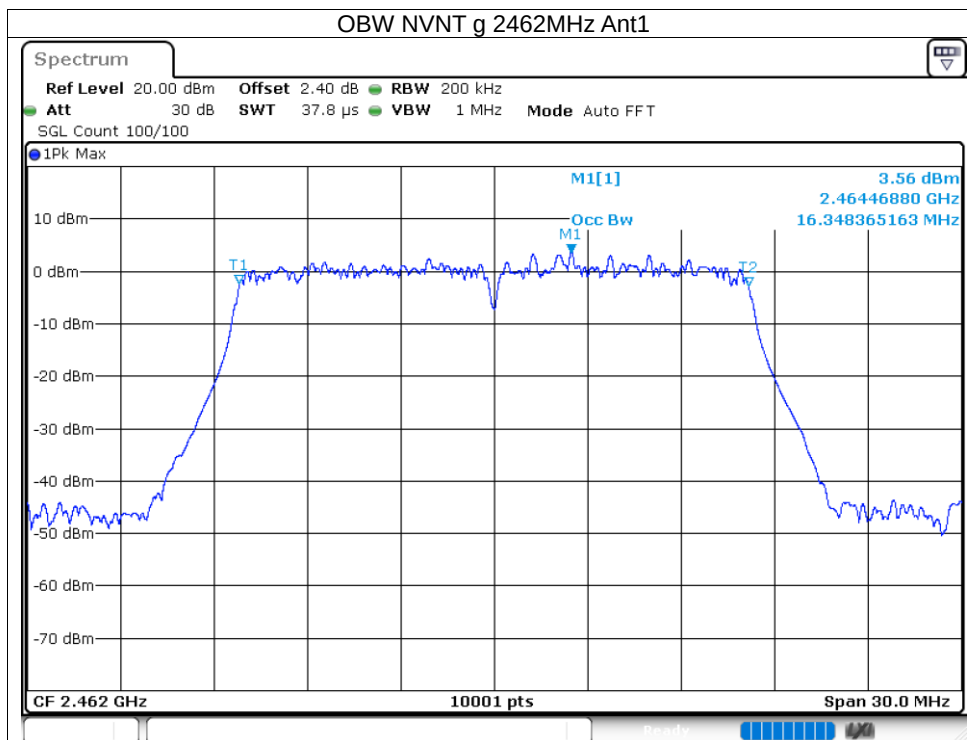


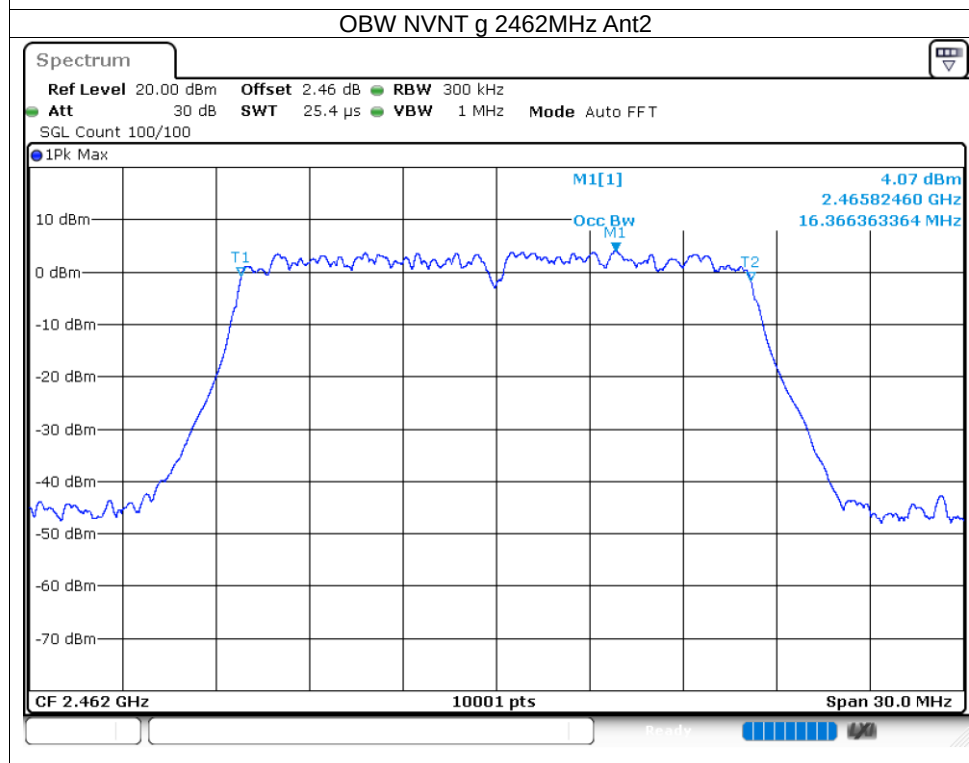
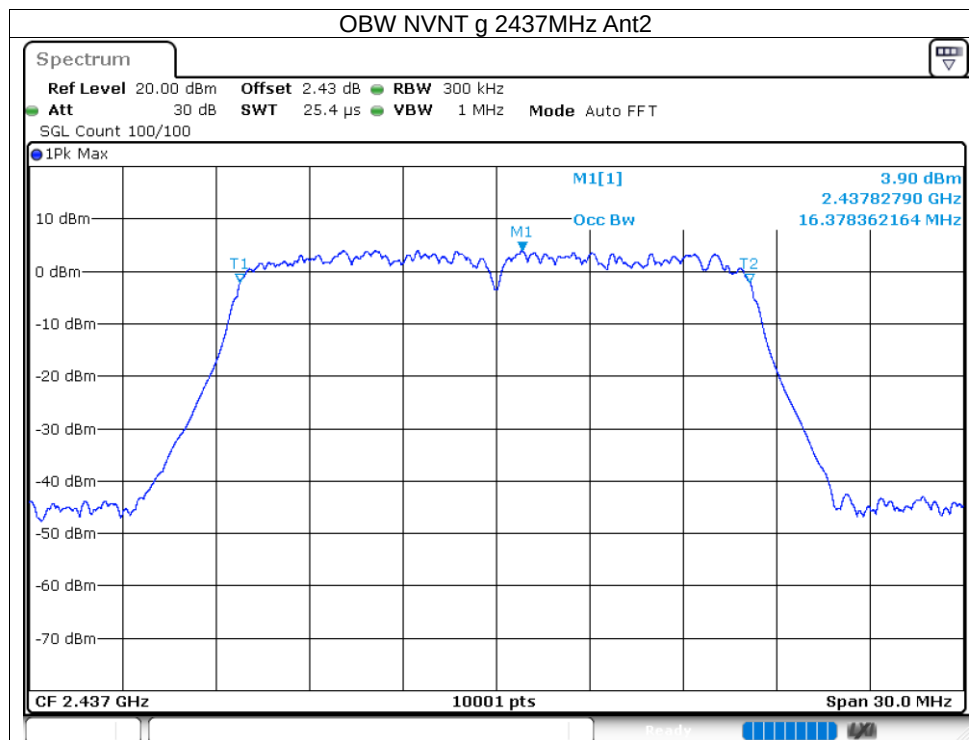


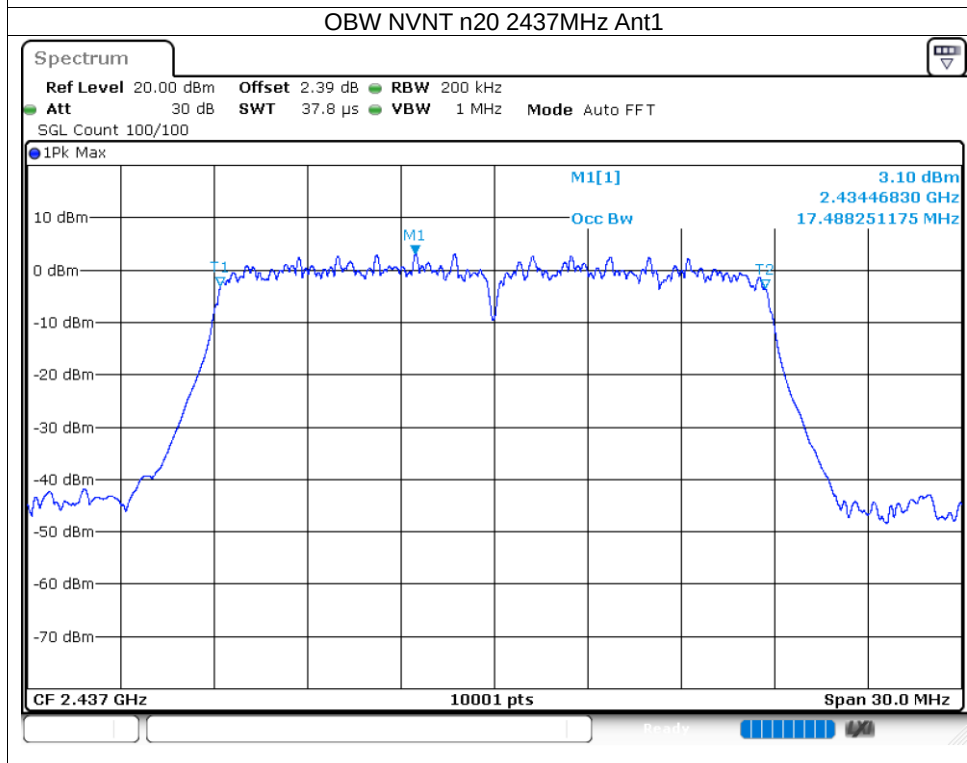
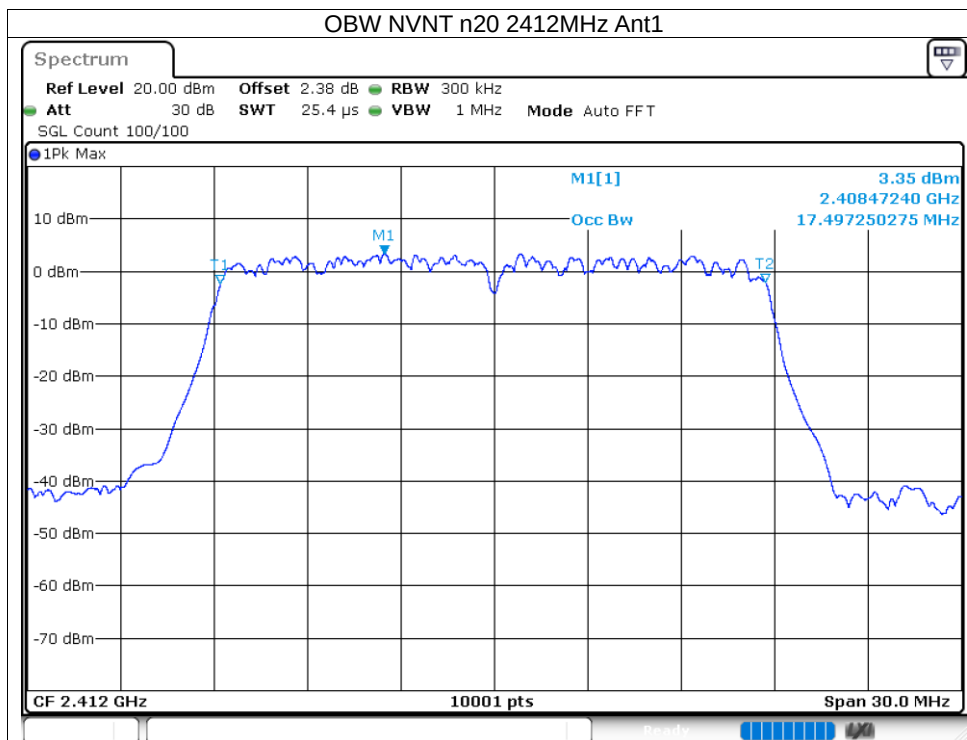


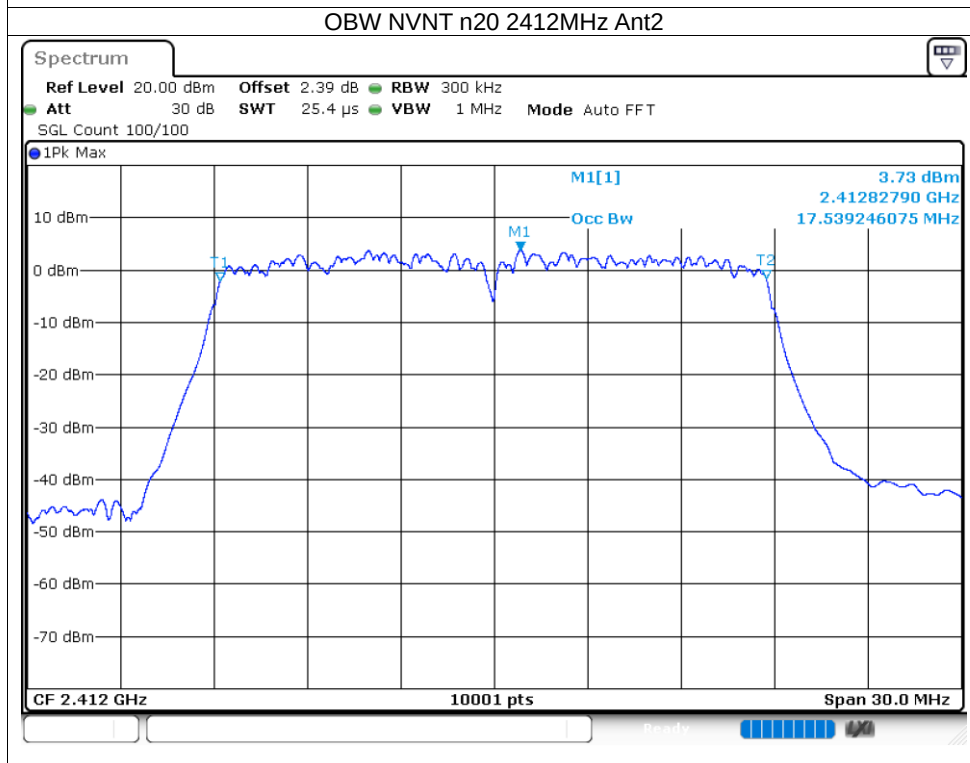
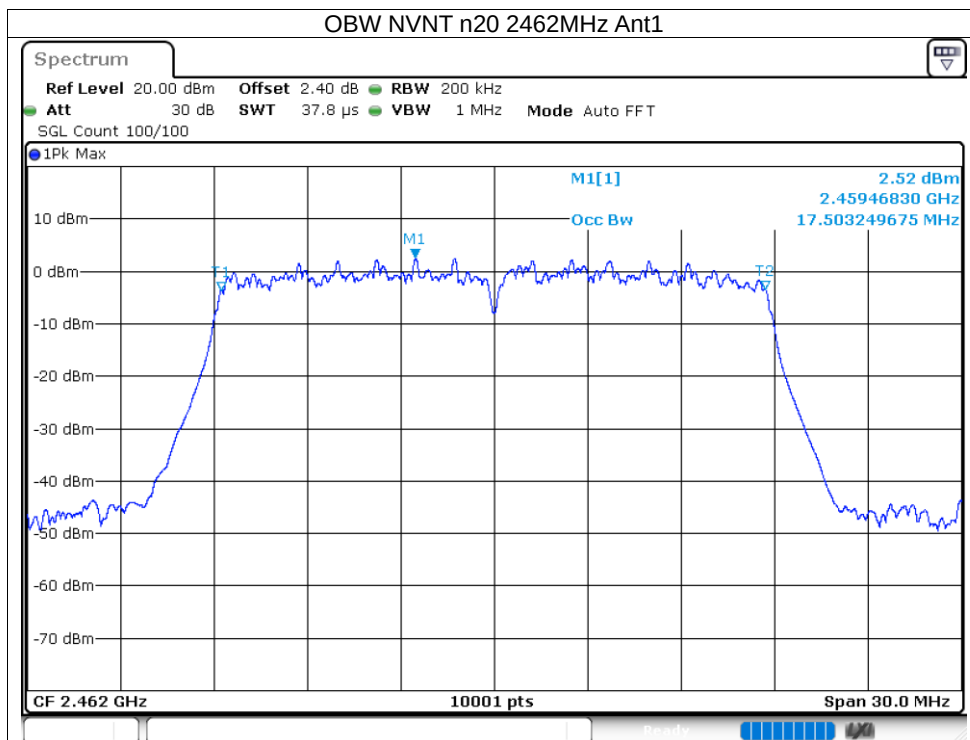


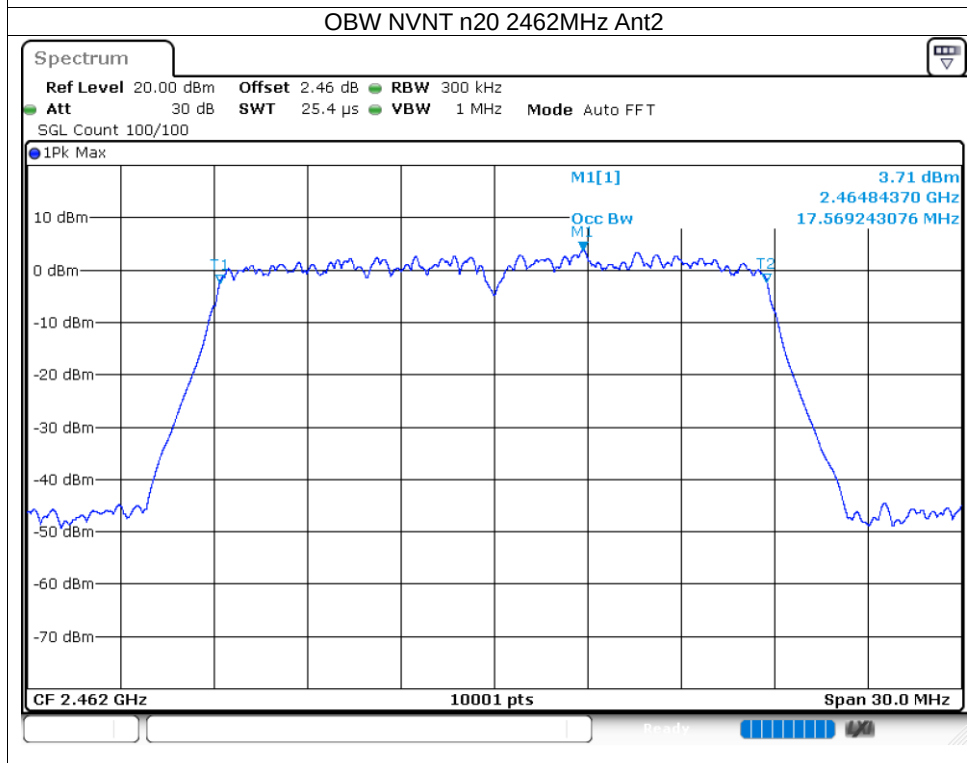
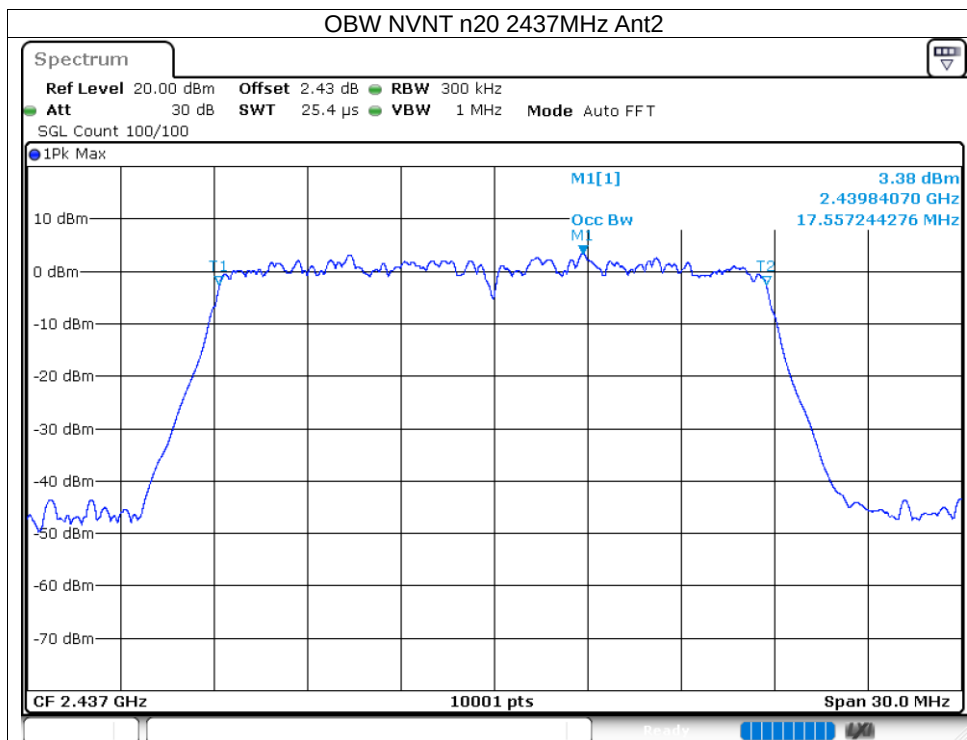


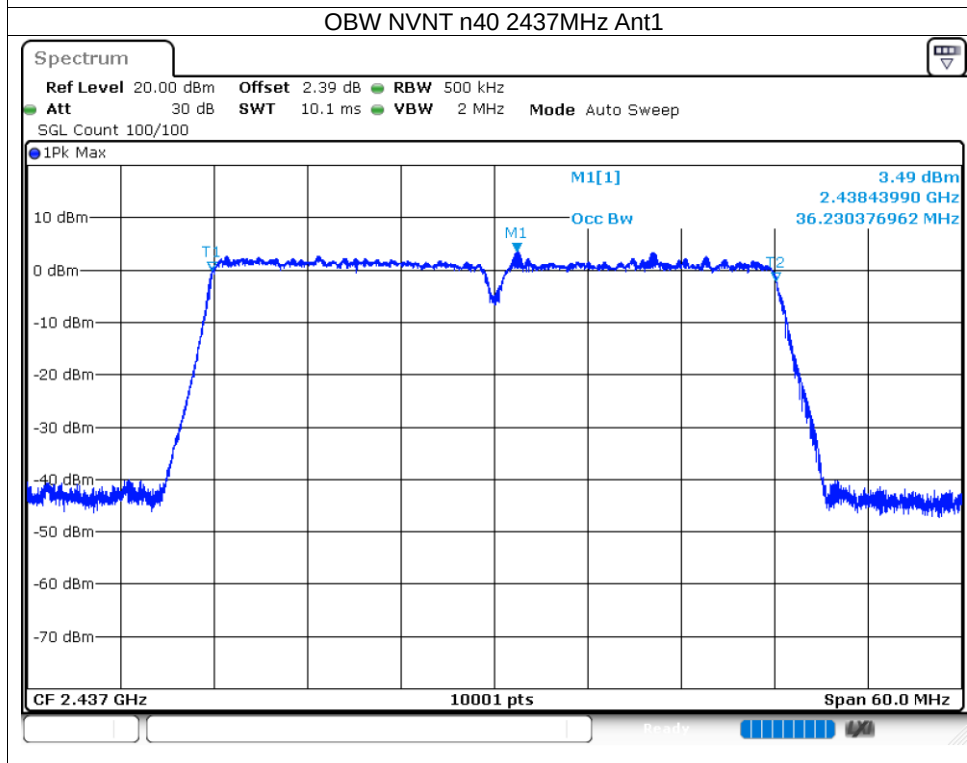
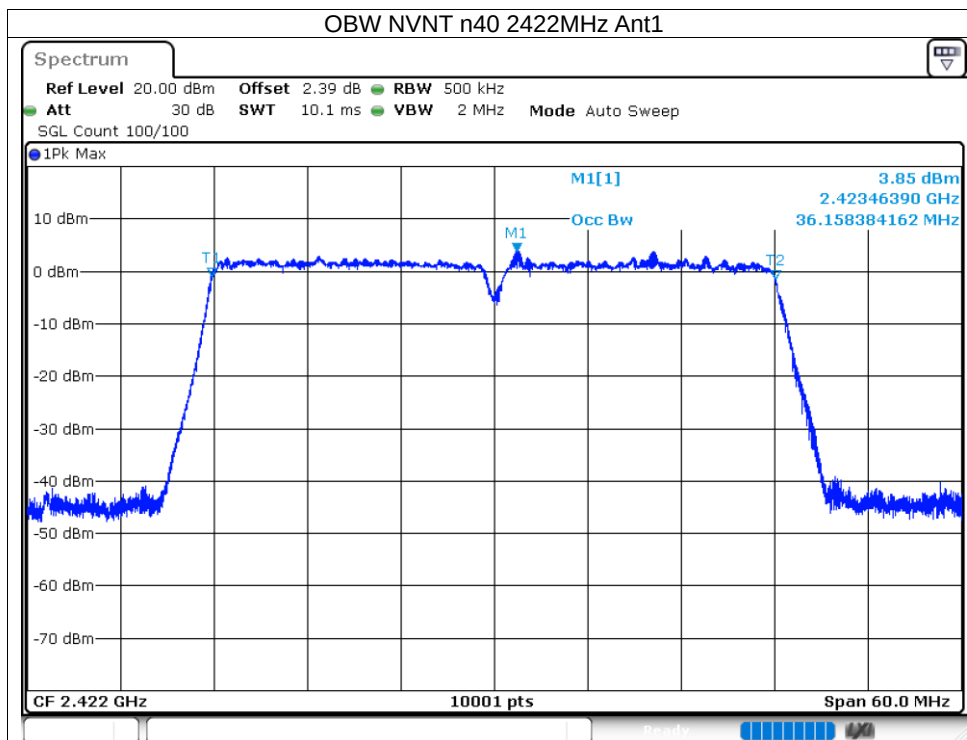


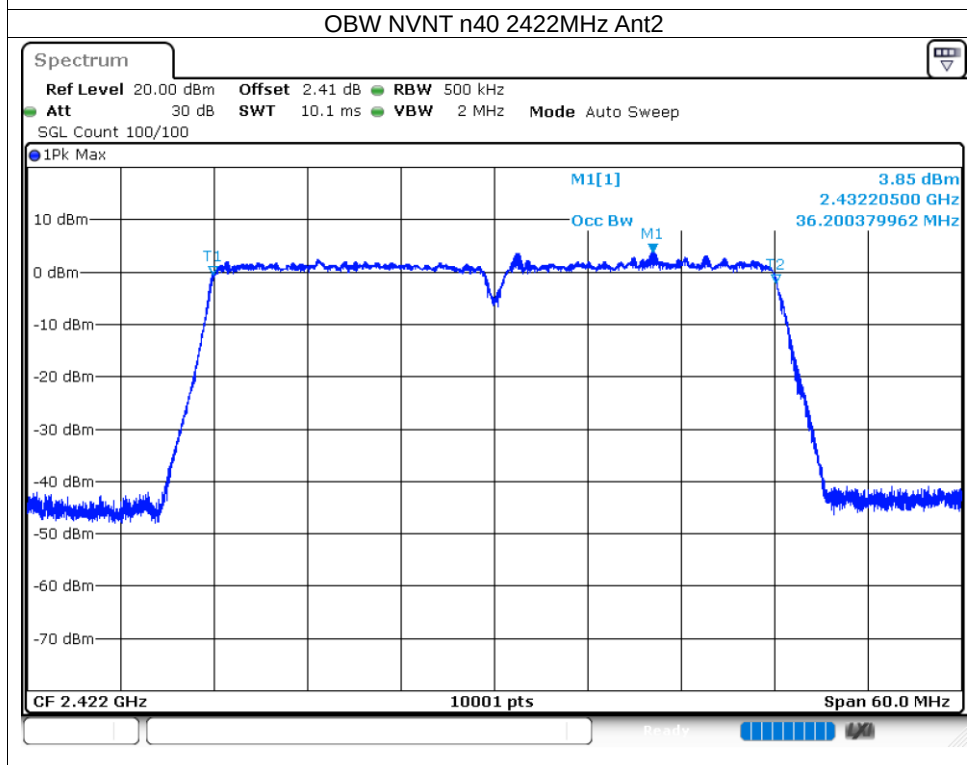
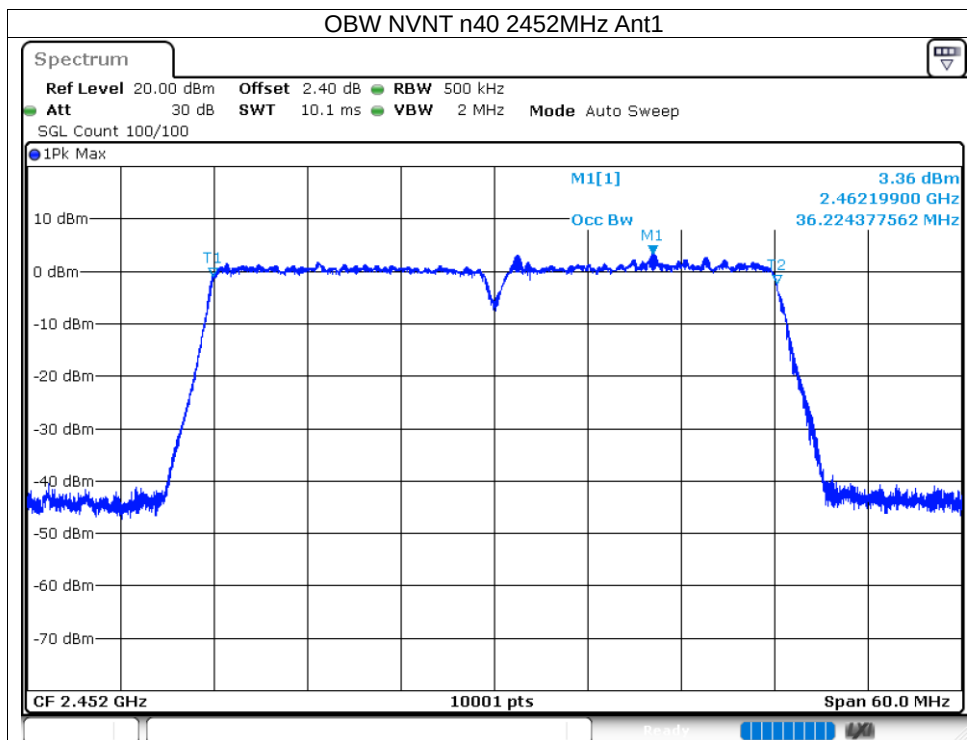


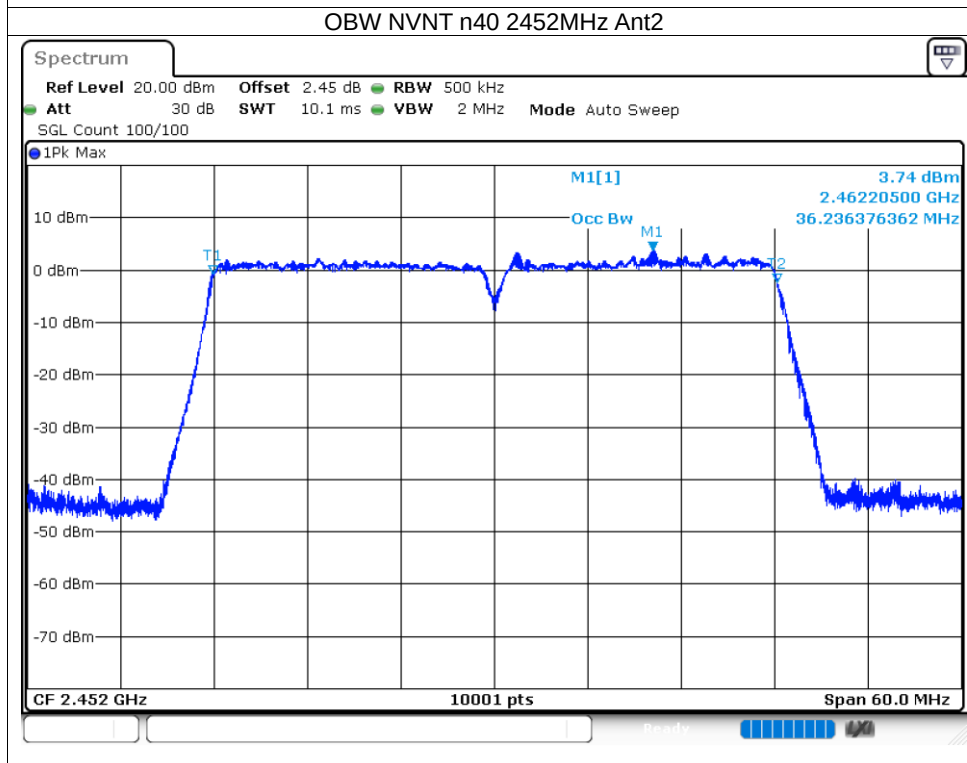
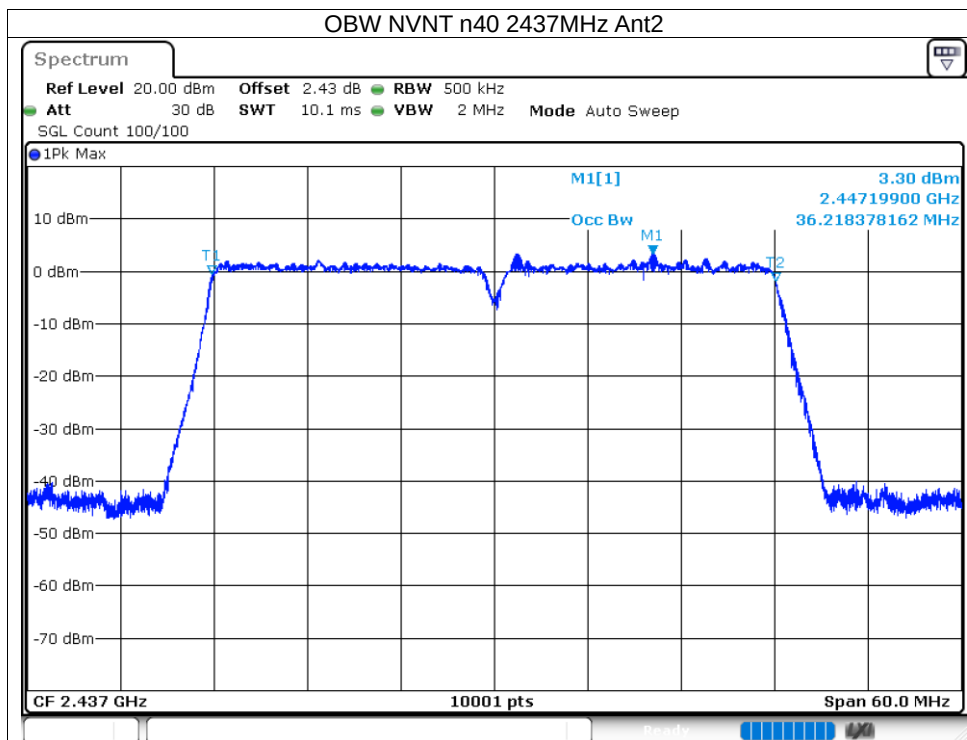


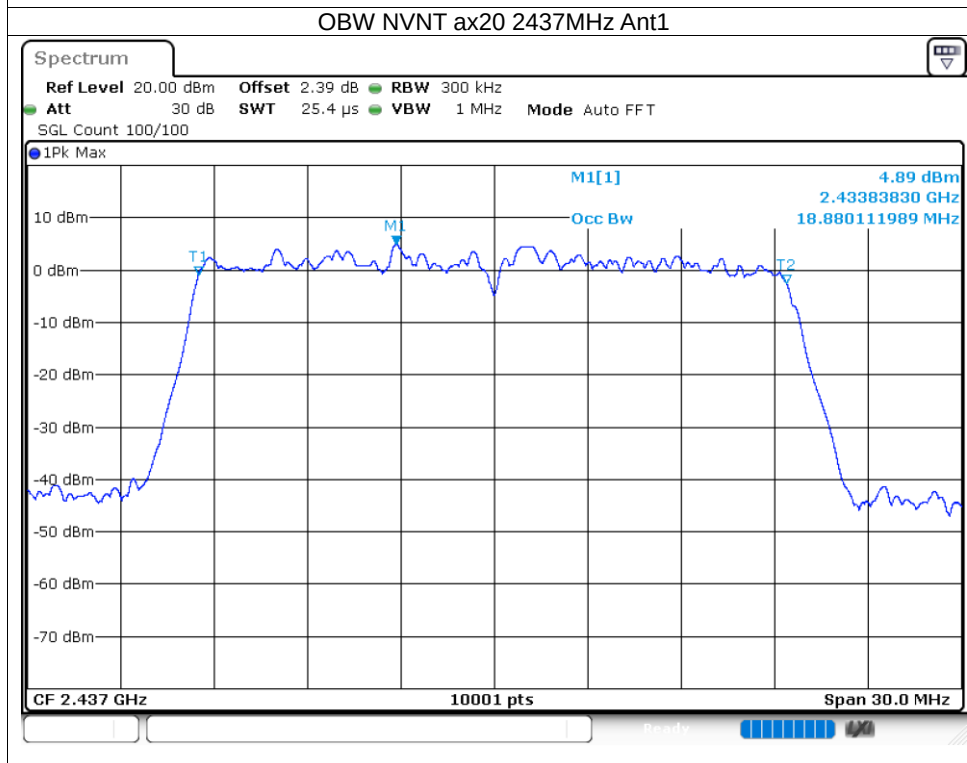
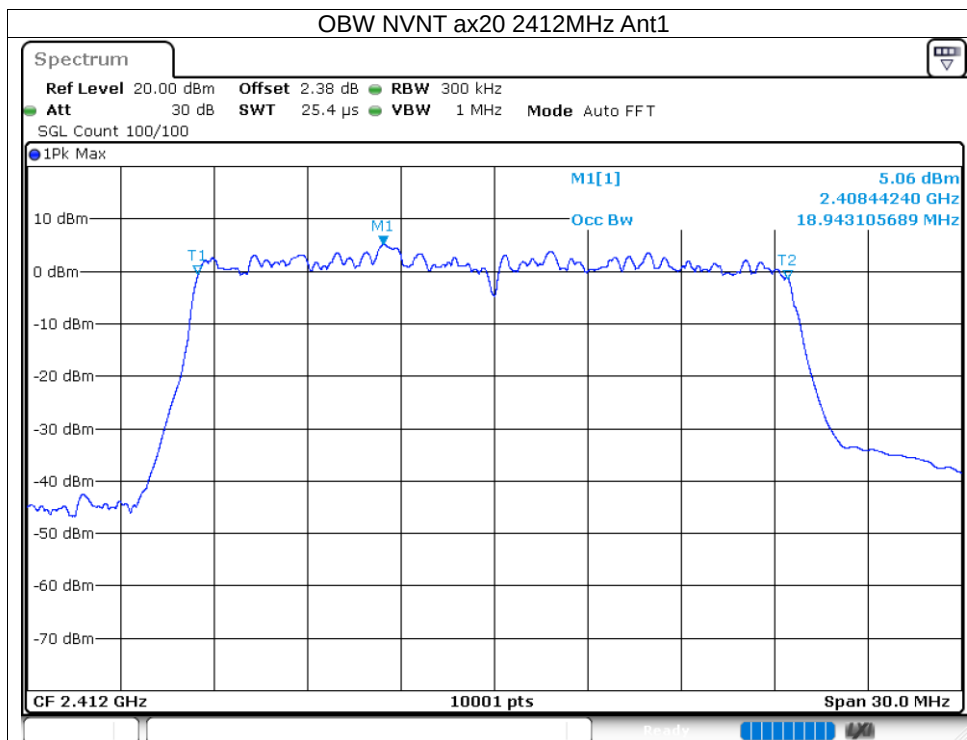


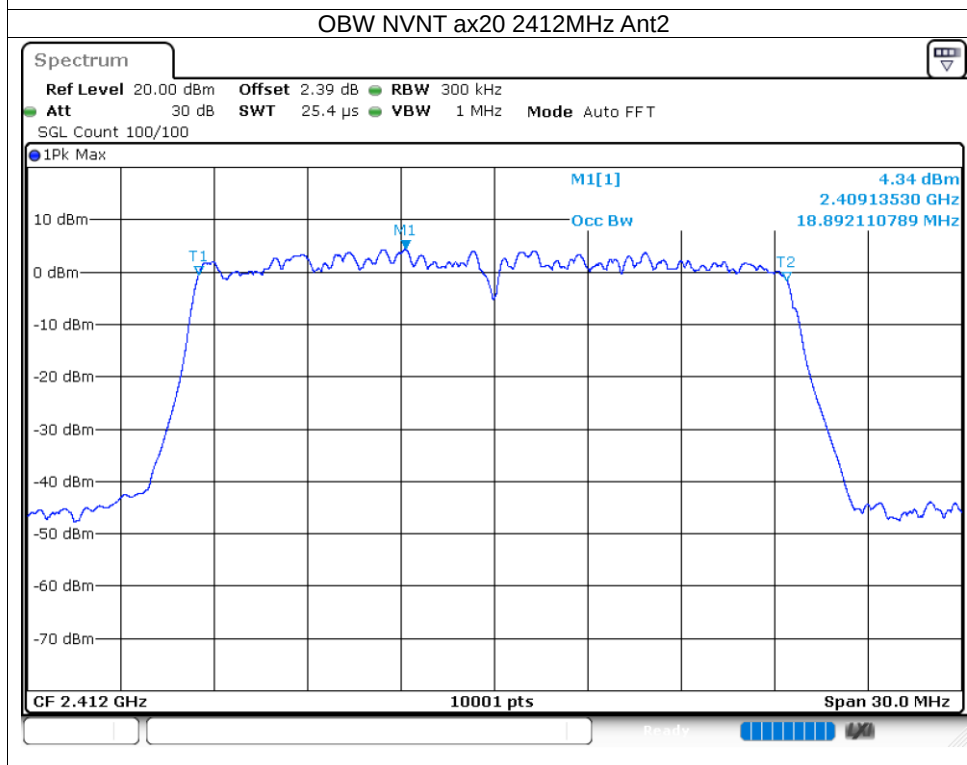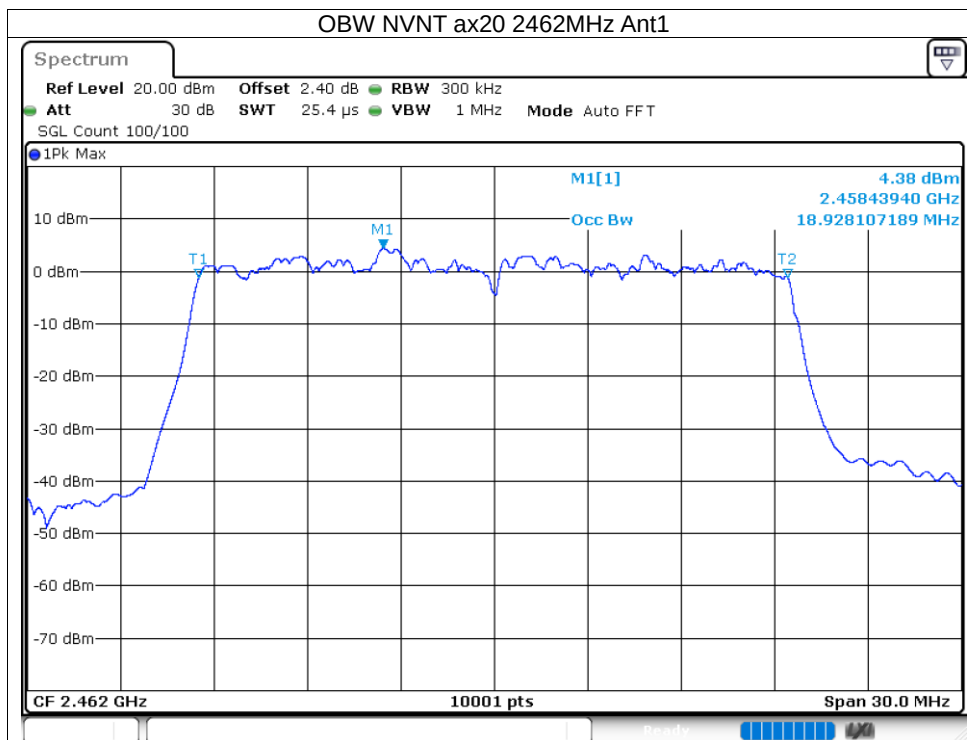

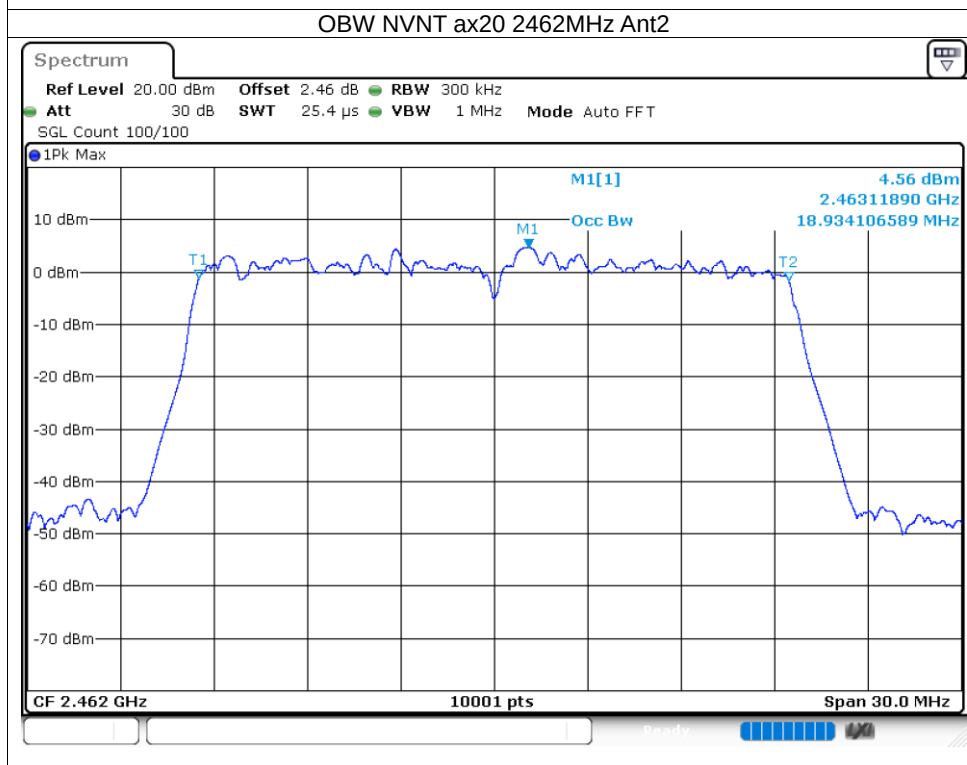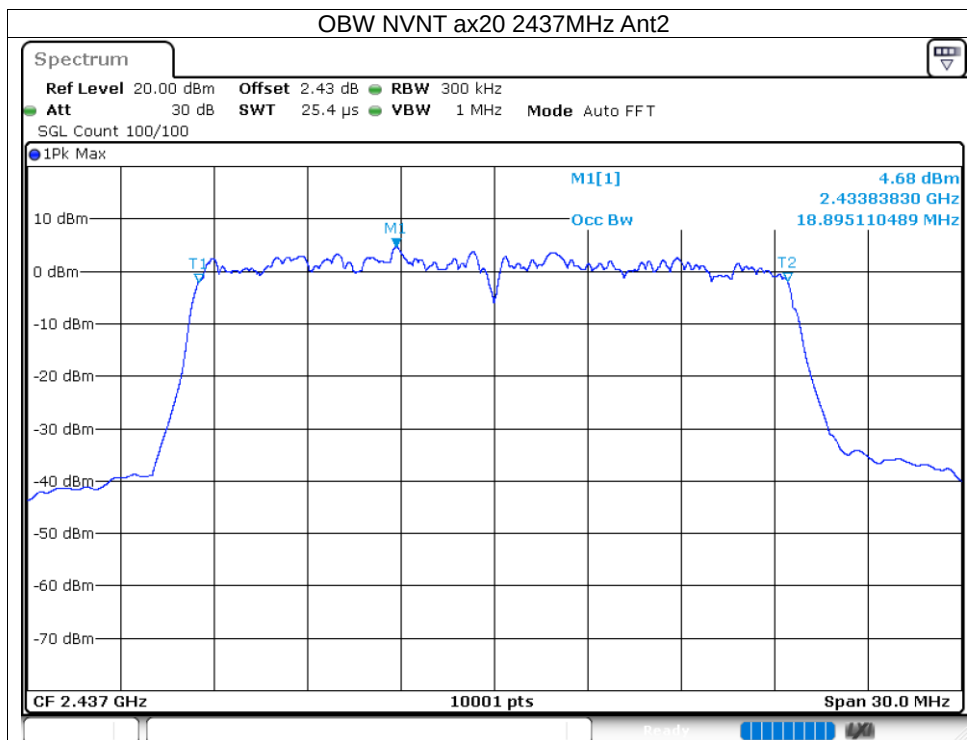

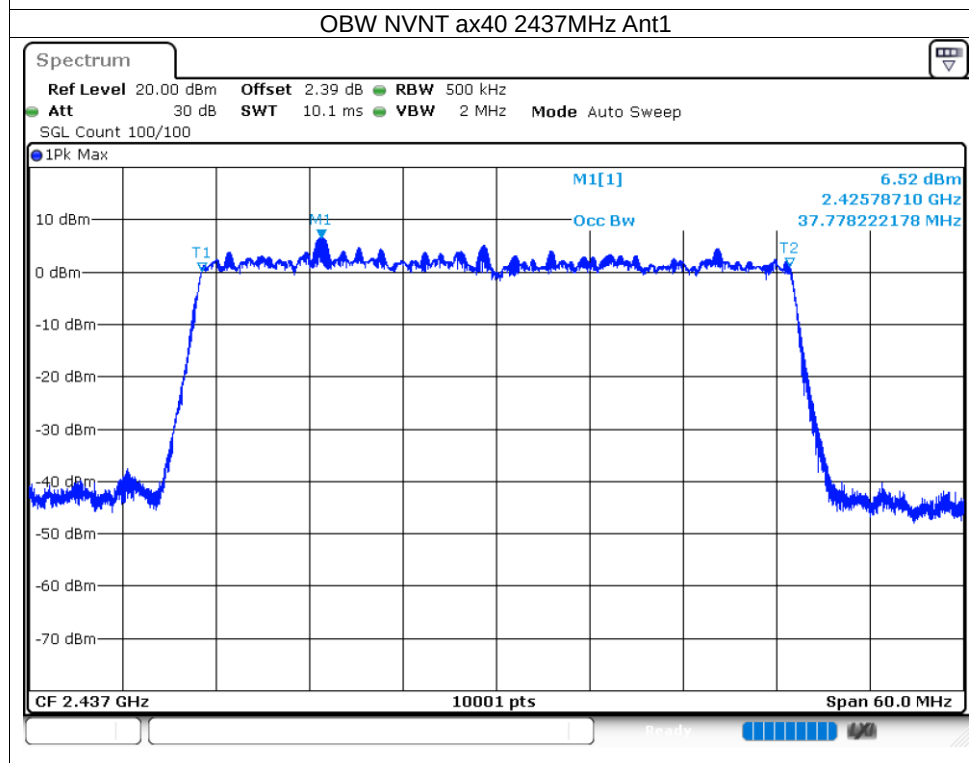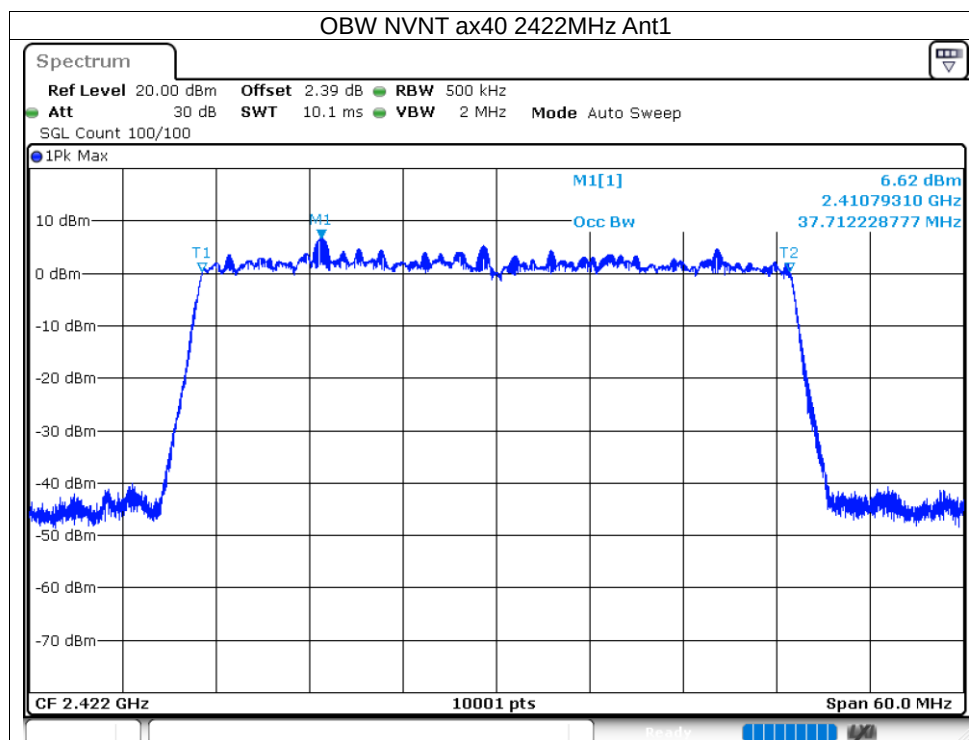

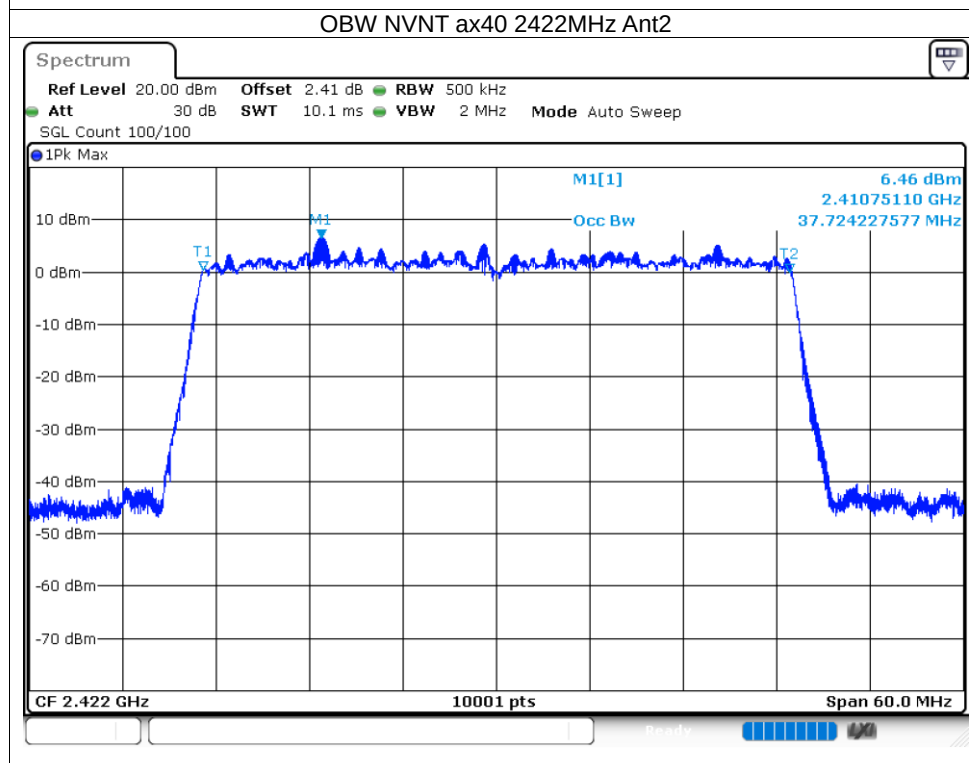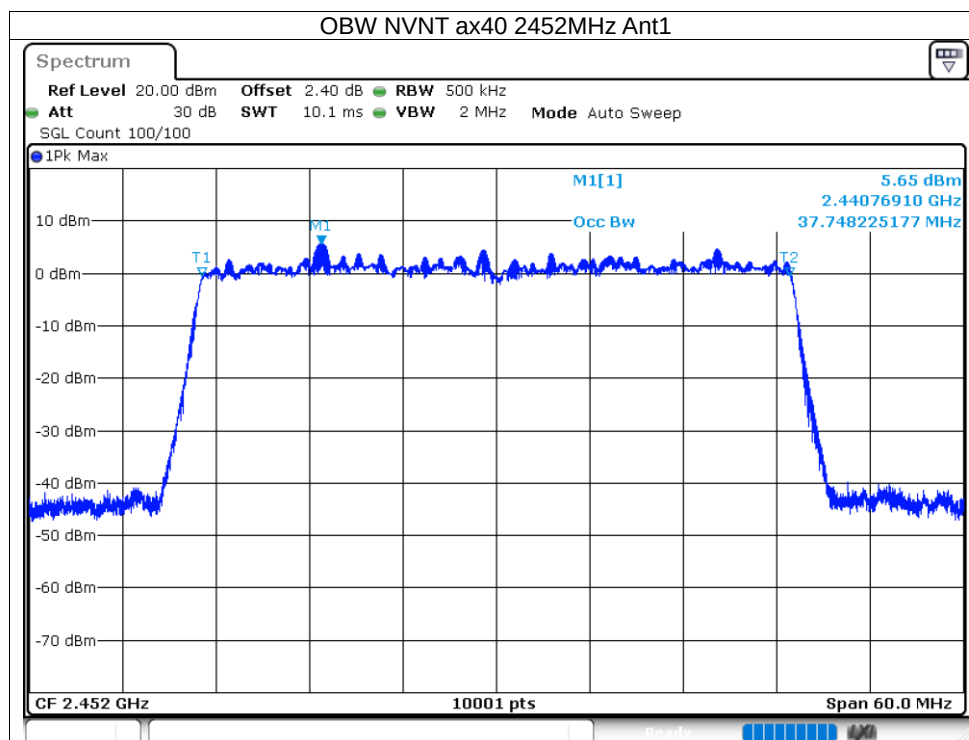

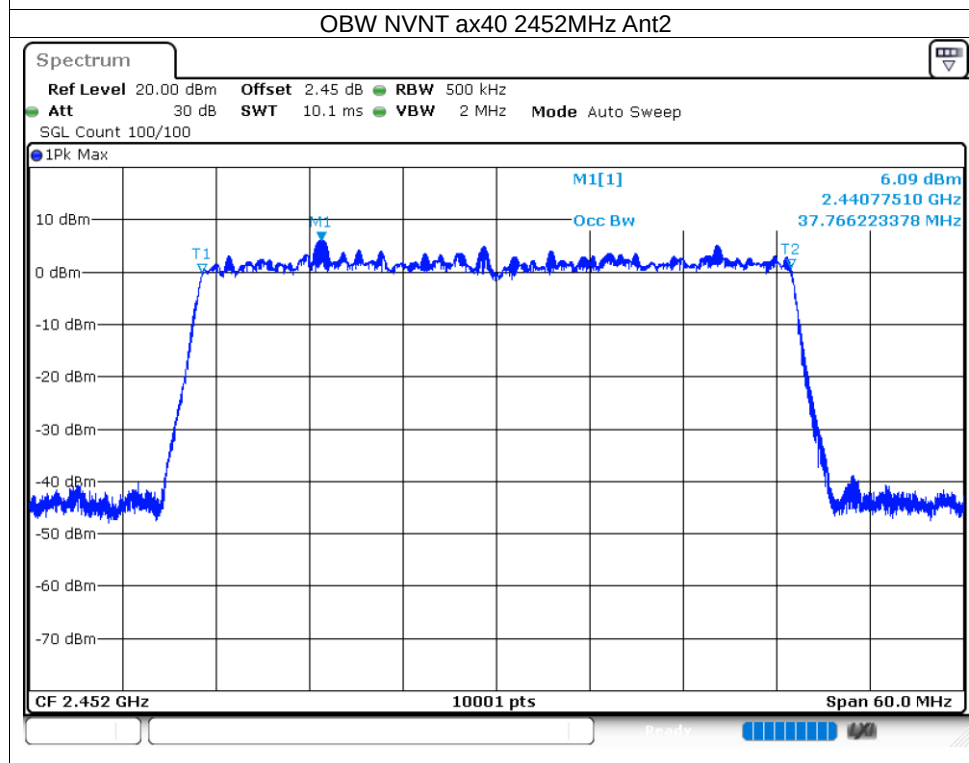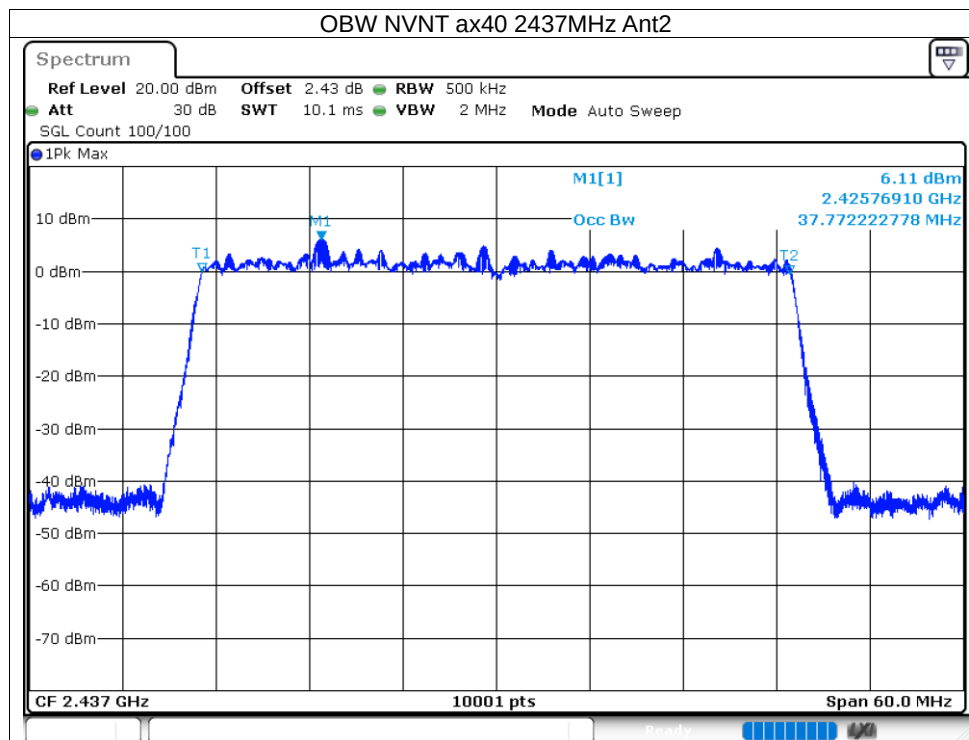

8.1.5 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-9.28	0	-9.28	8	Pass
NVNT	b	2437	Ant1	-9.24	0	-9.24	8	Pass
NVNT	b	2462	Ant1	-9.85	0	-9.85	8	Pass
NVNT	b	2412	Ant2	-9.23	0	-9.23	8	Pass
NVNT	b	2437	Ant2	-8.81	0	-8.81	8	Pass
NVNT	b	2462	Ant2	-9.2	0	-9.2	8	Pass
NVNT	g	2412	Ant1	-12.74	0	-12.74	8	Pass
NVNT	g	2437	Ant1	-12.95	0	-12.95	8	Pass
NVNT	g	2462	Ant1	-13.02	0	-13.02	8	Pass
NVNT	g	2412	Ant2	-12.69	0	-12.69	8	Pass
NVNT	g	2437	Ant2	-12.74	0	-12.74	8	Pass
NVNT	g	2462	Ant2	-12.85	0	-12.85	8	Pass
NVNT	n20	2412	Ant1	-12.44	0	-12.44	8	Pass
NVNT	n20	2437	Ant1	-12.45	0	-12.45	8	Pass
NVNT	n20	2462	Ant1	-12.98	0	-12.98	8	Pass
NVNT	n20	2412	Ant2	-12.78	0	-12.78	8	Pass
NVNT	n20	2437	Ant2	-13.2	0	-13.2	8	Pass
NVNT	n20	2462	Ant2	-13.19	0	-13.19	8	Pass
NVNT	n40	2422	Ant1	-14.63	0	-14.63	8	Pass
NVNT	n40	2437	Ant1	-14.91	0	-14.91	8	Pass
NVNT	n40	2452	Ant1	-15.37	0	-15.37	8	Pass
NVNT	n40	2422	Ant2	-14.87	0	-14.87	8	Pass
NVNT	n40	2437	Ant2	-15.23	0	-15.23	8	Pass
NVNT	n40	2452	Ant2	-14.88	0	-14.88	8	Pass
NVNT	ax20	2412	Ant1	-12.21	0	-12.21	8	Pass
NVNT	ax20	2437	Ant1	-12.33	0	-12.33	8	Pass
NVNT	ax20	2462	Ant1	-12.64	0	-12.64	8	Pass
NVNT	ax20	2412	Ant2	-12.12	0	-12.12	8	Pass
NVNT	ax20	2437	Ant2	-12.4	0	-12.4	8	Pass
NVNT	ax20	2462	Ant2	-12.26	0	-12.26	8	Pass
NVNT	ax40	2422	Ant1	-13.79	0	-13.79	8	Pass
NVNT	ax40	2437	Ant1	-13.96	0	-13.96	8	Pass
NVNT	ax40	2452	Ant1	-14.41	0	-14.41	8	Pass
NVNT	ax40	2422	Ant2	-13.83	0	-13.83	8	Pass
NVNT	ax40	2437	Ant2	-14.27	0	-14.27	8	Pass
NVNT	ax40	2452	Ant2	-13.91	0	-13.91	8	Pass

