

LED flat lamp manual


To users: Thank you for purchasing rixiao photoelectric products. Please read the manual carefully before installation and use

Installation instructions:

Before installation, be sure to cut off the power supply to protect the safety of operators.

Ceiling frame: 306.5 x 306.5 x 17mm

Lamp size: 300 x 300 x 14mm

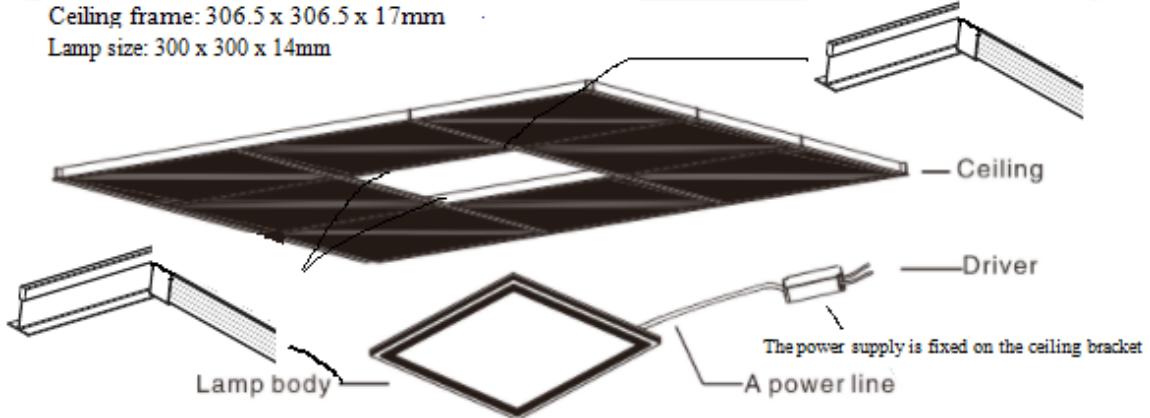

The minimum length of t-shaped protruding supporting lamps is 3.0mm

The minimum thickness of t-shaped protruding supporting lamps is 1.0mm

Installation steps

1. Remove the corresponding gusset plate from the ceiling where the lamp is installed;

2. Connect the power cord between the lamp body and the driver;

3. Insert the white supply wire (neutral) into quick wire connector with the preassembled white fixture wire. Insert the black supply wire (hot) into quick wire connector with the preassembled black fixture wire. Insert supply ground wire into quick wire connector with the preassembled ground wire. Make sure all connections are secure, tuck all wires inside the junction box. Push junction box into the ceiling opening and fix with screw. Close the cover of the connection box.

4. Buckle the lamp body into the keel groove where the buckle plate is removed

The keel groove is fixed with the edge Mosaic of the lamp.

Safety precautions

1. The power supply should not exceed the specified range (input voltage range: 120V~, frequency: 60 Hz);

2. Do not install the lamp on the open air, inclined place or unsound objects

3. Do not use with dimmer and electronic switch

4. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

5. When the lamp is abnormal, please cut off the power supply quickly and contact the sales shop

FCC Statement:

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try correct the interference by one or more of the following measures:

-Reorient the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void your authority to operate the equipment.