




UHF 無線麥克風系統

UHF Wireless Microphone System

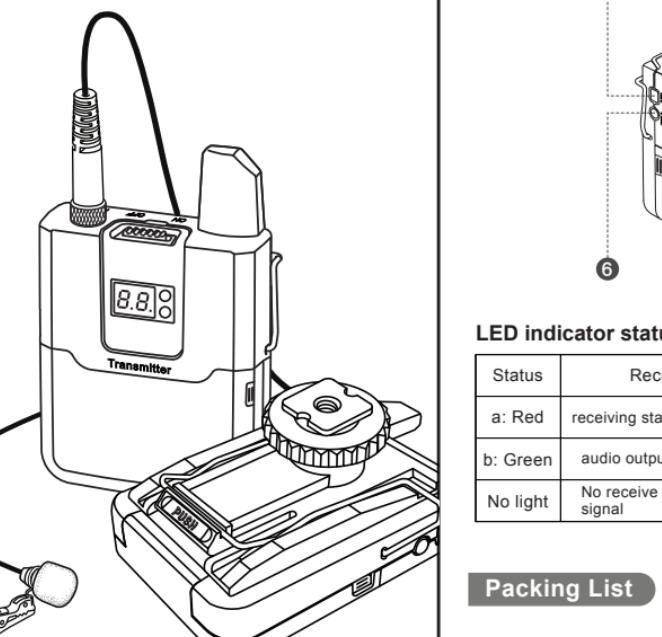

Product description

Receiver

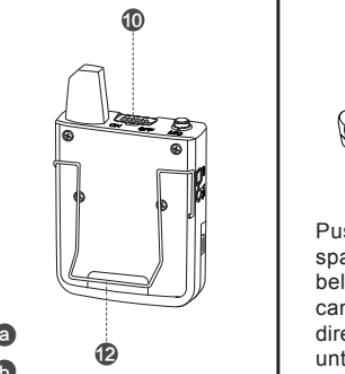
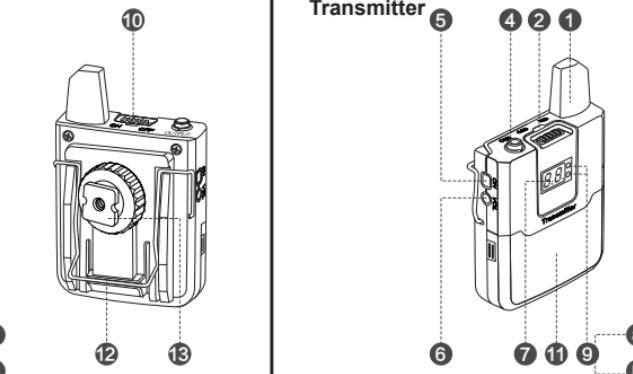


LED indicator status

Status	Receiver	Transmitter
a: Red	receiving status indication	Audio input peak indication
b: Green	audio output indication	Audio input normal level indication
No light	No receive or no audio signal	No audio signal input



Packing List

Receiver Transmitter Mobile phone audio cable
Camera audio cable Lavalier microphone Belt clip
Hotshoe camera mount Instruction manual

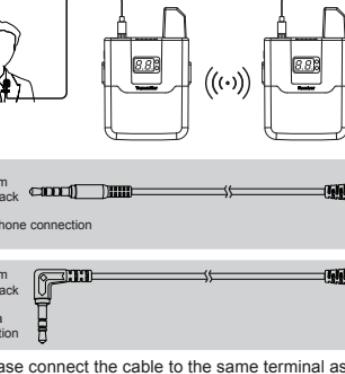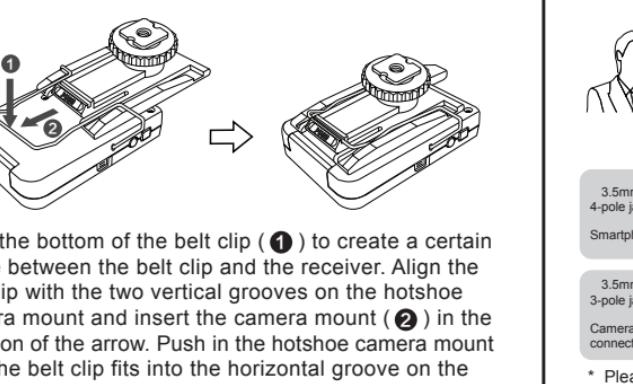


1. antenna
2. a: RF status light
b: Audio light
3. 3.5mm audio output interface
4. 3.5mm microphone input interface
5. Channel selection
6. Volume adjustment
7. Channel display LED light
8. a: Input peak indicator
b: Audio input indicator
9. Switch lock
10. Battery bin
11. Belt clip
12. Hotshoe camera mount
13. Belt clip

Battery Installation

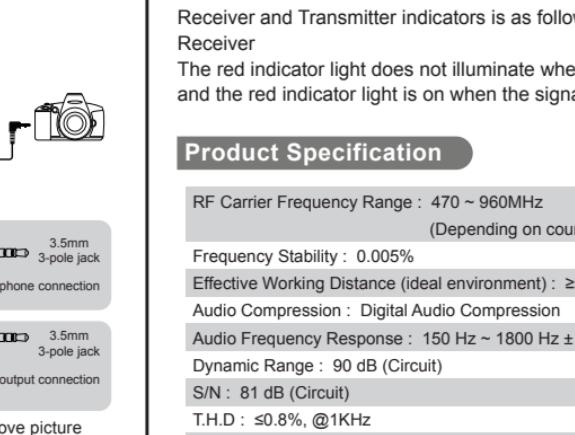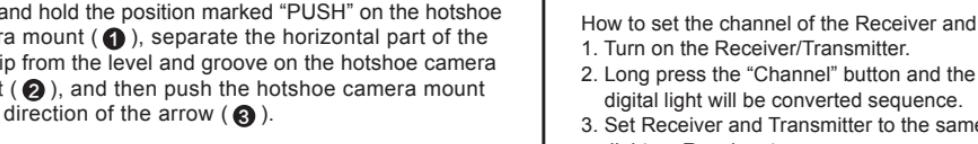

Install hotshoe camera mount

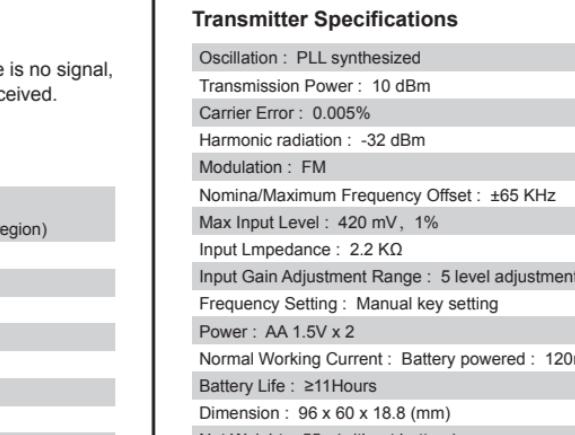

Disassemble hotshoe camera mount

Receiver and Transmitter indicators is also follows

Receiver

The red indicator light does not illuminate when there is no signal, and the red indicator light is on when the signal is received.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Before leaving the factory, the transmitter and receiver of each product have been set up in pairs, and can be used directly when starting.

How to set the channel of the Receiver and Transmitter

1. Turn on the Receiver/Transmitter.
2. Long press the "Channel" button and the letters of the digital light will be converted sequence.
3. Set Receiver and Transmitter to the same channel the red light on Receiver turns on.

Output Impedance : 400 Ω

Power : AA 1.5V x 2

Normal Working Current : 3V 100mA

Battery Life : ≥11Hours

Dimension : 96 x 60 x 18.8 (mm)

Net Weight : 55g (without battery)

Transmitter Specifications

Oscillation PLL synthesized

Transmitter Power : 1dBm

Carrier Err. : 0.05%

Harmonic radiation : -32dBm

Modulation : F.M

Normal/Maximum Frequency Offset : ±5KHz

Max Input Level : 40 mV, 1%

Input Impedance : 2.2 KΩ

Input Gain Adjustment Range : 5 level adjustment, every 3dB step

Frequency Setting : Manual key setting

Power : AA 1.5V x 2

Normal Working Current : Battery power : 120mA

Battery Life : ≥11Hours

Dimension : 96 x 60 x 18.8 (mm)

Net Weight : 55g (without battery)

Receiver Specifications

Receiving Mode : Superheterodyne

Mirror Suppression : 45 dBm

Noise Regulation : built - in setting parameter

RF Sensitivity : when input is 10 dBu, S/N ≥45 dB

Frequency Synchronization : Manual key settings

Max Output Level : LINE : 0.72 Vpp

Output Level Adjustment Range : 5 level adjustment, attenuation adjustment, every 3dB step

Output Impedance : 400 Ω

Power : AA 1.5V x 2

Normal Working Current : 3V 100mA

Battery Life : ≥11Hours

Dimension : 96 x 60 x 18.8 (mm)

Net Weight : 55g (without battery)

RF exposure information

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

