



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.249

Report Reference No. : CTL2106102061-WF

Compiled by:
(position+printed name+signature)

Happy Guo
(File administrators)

Tested by:
(position+printed name+signature)

Gray Gao
(Test Engineer)

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)



Product Name : Alarm Thermometer

Model/Type reference : Quad XPro

List Model(s)..... : N/A

Trade Mark..... : ChefsTemp

FCC ID..... : 2A2DD-ST2252QX

Applicant's name : LEADTEK INC

Address of applicant : 7837 DELTA OAK CT LAS VEGAS NV 89147 UNITES STATES

Test Firm..... : Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm : Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification..... :

Standard : FCC Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5850 MHz and 24.0 - 24.25 GHz.

TRF Originator : Shenzhen CTL Testing Technology Co., Ltd.

Master TRF..... : Dated 2011-01

Date of receipt of test item : Aug. 23, 2021

Date of sampling..... : Aug. 23, 2021

Date of Test Date : Aug. 23, 2021–Sept. 07, 2021

Data of Issue..... : Sept. 08, 2021

Result..... : Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. : CTL2106102061-WF	Sept. 08, 2021 ----- Date of issue
---	--

Equipment under Test : Alarm Thermometer

Sample No : CTL210610206-1-S001

Model /Type : Quad XPro

Listed Models : N/A

Applicant : LEADTEK INC

Address : 7837 DELTA OAK CT LAS VEGAS NV 89147
UNITES STATES

Manufacturer : LEADTEK INC

Address : 7837 DELTA OAK CT LAS VEGAS NV 89147
UNITES STATES

Test result	Pass *
-------------	--------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

** Modified History **

[illegible]

Table of Contents

Page

1. SUMMARY	5
1.1. TEST STANDARDS	5
1.2. TEST DESCRIPTION	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	8
2.1. ENVIRONMENTAL CONDITIONS	8
2.2. GENERAL DESCRIPTION OF EUT	8
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY	8
2.4. EQUIPMENTS USED DURING THE TEST	9
2.5. RELATED SUBMITTAL(S) / GRANT (S)	9
2.6. MODIFICATIONS	9
3. TEST CONDITIONS AND RESULTS	10
3.1. CONDUCTED EMISSIONS TEST	10
3.2. RADIATED EMISSIONS AND BAND EDGE	11
3.3. OCCUPIED BANDWIDTH MEASUREMENT	17
3.4. ANTENNA REQUIREMENT	18
4. TEST SETUP PHOTOS OF THE EUT	19
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	20

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.249](#): Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.249		
FCC Part 15.249(a)	Field Strength of Fundamental	PASS
FCC Part 15.209	Spurious Emission	PASS
FCC Part 15.209	Band edge	PASS
FCC Part 15.215(c)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	N/A
FCC Part 15.203	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.10 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L7497

Shenzhen CTL Testing Technology Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

A2LA-Lab Cert. No. 4343.01

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

IC Registration No.: 9618B

CAB identifier: CN0041

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements with Registration No.: 9618B on Jan. 22, 2019.

FCC-Registration No.: 399832

Designation No.: CN1216

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 399832, December 08, 2017.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)

Radiated Emission 30~1000MHz	$\pm 4.10\text{dB}$	(1)
Radiated Emission Above 1GHz	$\pm 4.32\text{dB}$	(1)
Conducted Disturbance 0.15~30MHz	$\pm 3.20\text{dB}$	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Alarm Thermometer
Model/Type reference:	Quad XPro
Power supply:	DC 3V from battery
900MHz ISM Band wireless	
Operation frequency:	915MHz
Modulation:	FSK
Channel number:	1
Antenna type:	Monopole Antenna
Antenna gain:	0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 1 channel provided to the EUT.

Operation Frequency :

Channel	Frequency (MHz)
01	915

Note: The line display in grey were the channel selected for testing

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ESH2-Z5	860014/010	2021/05/10	2022/05/09
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2020/04/07	2023/04/06
EMI Test Receiver	R&S	ESCI	1166.5950.03	2020/11/28	2021/11/27
Spectrum Analyzer	Agilent	E4407B	MY41440676	2021/05/10	2022/05/09
Spectrum Analyzer	Agilent	N9020A	US46220290	2021/05/19	2022/05/18
Spectrum Analyzer	Keysight	N9020A	MY53420874	2021/05/19	2022/05/18
Controller	EM Electronics	EM 1000	060859	2021/05/19	2022/05/18
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2021/05/19	2022/05/18
Active Loop Antenna	Da Ze	ZN30900A	/	2021/05/10	2022/05/09
Amplifier	Agilent	8449B	3008A02306	2021/05/13	2022/05/12
Amplifier	Agilent	8447D	2944A10176	2021/05/13	2022/05/12
Temperature/Humidity Meter	Gangxing	CTH-608	02	2021/05/11	2022/05/10
Power Sensor	Agilent	U2021XA	MY55130004	2021/05/19	2022/05/18
Power Sensor	Agilent	U2021XA	MY55130006	2021/05/19	2022/05/18
Spectrum Analyzer	RS	FSP	1164.4391.38	2021/05/19	2022/05/18
Test Software					
Name of Software			Version		
TST-PASS			1.1.0		
ES-K1(Below 1GHz)			V1.71		
e3(Above 1GHz)			6.111221a		

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

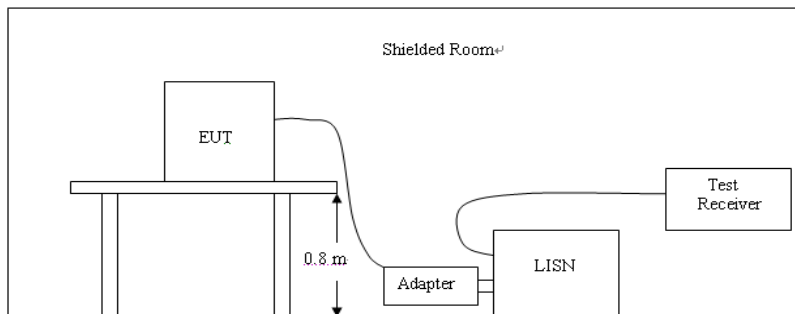

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

Not applicable to this device, which is powered by battery.

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz})) + 40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz})) + 40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30) + 40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

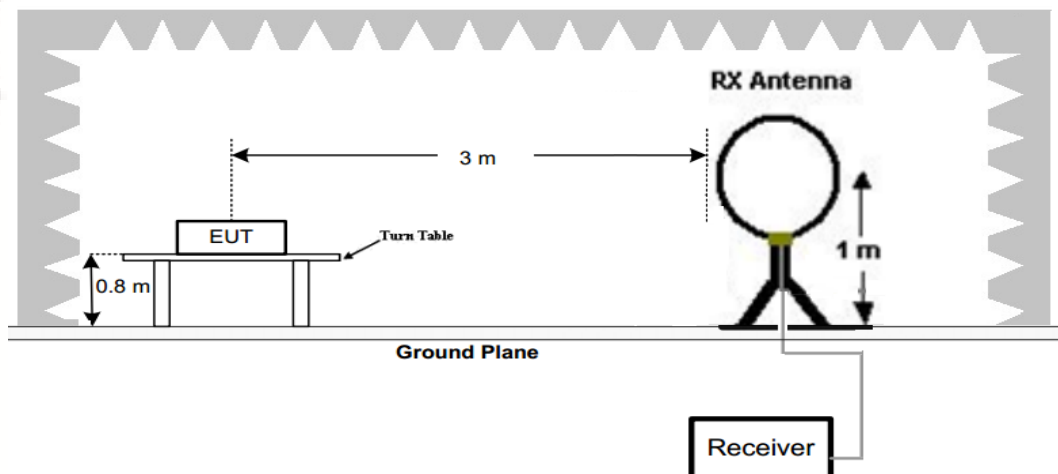

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

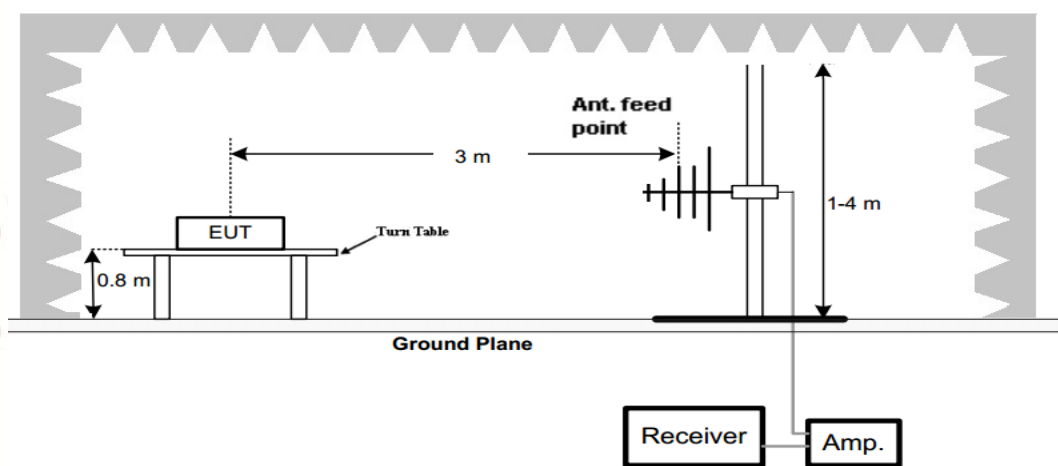

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

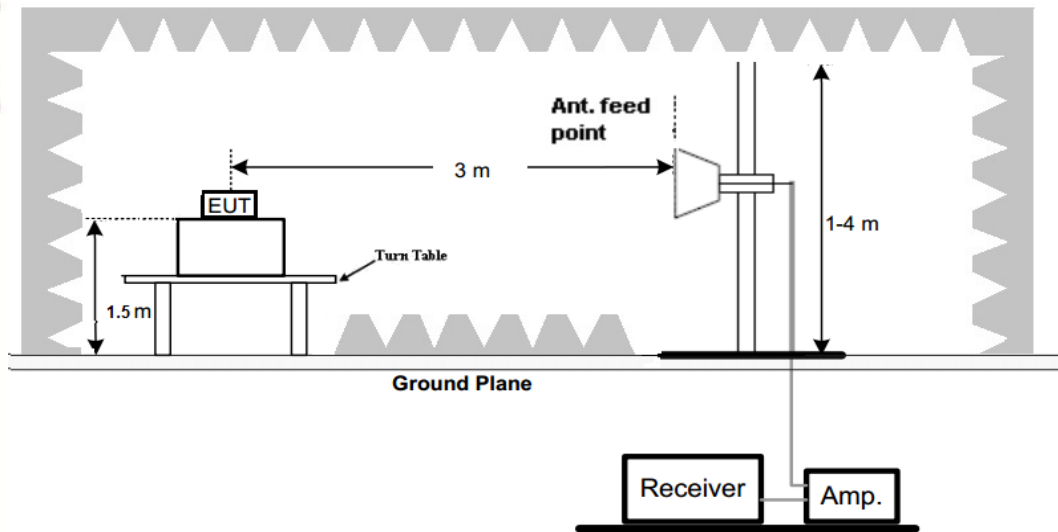**Test Procedure**


1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.


TEST RESULTS

Remark:

1. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

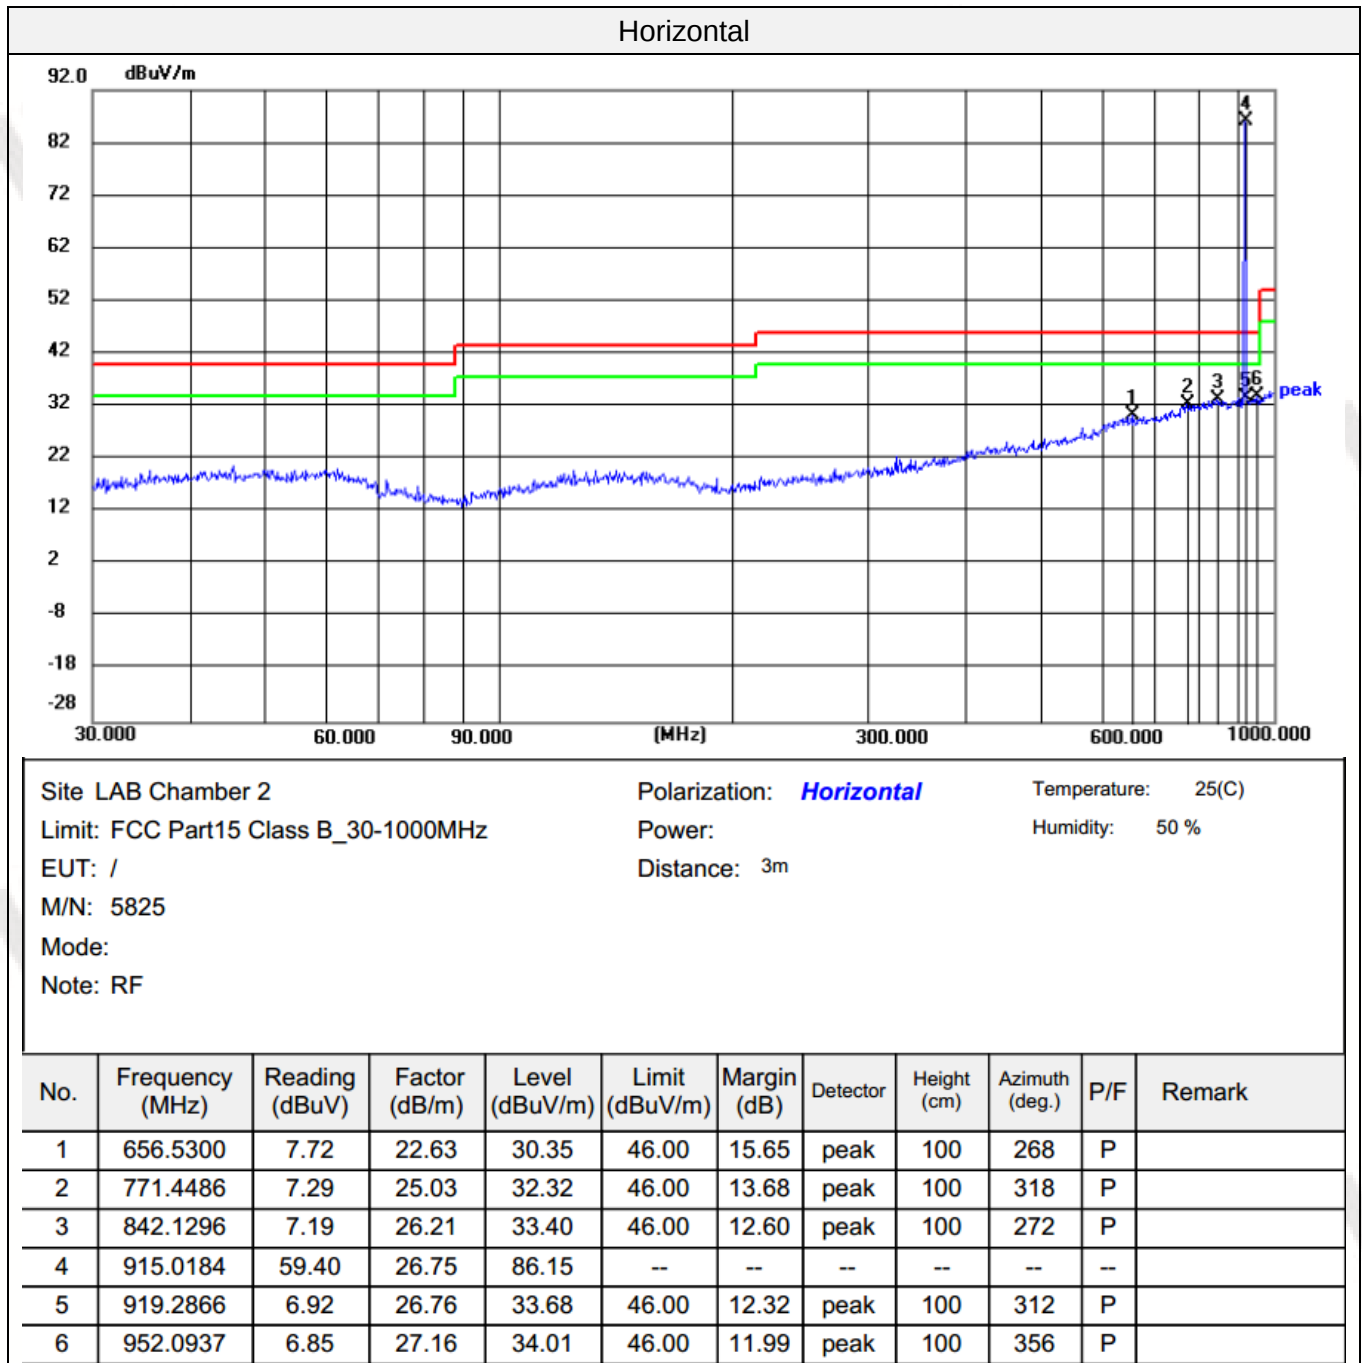

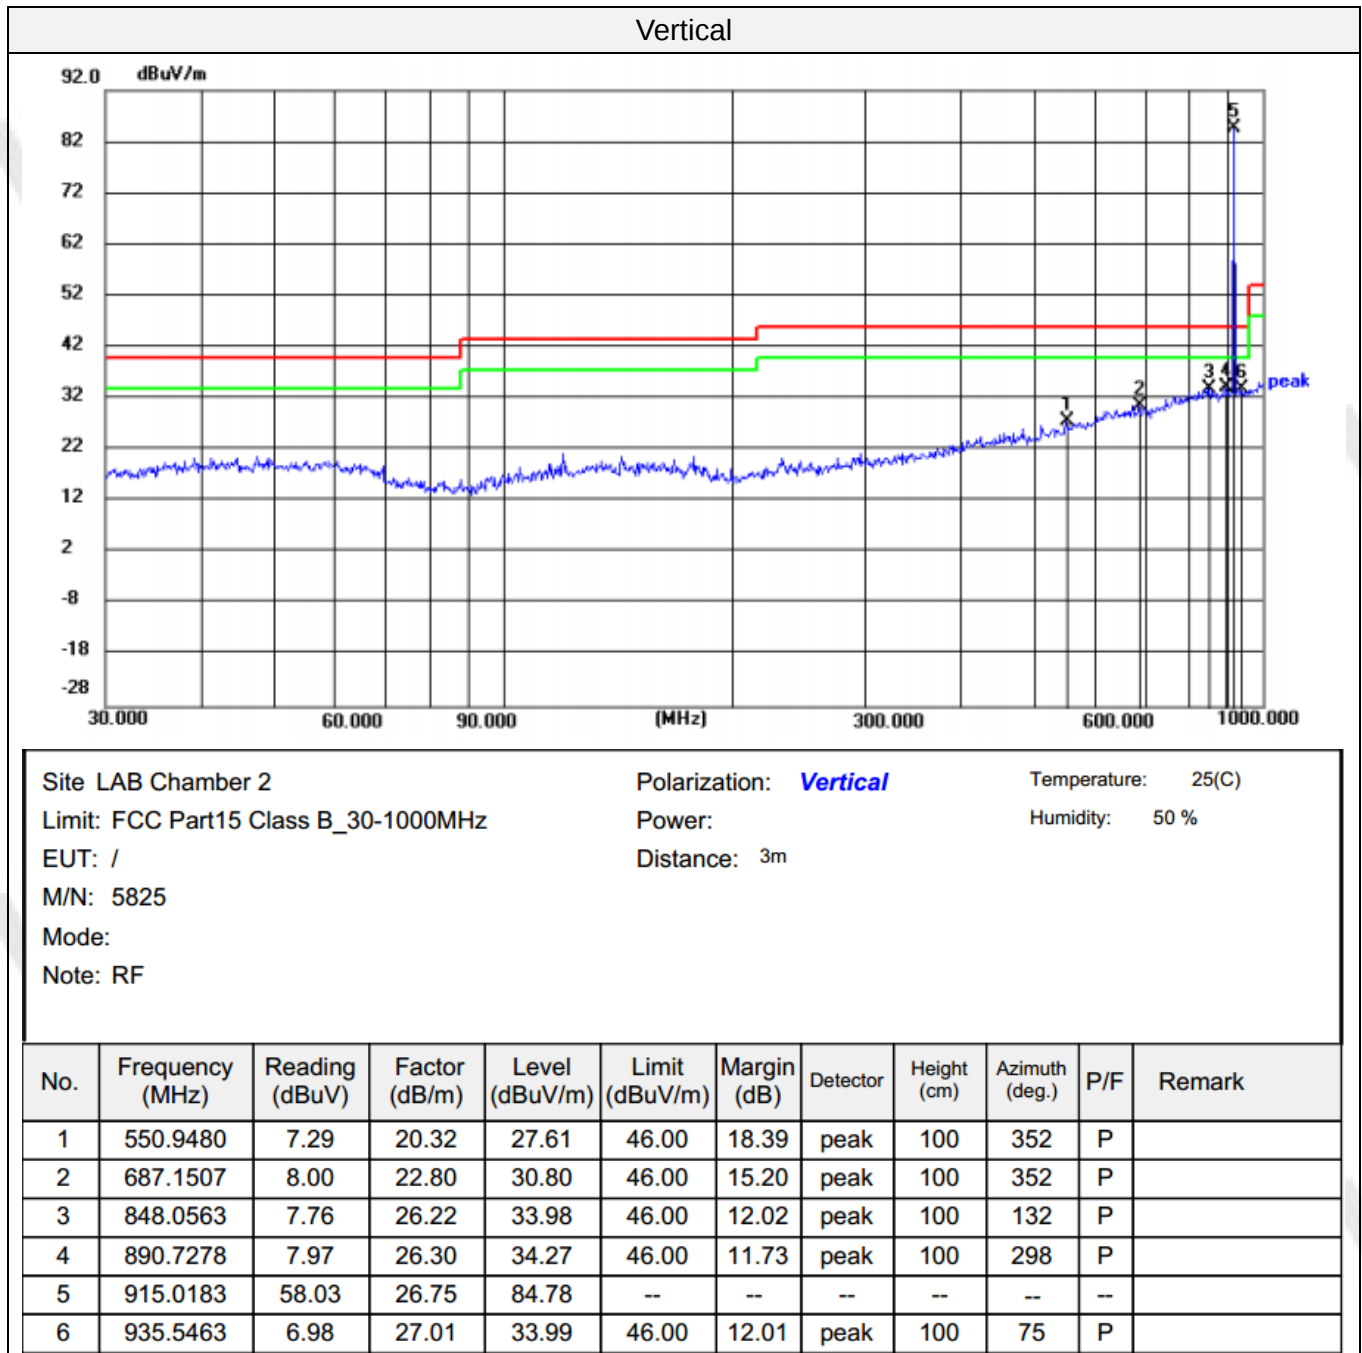

Frequency (MHz)	Antenna Pol.	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
915 MHz	H	86.15	94	4.30	89.70	22.48	2.10	28.13	-3.55
915 MHz	V	84.78	94	5.67	88.33	22.48	2.10	28.13	-3.55

Frequency(MHz):				915		Polarity:			Horizontal	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1830.00	56.32	PK	74.00	17.68	60.21	27.31	4.04	35.23	-3.89
1	1830.00	49.86	AV	54.00	4.14	53.75	27.31	4.04	35.23	-3.89
2	2745.00	52.49	PK	74.00	21.51	52.62	29.47	4.98	34.58	-0.13
2	2745.00	--	AV	54.00	--	--	--	--	--	--
3	3660.00	49.27	PK	74.00	24.73	45.90	32.39	6.01	35.03	3.37
3	3660.00	--	AV	54.00	--	--	--	--	--	--
4	4575.00	47.46	PK	74.00	26.54	42.19	32.97	6.77	34.47	5.27
4	4575.00	--	AV	54.00	--	--	--	--	--	--


Frequency(MHz):				915		Polarity:			Vertical	
No.	Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1	1830.00	55.38	PK	74.00	18.62	59.27	27.31	4.04	35.23	-3.89
1	1830.00	47.74	AV	54.00	6.26	51.63	27.31	4.04	35.23	-3.89
2	2745.00	54.13	PK	74.00	19.87	54.26	29.47	4.98	34.58	-0.13
2	2745.00	46.76	AV	54.00	7.24	46.89	29.47	4.98	34.58	-0.13
3	3660.00	47.37	PK	74.00	26.63	44.00	32.39	6.01	35.03	3.37
3	3660.00	--	AV	54.00	--	--	--	--	--	--
4	4575.00	45.77	PK	74.00	28.23	40.50	32.97	6.77	34.47	5.27
4	4575.00	--	AV	54.00	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below QP/AV limit.
5. The other emission levels were very low against the limit.
6. RBW100KHz VBW300KHz for test at below 1GHz; RBW1MHz VBW3MHz Peak detector is for PK value, RBW 1MHz VBW10Hz Peak detector is for AV value for test at above 1GHz.

Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	902.0	<46dBuV	Pass
Highest	928.0	<46dBuV	Pass

Test Result of Worst Case:
Horizontal and Vertical:

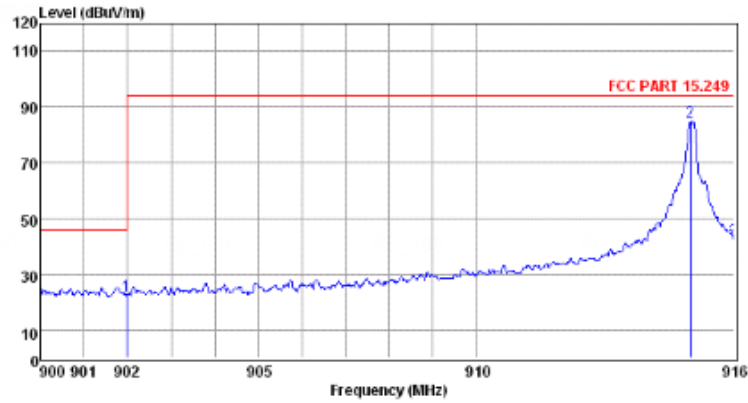


Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1 901.98	-0.80	1.87	21.10	22.17	46.00	-23.83	QP
2 914.98	61.50	2.04	21.19	84.73	94.00	-9.27	QP
3 916.00	19.28	2.04	21.19	42.51	94.00	-51.49	QP

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	901.98	-0.80	1.87	21.10	22.17	46.00	-23.83	QP
2	914.98	61.50	2.04	21.19	84.73	94.00	-9.27	QP
3	916.00	19.28	2.04	21.19	42.51	94.00	-51.49	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

Horizontal and Vertical:

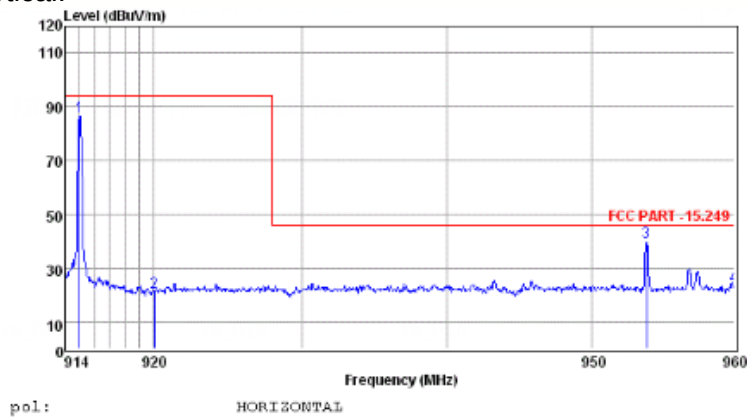

pol:

HORIZONTAL

Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1 914.99	63.53	2.04	21.19	86.76	94.00	-7.24	QP
2 920.03	-2.09	1.90	21.22	21.03	94.00	-72.97	QP
3 953.84	16.19	2.03	21.44	39.66	46.00	-6.34	QP
4 960.00	-0.29	1.90	21.48	23.09	46.00	-22.91	QP

	Freq	Reading	CabLos	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	914.99	63.53	2.04	21.19	86.76	94.00	-7.24	QP
2	920.03	-2.09	1.90	21.22	21.03	94.00	-72.97	QP
3	953.84	16.19	2.03	21.44	39.66	46.00	-6.34	QP
4	960.00	-0.29	1.90	21.48	23.09	46.00	-22.91	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that are 20db below the official limit are not reported

3.3. Occupied Bandwidth Measurement


Limit

N/A

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 3 KHz RBW and 10 KHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


Test Configuration



Test Results

Type	Channel	99% OBW (KHz)	20dB bandwidth (KHz)	Result
FSK	01	118.49	85.05	Pass

Test plot as follows:

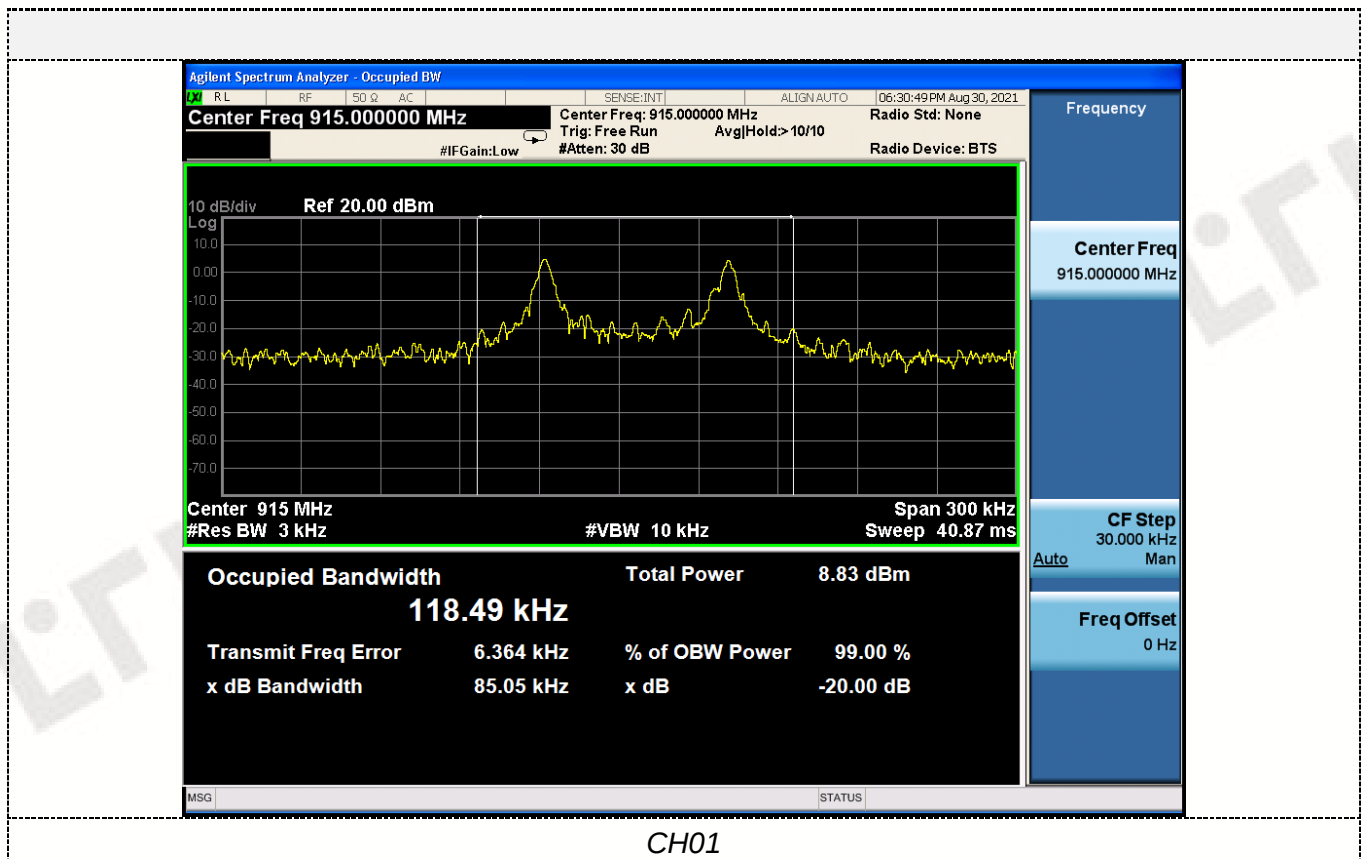

3.4. Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Test Result:

The directional gains of antenna used for transmitting is 0dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Please see EUT photo for details.

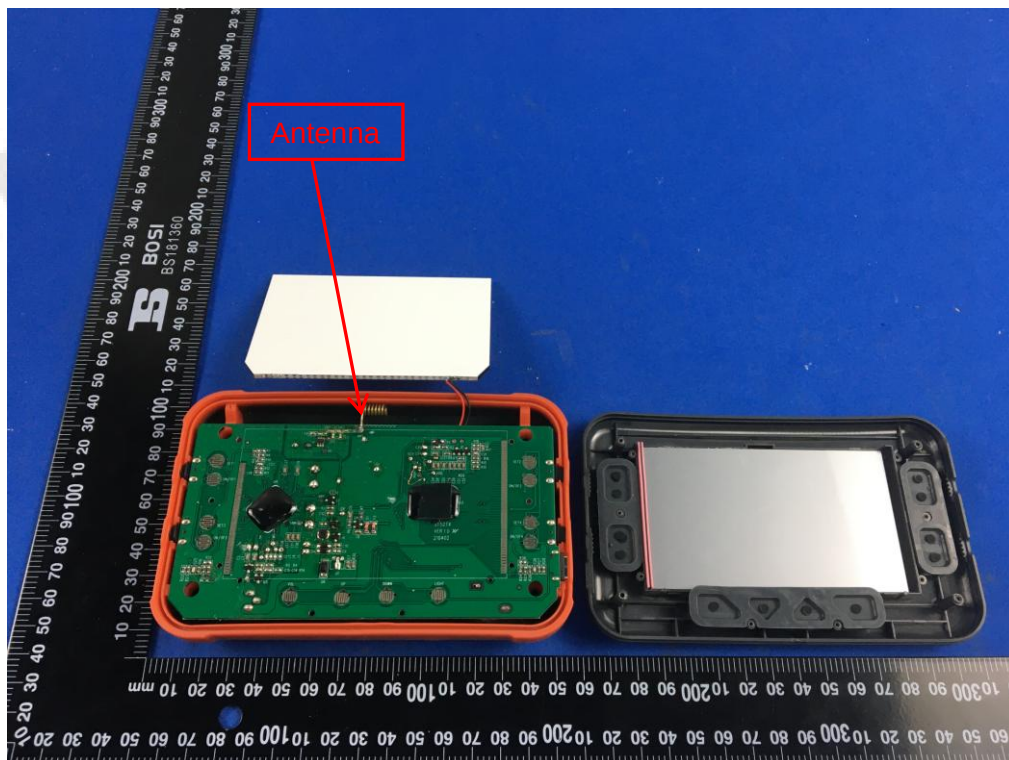



4. Test Setup Photos of the EUT



5. External and Internal Photos of the EUT


External Photos of EUT

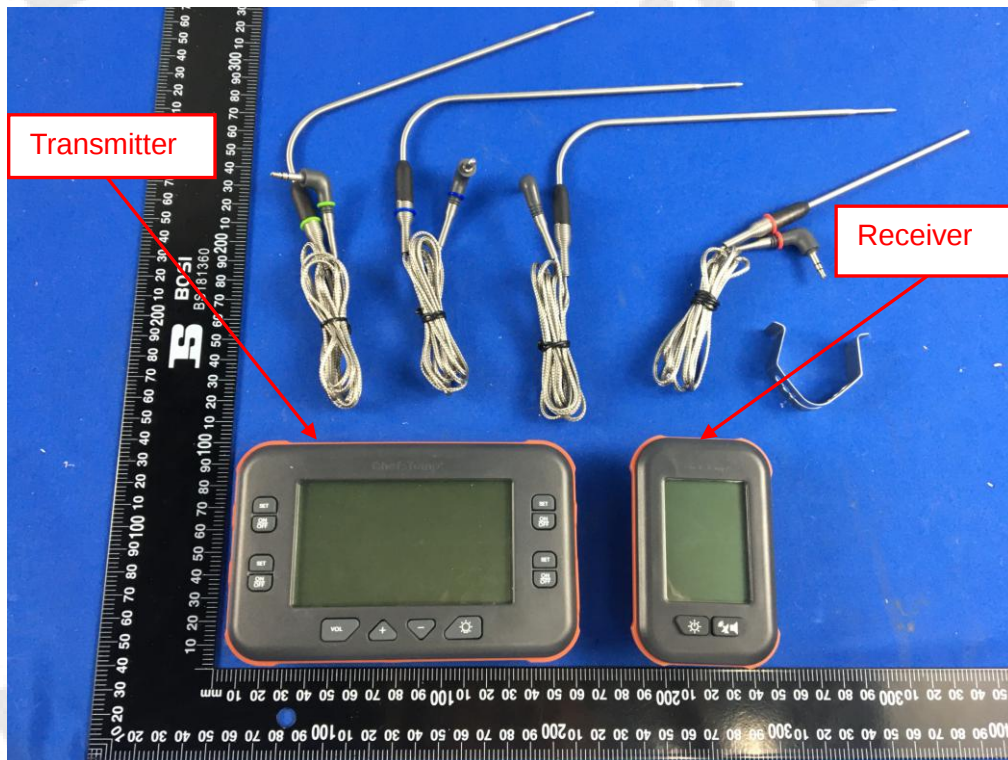



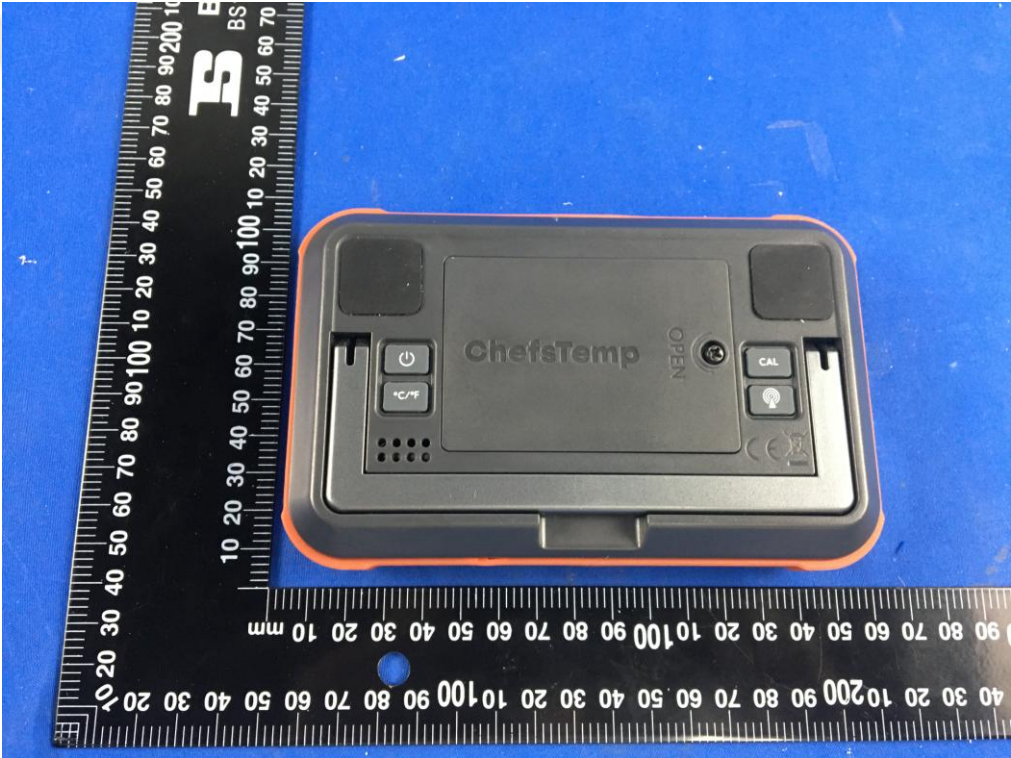





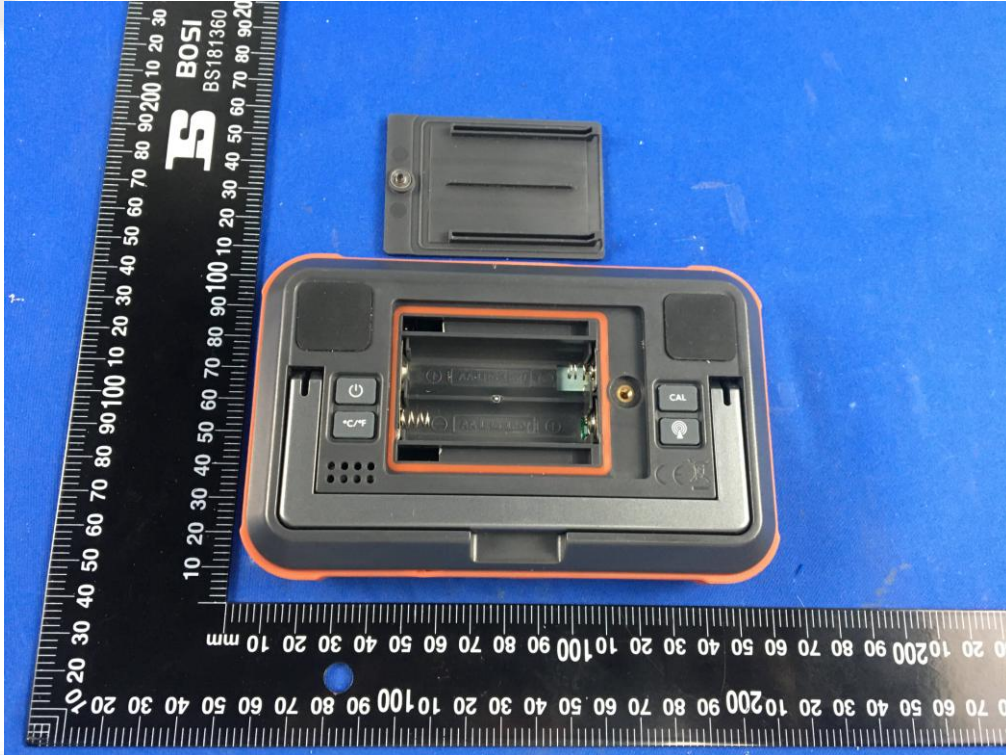

Internal Photos of EUT

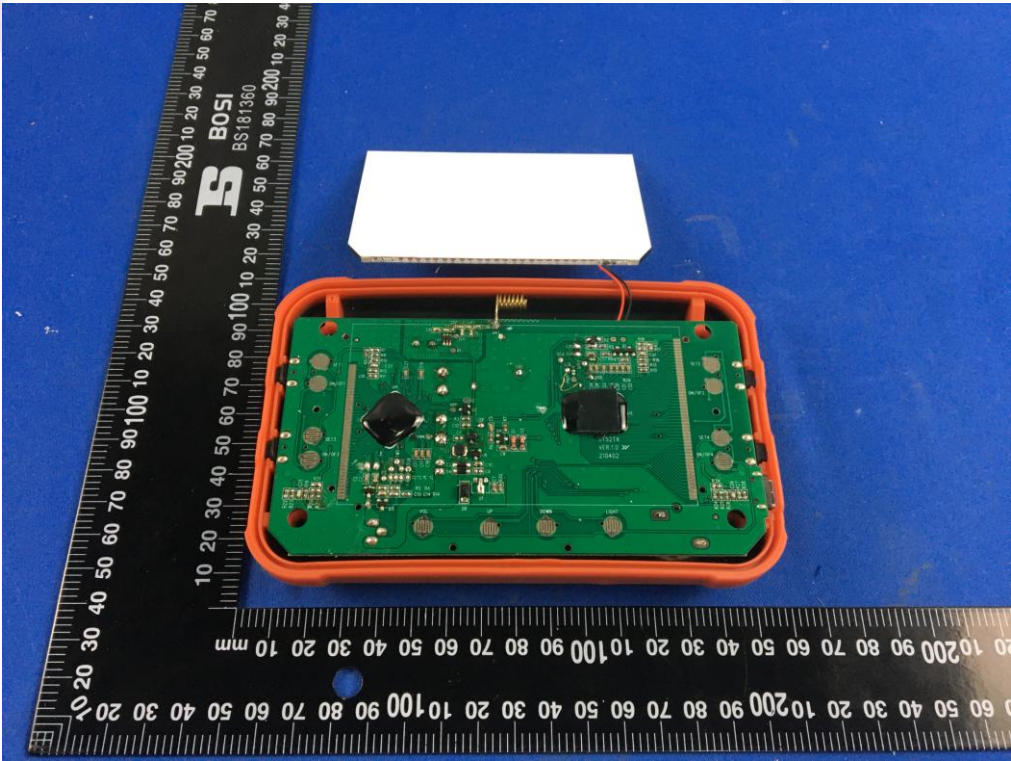

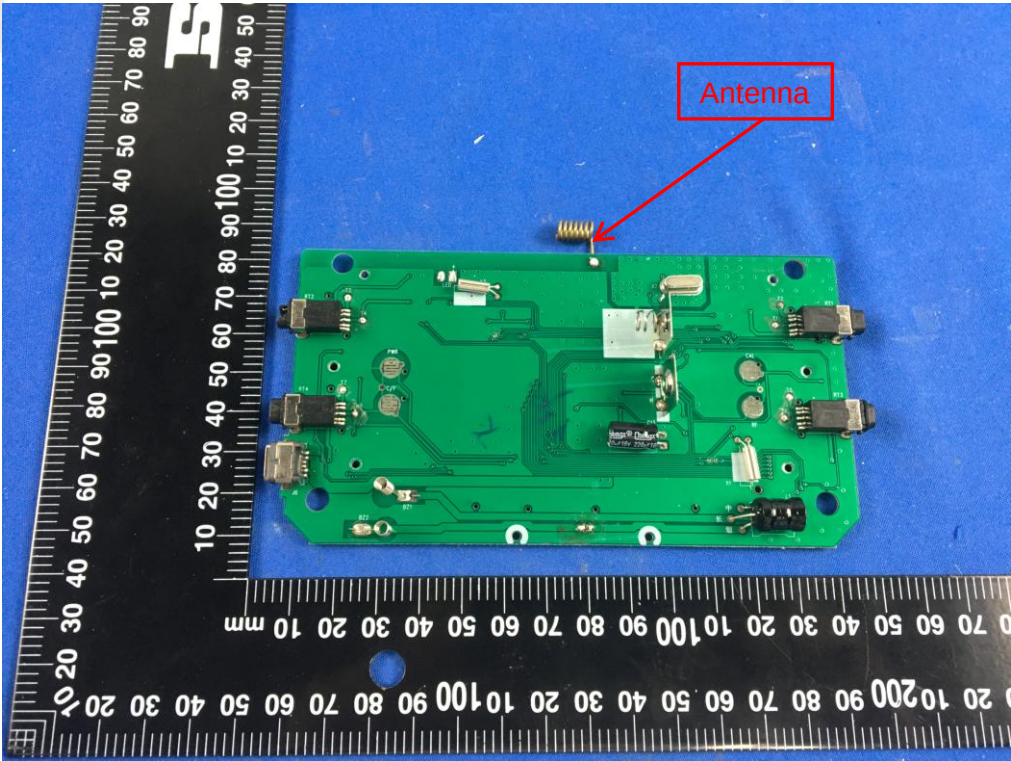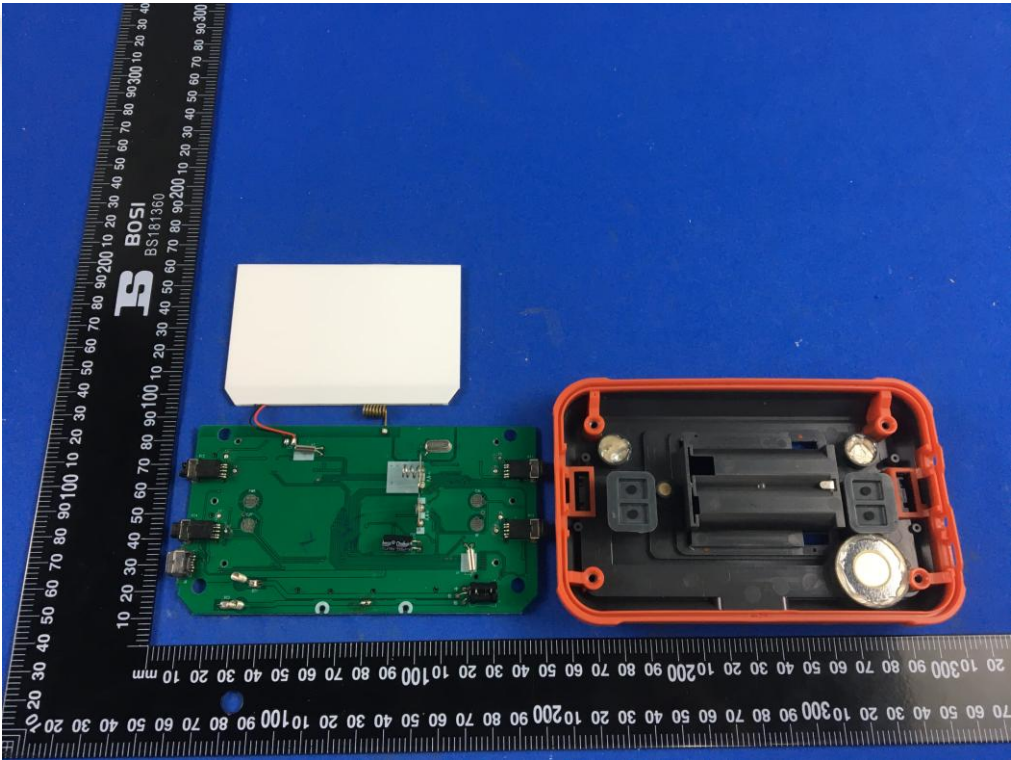

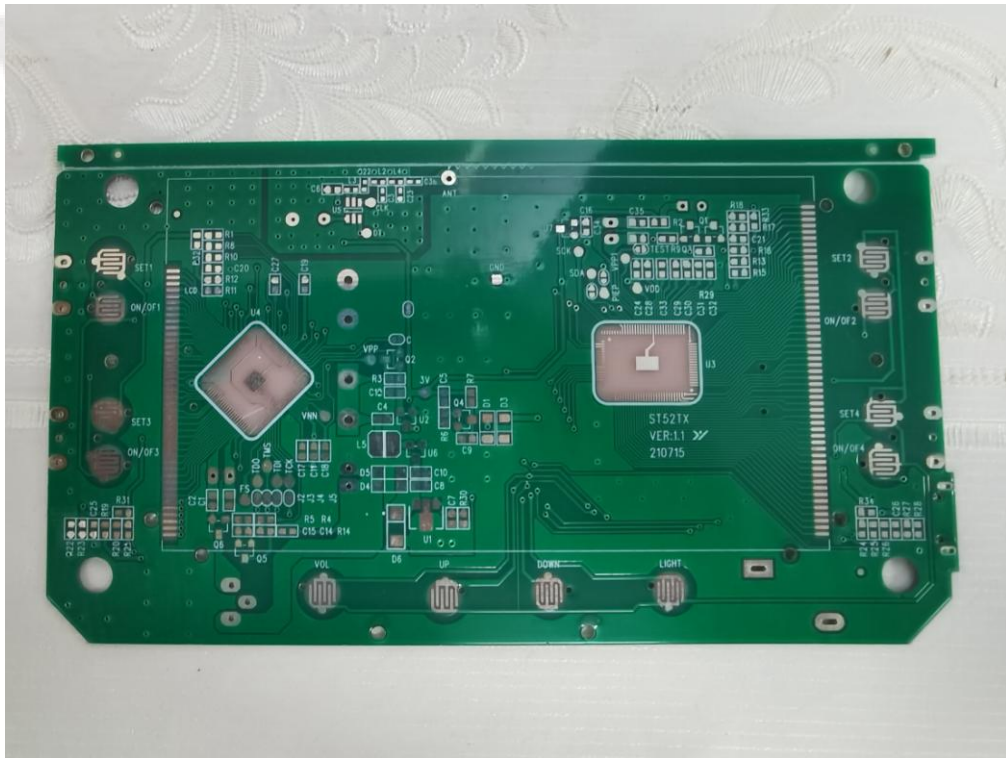

***** End of Report *****