

and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.

7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

6.15.4 Test data

Pass: Please Refer To DFS Report: BLA-EMC-202403-A9205


7 Appendix A

7.1 Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	13.811	24	Pass
NVNT	a	5200	Ant1	14.476	24	Pass
NVNT	a	5240	Ant1	15.271	24	Pass
NVNT	a	5260	Ant1	15.345	24	Pass
NVNT	a	5280	Ant1	15.098	24	Pass
NVNT	a	5320	Ant1	12.904	24	Pass
NVNT	a	5500	Ant1	12.588	24	Pass
NVNT	a	5600	Ant1	14.481	24	Pass
NVNT	a	5700	Ant1	18.286	24	Pass
NVNT	a	5745	Ant1	15.886	30	Pass
NVNT	a	5785	Ant1	15.271	30	Pass
NVNT	a	5825	Ant1	13.812	30	Pass
NVNT	ac20	5180	Ant1	13.483	24	Pass
NVNT	ac20	5200	Ant1	14.133	24	Pass
NVNT	ac20	5240	Ant1	14.929	24	Pass
NVNT	ac20	5260	Ant1	15.105	24	Pass
NVNT	ac20	5280	Ant1	14.892	24	Pass
NVNT	ac20	5320	Ant1	12.808	24	Pass
NVNT	ac20	5500	Ant1	12.448	24	Pass
NVNT	ac20	5600	Ant1	14.443	24	Pass
NVNT	ac20	5700	Ant1	14.151	24	Pass
NVNT	ac20	5745	Ant1	15.835	30	Pass
NVNT	ac20	5785	Ant1	15.325	30	Pass
NVNT	ac20	5825	Ant1	13.762	30	Pass
NVNT	ac40	5190	Ant1	16.444	24	Pass
NVNT	ac40	5230	Ant1	16.834	24	Pass
NVNT	ac40	5270	Ant1	16.689	24	Pass
NVNT	ac40	5310	Ant1	16.249	24	Pass
NVNT	ac40	5510	Ant1	16.874	24	Pass
NVNT	ac40	5590	Ant1	15.239	24	Pass

NVNT	ac40	5670	Ant1	15.889	24	Pass
NVNT	ac40	5755	Ant1	16.813	30	Pass
NVNT	ac40	5795	Ant1	16.008	30	Pass
NVNT	ac80	5210	Ant1	17.383	24	Pass
NVNT	ac80	5290	Ant1	16.938	24	Pass
NVNT	ac80	5530	Ant1	14.931	24	Pass
NVNT	ac80	5610	Ant1	15.457	24	Pass
NVNT	ac80	5775	Ant1	16.143	30	Pass
NVNT	n20	5180	Ant1	13.405	24	Pass
NVNT	n20	5200	Ant1	14.063	24	Pass
NVNT	n20	5240	Ant1	14.899	24	Pass
NVNT	n20	5260	Ant1	15.089	24	Pass
NVNT	n20	5280	Ant1	14.96	24	Pass
NVNT	n20	5320	Ant1	12.775	24	Pass
NVNT	n20	5500	Ant1	12.643	24	Pass
NVNT	n20	5600	Ant1	14.713	24	Pass
NVNT	n20	5700	Ant1	14.532	24	Pass
NVNT	n20	5745	Ant1	15.8	30	Pass
NVNT	n20	5785	Ant1	14.961	30	Pass
NVNT	n20	5825	Ant1	13.459	30	Pass
NVNT	n40	5190	Ant1	17.072	24	Pass
NVNT	n40	5230	Ant1	17.49	24	Pass
NVNT	n40	5270	Ant1	17.362	24	Pass
NVNT	n40	5310	Ant1	16.231	24	Pass
NVNT	n40	5510	Ant1	16.861	24	Pass
NVNT	n40	5590	Ant1	17.152	24	Pass
NVNT	n40	5670	Ant1	14.342	24	Pass
NVNT	n40	5755	Ant1	16.774	30	Pass
NVNT	n40	5795	Ant1	15.957	30	Pass


Power NVNT a 5180MHz Ant1

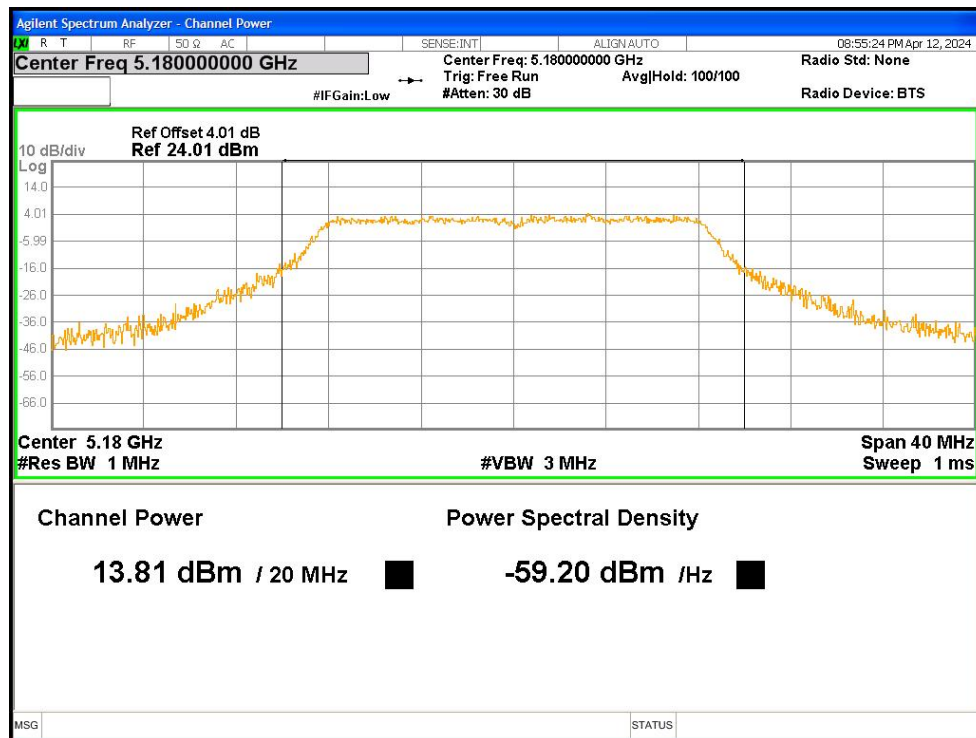


Power NVNT a 5200MHz Ant1

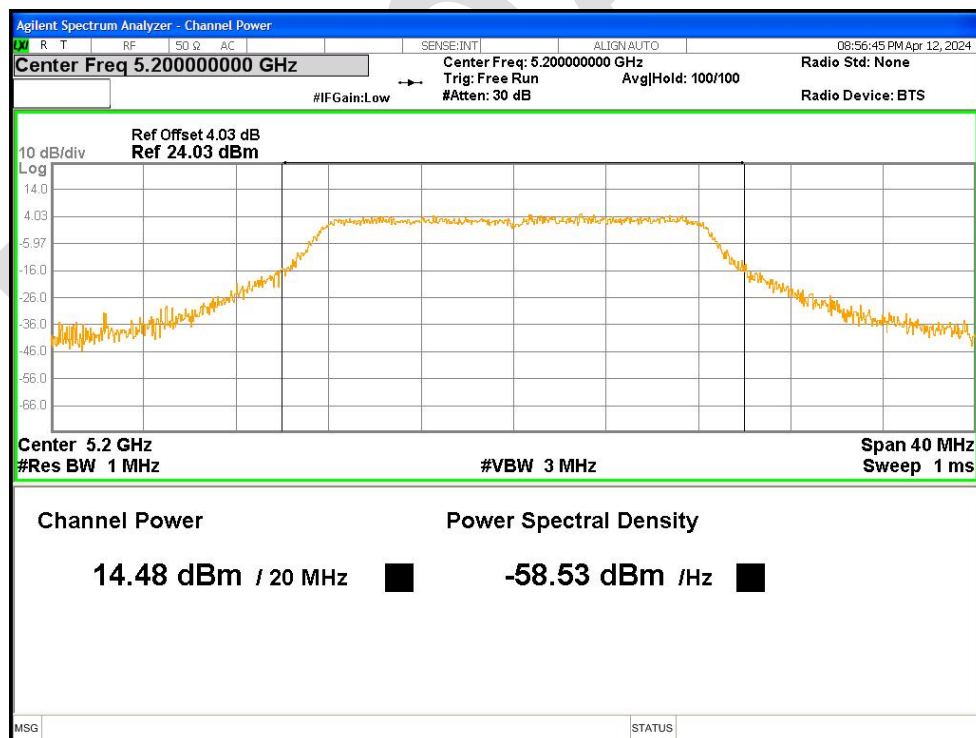


Power NVNT a 5240MHz Ant1

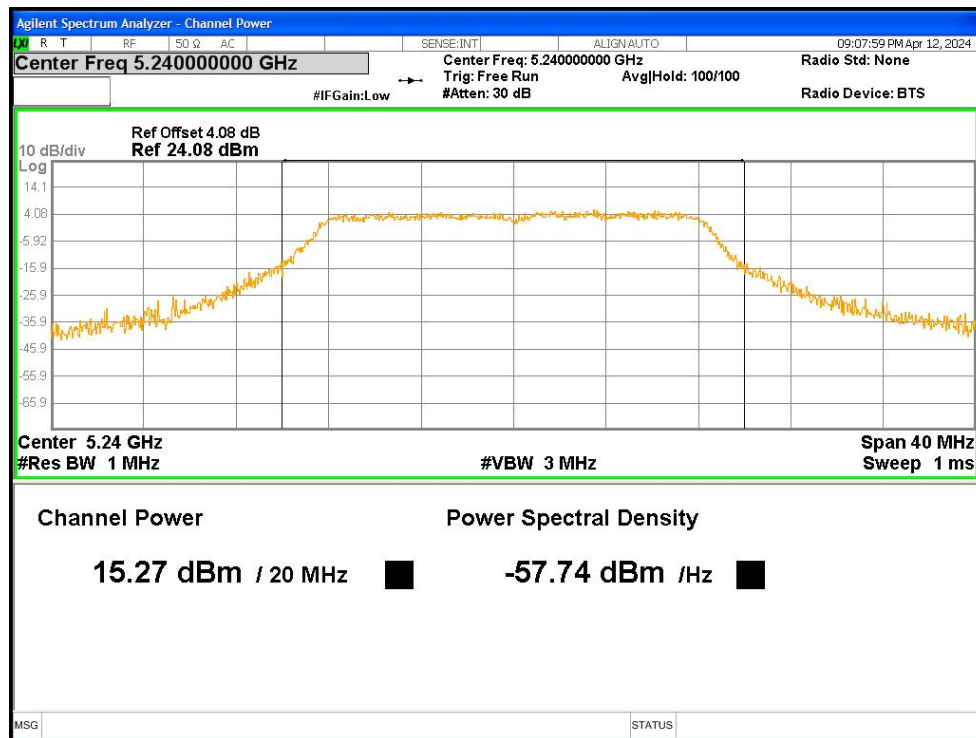


Power NVNT a 5260MHz Ant1

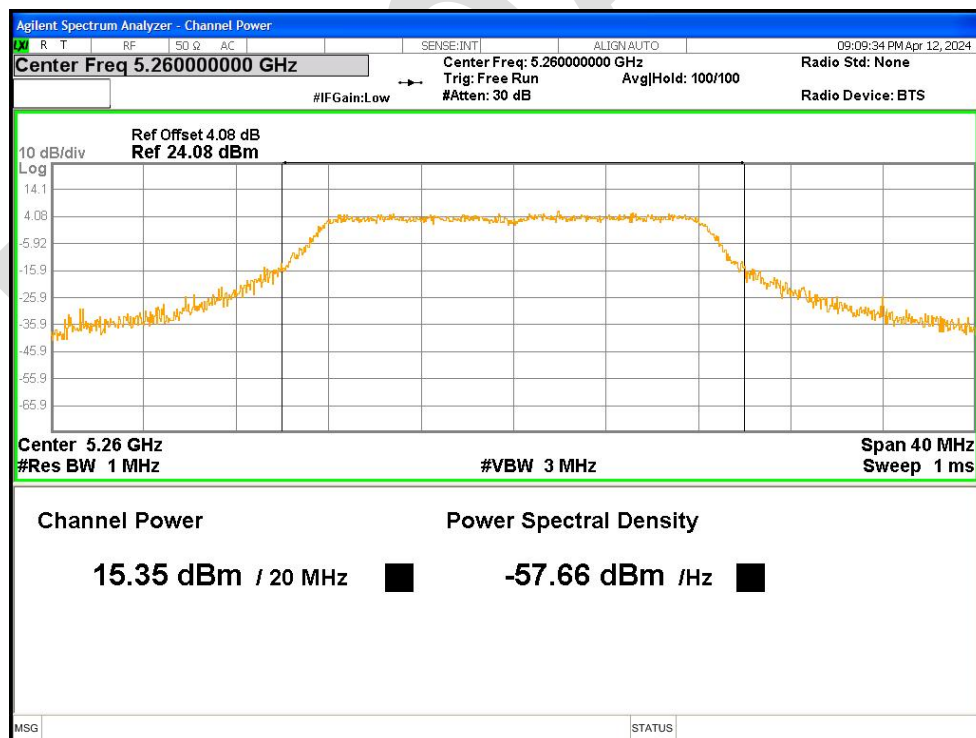


Power NVNT a 5280MHz Ant1

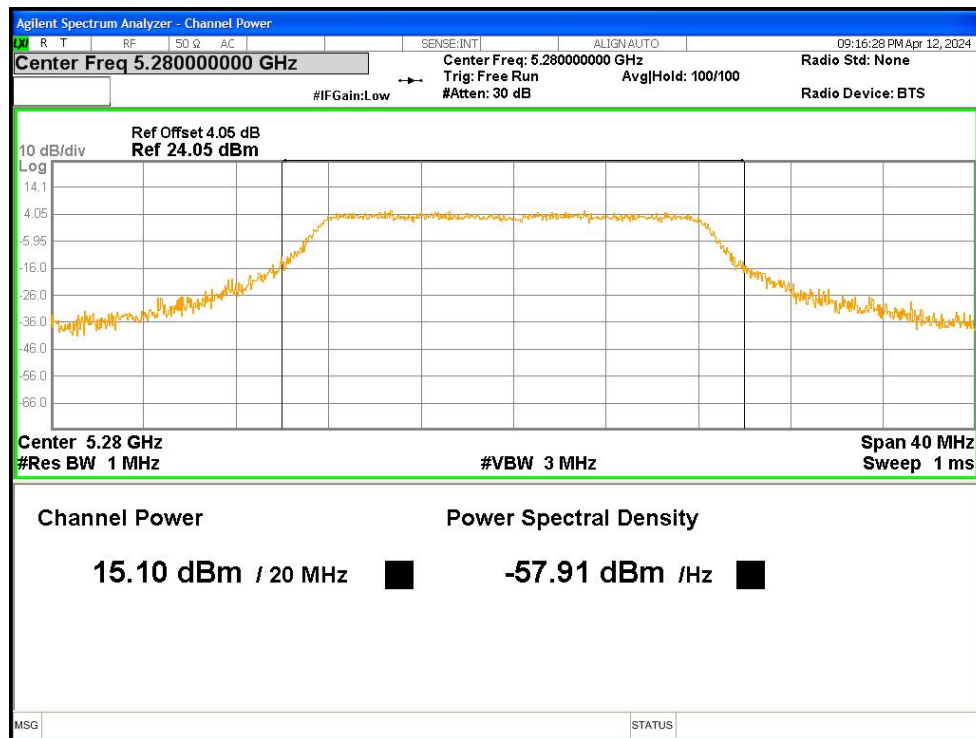


Power NVNT a 5320MHz Ant1

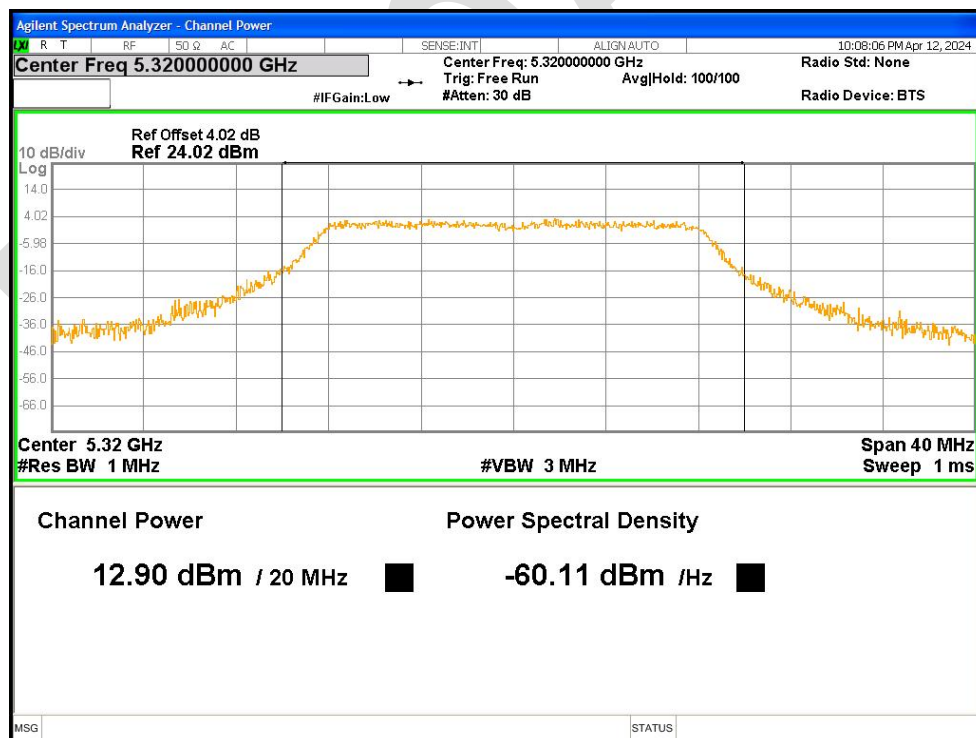


Power NVNT a 5500MHz Ant1

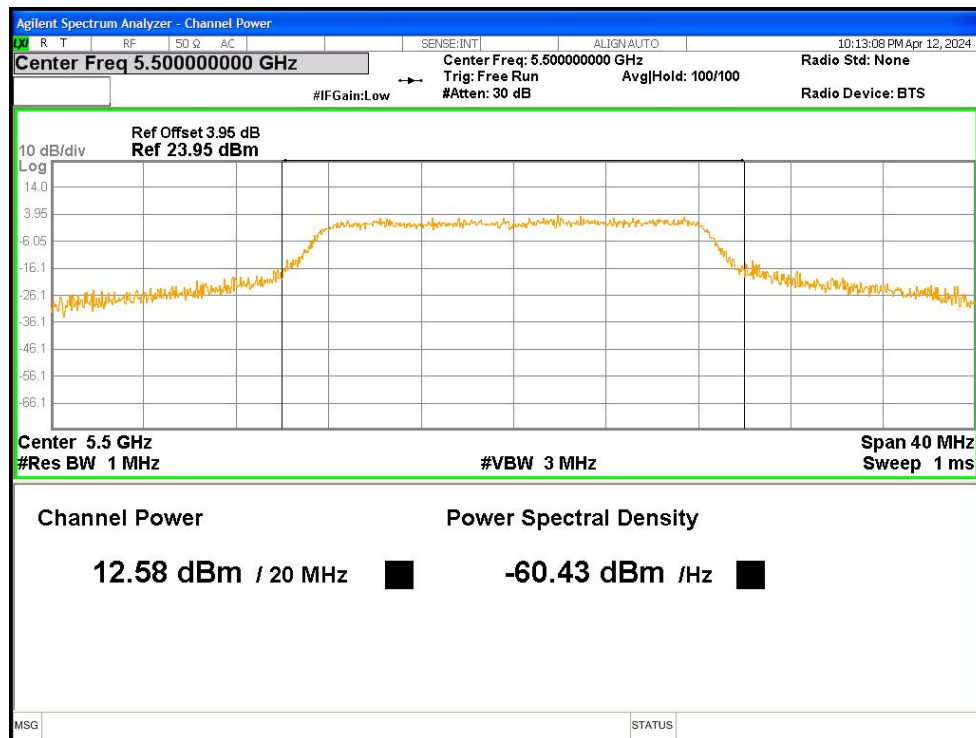


Power NVNT a 5600MHz Ant1

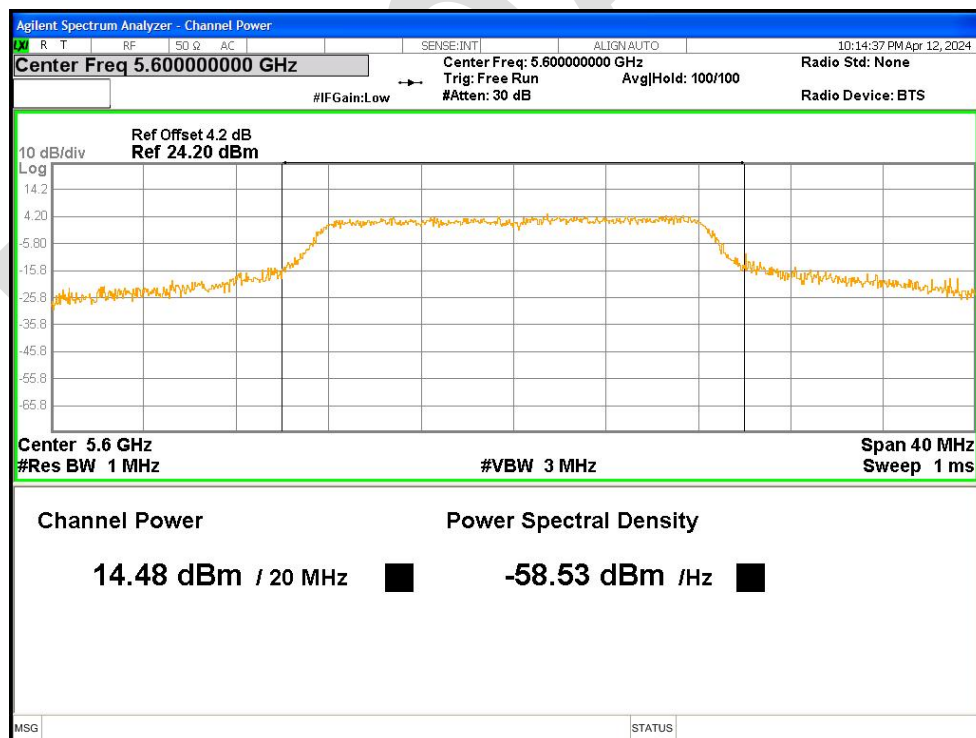


Power NVNT a 5700MHz Ant1

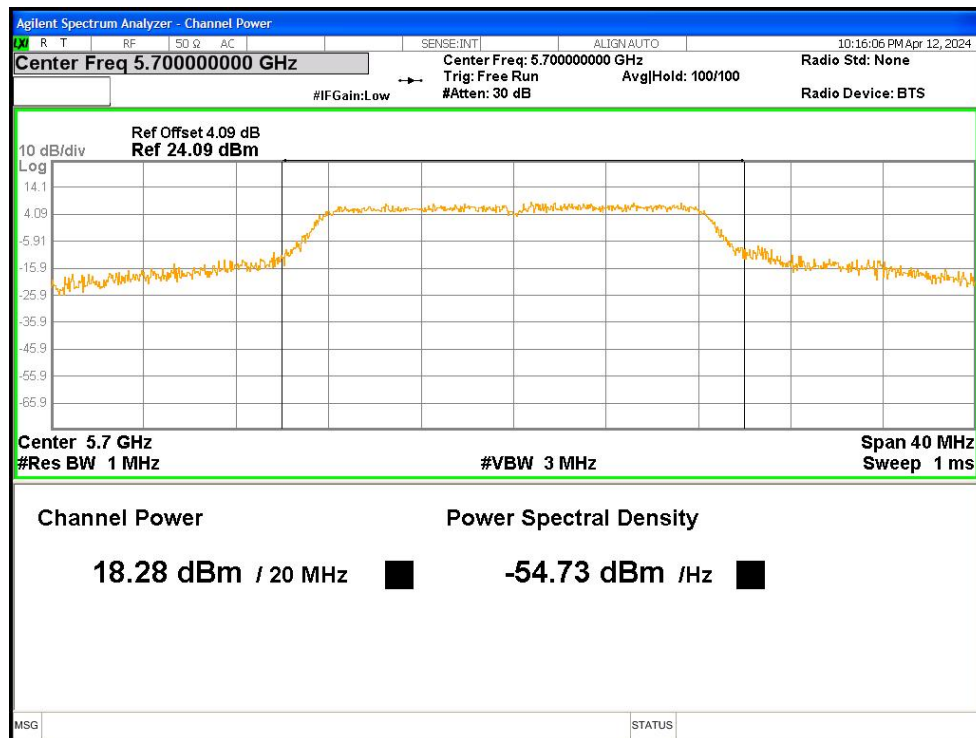


Power NVNT a 5745MHz Ant1

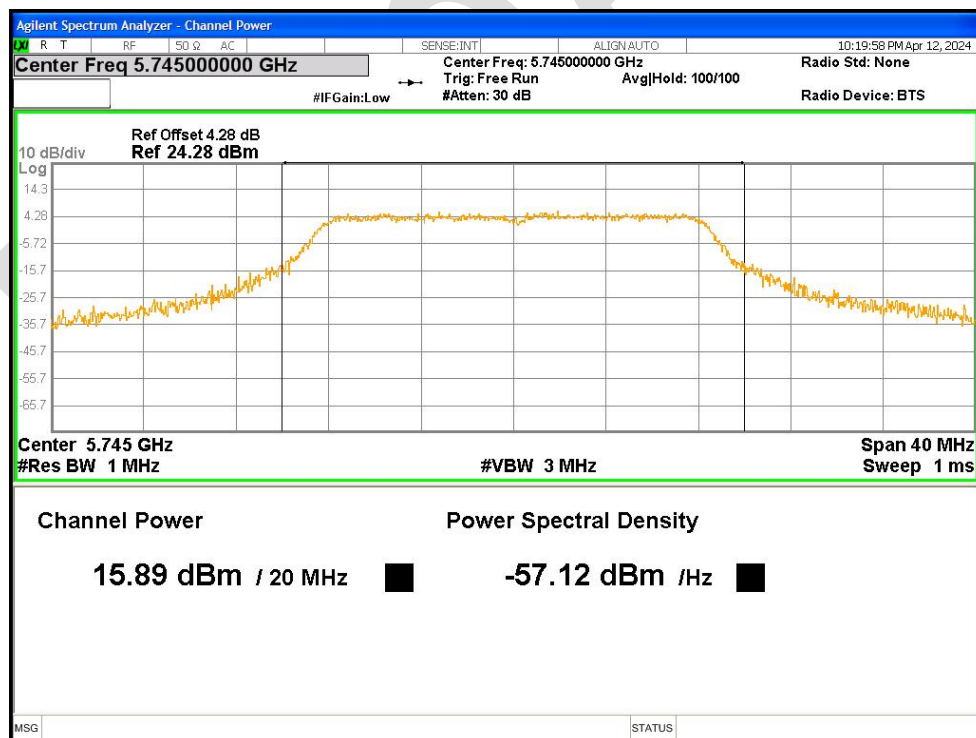


Power NVNT a 5785MHz Ant1

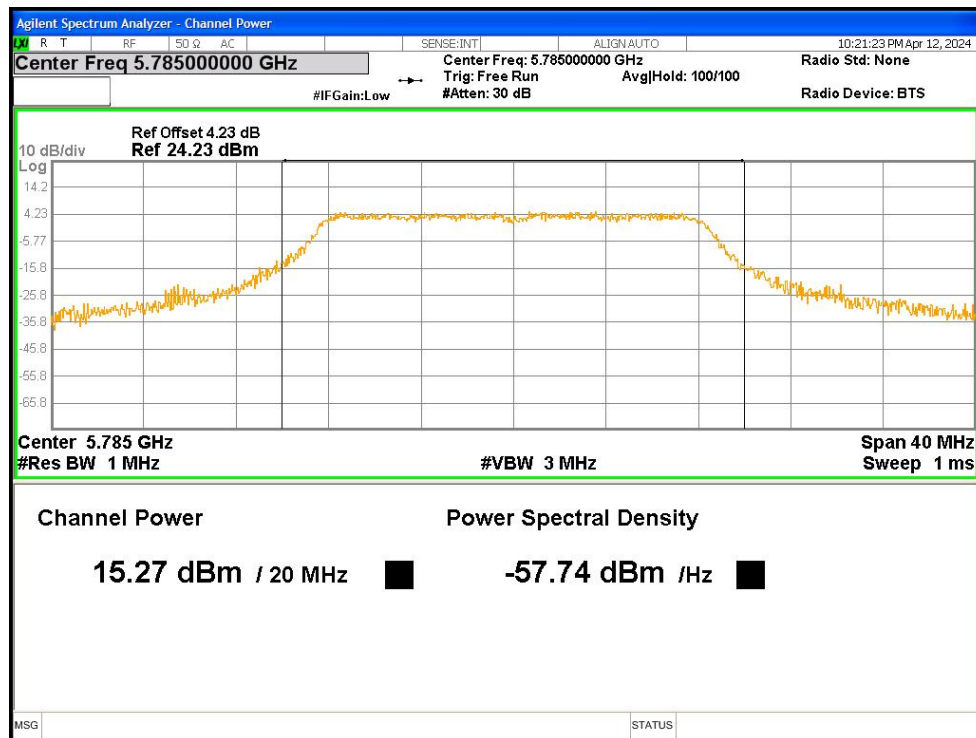


Power NVNT a 5825MHz Ant1

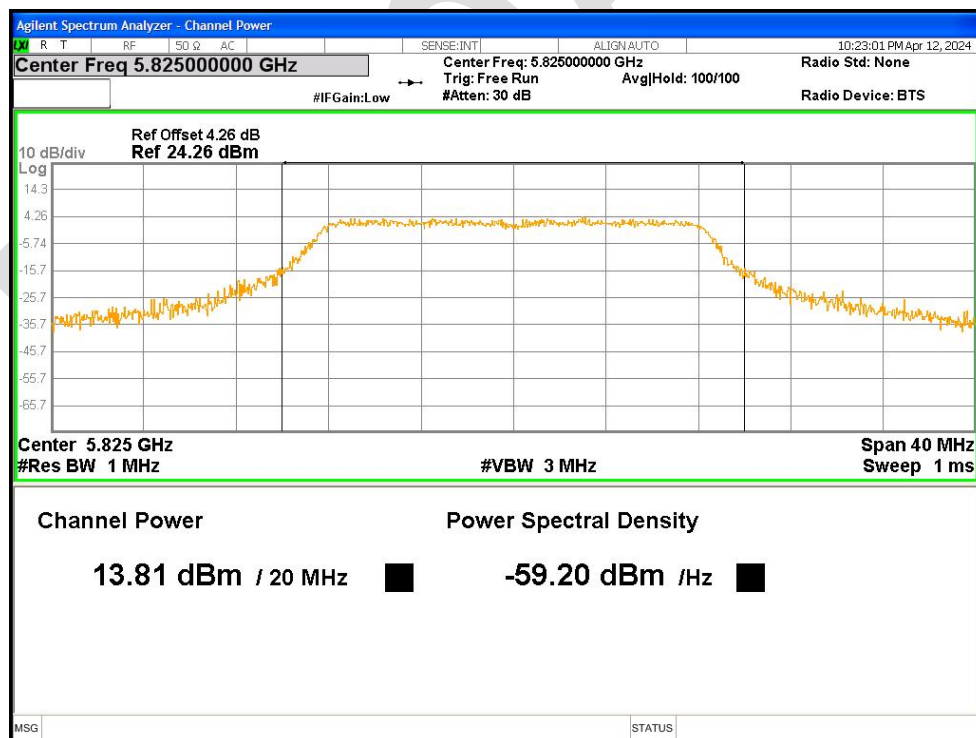


Power NVNT ac20 5180MHz Ant1

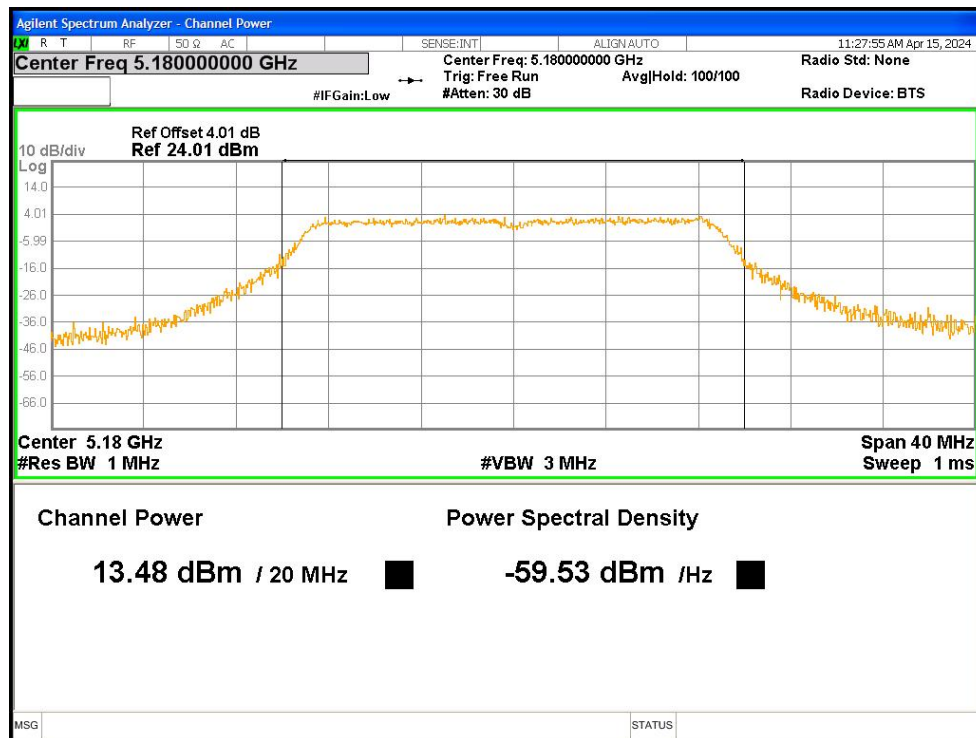


Power NVNT ac20 5200MHz Ant1

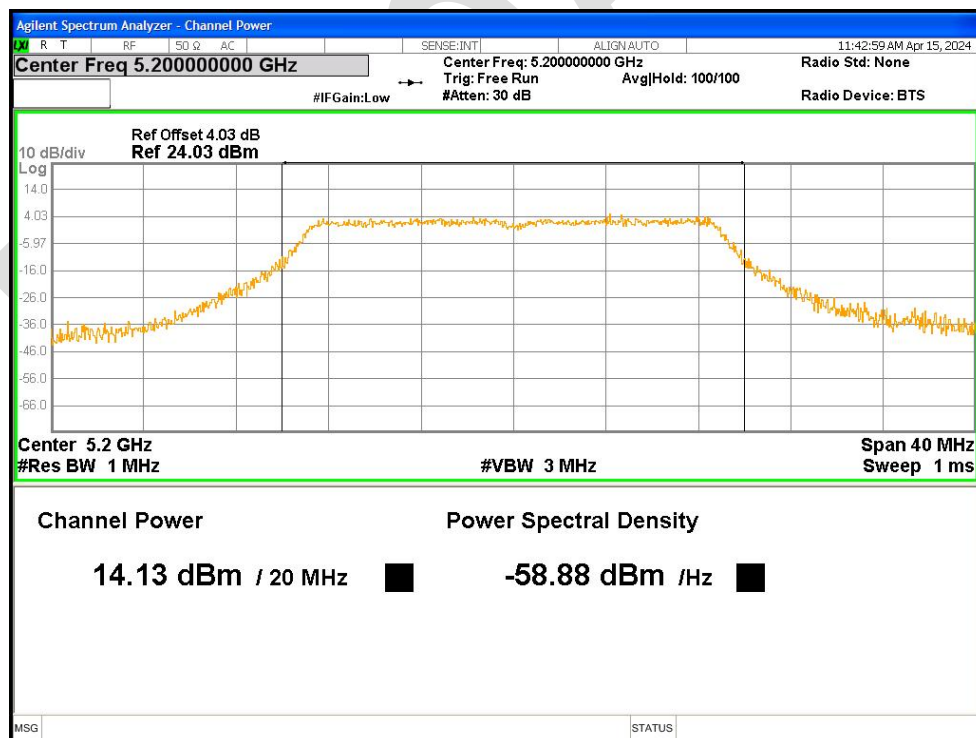


Power NVNT ac20 5240MHz Ant1

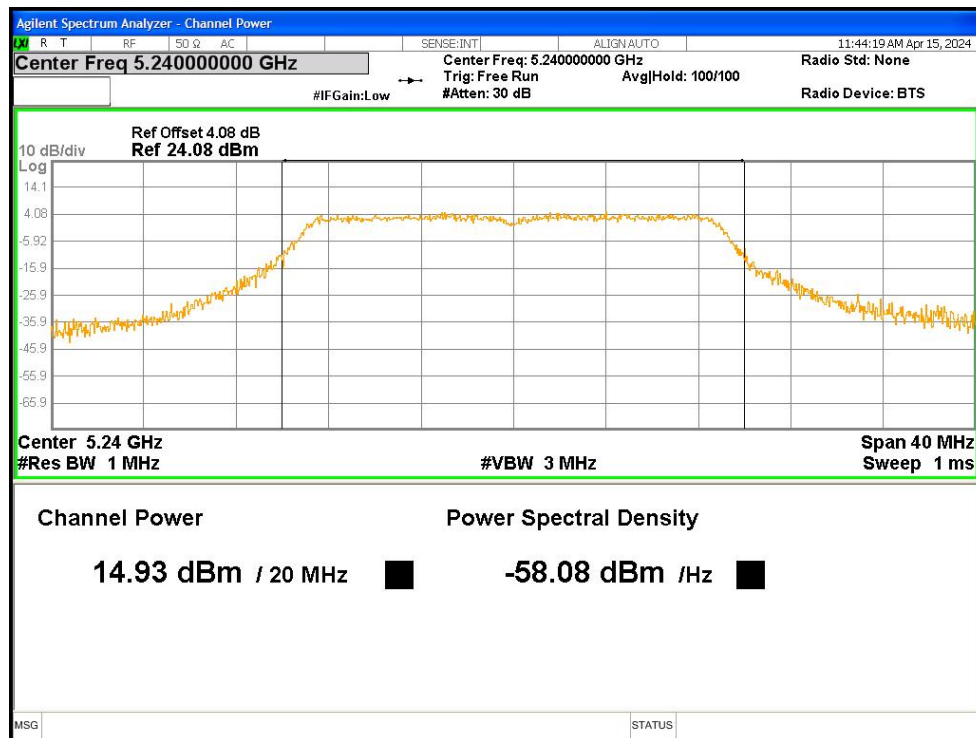


Power NVNT ac20 5260MHz Ant1

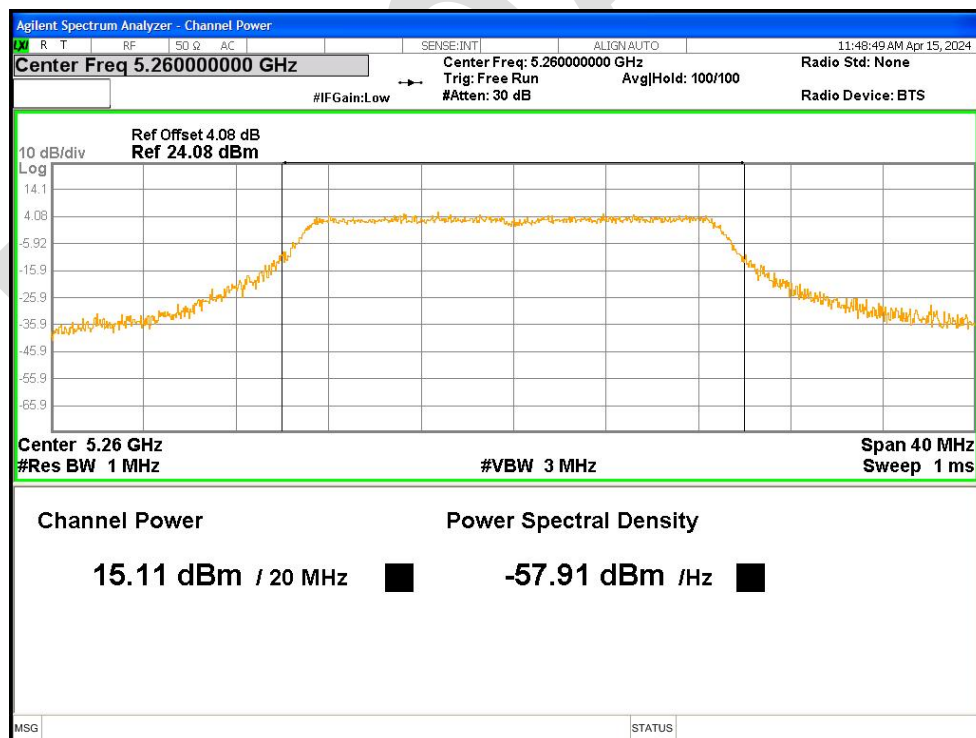


Power NVNT ac20 5280MHz Ant1

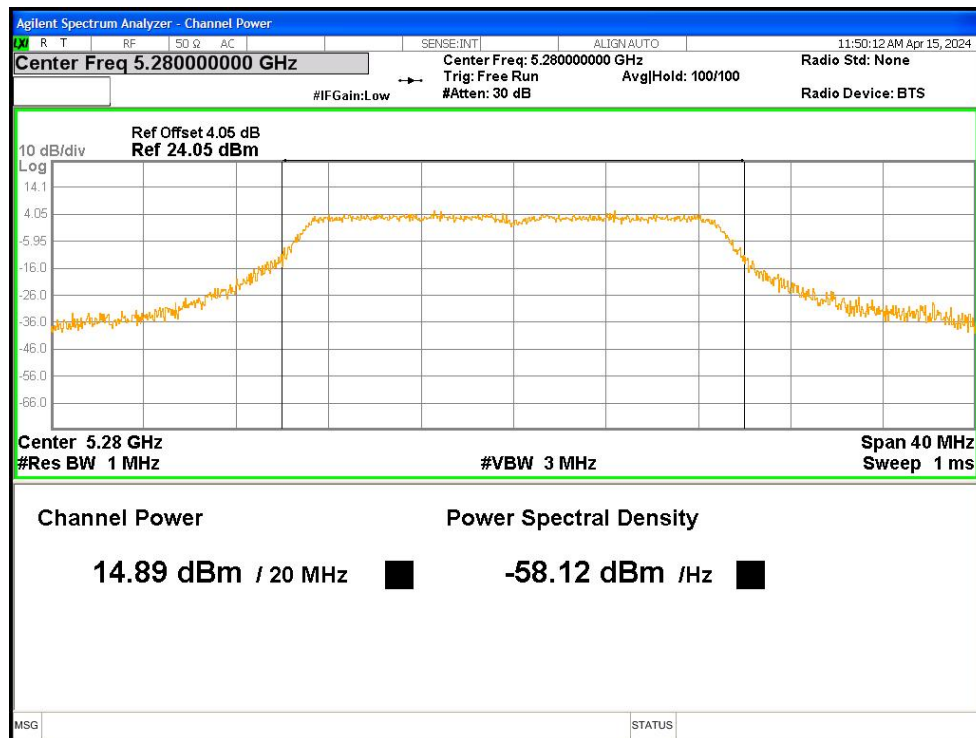


Power NVNT ac20 5320MHz Ant1

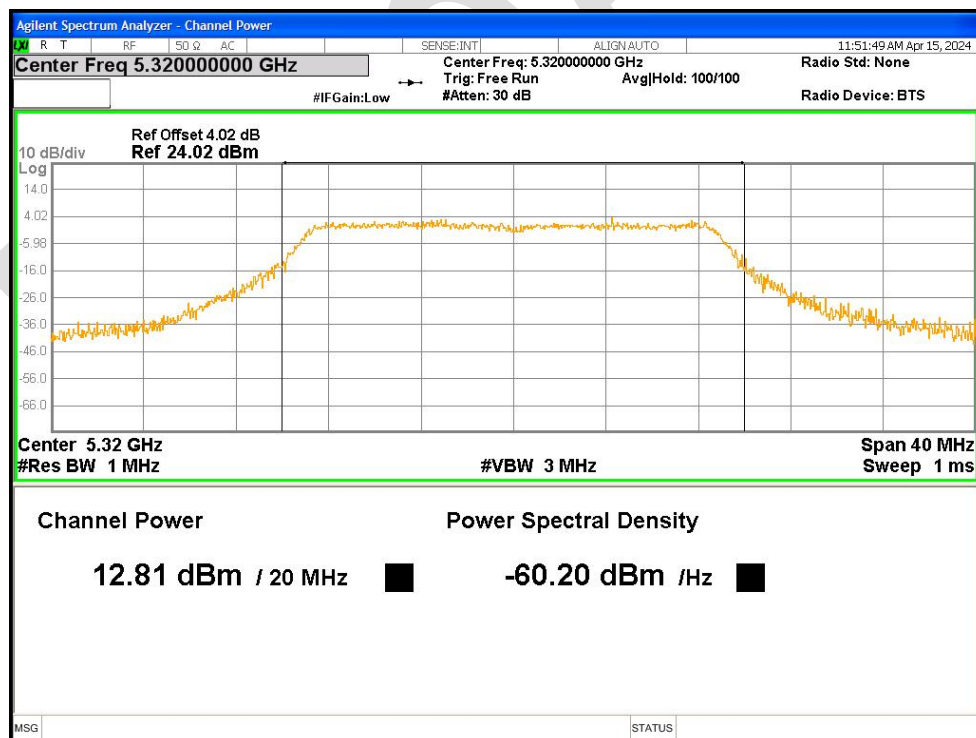


Power NVNT ac20 5500MHz Ant1

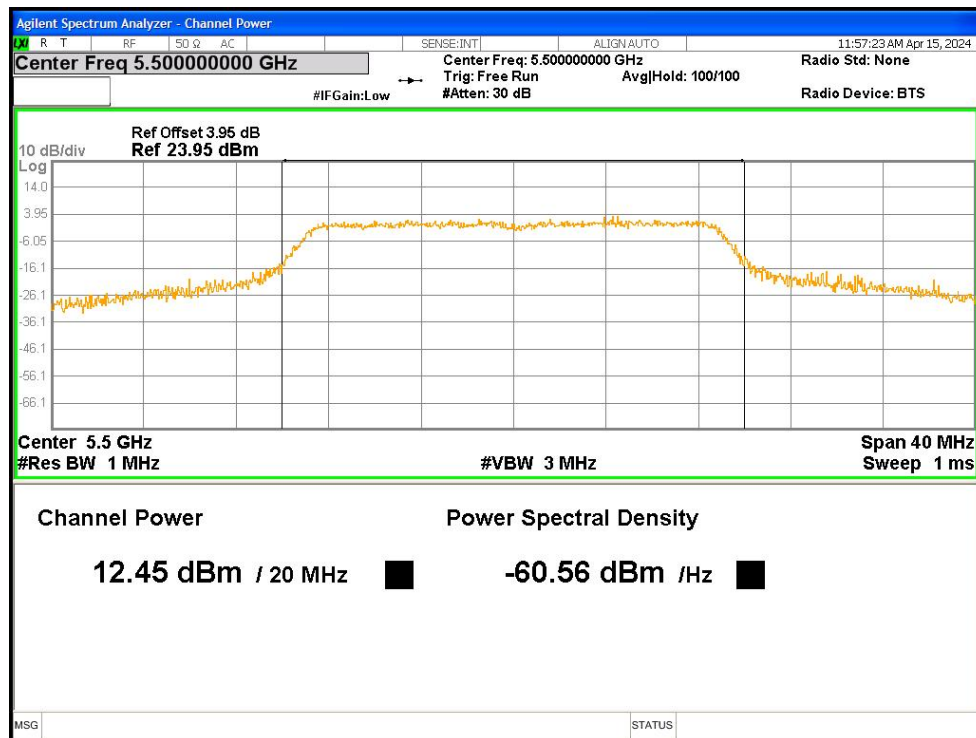


Power NVNT ac20 5600MHz Ant1

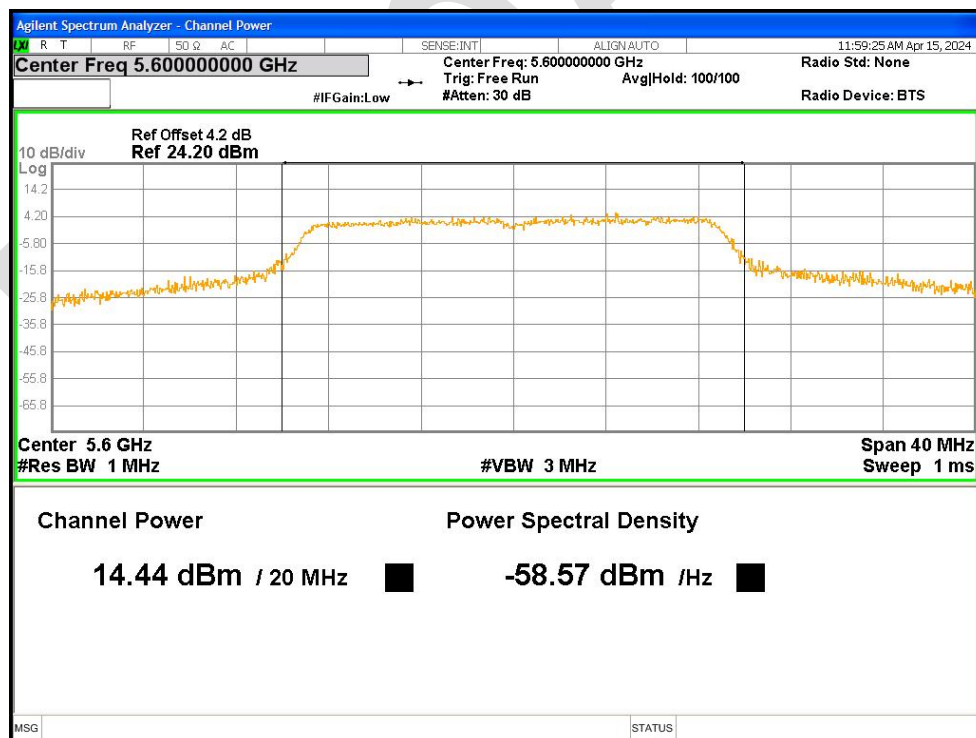


Power NVNT ac20 5700MHz Ant1

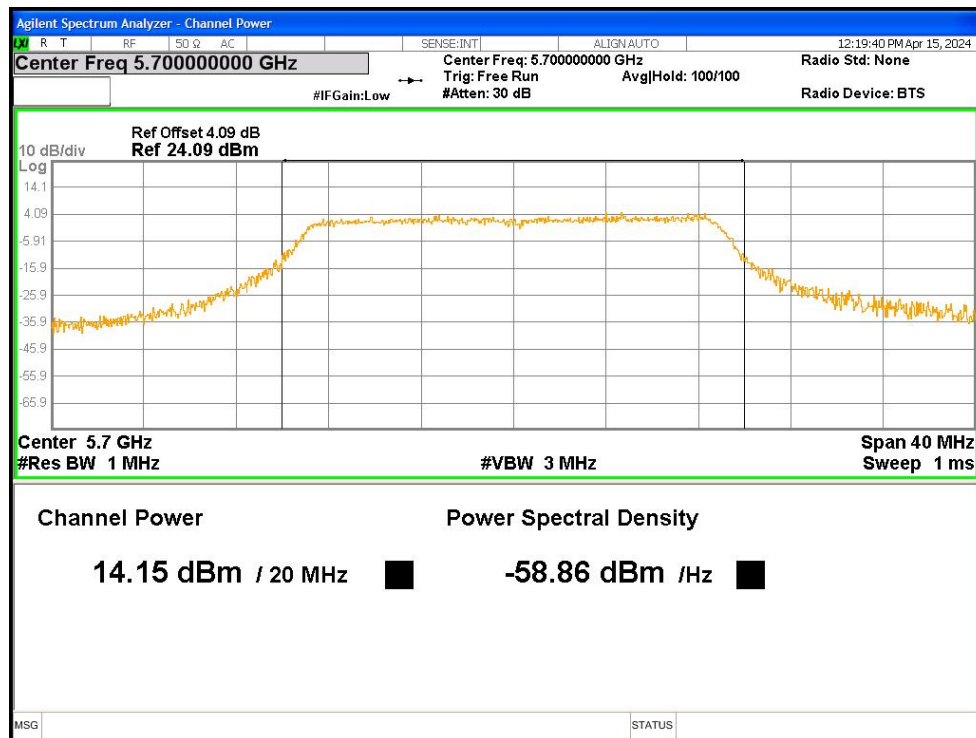


Power NVNT ac20 5745MHz Ant1

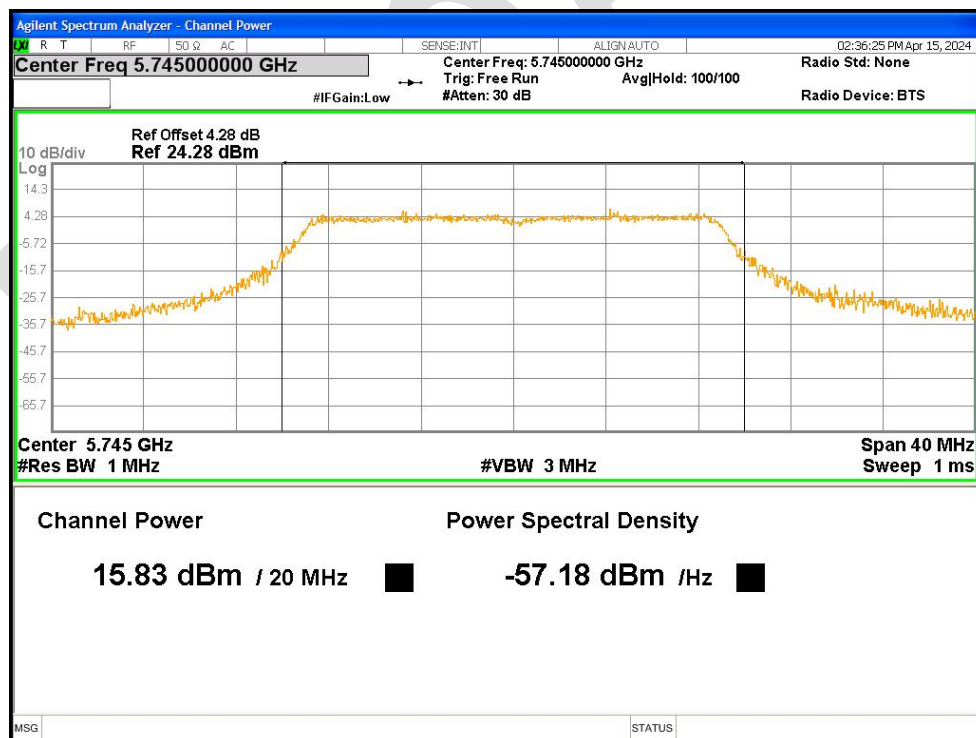


Power NVNT ac20 5785MHz Ant1

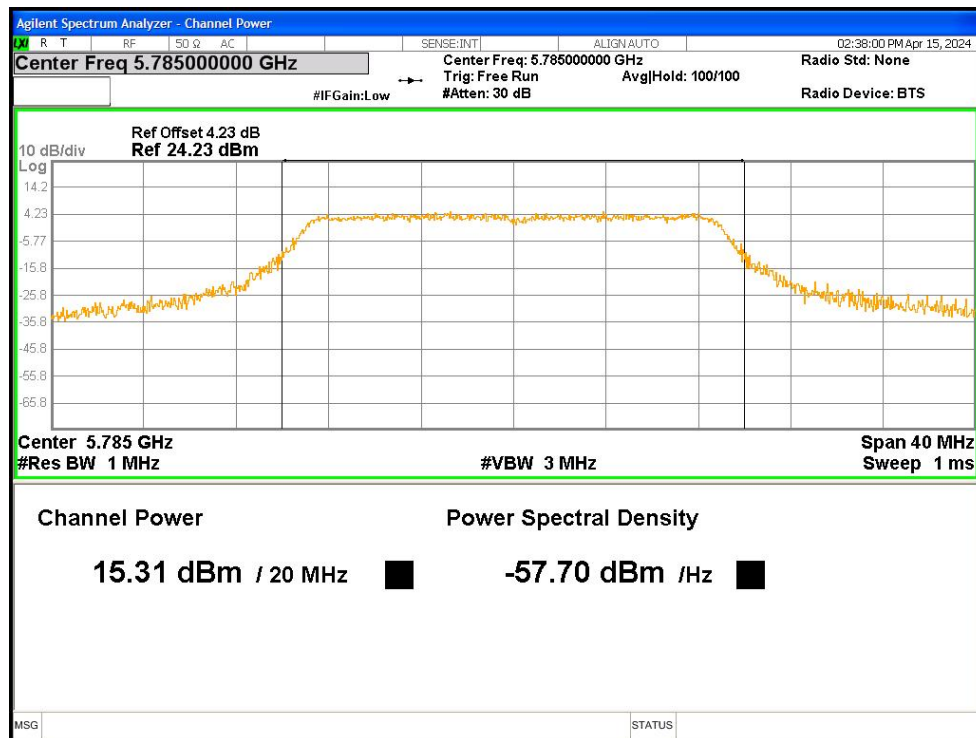


Power NVNT ac20 5825MHz Ant1

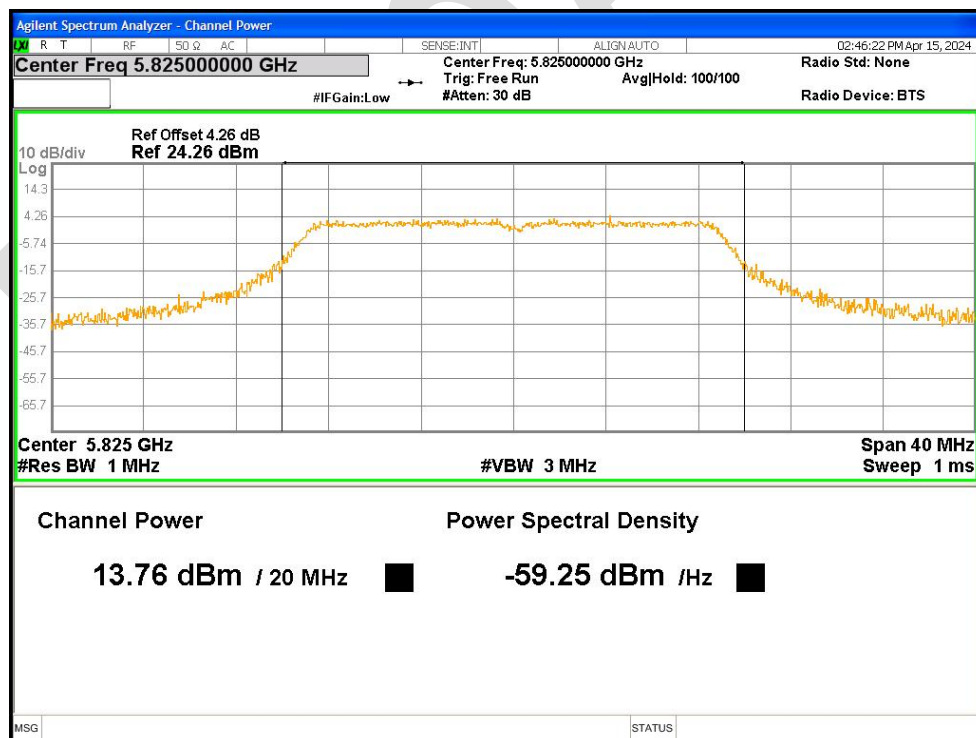


Power NVNT ac40 5190MHz Ant1

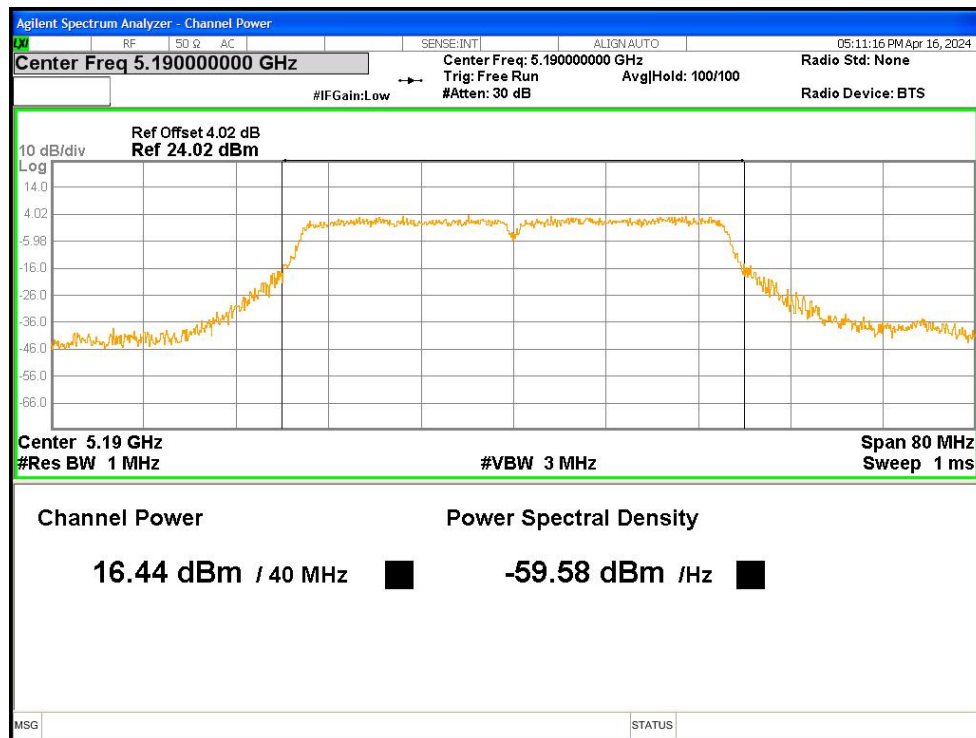


Power NVNT ac40 5230MHz Ant1

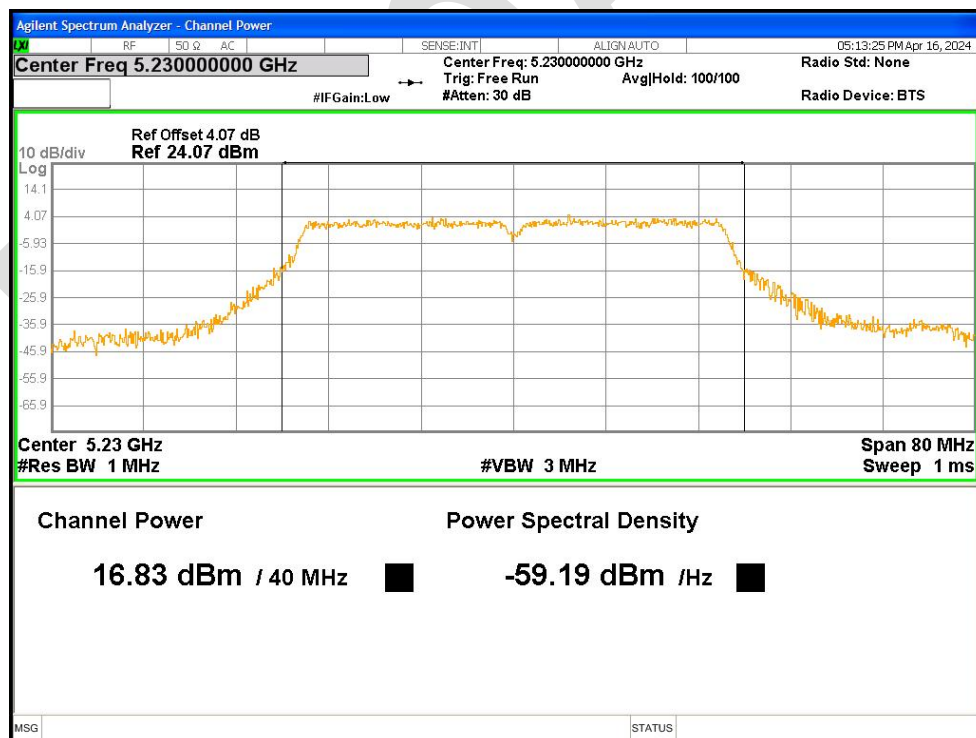


Power NVNT ac40 5270MHz Ant1

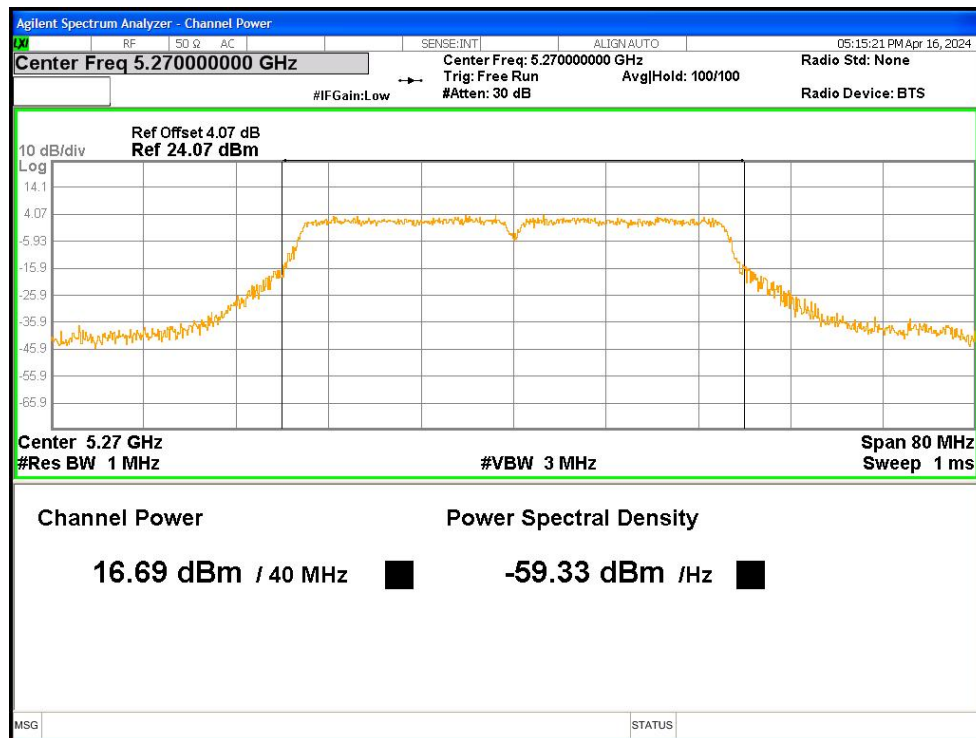


Power NVNT ac40 5310MHz Ant1

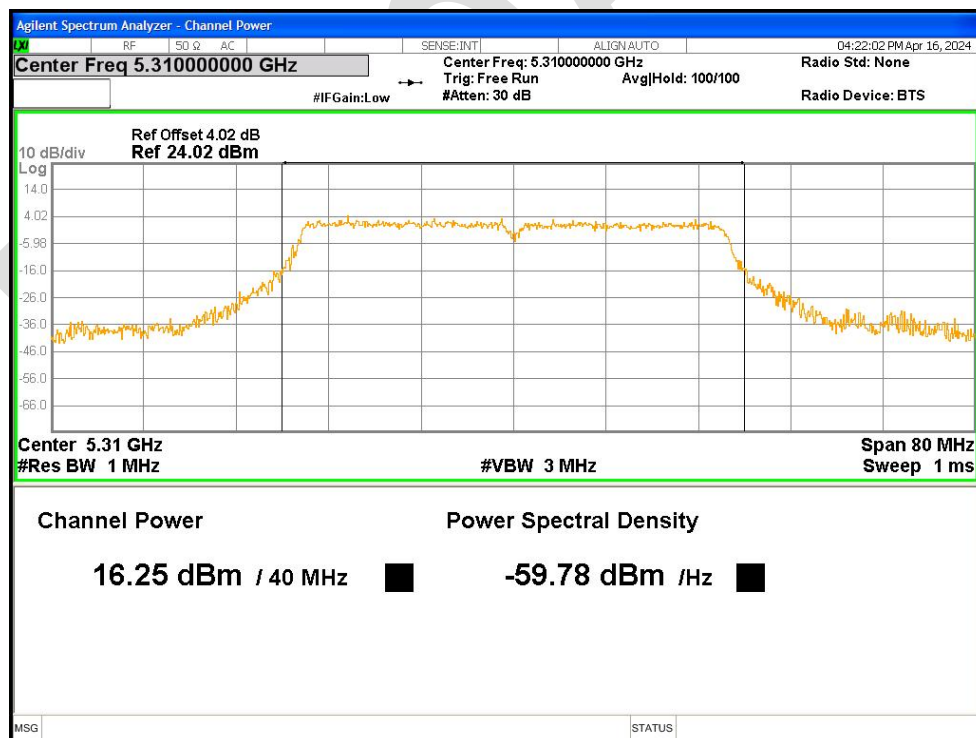


Power NVNT ac40 5510MHz Ant1

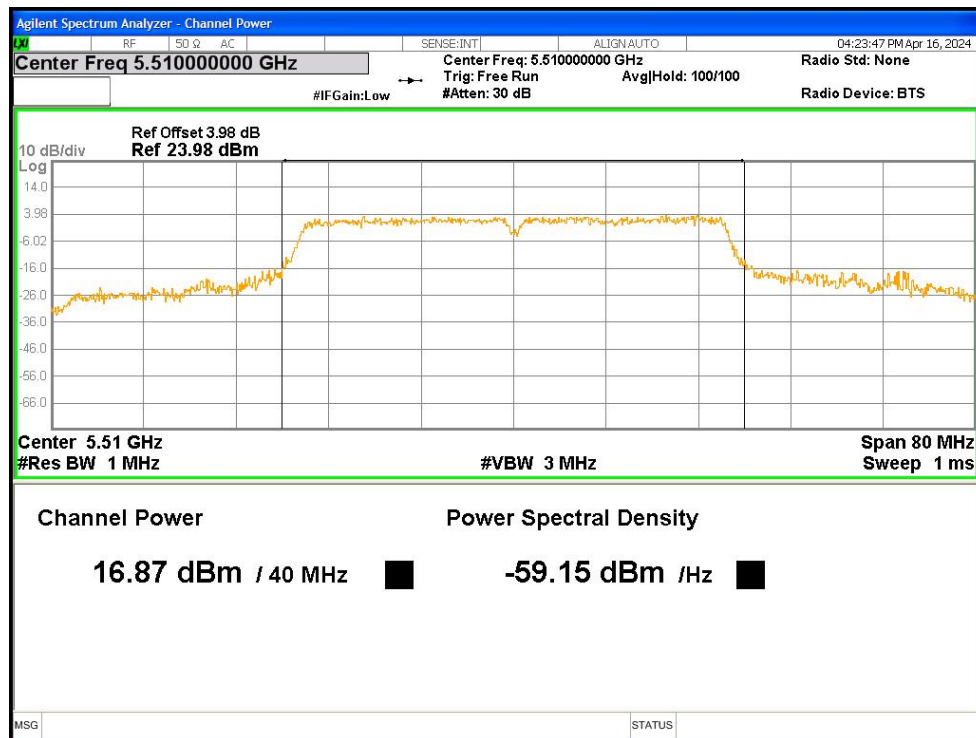


Power NVNT ac40 5590MHz Ant1

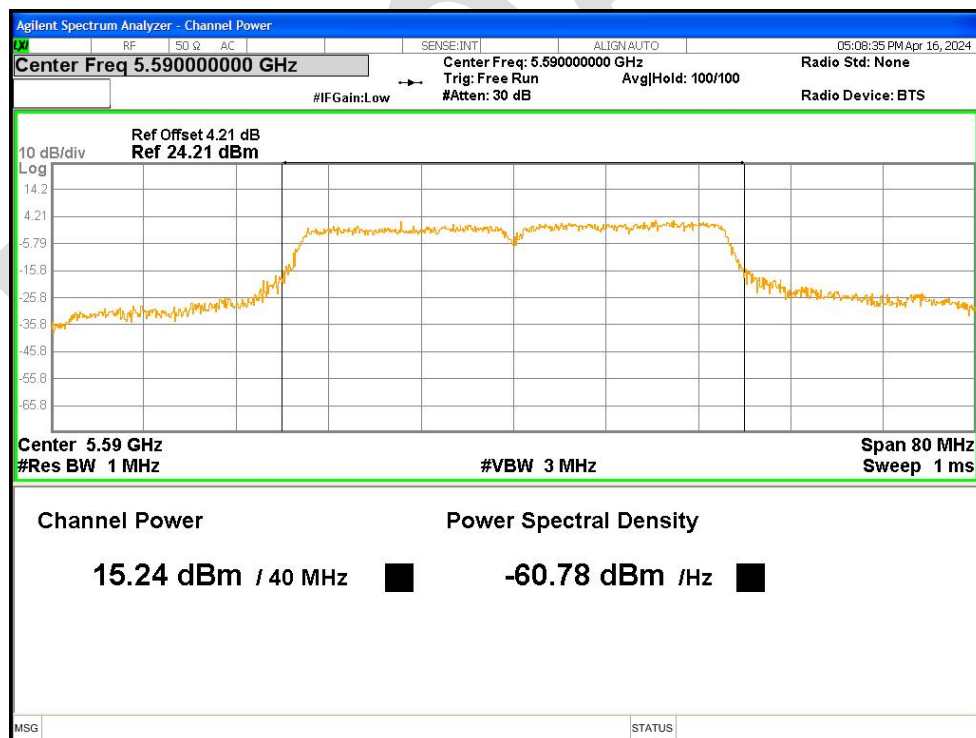


Power NVNT ac40 5670MHz Ant1

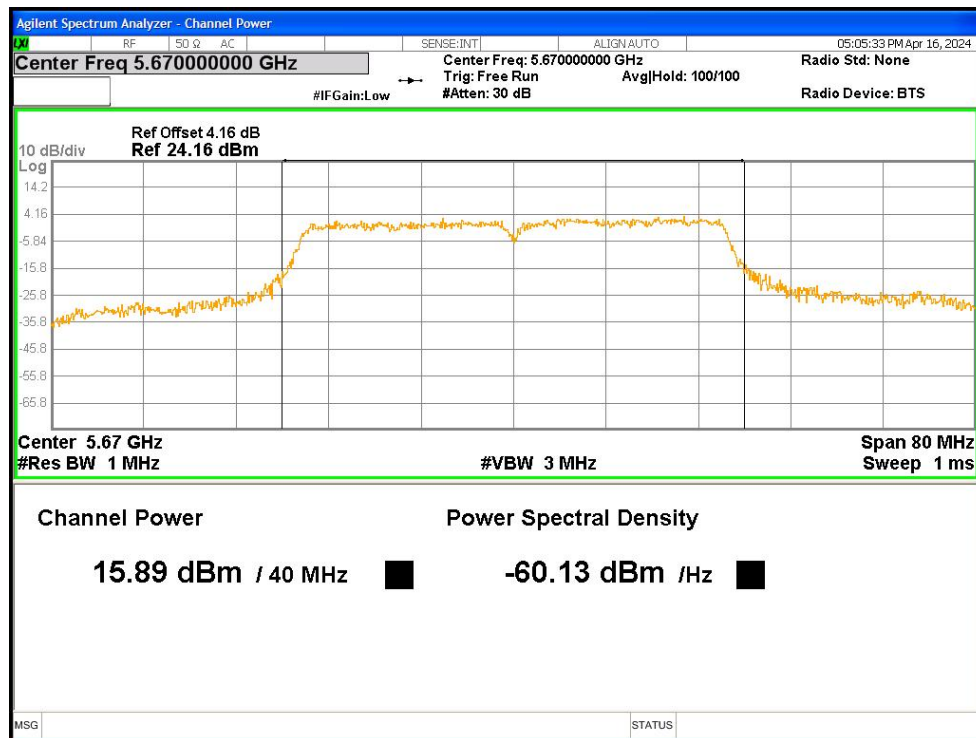


Power NVNT ac40 5755MHz Ant1

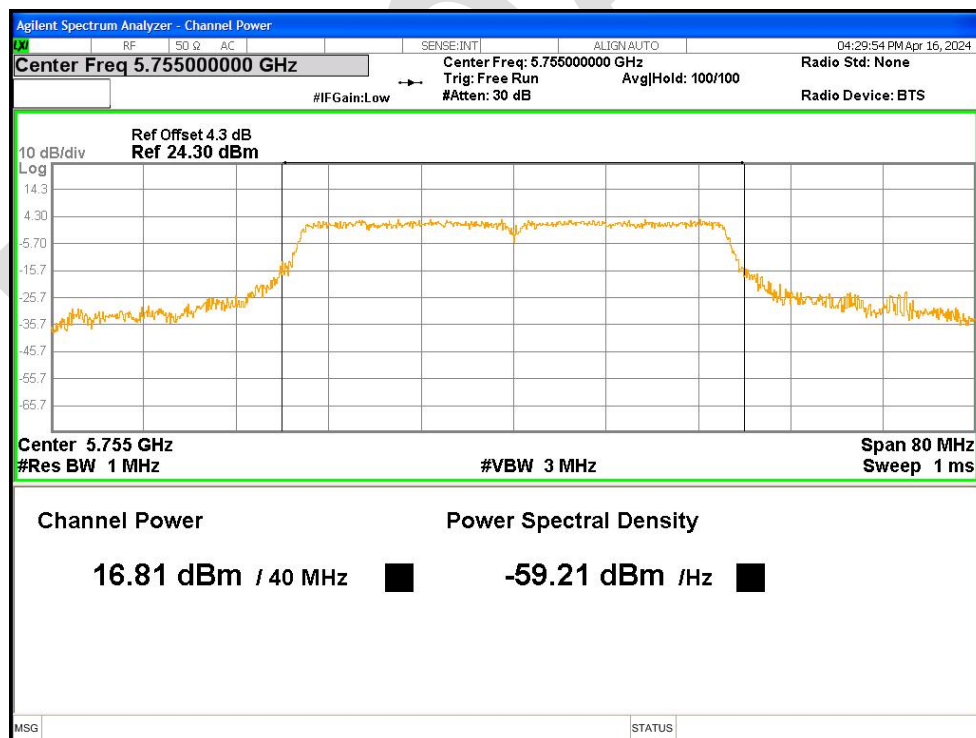


Power NVNT ac40 5795MHz Ant1

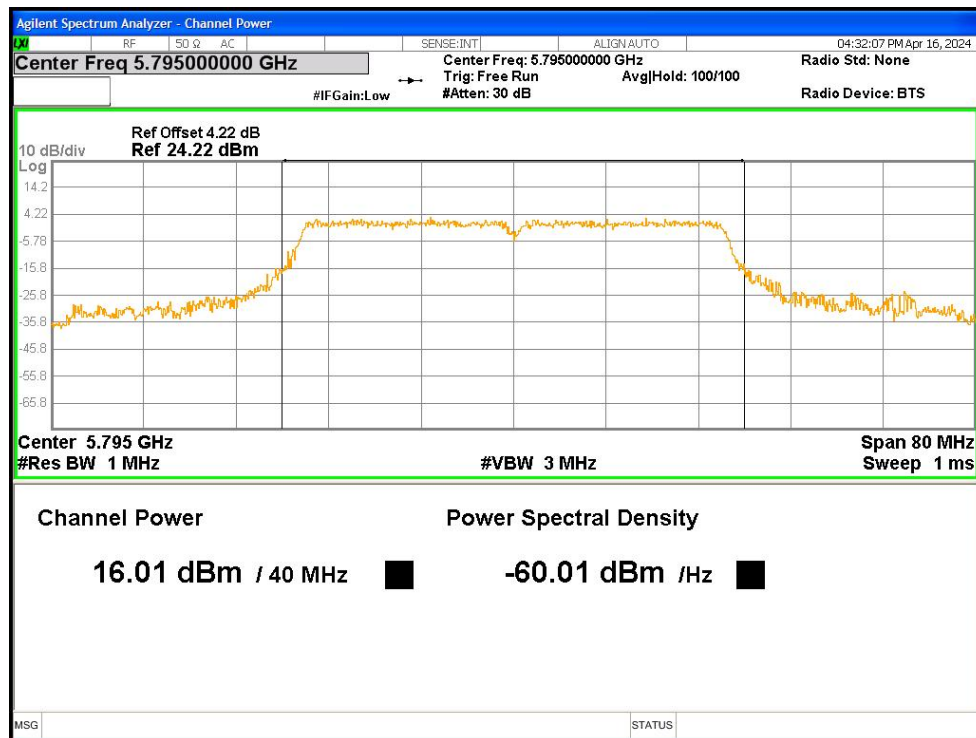


Power NVNT ac80 5210MHz Ant1

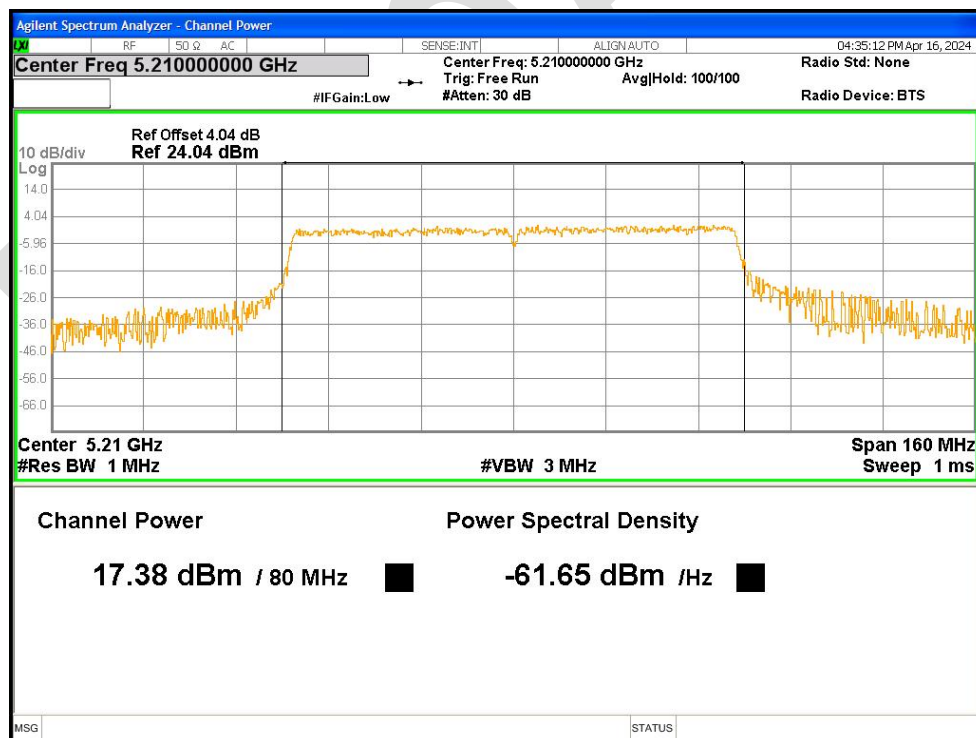


Power NVNT ac80 5290MHz Ant1

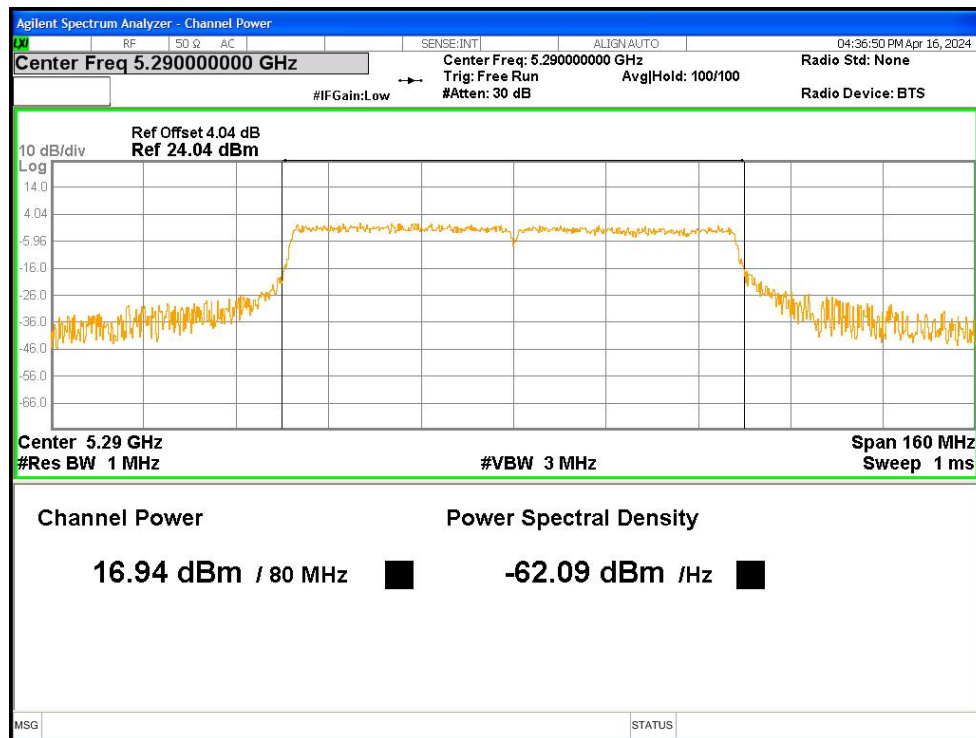


Power NVNT ac80 5530MHz Ant1

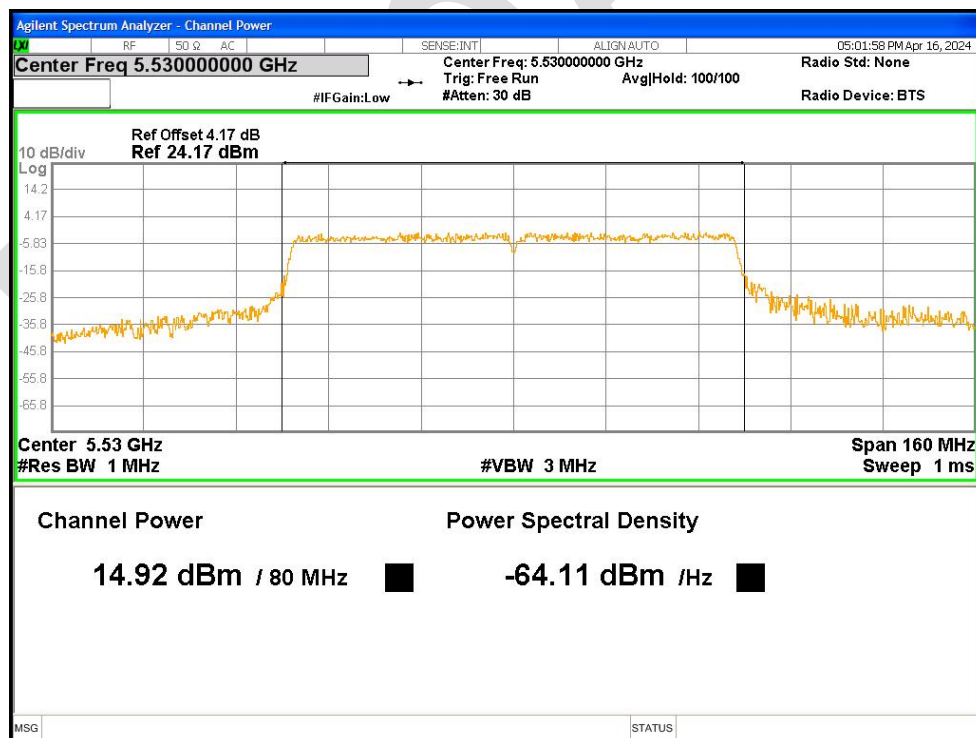


Power NVNT ac80 5610MHz Ant1

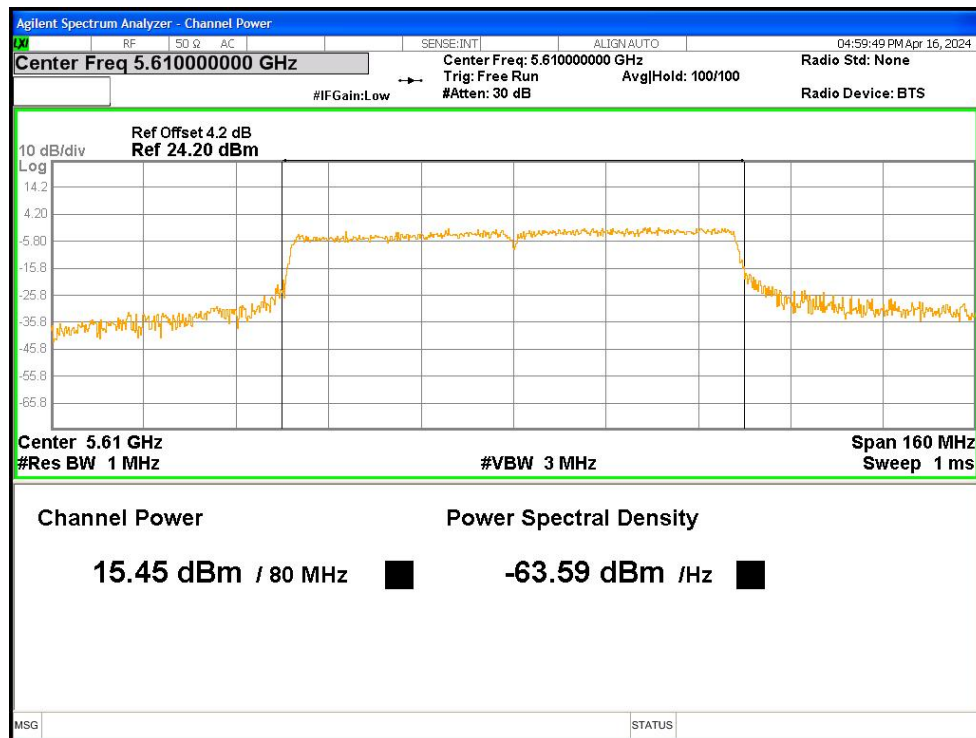


Power NVNT ac80 5775MHz Ant1

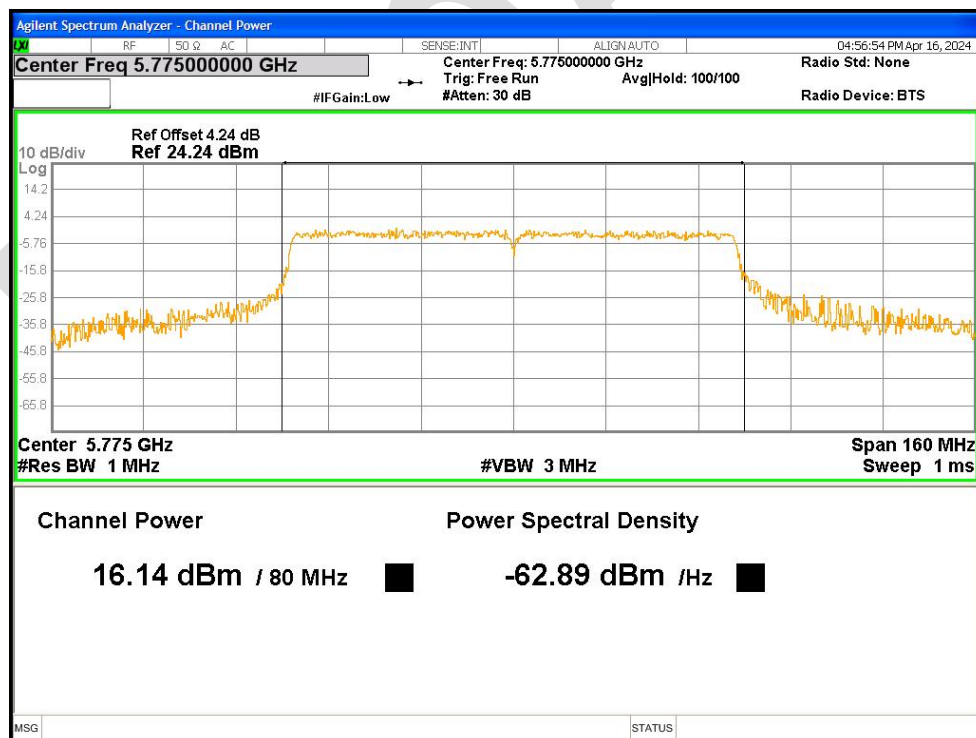


Power NVNT n20 5180MHz Ant1

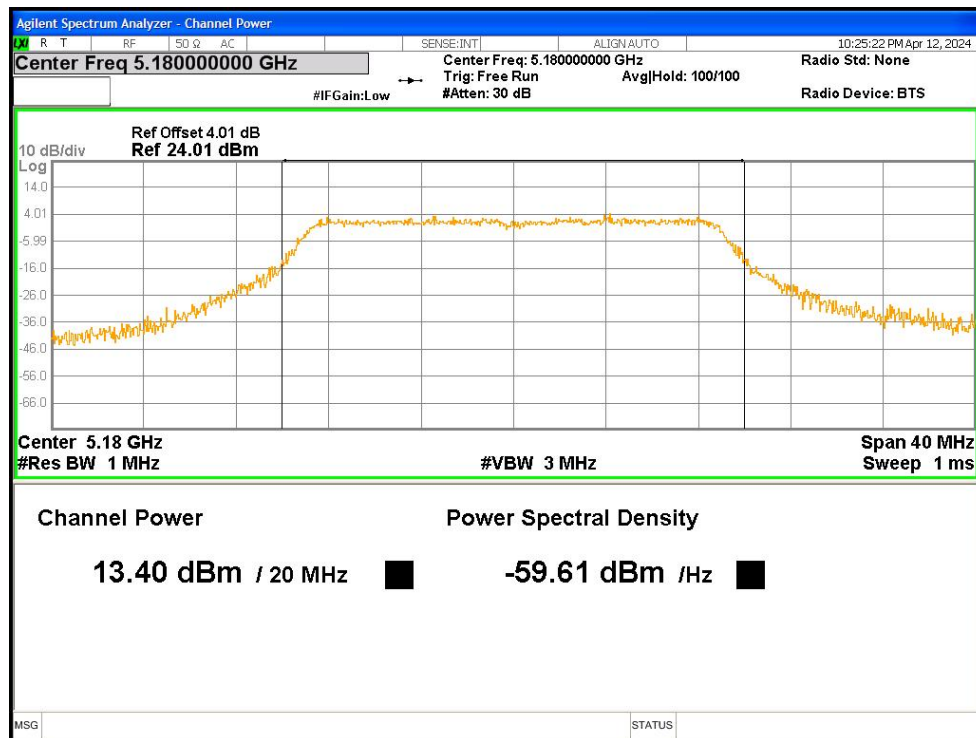


Power NVNT n20 5200MHz Ant1

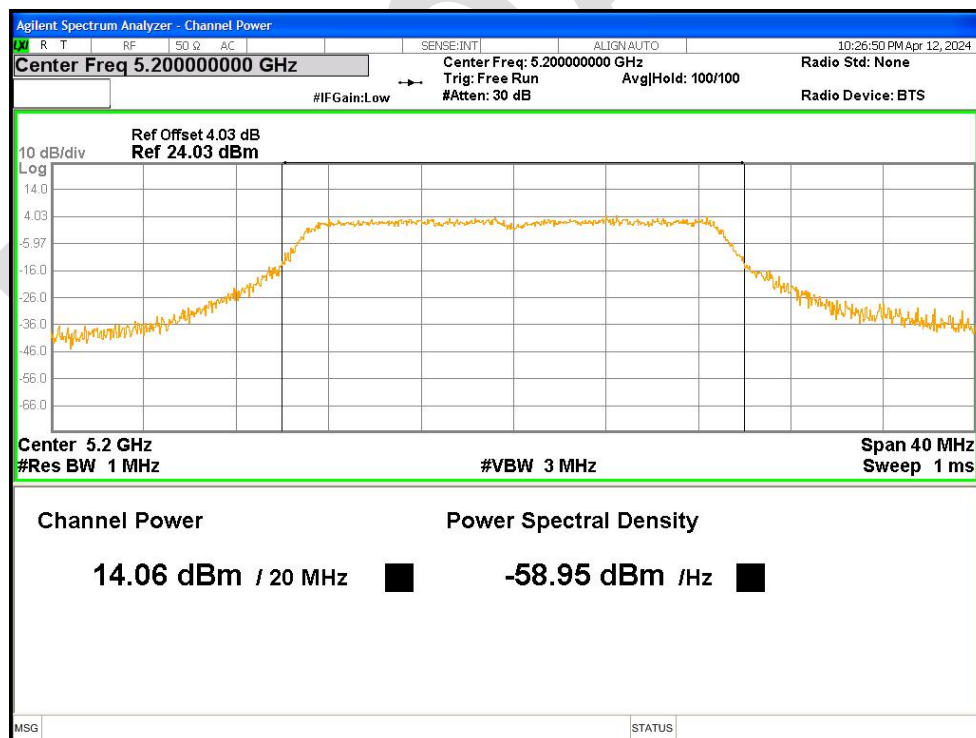


Power NVNT n20 5240MHz Ant1

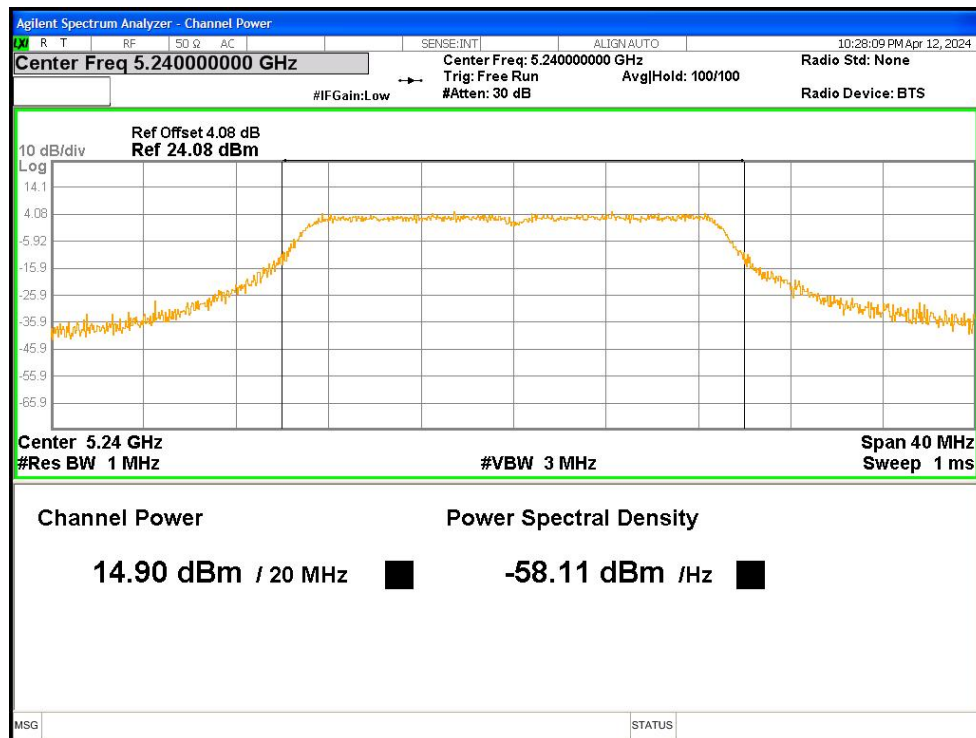


Power NVNT n20 5260MHz Ant1

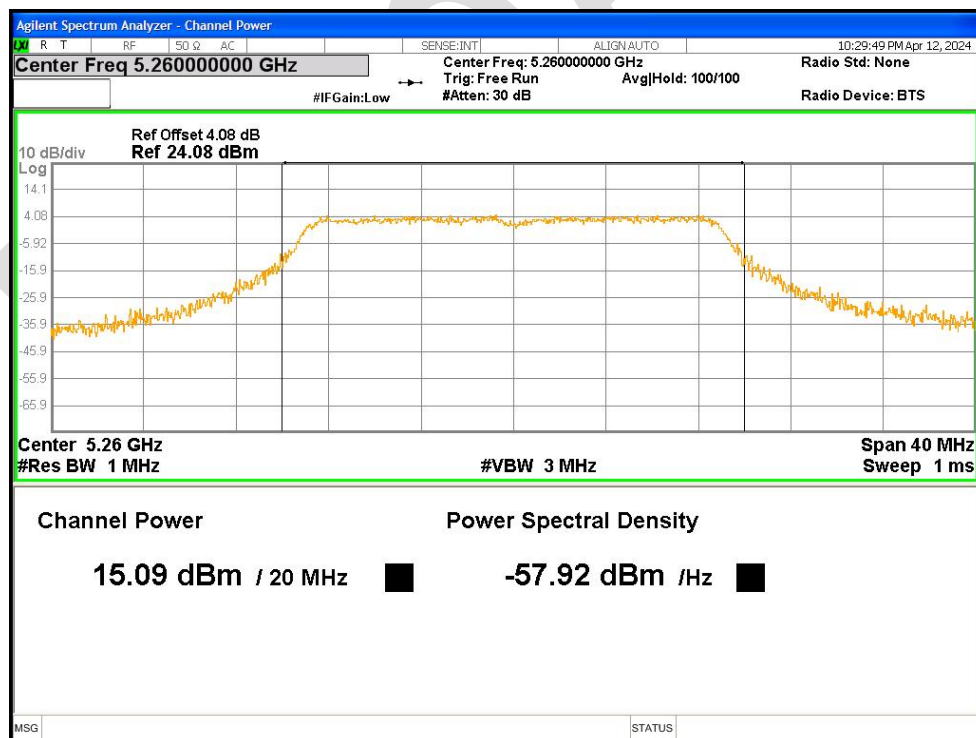


Power NVNT n20 5280MHz Ant1

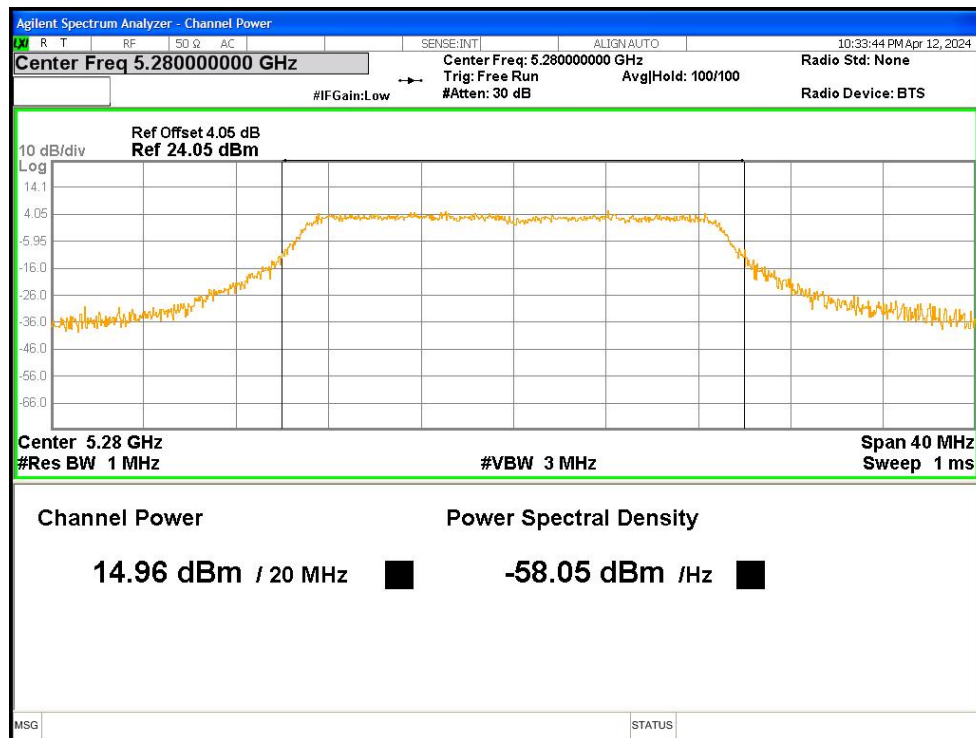


Power NVNT n20 5320MHz Ant1

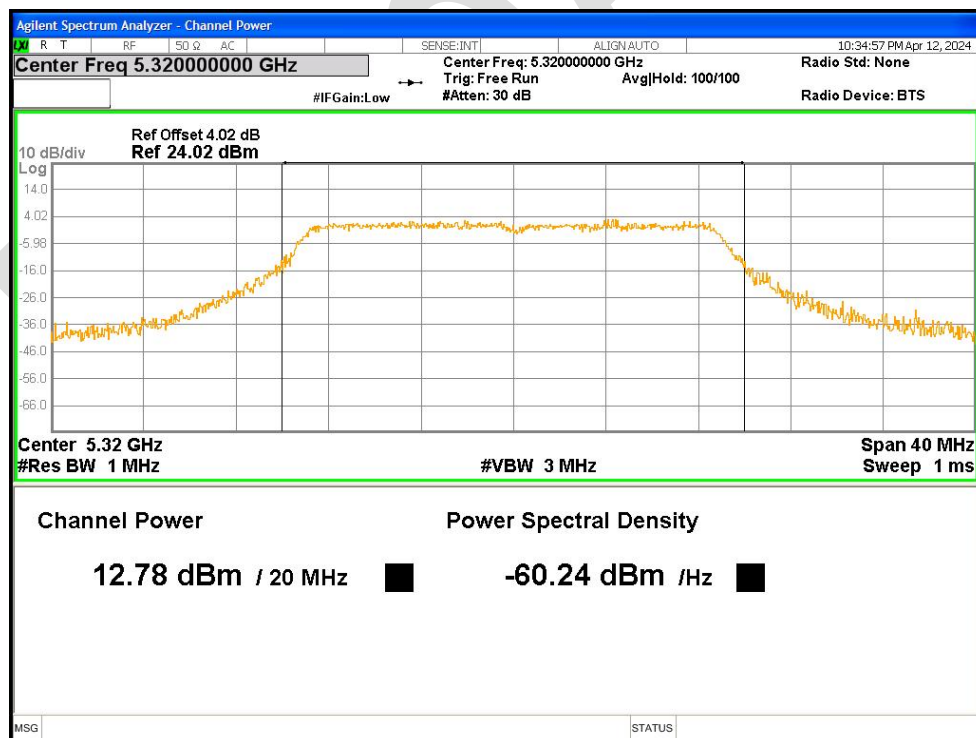

Power NVNT n20 5500MHz Ant1

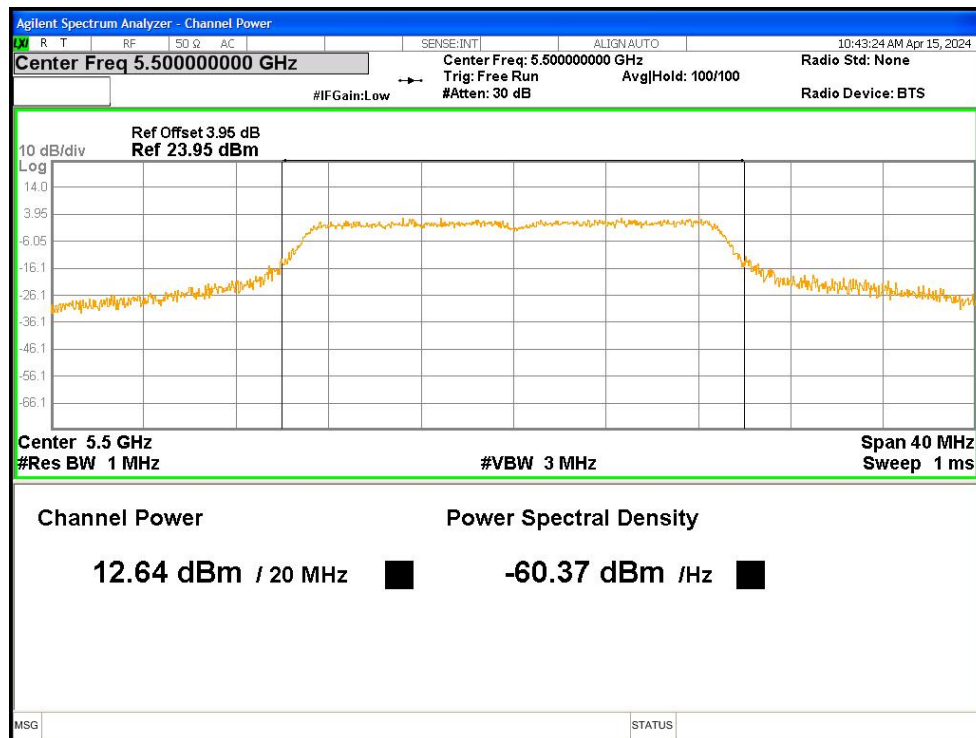

Power NVNT n20 5600MHz Ant1

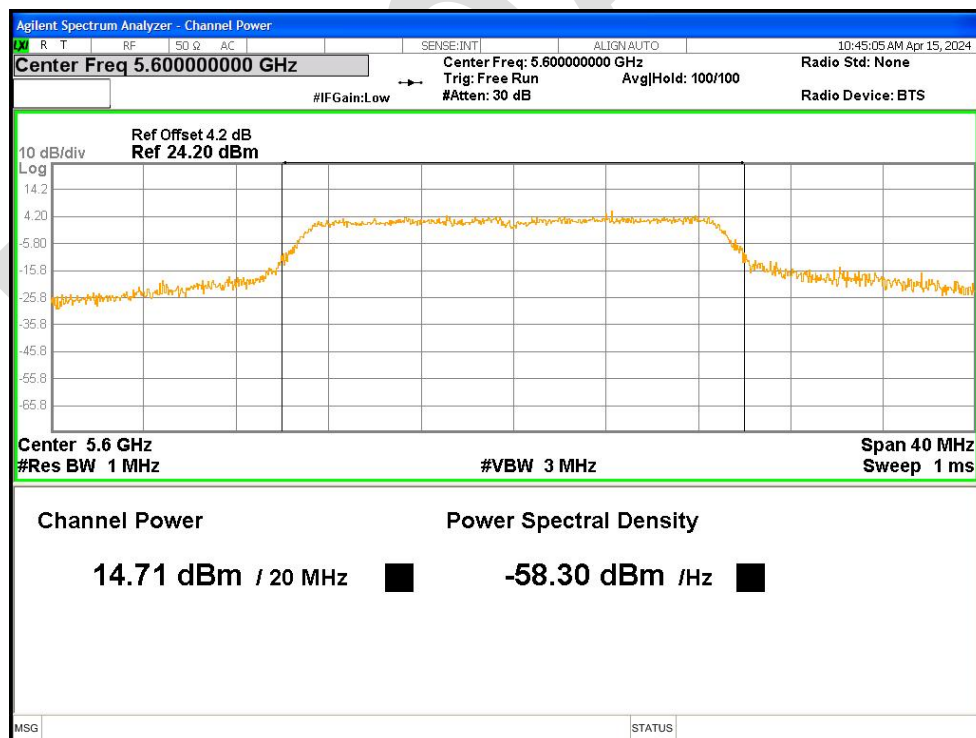

Power NVNT n20 5700MHz Ant1