



# K600G-B97W MECHANICAL KEYBOARD

## USER MANUAL

产品使用手册

保修卡

合格证



MACHENIKE

合格证

QUALIFIED CERTIFICATE

检验

MACHENIKE CERTIFIED

使用本产品前请仔细阅读指导手册，妥善保存以备参考。  
Please read the instructions carefully before using this product and keep it well for reference.

## CONTENTS

English	3-4
РУССКИЙ	5-6
ESPAÑOL	7-8
FRANÇAIS	9-10
PORTUGUÊS	11-12
ITALIANO	13-14
Germany	15-16
POLSKI	17-18
한국어	19-20
ไทย	21-22
العربية	23-24
简体中文	25-29

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF warning for Portable device: The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

## 产品外观 OVERVIEW

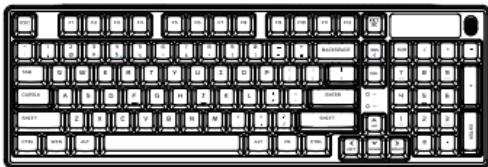

## 产品参数 TECH SPECS

PRODUCT MODEL 产品型号	Machenike K600G-B97W
CONNECTIVITY 连接方式	Wired+2.4G+Bluetooth 有线+2.4G+蓝牙
KEYS AMOUNT 按键数量	97 Keys 97键
MULTI-MEDIA KEYS 多媒体键	12 Keys 12键
ANTI-GHOSTING 无冲模式	N-key Rollover 全键无冲
DIMENSION 尺寸	398.5*132.1*47.8mm
BATTERY 电池	8000mAh
CABLE 线长	Approx 1.5m 约1.5米
执行标准	GB/T 14081-2010

## 多媒体功能键 MULTIMEDIA KEYS (Windows)

组合键 Key Combination	功能 Function	组合键 Key Combination	功能 Function
FN+F1	屏幕亮度减 Decrease Screen Brightness	FN+F7	上一首 Previous track
FN+F2	屏幕亮度加 Increase Screen Brightness	FN+F8	播放/暂停 Play/Pause
FN+F3	邮件 Email	FN+F9	下一首 Next Track
FN+F4	计算器 Calculator	FN+F10	静音 Mute
FN+F5	我的电脑 My Computer	FN+F11	音量- Volume Down
FN+F6	媒体播放器 Media Player	FN+F12	音量+ Volume Up

## 多媒体功能键 MULTIMEDIA KEYS (Mac OS)

组合键 Key Combination	功能 Function	组合键 Key Combination	功能 Function
FN+F1	屏幕亮度减 Decrease Screen Brightness	FN+F7	上一首 Previous track
FN+F2	屏幕亮度加 Increase Screen Brightness	FN+F8	播放/暂停 Play/Pause
FN+F3	显示多任务窗口 Mission Panel	FN+F9	下一首 Next Track
FN+F4	呼出Siri Enable Siri	FN+F10	静音 Mute
FN+F5	搜索 Search	FN+F11	音量- Volume Down
FN+F6	应用缩略显示 App Expose	FN+F12	音量+ Volume Up

## Usage Instructions

### I. Connection Methods

**Wired Connection:** Connect the USB cable, and the keyboard will turn on with a flowing light effect.

#### Wireless Connection:

**Bluetooth Mode:** Toggle the switch to the wireless position. The keyboard will turn on with a flowing light effect, then the backlight will turn off. Press and hold FN+1/2/3 to enter Bluetooth pairing mode. The corresponding blue light will flash rapidly. Select the Bluetooth name "K600G" to pair. After a successful connection, the default light effect will resume.

**2.4G Mode:** Toggle the switch to the wireless position. The keyboard will turn on with a flowing light effect, then the backlight will turn off. Press and hold FN+4 to enter 2.4G pairing mode. The corresponding green light will flash rapidly. Insert the wireless receiver into the device. After a successful connection, the default light effect will resume.

**Note:** Press FN+[1]/[2@]/[3#]/[4\$] to switch the keyboard to BT1/BT2/BT3/2.4G mode respectively.

### II. Light Effects

- FN+INS: Switches the light mode. Supports 17 adjustable RGB light effects.
- FN+DEL: Switches the light color.
- FN+ "↑" or "↓": Adjusts the light brightness.
- FN+ "←" or "→": Adjusts the light speed.

### III. System Switching

The keyboard starts in Windows system mode by default. Press FN+A to switch to Mac system mode, and FN+W to switch back to Windows system mode. The corresponding key indicator light will flash purple three times when switching systems.

### IV. Battery Display

Press FN+Backspace to check the battery level. The number keys 1-0 will display green, with each lit key representing 10% of the battery. When the battery is below 10%, it will display red.

EN EN

### V. Cursor Movement Power Saving

During charging, the ESC red light will stay on. Once fully charged, the ESC light effect will resume. The charging voltage should not exceed 10V. When the battery voltage is below 3.5V, the ESC will flash red indicating low battery. If it drops below 3.2V, the keyboard will automatically shut down.

### VI. Sleep Mode

The keyboard will enter sleep mode (all LED lights off) if there is no operation within 10 minutes.

### VII. Reset

Press and hold FN+ESC for 3 seconds to restore factory settings and clear all macro settings.

### Product List:

Keyboard\*1, Cable\*1, Key Puller\*1, Receiver\*1, User Manual\*1, Certificate of Qualification\*1, Extra Switches\*2.