


SPECIFICATIONS

PRODUCT MODEL	KG87 Wireless Keyboard
CONNECTIVITY	Wired+Bluetooth+2.4G
KEYS AMOUNT	87 Keys
ANTI-GHOSTING	N-key Rollover
DIMENSION	373.4*140.3*37mm
CABLE	Approx. 1.5m

Package List:

Keyboard*1, Manual*1, Cable*1, Extra Switch*2, Switch Puller*1, Key Puller*1, Warranty card*1, Certificate *1

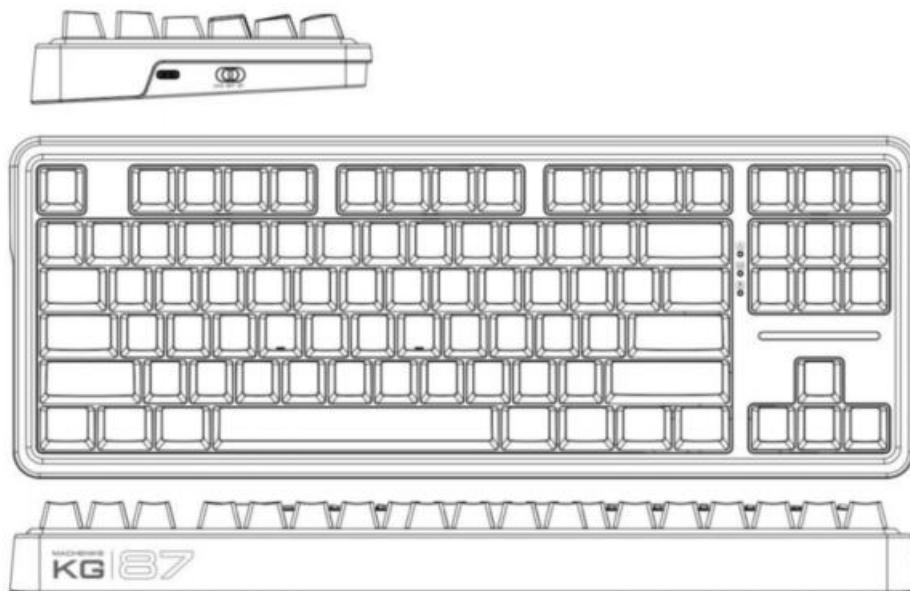

MULTIMEDIA FUNCTIONALITY (Windows)

Combination Keys	Function	Combination Keys	Function
FN+F1	Brightness Decrease	FN+F7	Previous Song
FN+F2	Brightness Increase	FN+F8	Play/Pause
FN+F3	Multitasking Window	FN+F9	Next Song
FN+F4	Voice	FN+F10	Mute
FN+F5	Show Desktop	FN+F11	Volume down
FN+F6	Search	FN+F12	Volume up

MULTIMEDIA FUNCTIONALITY (MacOS)

Combination Keys	Function	Combination Keys	Function
F1	Brightness Decrease	F7	Previous song
F2	Brightness Increase	F8	Play/Pause
F3	Multitasking Window	F9	Next song
F4	Siri	F10	Mute
F5	Show Desktop	F11	Volume down
F6	Search	F12	Volume up

EN

Usage Instructions

I. Wired Connection: Slide the toggle switch to the OFF position. Connect via USB cable to enter wired mode.

II. Wireless Connection

Bluetooth Pairing: Pairing Name: KG87 BT3.0 / KG87 BT5.0. Short press FN+[1]/[2]/[3] to switch between BT1/BT2/BT3 modes. Slide the switch to BT mode, then long press FN+[1]/[2]/[3] for 3 seconds to enter the corresponding Bluetooth channel pairing mode. The M indicator will flash blue/red/green rapidly to indicate pairing status. After successful pairing, the indicator stays lit.

2.4G Pairing: Slide the switch to 2.4G mode, then long press FN+[4] for 3 seconds to enter 2.4G pairing mode (M indicator flashes cyan rapidly). Connect the receiver to your computer. After successful pairing, the M indicator stays solid cyan.

III. Backlight Effects

FN+INS: Cycle through 19 lighting effects

FN+DEL: Switch backlight colors (red, green, blue, yellow, purple, cyan, white, RGB)

FN+ ↑ / ↓ : Adjust backlight brightness (5 levels). At limit, CAPS indicator flashes red 3 times.

FN+ ← / → : Adjust lighting flow speed (5 levels). At limit, CAPS indicator flashes red 3 times.

IV. Custom Lighting

Press FN+Backspace to enter custom lighting mode (CAPS indicator flashes red during recording).

Press same key repeatedly to set color, then configure other keys to create desired lighting pattern.

Press FN+Backspace again to save. During playback, defined keys stay lit.

V. Flowing Light Effects

FN+PAUSE: Switch flowing light modes

FN+SCRLK: Adjust flowing speed

FN+PRTSC: In solid / breathing mode, switch flowing colors (red, green, blue, yellow, purple, cyan, white)

VI. System Switching

Default: Windows system.FN+W: Switch to Windows (flowing light flashes yellow 3 times) .FN+A: Switch to Mac (flowing light flashes white 3 times)

VII. Battery/Charging Indicator

Battery check requires unplugging charger and switching to wireless mode. FN+APP: Hold to show battery level (1-0 keys):1-3: Red (low),4+:Green(Each key represents ~10% battery). Release to restore default lighting.<20%: Red flashing,<40%: Purple, <60%: Blue,<80%: Cyan,100%: Green.

Charging: Red light stays on during charging. Turns off when fully charged (displays current mode color).

VIII. Power Saving

Backlight turns off after 3min inactivity.Indicators turn off after 5min. Enters low-power mode after 30min.

IX. Reset

FN+ESC: Hold for 3 seconds to restore factory settings

Driver Download

Scan the QR code on packaging, visit official website, navigate to "Driver Support" and download "KG87 Wireless Keyboard" driver.

FCC COMPLIANCE STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications to this unit not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.