


Rebluum

Solar Battery -Wireless Security Camera **V1**

Quick Start Guide

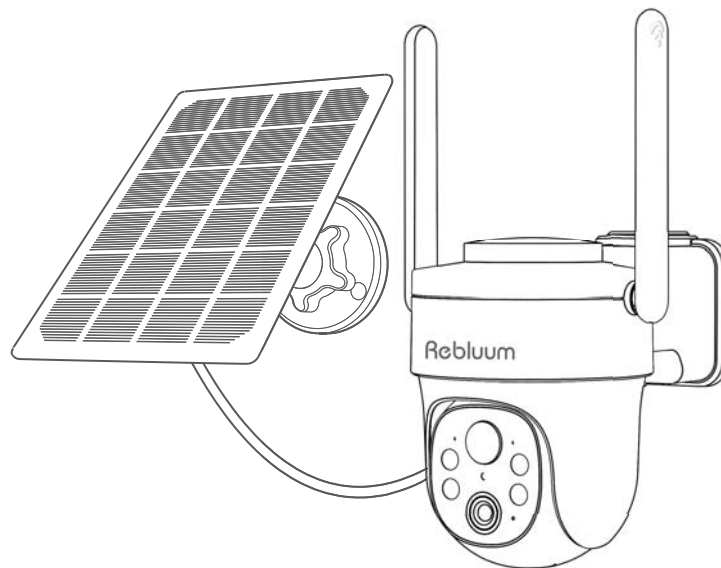

-  Toll Free: +1 844 497 1656 (US ONLY)
Available after 5: 30 PM at Pacific Time
-  support@szrebluum.com
-  Youtube: Rebluum Security


TABLE OF CONTENTS

01	What's Included	P01
02	Product overview	P02
03	App installation and Setup	P03
04	Mounting the camera	P05-07
05	Register an account	P08
06	Set up WiFi for the camera	P09-14
07	FAQ	P21
08	FCC Statement	P22


What's Included



Camera



Solar panel



Screw Pack



Type C
Charging Cable



Warning Sticker



User Manual



Position Sticker
for Camera



Position Sticker
for Solar Panel

Scan and Enter the Activation Code to Get Video Tutorial

Activation Code

786093




Note: The power cable of the solar panel is 9.2feet.

support@szrebluum.com +1 844 497 1656

1

Product overview

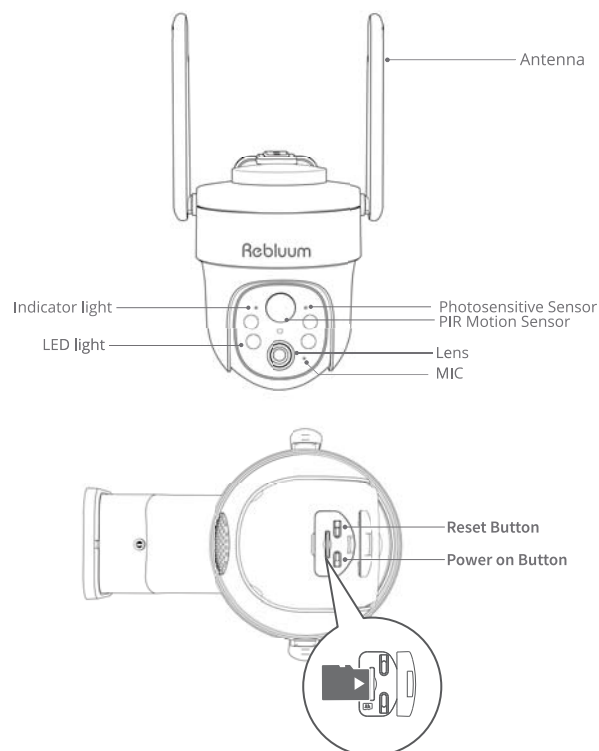

CAUTION: Please insert the Micro SD Card according to the direction shown in the diagram. Micro SD Card might JAM if inserted incorrectly and device could be damaged.

SD Card Port: Support micro SD card for local storage (Max 128GB).

Reset button: Used to restore the camera to factory settings (Press and hold on 5-8s).

Card capacity requirements: 8-128GB.

Read and write speed requirements: Class10 Level.

File format: FAT32. (Please format the SD card for the first use) Please refer to the FAQ 4.

Cloudedge App download and Setup

1. Search " CloudEdge" on apple store or google play to download the app.



2. Scan the following QR code.




IOS



Android

Scan and Enter the Activation Code to Get Video Tutorial .




TIPS: APP Permission Settings

When using the application for the first time, please turn on the following 2 permissions.

- 1) Allow "Clouddedge" to access mobile cellular data and WLAN, otherwise you will not be able to add devices.
- 2) Allow "Clouddedge" to receive messages, otherwise the phone will not receive alert push notifications when motion detection or audible alerts are triggered.


The following is a screenshot of iOS cellphone operation, Android cell phone permissions open method is basically the same as this method.

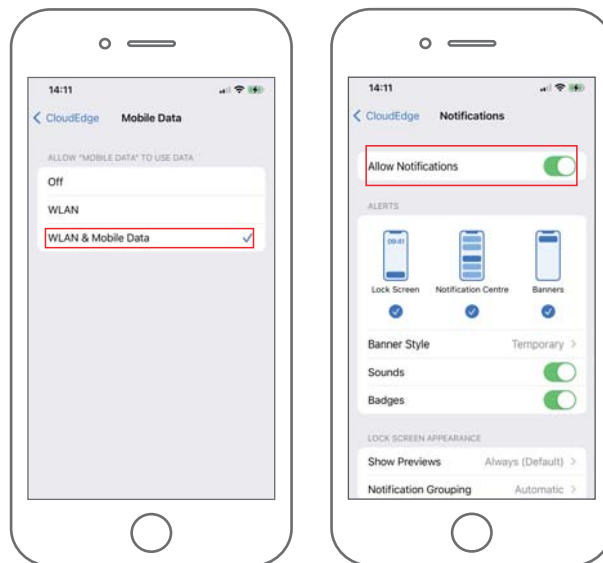

Mounting the camera

Select Height and location



Hang the camera 7-10 ft (2-3 m) above the ground. This height maximizes the detection range of the motion sensor. Avoid placing the camera under direct sunlight.

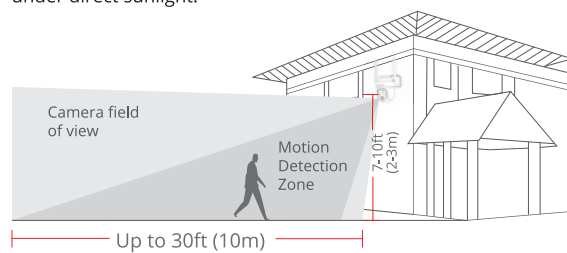

Installation


1. Drilling according to position sticker, drill bit: 15/64"(6 mm).
2. Insert the plastic anchors.
3. Tighten the screw.

What is required:

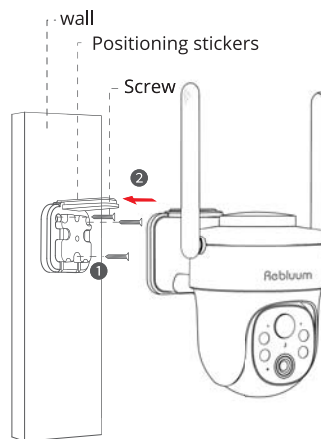


Installation instruction of solar panel

1. Keep the installation angle of solar panels about 30-45° with the horizontal plane, as shown in the picture below.
2. The installation between the solar panel and the camera is shown in the following figure (open up the silicone cover at the bottom of the camera, remove the small center part of the cover, insert the power cord through the opening and plug it into the Type C port).

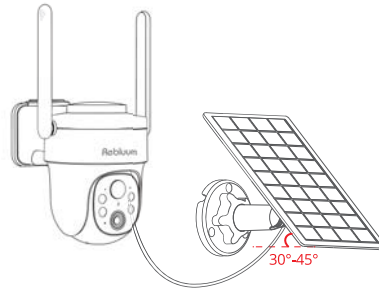


Tips for the installation of solar panel

- 1: Please keep the solar panel at an angle that can be directly exposed to the sun.
- 2: Please avoid shading on the solar panel.
- 3: Check the power indicator, make sure it is red (except the camera at full charge).

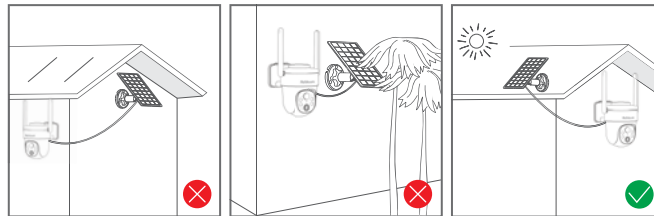

Test the Wifi signal at installation position


Make sure the wifi signal value is above 75 before installation.

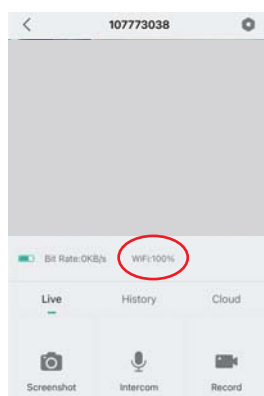

Register an account

The Cloudedge APP is totally free for remote access.
As for storage, you can use a micro SD card or pay for the cloud service.

1. Enter the app and tap the "sign up now" at the bottom side.
2. Sign up with your email address, and click "Next".
3. Set up a "Nickname" and "Password" for your APP, click "Done" to complete.

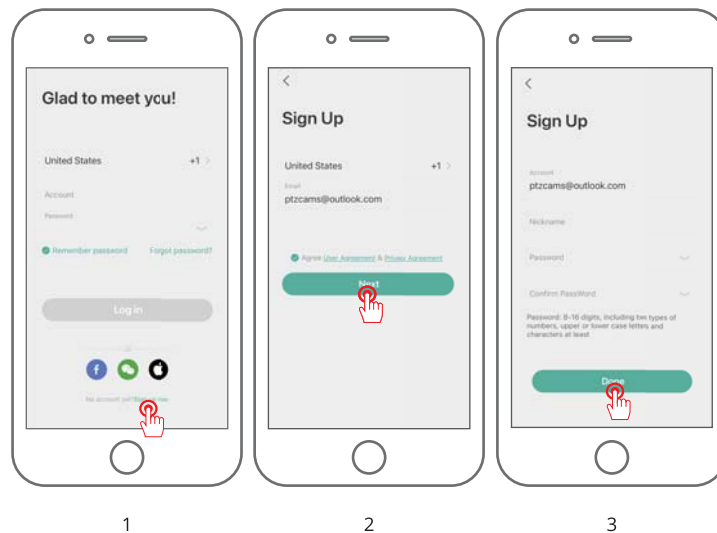


Set up WiFi for the camera


1. Set up the camera near by the router.

Note: The camera can only connect to a 2.4 GHz WiFi signal. It does not support using a 5 GHz signal. You can confirm your home wifi is 2.4Ghz or not via the sticker on your home router.

PS:Please contact us if your router is dual-band .

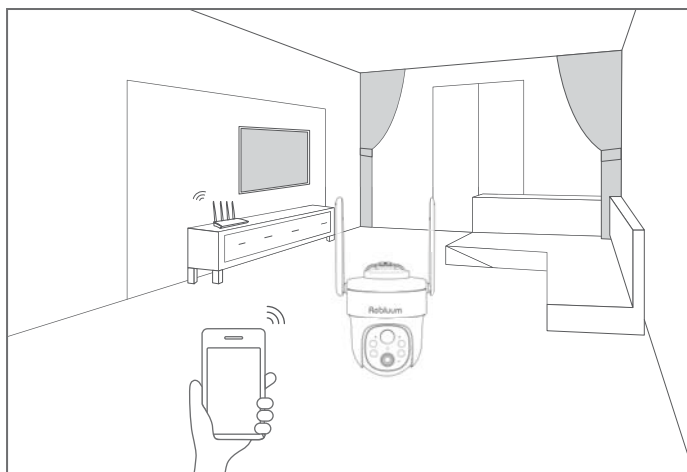

2. Log in to "CloudEdge", then tap the "+" icon in the center. Tap "Battery Camera" to add device.

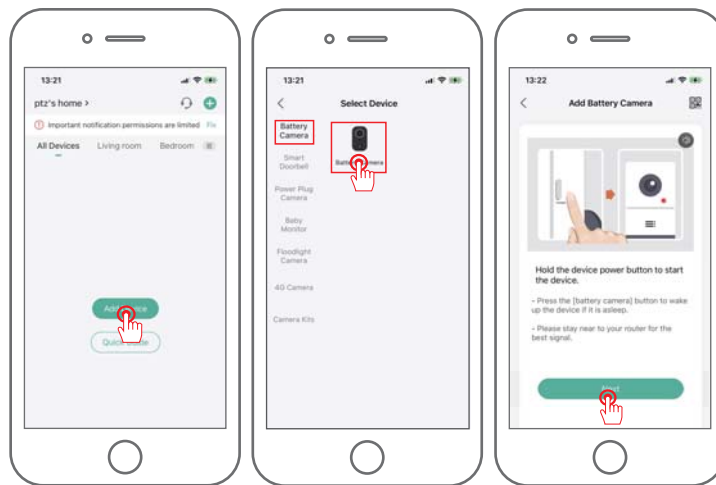

2-1

2-2


2-3

Reset the camera by holding the reset button for about 5 seconds, the device is reset successfully if you hear a "BUGU" tone, then tap Next .



3

1. Selecting the 2.4Ghz wifi, input the password and click next .
2. Please double check the wifi name and password and tap OK .

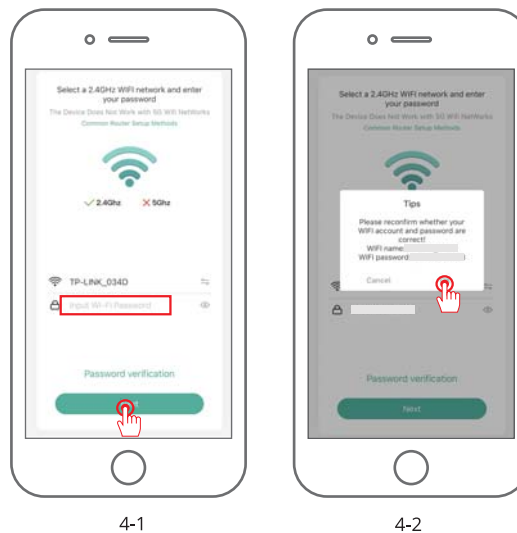

1. You will get a QR code on the app after you tap next.
2. Use the camera to scan the QR code on your mobile phone.
3. Tap next until you hear a "BUGU" tone.



5-1



5-2



5-3




5-4


1. Wait for the network configuration,the indicator turns to blue means camera added successfully.
2. Tap next, get live view.




6-1

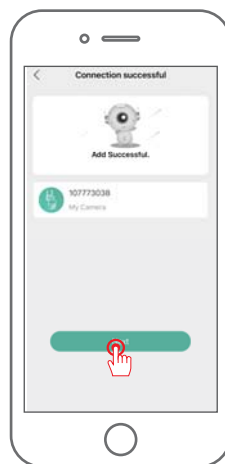

6-2

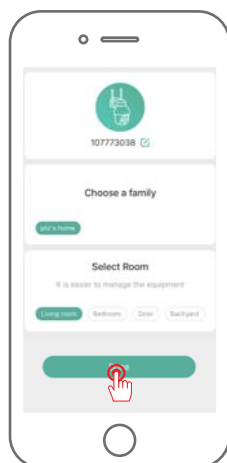

6-3

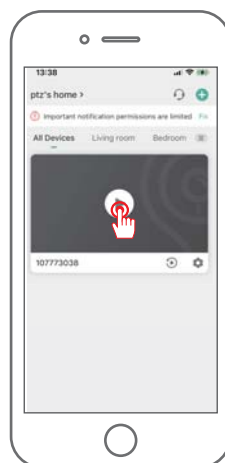


6-4

Alarm Management


Tap to the setting button select alarm management

1.10 means top sensitivity,1 means the lowest .

2.Tap Custom mode,turn on the humanoid detection to reduce the false alarm.

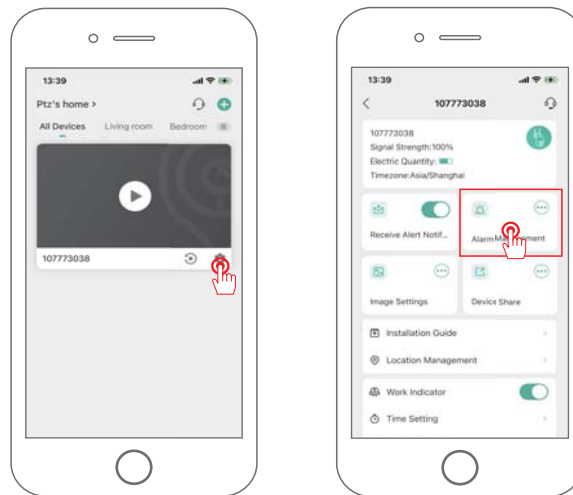


- 3.If you want to detect all the moving objects, please turn off the humanoid detection.
- 4.The default recording time is 10S, you can select 20S, 30S depend on your needs.

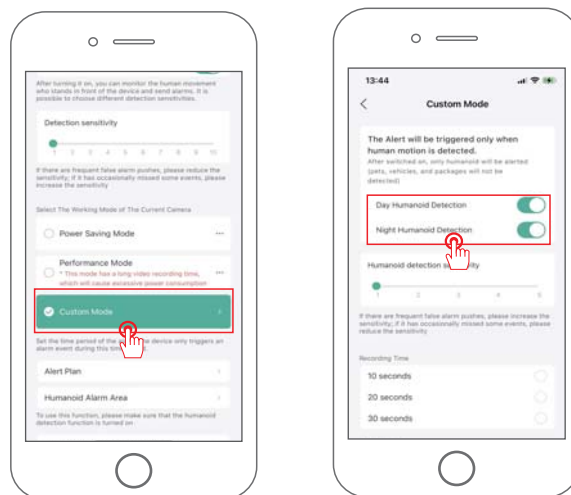


Audio warning and strobe light

Audio warning and strobe light is only valid at night.

Tap setting icon, choose alarm management, tap audio warning and strobe light, turn on.

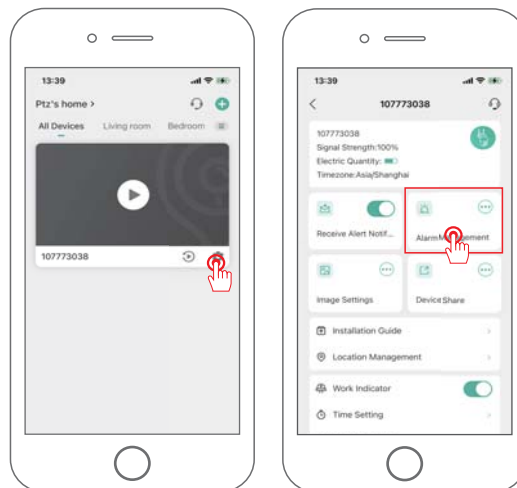


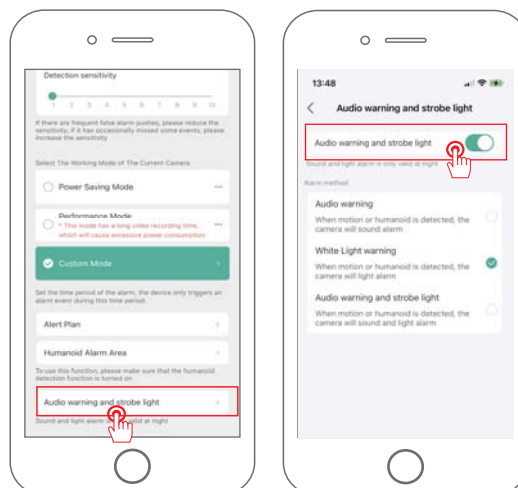


Device Share

If your family members want to view, you can share the camera by the following steps

1. Ask your family members to download the cloudedge app and sign up a new account with email.
2. Operate on your own account, click the setting button and select device share-add-enter account and input your family members email account.
3. Your family member will get a invitation request, click agree to join.

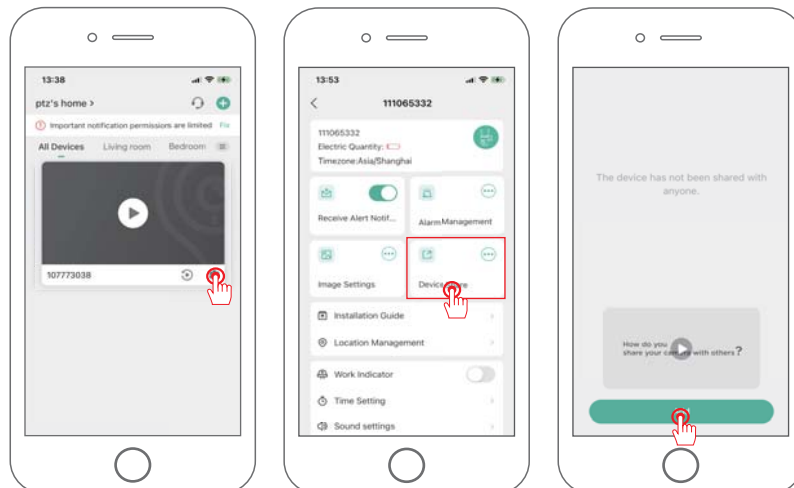

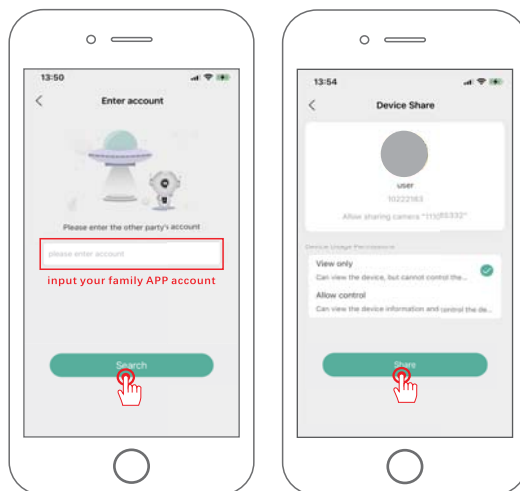

FAQ

Q1: The device prompts offline?

- A:**
- Check whether the Camera is in the power-on state.
 - Check whether the Wi-Fi network is in good condition and restart the router.
 - Put the camera near by the router,try again.
 - Delete the camera from your Cloudedge APP account and add it again after resetting the device.
 - Check whether the device firmware and application program are the latest version.

Q2: Why the device is still in the list after resetting?

- A:** The device resetting is only for the parameter configurations of the camera, not for App configuration. If you want to remove the camera, Please just delete it from the APP end.

Q3 : How to change the camera network to another router?

- A :** First remove and reset the device on the App and then configure the device again by the App.

Q4 : Why the SD card can not be identified?

- A :**
1. Please plug in SD card after power cut.
 2. Confirm whether the SD card is normal and the format is FAT32. Please note: TF card may not be identified when the Internet environment is not good.
 3. Please format the SD card for the first use,tap the setting icon, choose recording management,tap the format button.

Q5 : Why I can't get the notifications with my cell phone App?

- A :**
1. Please confirm that the App has been running on the phone.
 2. Make sure if the "Cloudedge"app notification push function has been opened.
 3. Make sure if the message notification and authority confirmation in the mobile phone system have been opened.

Safety Statement

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/ TV technician for help.

FCC Radio Frequency Exposure Statement

The device has been evaluated to meet general RF exposure requirements. The device can be used in fixed/mobile exposure condition. The min separation distance is 20cm.

Notice: Shielded cables

All connections to other computing devices must be made using shielded cables to maintain compliance with FCC regulations.

IC Caution:

Radio Standards Specification RSS-Gen, issue 5

- English: This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: This device may not cause interference. This device must accept any interference, including interference that may cause undesired operation of the device. RF exposure statement: The equipment complies with IC Radiation exposure limit set forth for uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

- French:

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes: Cet appareil ne doit pas causer d'interférences. Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil. Déclaration d'exposition RF: L'équipement est conforme à la limite d'exposition aux radiations de la IC établie pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

UK Caution:

The device is in compliance with the essential requirements and other relevant provisions of the UK Radio Equipment Regulations SI 2017:1206 (as amended).

1. The device has been evaluated to meet general RF exposure requirements. The device can be used in portable exposure conditions without restriction.
2. The device complies with RF specifications when the device used at 20cm from your body.

Declaration of Conformity:

Hereby, Shenzhen Anked Electronics Co., Ltd declares that the product V1 is in compliance with the following Regulations: Radio Equipment Regulations 2017, Electrical Equipment (Safety) Regulations 2016 and The Restriction of the Use of Certain Hazardous Substances in Electrical and Electrical Equipment 2012. The Full test of the UK declaration of conformity is available at the following internet address:www.viziuyu.com

Manufacturer Name:Shenzhen Anked Electronics Co., Ltd

Manufacturer Address:Room 302, Infinova technology company factory building,No.

Guanbao Road, Luhua Community, Guanhu Street, Longhua District, Shenzhen

Transmitter power: 18.64dBm

TX/RX Frequency Range: 2412-2472MHz



Warranty Tips

Please fill in the following information or scan QR code to activate the free 12-month warranty from the order date on.

After finish filling or scanning, please take a picture and send it to the email(support@szrebluum.com).

Then your free warranty will take effect!

During the warranty period, if any parts of product are damaged, please contact us immediately and we will provide satisfactory resolution.

Order Date: _____

Order Number/ID: _____

Buyer E-mail: _____

Buyer Tel: _____

Contact us

✉ support@szrebluum.com

☎ +1 844 497 1656

▶ Youtube: Rebluum Security



Free Warranty