



# FCC Test Report

Report No: FCS202106047W01

Issued for

Applicant:	Shenzhen JiaBei Technology Co., Ltd.
Address:	4C173, 4F, Trade Plaza One · China South City, Pinghu Town, Longgang District, Shenzhen · China
Product Name:	IFW01 Wireless Charger with Night Light
Brand Name:	N/A
Model Name:	IFW01
Series Model:	IFW02,IFW03,IFW04
FCC ID:	2A2EY-IFW01
Issued By: Flux Compliance Service Laboratory Add: Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan Tel: 769-27280901 Fax:769-27280901 <a href="http://www.fcs-lab.com">http://www.fcs-lab.com</a>	

## TEST RESULT CERTIFICATION

Applicant's Name.....: Shenzhen JiaBei Technology Co., Ltd.  
Address.....: 4C173, 4F, Trade Plaza One · China South City, Pinghu Town,  
Longgang District, Shenzhen · China  
Manufacture's Name.....: Shenzhen JiaBei Technology Co., Ltd.  
Address.....: 4C173, 4F, Trade Plaza One · China South City, Pinghu Town,  
Longgang District, Shenzhen · China

### Product Description

Product Name.....: IFW01 Wireless Charger with Night Light  
Brand Name .....: N/A  
Model Name.....: IFW01  
Series Model.....: IFW02,IFW03,IFW04  
Test Standards.....: FCC Rules and Regulations Part 15 Subpart C, Section 209  
Test Procedure.....: ANSI C63.10:2013

This device described above has been tested FCS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of FCS, this document may be altered or revised by FCS, personal only, and shall be noted in the revision of the document..

### Date of Test.....:

Date (s) of performance of tests.: 18 Jun. 2021 ~ 23 Jun. 2021

Date of Issue.....: 23 Jun. 2021

Test Result.....: Pass

Tested by : 

(Scott Shen)

Reviewed by : 

(Duke Qian)

Approved by : 

(Kait Chen)

Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	10
2.4 EQUIPMENTS LIST	11
3 CONDUCTED EMISSION MEASUREMENT	12
3.1 LIMIT	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST RESULTS	14
4. RADIATED EMISSION MEASUREMENT	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	17
4.3 TEST SETUP	18
4.4 TEST RESULTS	19
6. 20 DB BANDWIDTH TEST	25
6.1 LIMIT	25
6.2 TEST PROCEDURE	25
6.3 TEST SETUP	25
6.4 TEST RESULTS	26
7. ANTENNA REQUIREMENT	27
7.1 STANDARD REQUIREMENT	27
7.2 EUT ANTENNA	27

### Revision History

Rev.	Issue Date	Effect Page	Contents
00	23 Jun. 2021	All	Initial Issue

## 1. SUMMARY OF TEST RESULTS

FCC Rules and Regulations Part 15 Subpart C, Section 209			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.209(a) (f)	Radiated Spurious Emission	PASS	--
15.215(c)	20dB Bandwidth	PASS	--
15.203	Antenna Requirement	PASS	--

### NOTE:

- (1)" N/A" denotes test is not applicable in this Test Report
- (2) All tests are according to ANSI C63.10-2013

## 1.1 TEST FACTORY

Company Name:	Flux Compliance Service Laboratory
Address:	Room 105 Floor Bao hao Technology Building 1 NO.15 Gong ye West Road Hi-Tech Industrial, Song shan lake Dongguan
Telephone:	+86-769-27280901
Fax:	+86-769-27280901
FCC Test Firm Registration Number: 514908 Designation number: CN0127 A2LA accreditation number: 5545.01	

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.71$ dB
2	Unwanted Emissions, conducted	$\pm 2.98$ dB
3	Conducted Emission (9KHz-150KHz)	$\pm 4.13$ dB
4	Conducted Emission (150KHz-30MHz)	$\pm 4.74$ dB
5	All emissions, radiated (9KHz -30MHz)	$\pm 3.1$ dB
6	All emissions, radiated(<1G) 30MHz-1000MHz	$\pm 3.2$ dB
7	All emissions, radiated (1GHz -18GHz)	$\pm 3.66$ dB
8	All emissions, radiated (18GHz -40GHz)	$\pm 4.31$ dB

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	IFW01 Wireless Charger with Night Light
Trade Name	N/A
Model Name	IFW01
Series Model	IFW02,IFW03,IFW04
Model Difference	The above product with same circuit, PCB layout, electrical parts, materials and wiring structures, Appearance shape, the materials of decorative accessories is same, only different color.
Channel List	Please refer to the Note 2.
Operation frequency	115-205KHz
Modulation Type	MSK
Antenna Type	Inductive Loop Antenna with 1.0dBi
Power Supply	Input : DC 5V/2.1A,9V/2A Output : 5W,7.5W,10W,15W
Hardware version number	V1.0
Software version number	V1.0
Connecting I/O Port(s)	Please refer to the User's Manual

#### Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

**2. Channel List**

Channel	Frequency (MHz)
Low	0.115
Middle	0.123
High	0.205

**3. Table for Filed Antenna**

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	HYDZ	Inductive Loop Antenna	N/A	1.0dBi	Antenna

.0

## 2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test software: KCC

The test software was used to control EUT work in continuous TX mode, and select test channel, Wireless mode as below table

Tested mode, Description	
Mode	Description
Mode 1	5W
Mode 2	7.5W
Mode 3	10W
Mode 4	15W

### 2.3 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

#### Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
1	Adapter	HW	0789SK	N/A	This adapter is for testing only in report.
2	Phone	HW	Mate 20	N/A	This phone is for testing only in report.

#### Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note

#### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

## 2.4 EQUIPMENTS LIST

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESRP 3	FCS-E001	2020. 06.26	2021. 06.25
Signal Analyzer	R&S	FSV40-N	FCS-E012	2021.05.03	2022.05.02
Active loop Antenna	ZHINAN	ZN30900C	FCS-E013	2020.08.09	2021.08.10
Bilog Antenna	SCHWARZBECK	VULB 9168	FCS-E002	2020.08.26	2021.08.25
Horn Antenna	SCHWARZBECK	BBHA 9120D	FCS-E003	2020.08.26	2021.08.25
SHF-EHF Horn Antenna (18G-40GHz)	A-INFO	LB-180400-KF	FCS-E018	2020.06.26	2021.06.25
Pre-Amplifier(0.1M-3G Hz)	EMCI	EM330N	FCS-E004	2020.06.26	2021.06.25
Pre-Amplifier (1G-18GHz)	N/A	TSAMP-0518SE	FCS-E014	2021.05.03	2022.05.02
Pre-Amplifier (18G-40GHz)	TERA-MW	TRLA-0400	FCS-E019	2020.08.08	2021.08.07
Temperature & Humidity	HTC-1	victor	FCS-E005	2020.08.26	2021.08.25

### Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	FCS-E020	2021.05.03	2022.05.02
LISN	R&S	ENV216	FCS-E007	2020.08.08	2021.08.07
LISN	ETS	3810/2NM	FCS-E009	2021.05.03	2022.05.02
Temperature & Humidity	HTC-1	victor	FCS-E008	2020.08.08	2021.08.07

### RF Connected Test

Kind of Equipment	Manufacturer	Type No.	Company No.	Last calibration	Calibrated until
Spectrum Analyzer	Keysight	N9020A	FCS-E015	2021.05.03	2022.05.02
Spectrum Analyzer	Agilent	E4447A	MY50180039	2020.08.08	2021.08.07
Spectrum Analyzer	R&S	FSV-40	101499	2020.08.26	2021.08.25

### 3 CONDUCTED EMISSION MEASUREMENT

#### 3.1 LIMIT

Operating frequency band. In case the emission fall within the restricted band specified on Part 207(a) limit in the table below has to be followed.

FREQUENCY (MHz)	Conducted Emissionlimit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


#### 3.2 TEST PROCEDURE

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- a. The EUT was 0.8 meters from the horizontal ground plane and 0.4 meters from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

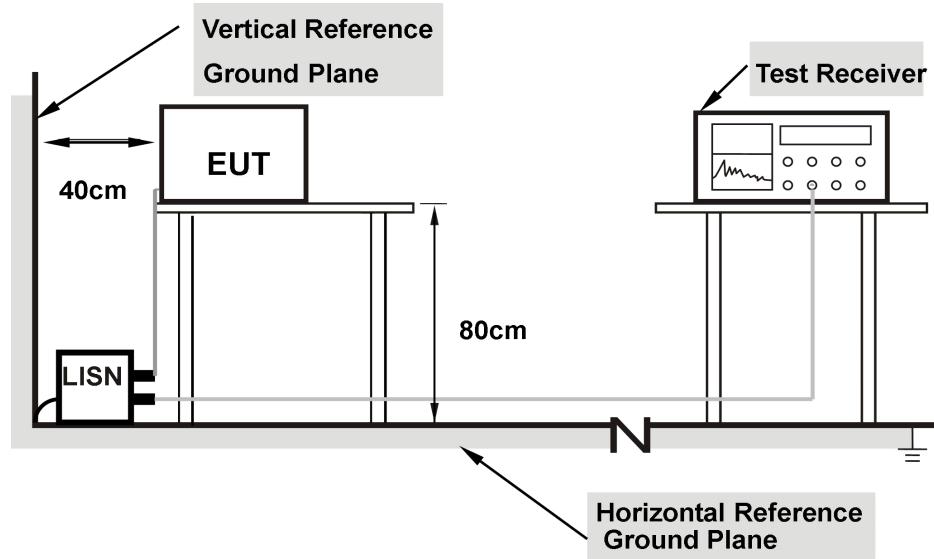


**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.4 TEST RESULTS


Temperature:	25°C	Relative Humidity:	50%
Test Mode:	Mode 4	Test Voltage:	Input AC 120V/60Hz by adapter
Result:	Pass		

L-line

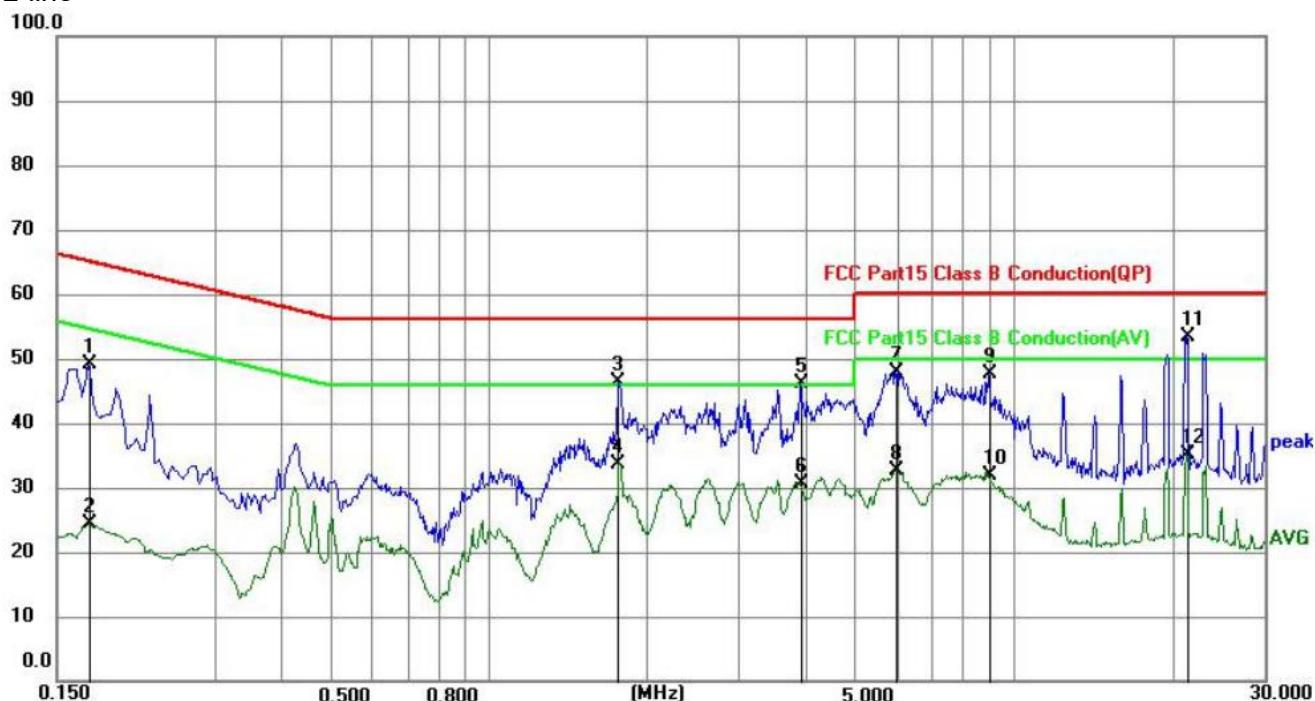

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1725	39.32	9.78	49.10	64.84	15.74	QP
2	0.1725	14.48	9.78	24.26	54.84	30.58	AVG
3	1.7700	32.56	13.78	46.34	56.00	9.66	QP
4	1.7700	19.89	13.78	33.67	46.00	12.33	AVG
5	3.9210	28.01	18.15	46.16	56.00	9.84	QP
6	3.9210	12.45	18.15	30.60	46.00	15.40	AVG
7	5.9460	27.95	19.97	47.92	60.00	12.08	QP
8	5.9460	12.62	19.97	32.59	50.00	17.41	AVG
9	8.9340	27.68	20.00	47.68	60.00	12.32	QP
10	8.9340	11.78	20.00	31.78	50.00	18.22	AVG
11	21.3630	33.23	20.18	53.41	60.00	6.59	QP
12	21.3630	14.83	20.18	35.01	50.00	14.99	AVG

## N-line

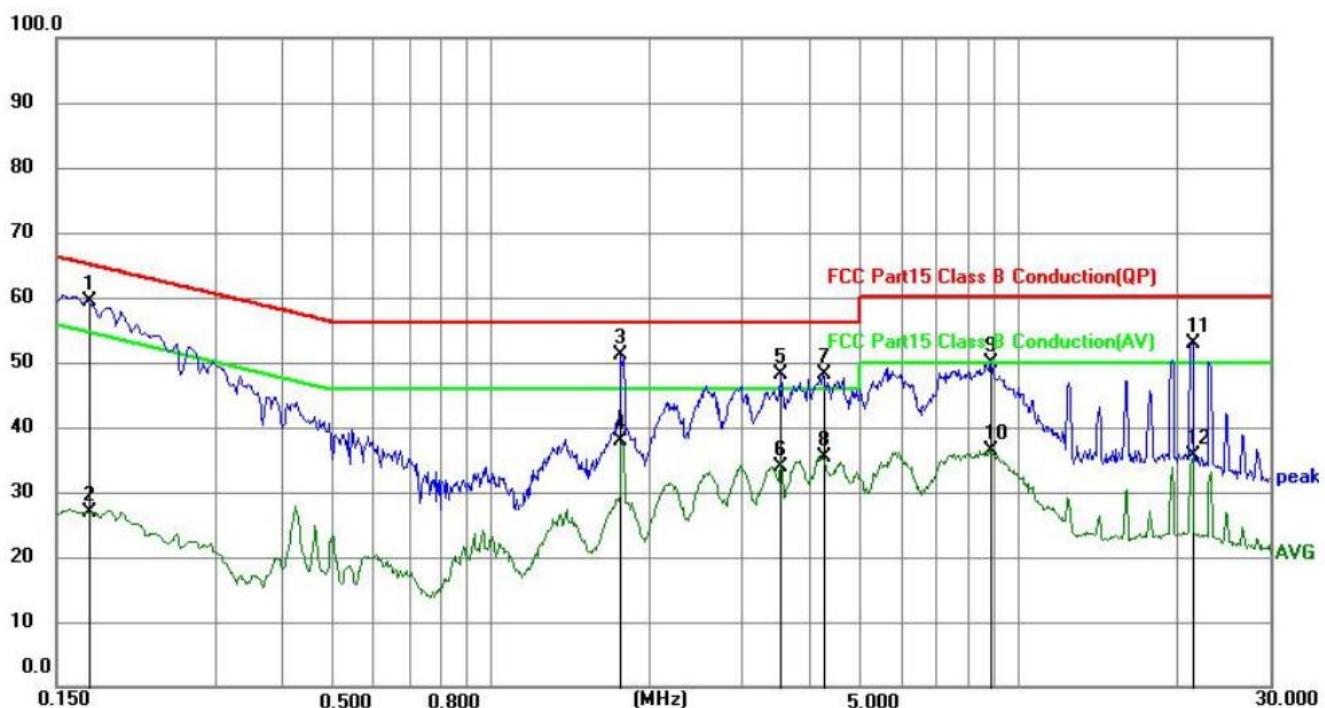

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1725	49.60	9.78	59.38	64.84	5.46	QP
2	0.1725	17.17	9.78	26.95	54.84	27.89	AVG
3	1.7700	37.25	13.78	51.03	56.00	4.97	QP
4	1.7700	24.04	13.78	37.82	46.00	8.18	AVG
5	3.5520	30.46	17.56	48.02	56.00	7.98	QP
6	3.5520	16.20	17.56	33.76	46.00	12.24	AVG
7	4.2630	29.33	18.77	48.10	56.00	7.90	QP
8	4.2630	16.53	18.77	35.30	46.00	10.70	AVG
9	8.9070	29.69	20.16	49.85	60.00	10.15	QP
10	8.9070	16.29	20.16	36.45	50.00	13.55	AVG
11	21.4169	32.55	20.26	52.81	60.00	7.19	QP
12	21.4169	15.25	20.26	35.51	50.00	14.49	AVG

## 4. RADIATED EMISSION MEASUREMENT

### 4.1 LIMIT

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed

#### LIMITS OF RADIATED EMISSION MEASUREMENT (0.009mhz - 1000mhz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB<sub>u</sub>V/m)=20log Emission level (uV/m).
- (4) Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- (5) The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

## 4.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic(Peak/AV)
RB / VB (emission in restricted band)	PK=1MHz / 1MHz, AV=1 MHz /10 Hz


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters (above 1GHz is 1.5 m) above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then QuasiPeak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### Note:


Both horizontal and vertical antenna polarities were tested. The worst case emissions were reported

#### 4.3 TEST SETUP


##### (A) Radiated Emission Test-Up Frequency Below 30MHz

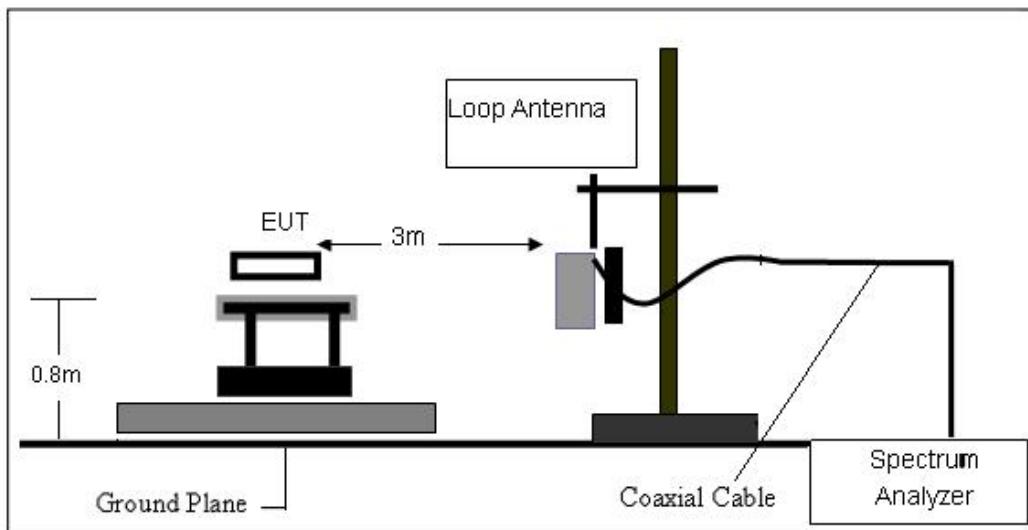

##### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

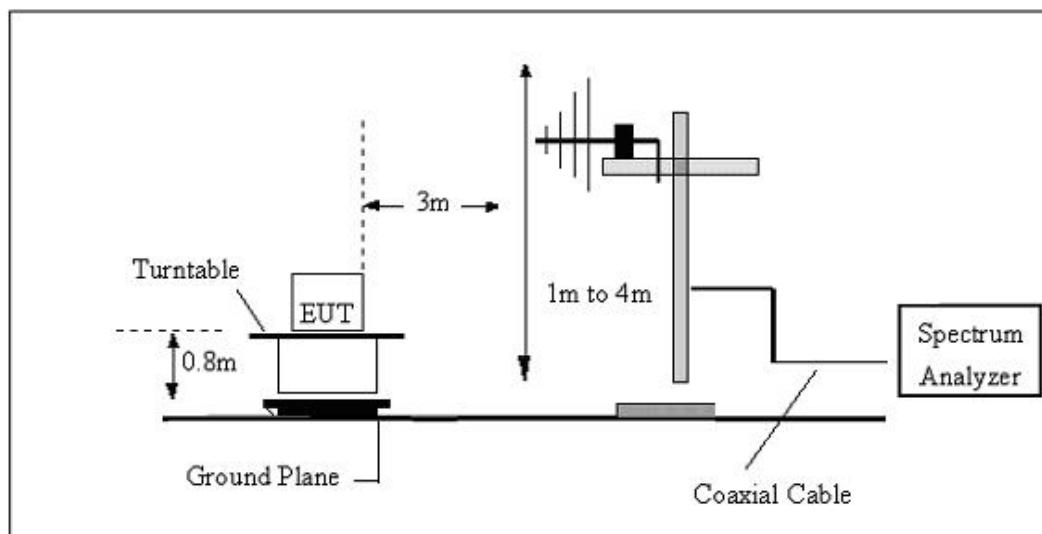

##### (C) Radiated Emission Test-Up Frequency Above 1GHz

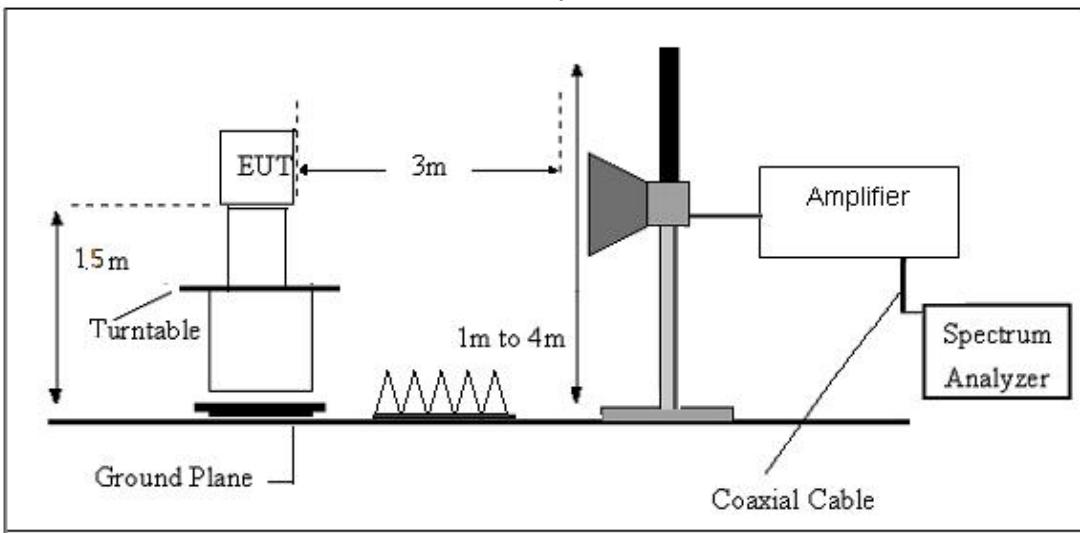


#### 4.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	60%
Test Mode:	Mode 4	Test Voltage:	DC 5V

For spurious emission

(9KHz-30MHz)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	Mode 4		

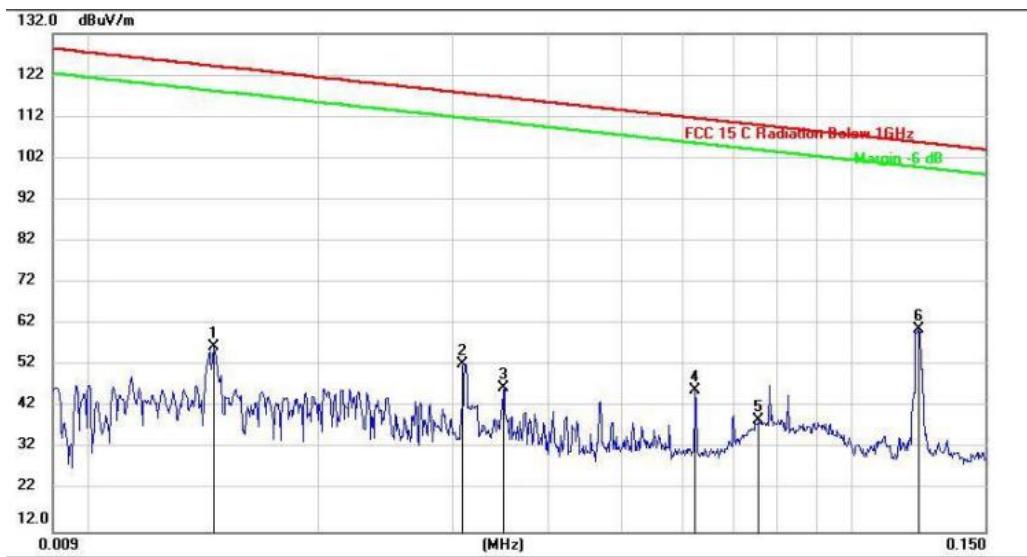


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
1		0.0146	35.91	20.61	56.52	124.15	-67.63 peak
2		0.0309	31.80	20.42	52.22	117.67	-65.45 peak
3		0.0350	26.13	20.42	46.55	116.59	-70.04 peak
4		0.0625	25.69	20.43	46.12	111.59	-65.47 peak
5		0.0757	18.31	20.44	38.75	109.93	-71.18 peak
6	*	0.1223	40.34	20.43	60.77	105.79	-45.02 peak

#### Remarks:

1. Final Level = Receiver Read level + Factor

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	Mode 4		

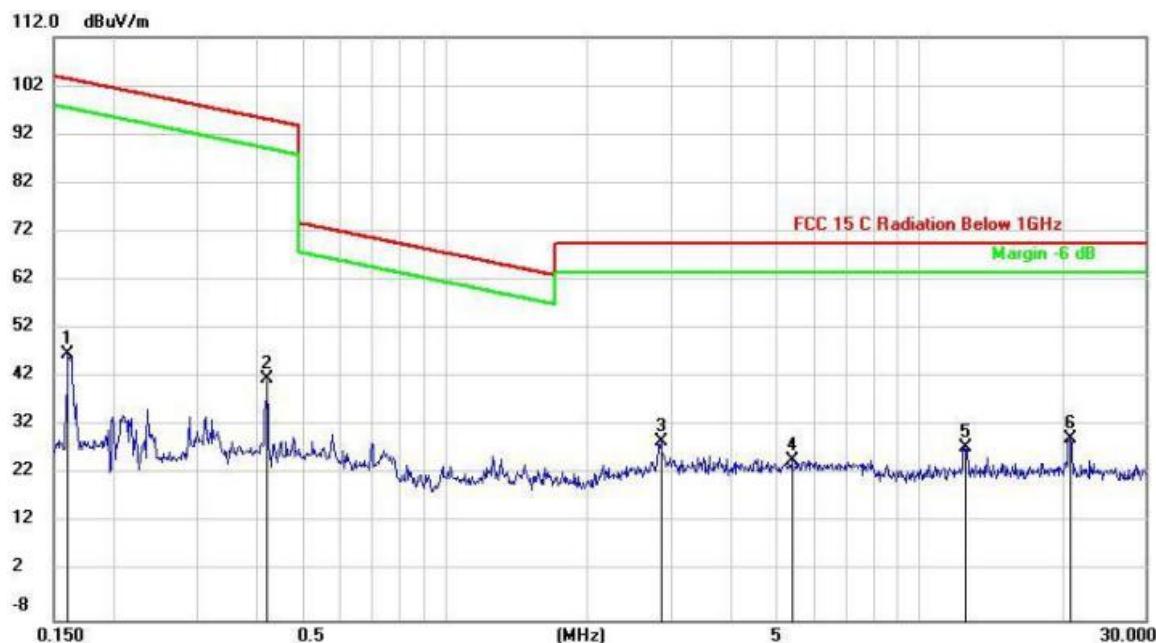


No.	Mk.	Freq. MHz	Reading	Correct	Measure-	Limit	Over dB	Over Detector
			Level dBuV	Factor	ment dBuV/m			
1		0.1607	26.42	20.39	46.81	103.43	-56.62	peak
2		0.4193	21.35	20.31	41.66	95.15	-53.49	peak
3		2.8540	8.39	20.27	28.66	69.50	-40.84	peak
4		5.3900	4.41	20.33	24.74	69.50	-44.76	peak
5		12.4495	7.17	20.36	27.53	69.50	-41.97	peak
6	*	20.8137	9.10	20.28	29.38	69.50	-40.12	peak

#### Remarks:


1. Final Level = Receiver Read level + Factor

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	Mode 4		

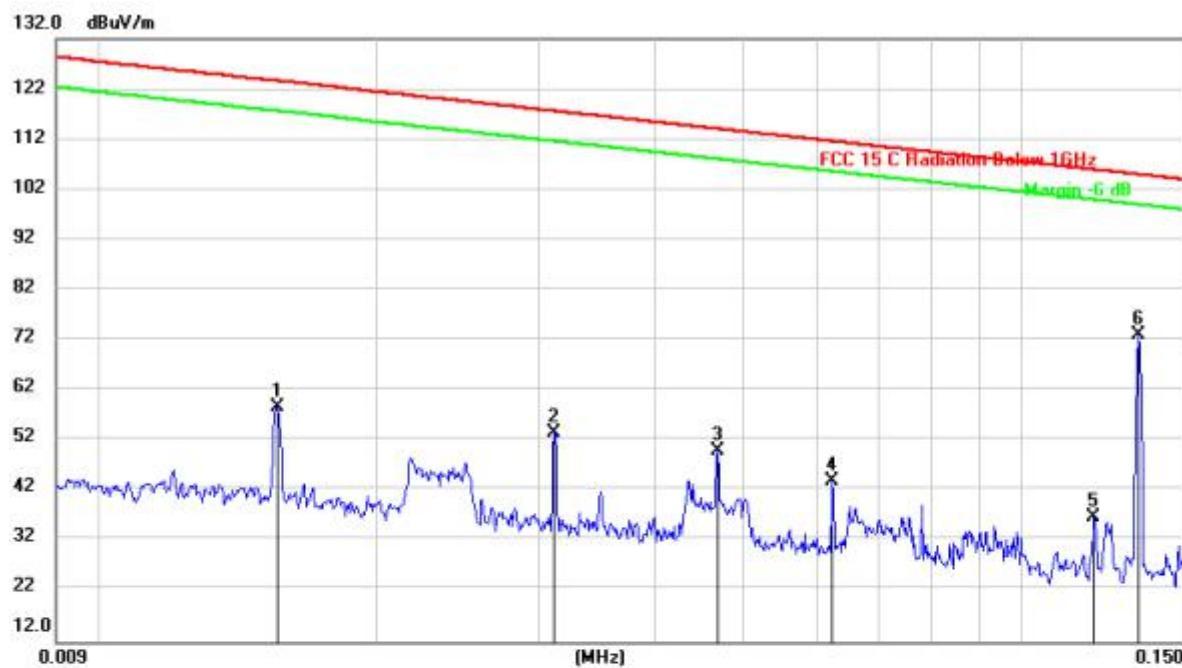

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB	Detector
1		0.0156	38.15	20.60	58.75	123.57	-64.82	QP
2		0.0312	32.86	20.61	53.47	117.59	-64.12	QP
3		0.0469	29.11	20.77	49.88	114.07	-64.19	QP
4		0.0625	23.27	20.74	44.01	111.59	-67.58	QP
5		0.1201	16.23	20.50	36.73	105.94	-69.21	QP
6	*	0.1344	52.77	20.30	73.07	104.97	-31.90	QP

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	Mode 4		

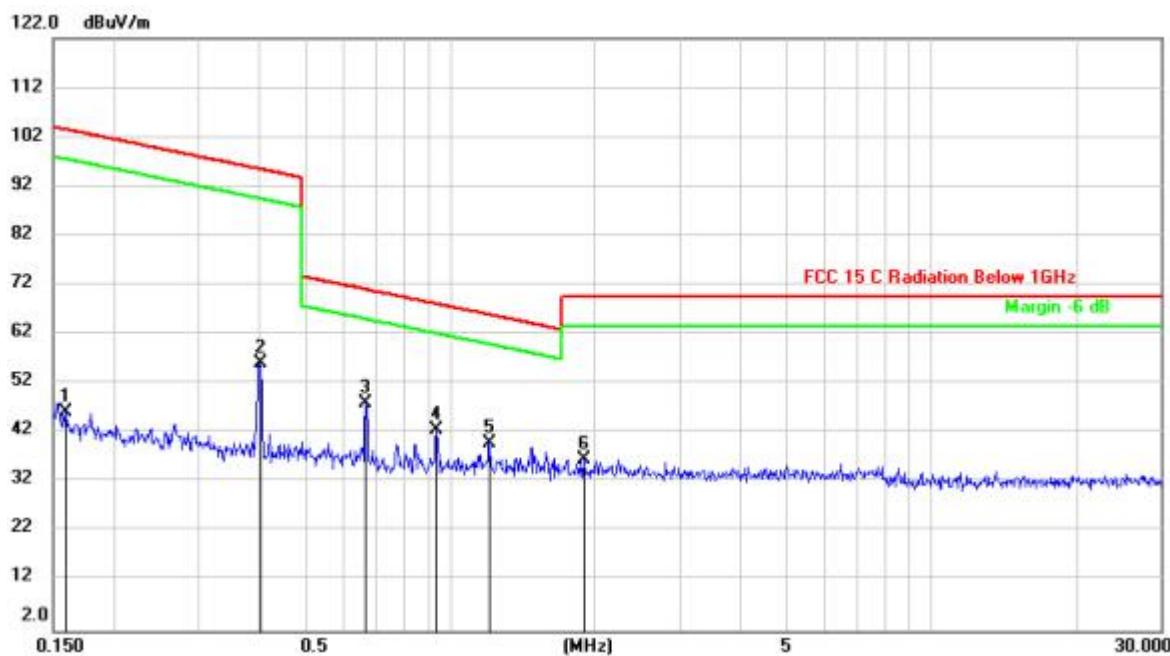

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dBuV/m	dBuV/m	dBuV/m	dB
							Detector
1		0.1590	26.08	20.31	46.39	103.55	-57.16
2		0.4019	35.55	20.47	56.02	95.52	-39.50
3	*	0.6683	27.42	20.64	48.06	71.11	-23.05
4		0.9381	21.76	20.78	42.54	68.17	-25.63
5		1.2034	19.22	20.77	39.99	66.02	-26.03
6		1.8979	16.11	20.64	36.75	69.50	-32.75

(30MHz-1000MHz)

Temperature:	23.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Horizontal
Test Mode:	Mode 4		




No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.8348	30.75	-16.63	14.12	40.00	-25.88	QP
2	105.6415	29.74	-17.98	11.76	43.50	-31.74	QP
3	202.8104	29.80	-17.93	11.87	43.50	-31.63	QP
4	360.4476	29.73	-14.94	14.79	46.00	-31.21	QP
5	541.3725	30.21	-13.14	17.07	46.00	-28.93	QP
6	654.2318	30.61	-10.55	20.06	46.00	-25.94	QP

### Remarks:

### 1. Final Level = Receiver Read level + Factor

Temperature:	22.7°C	Relative Humidity:	61%
Test Voltage:	DC 5V	Phase:	Vertical
Test Mode:	Mode 4		

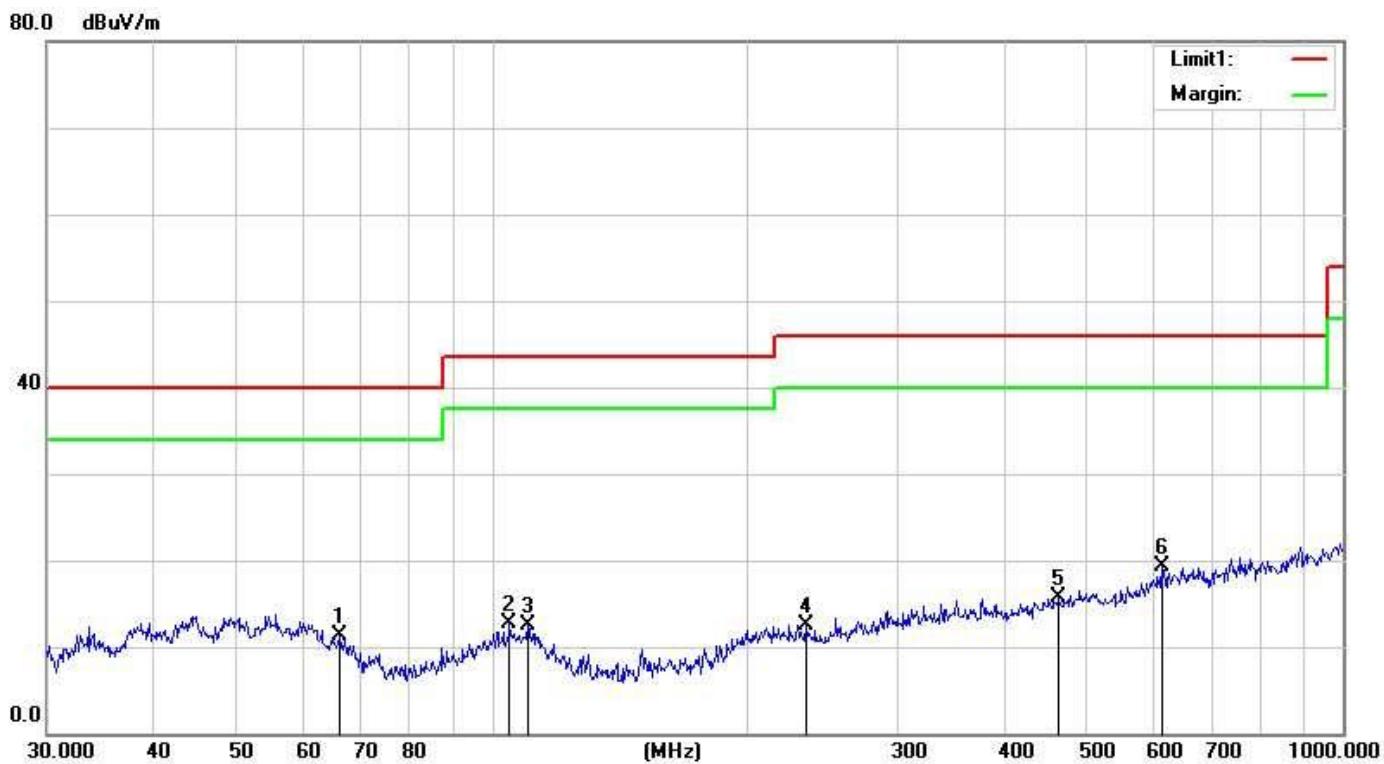

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.2662	51.54	-40.24	11.30	40.00	-28.70	QP
2	104.9033	52.89	-40.24	12.65	43.50	-30.85	QP
3	110.1816	52.83	-40.24	12.59	43.50	-30.91	QP
4	234.1684	52.76	-40.24	12.52	46.00	-33.48	QP
5	463.9696	55.96	-40.24	15.72	46.00	-30.28	QP
6	612.0642	59.59	-40.24	19.35	46.00	-26.65	QP

### Remarks:

## 1. Final Level = Receiver Read level + Factor

## 5. 20 DB BANDWIDTH TEST

### 5.1 LIMIT


According to 15.215 (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation

## 5.2 TEST PROCEDURE

Check the calibration of the measuring instrument using either an internal calibrator or a

- a. known signal from an external generator
- b. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.


## 5.3 TEST SETUP

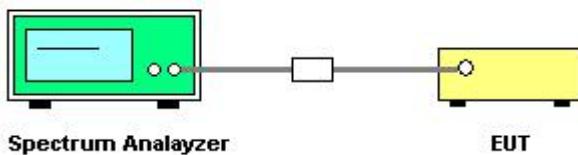

## 5.4 TEST RESULTS

Temperature:	25°C	Relative Humidity:	50%
Test Mode:	Mode 4	Test Voltage:	DC 5V

Frequency (KHz)	20dB Bandwidth (Hz)	Result
123.0	9249	PASS

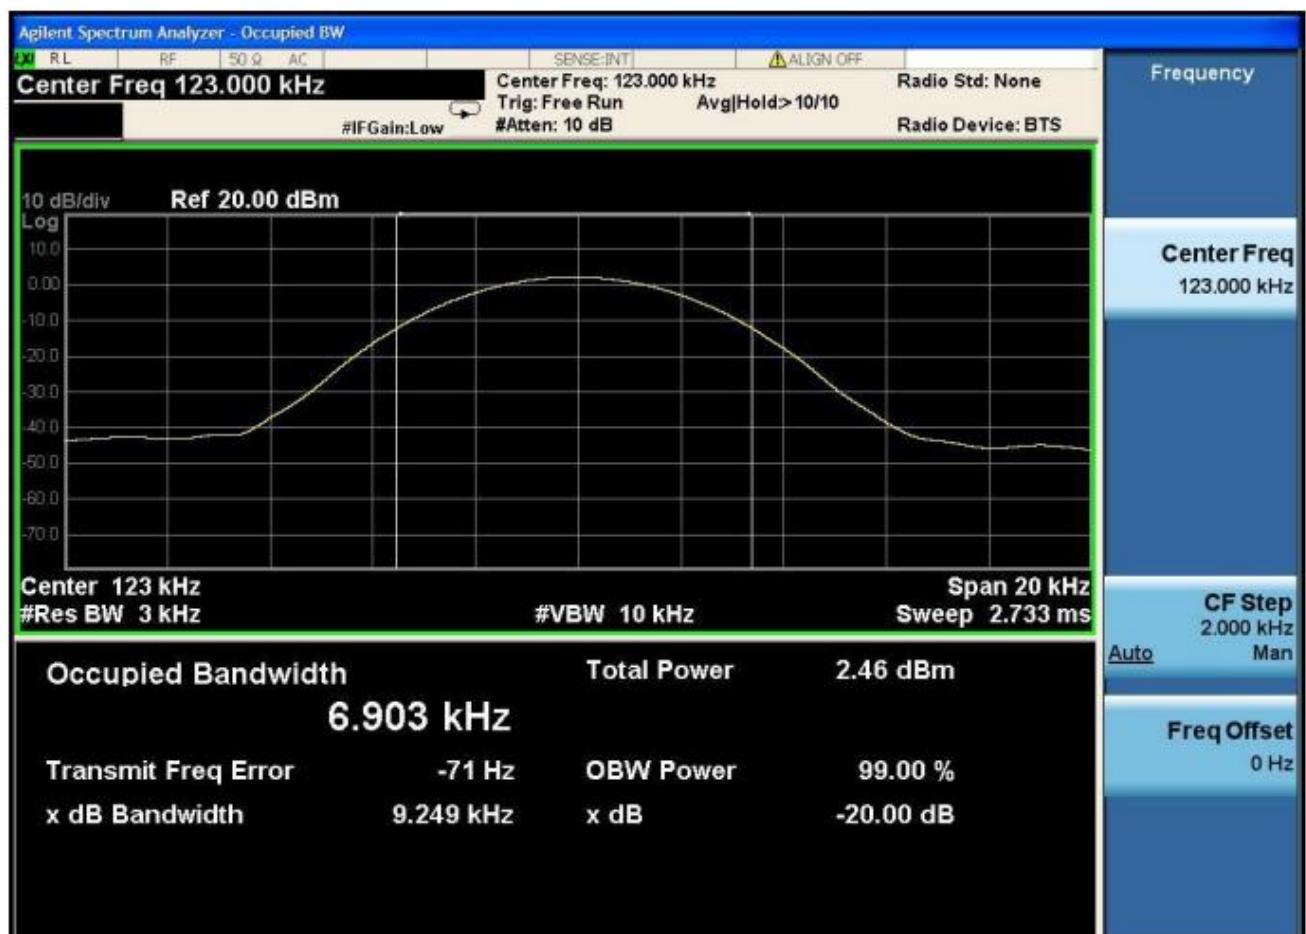

## 6. ANTENNA REQUIREMENT

### 6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.2 EUT ANTENNA

The antennas used for this product is Inductive Loop Antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

\*\*\*\*\*END OF THE REPORT\*\*\*\*\*