






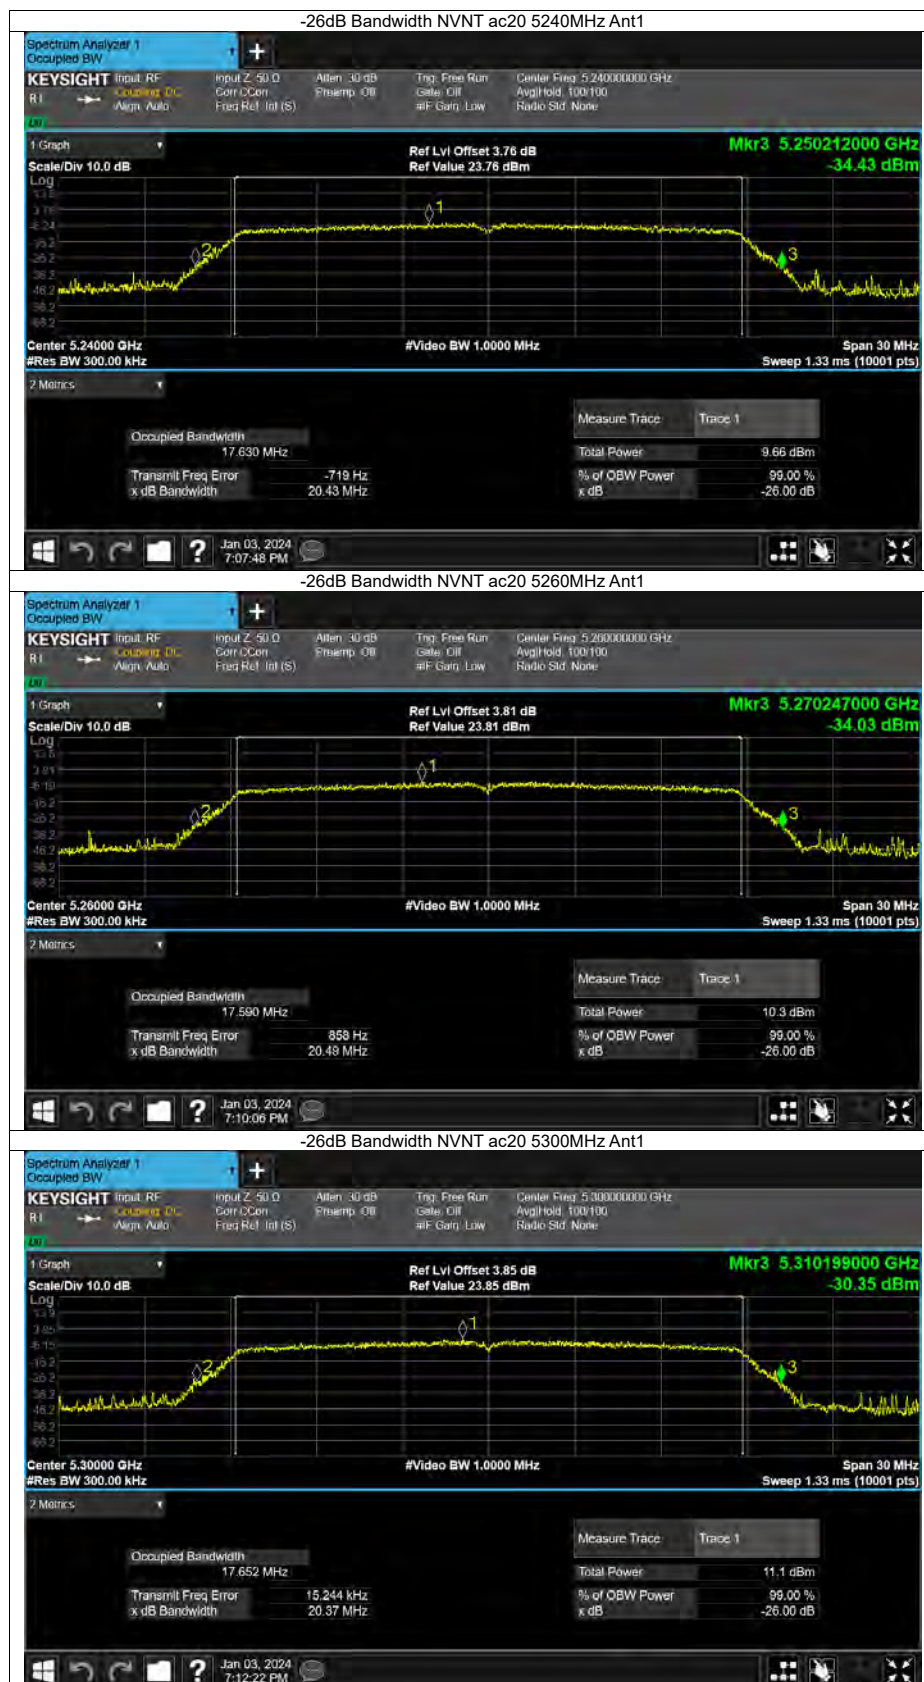


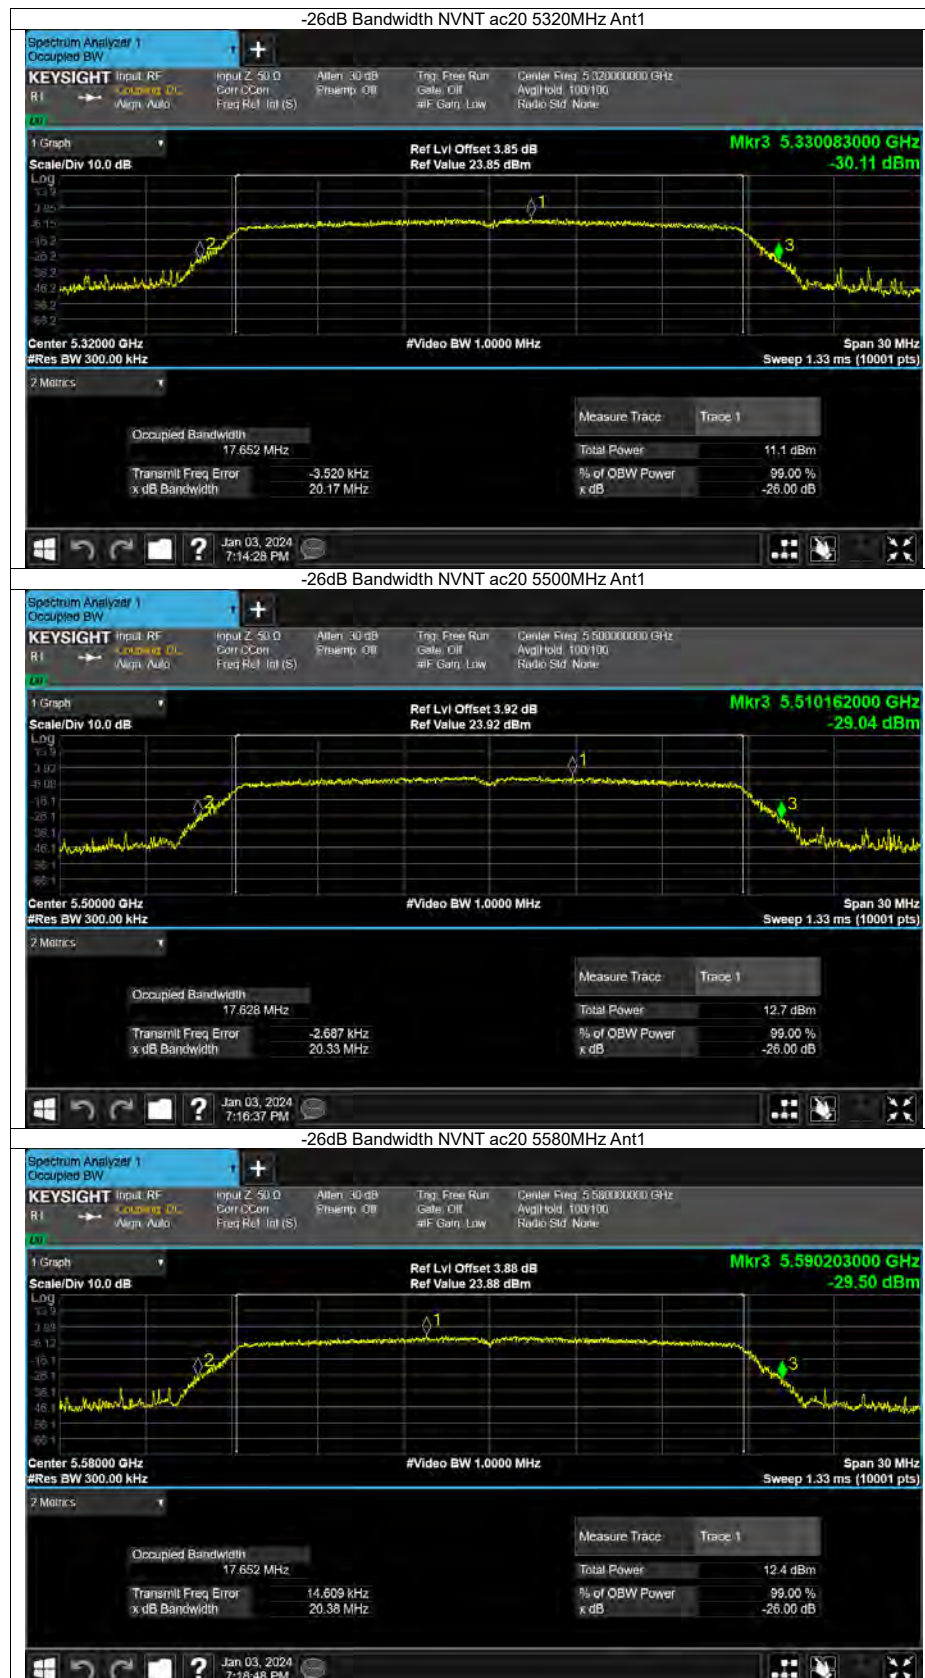

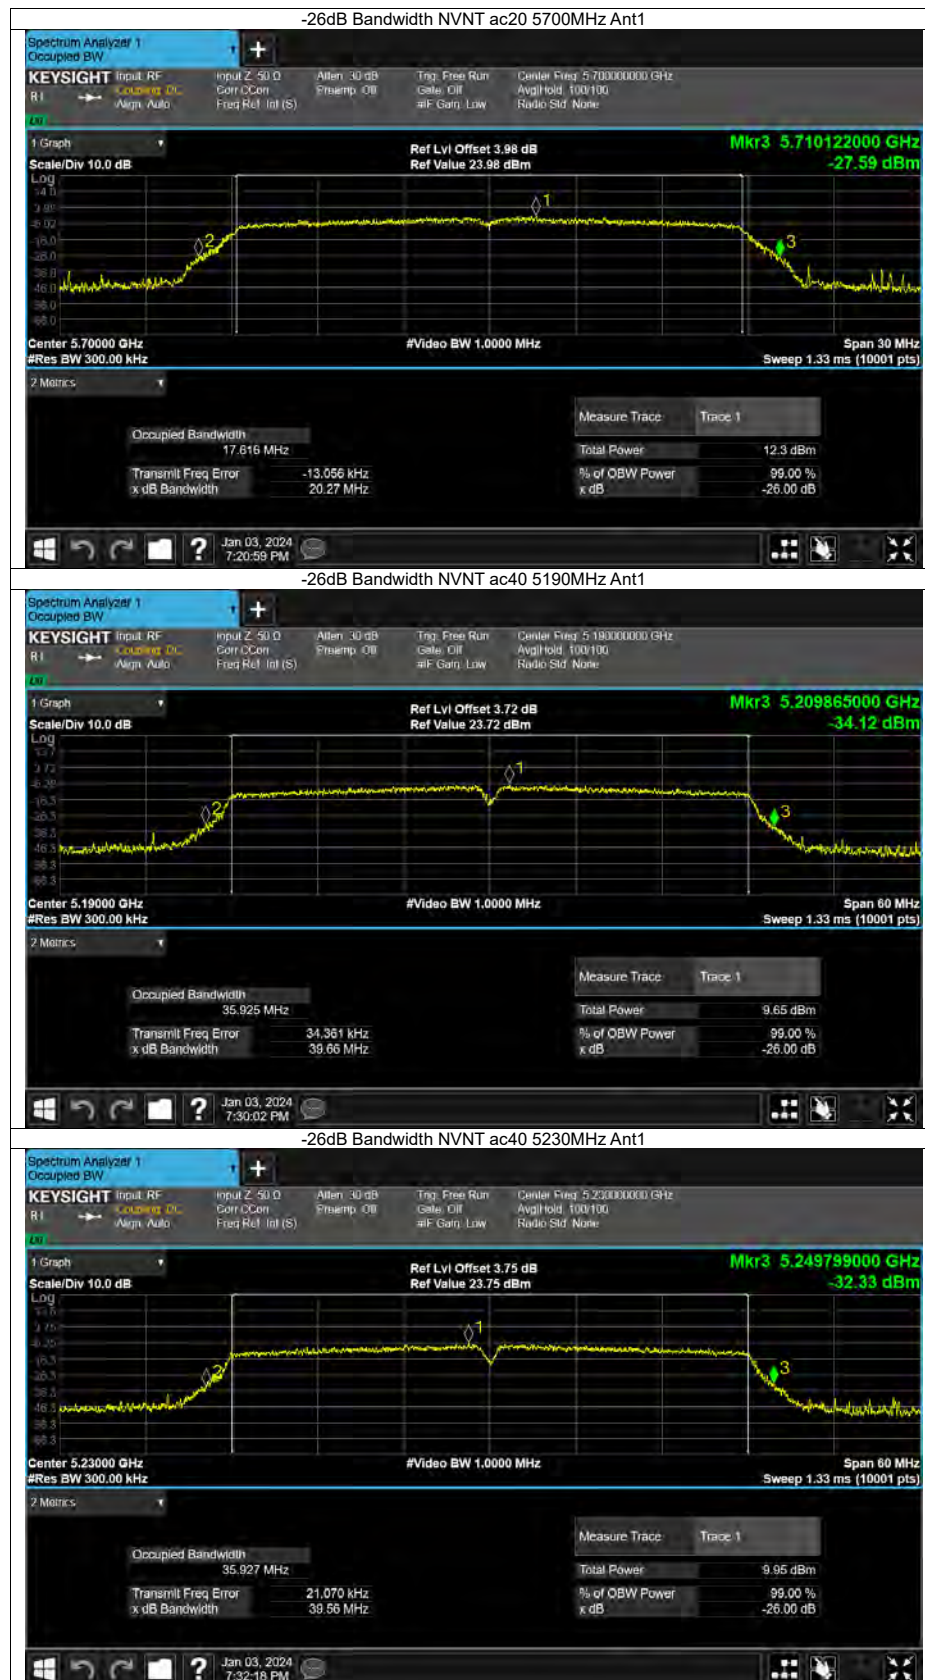

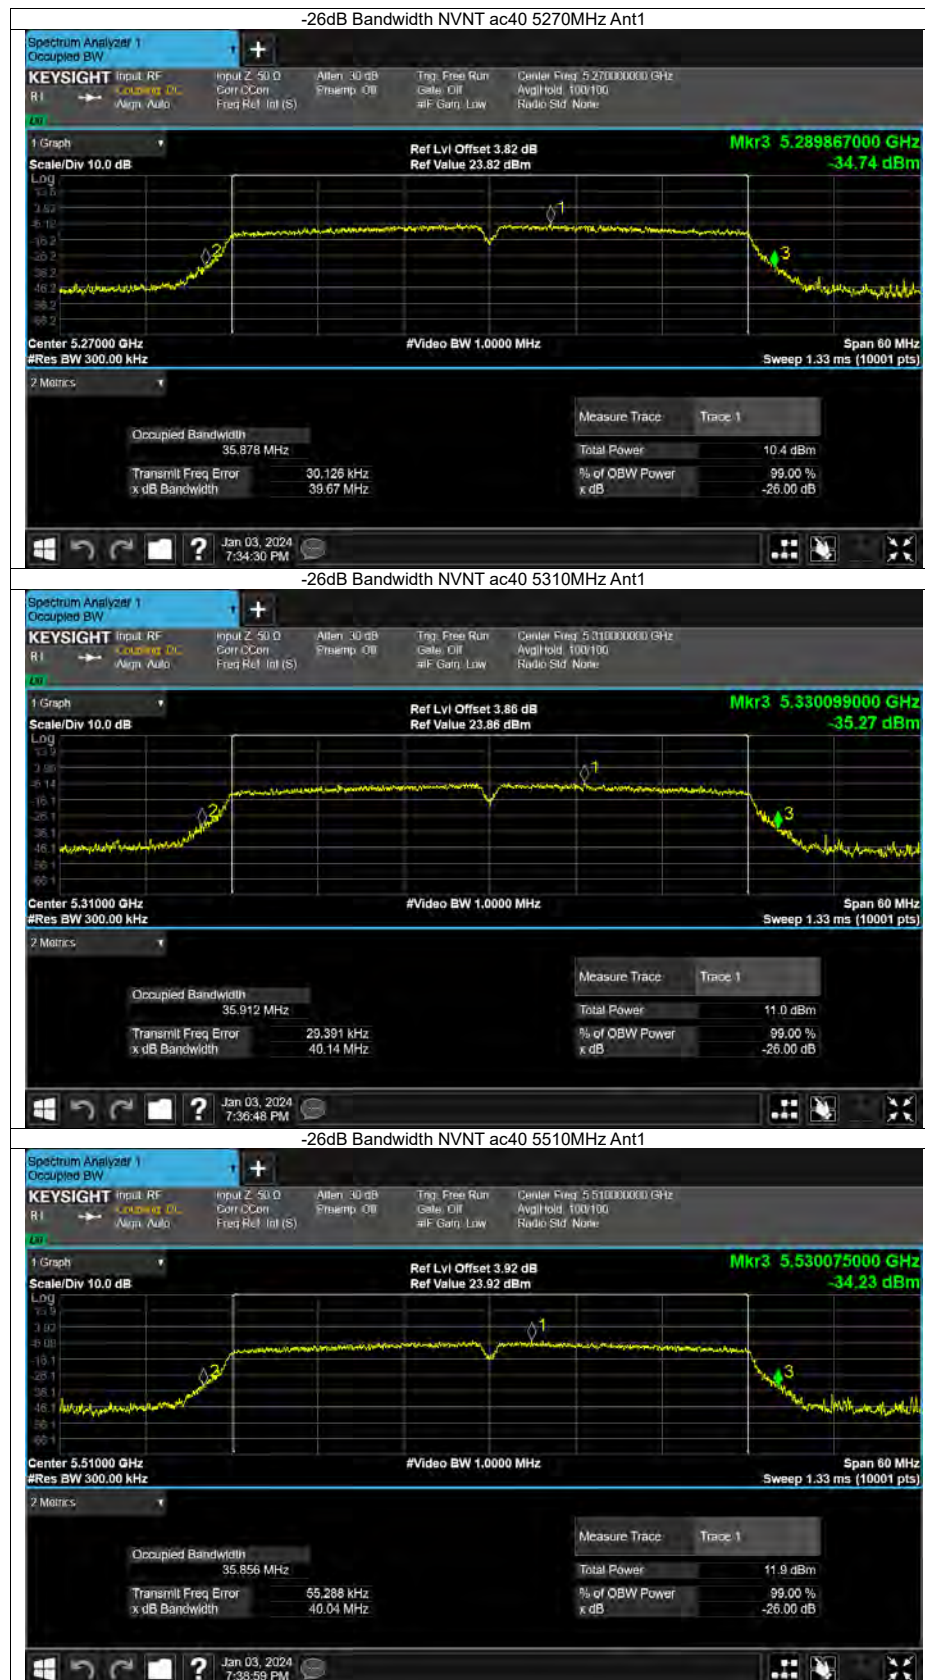

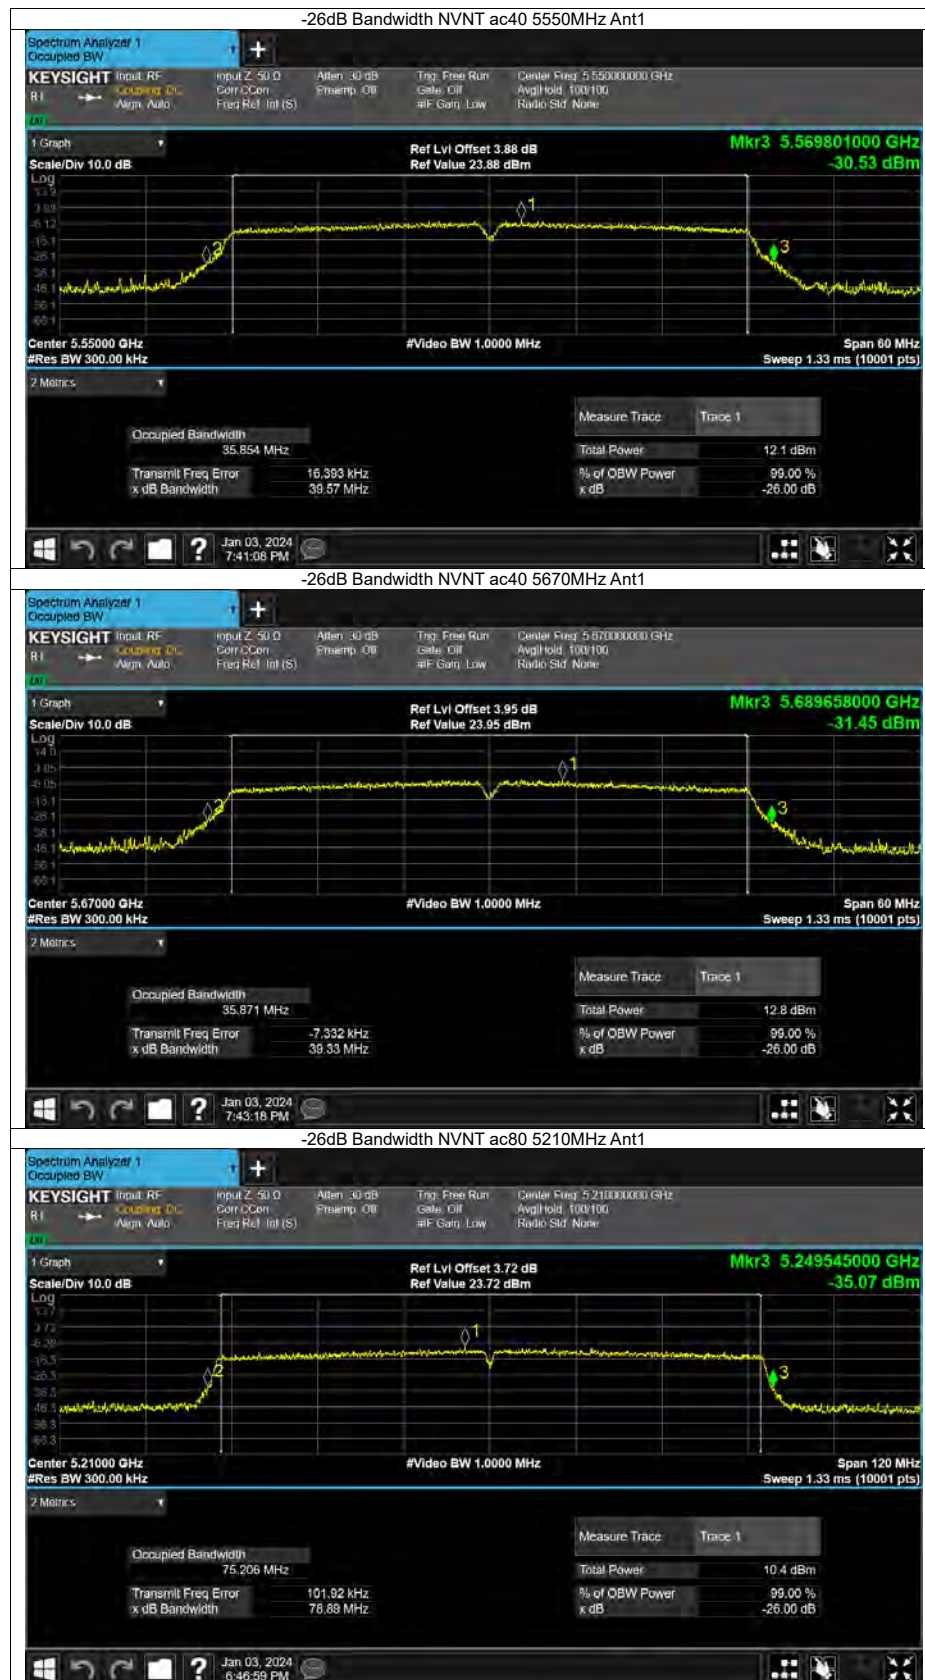

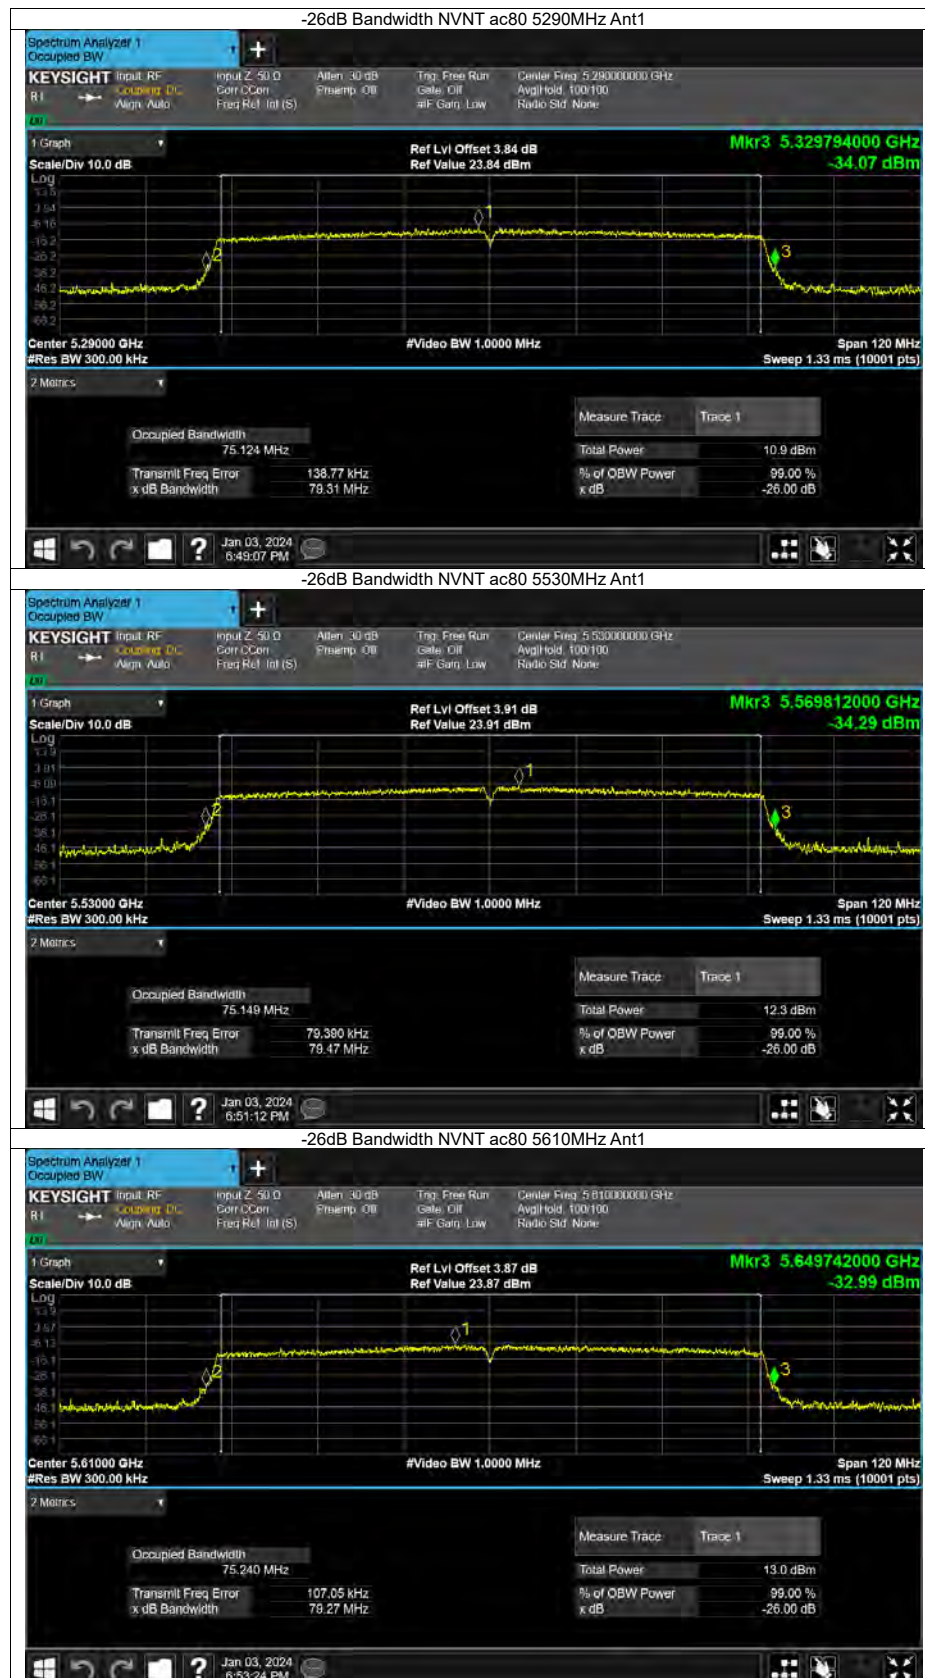



Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.536
NVNT	a	5200	Ant1	16.503
NVNT	a	5240	Ant1	16.554
NVNT	a	5260	Ant1	16.544
NVNT	a	5300	Ant1	16.541
NVNT	a	5320	Ant1	16.525
NVNT	a	5500	Ant1	16.562
NVNT	a	5580	Ant1	16.595
NVNT	a	5700	Ant1	16.567
NVNT	a	5745	Ant1	16.55
NVNT	a	5785	Ant1	16.501
NVNT	a	5825	Ant1	16.527
NVNT	n20	5180	Ant1	17.559
NVNT	n20	5200	Ant1	17.569
NVNT	n20	5240	Ant1	17.604
NVNT	n20	5260	Ant1	17.551
NVNT	n20	5300	Ant1	17.663
NVNT	n20	5320	Ant1	17.567
NVNT	n20	5500	Ant1	17.579
NVNT	n20	5580	Ant1	17.596
NVNT	n20	5700	Ant1	17.574
NVNT	n20	5745	Ant1	17.567
NVNT	n20	5785	Ant1	17.581
NVNT	n20	5825	Ant1	17.573
NVNT	n40	5190	Ant1	35.975
NVNT	n40	5230	Ant1	35.948
NVNT	n40	5270	Ant1	35.96
NVNT	n40	5310	Ant1	36.016
NVNT	n40	5510	Ant1	35.954
NVNT	n40	5550	Ant1	35.993
NVNT	n40	5670	Ant1	35.931
NVNT	n40	5755	Ant1	35.931
NVNT	n40	5795	Ant1	35.946
NVNT	ac20	5180	Ant1	17.554
NVNT	ac20	5200	Ant1	17.55
NVNT	ac20	5240	Ant1	17.538
NVNT	ac20	5260	Ant1	17.534
NVNT	ac20	5300	Ant1	17.566
NVNT	ac20	5320	Ant1	17.549
NVNT	ac20	5500	Ant1	17.554
NVNT	ac20	5580	Ant1	17.559
NVNT	ac20	5700	Ant1	17.567
NVNT	ac20	5745	Ant1	17.568
NVNT	ac20	5785	Ant1	17.537
NVNT	ac20	5825	Ant1	17.552
NVNT	ac40	5190	Ant1	35.96
NVNT	ac40	5230	Ant1	35.912
NVNT	ac40	5270	Ant1	35.971
NVNT	ac40	5310	Ant1	35.905
NVNT	ac40	5510	Ant1	35.972
NVNT	ac40	5550	Ant1	35.917
NVNT	ac40	5670	Ant1	35.861
NVNT	ac40	5755	Ant1	35.93
NVNT	ac40	5795	Ant1	35.925
NVNT	ac80	5210	Ant1	75.196
NVNT	ac80	5290	Ant1	75.112
NVNT	ac80	5530	Ant1	75.147
NVNT	ac80	5610	Ant1	75.175
NVNT	ac80	5775	Ant1	75.059













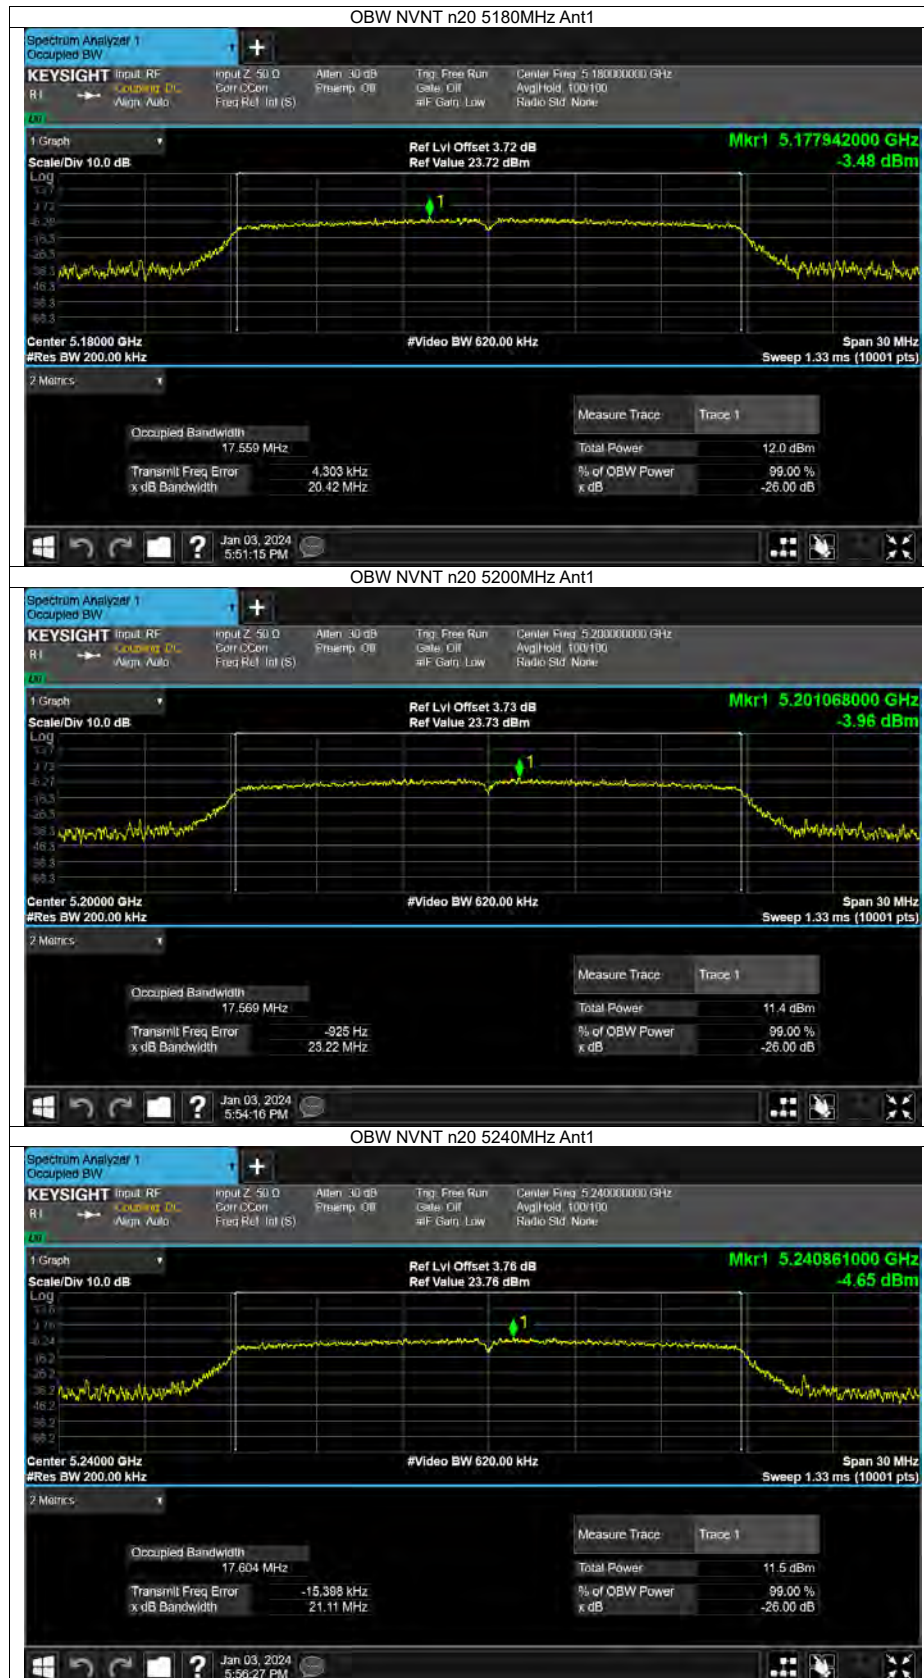


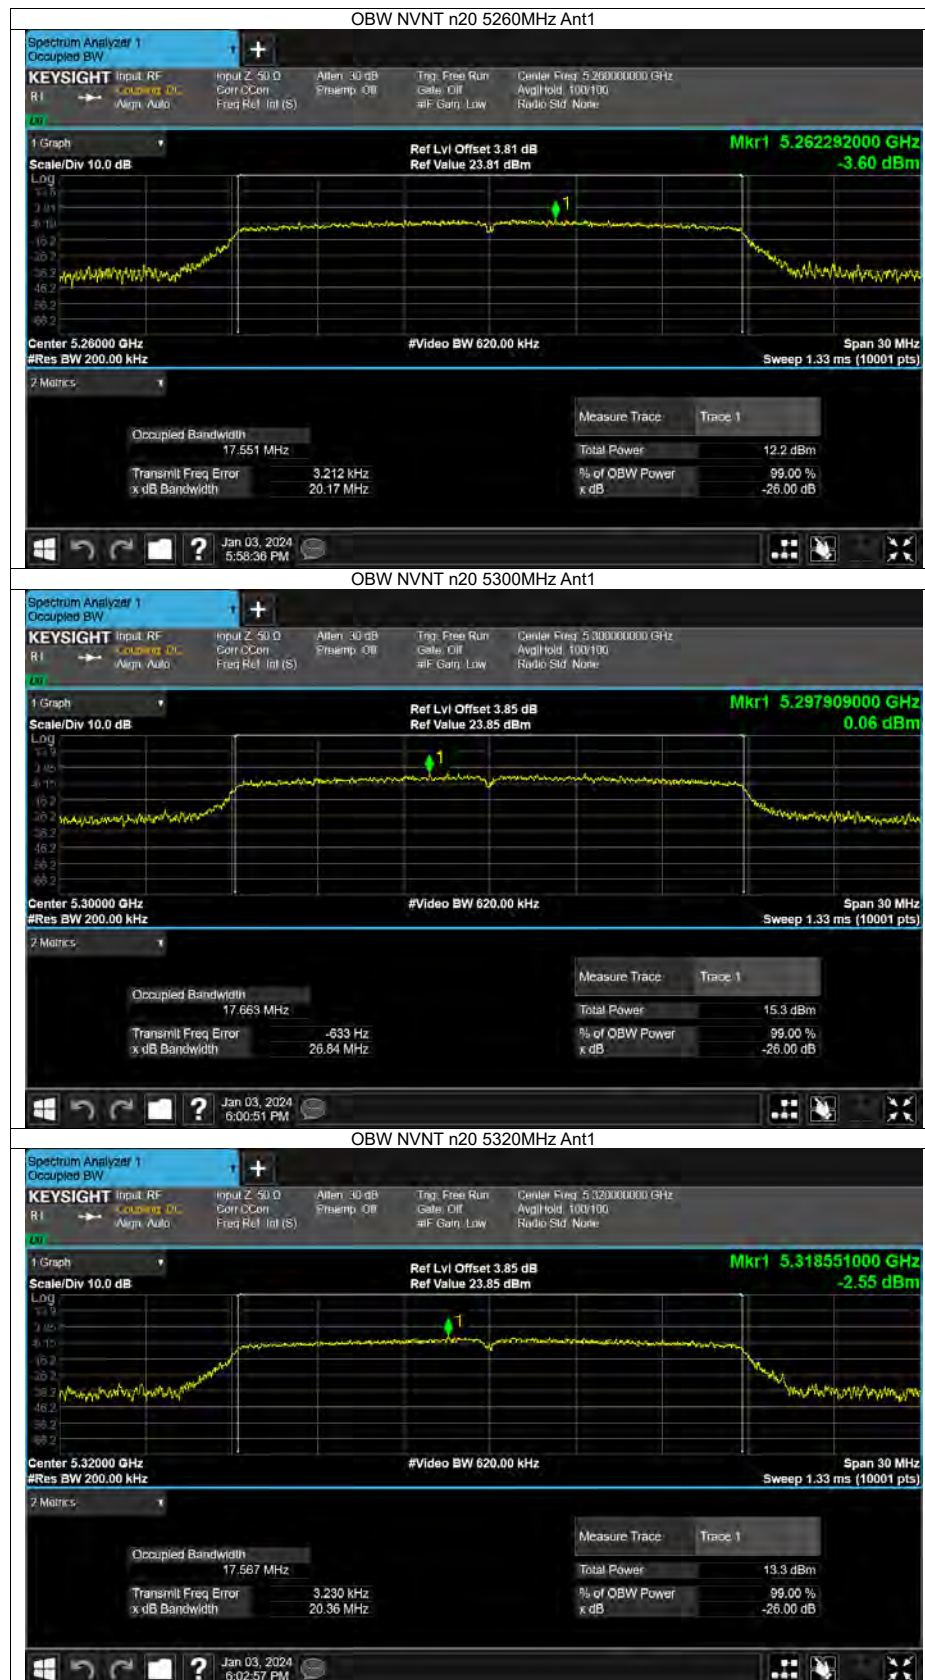


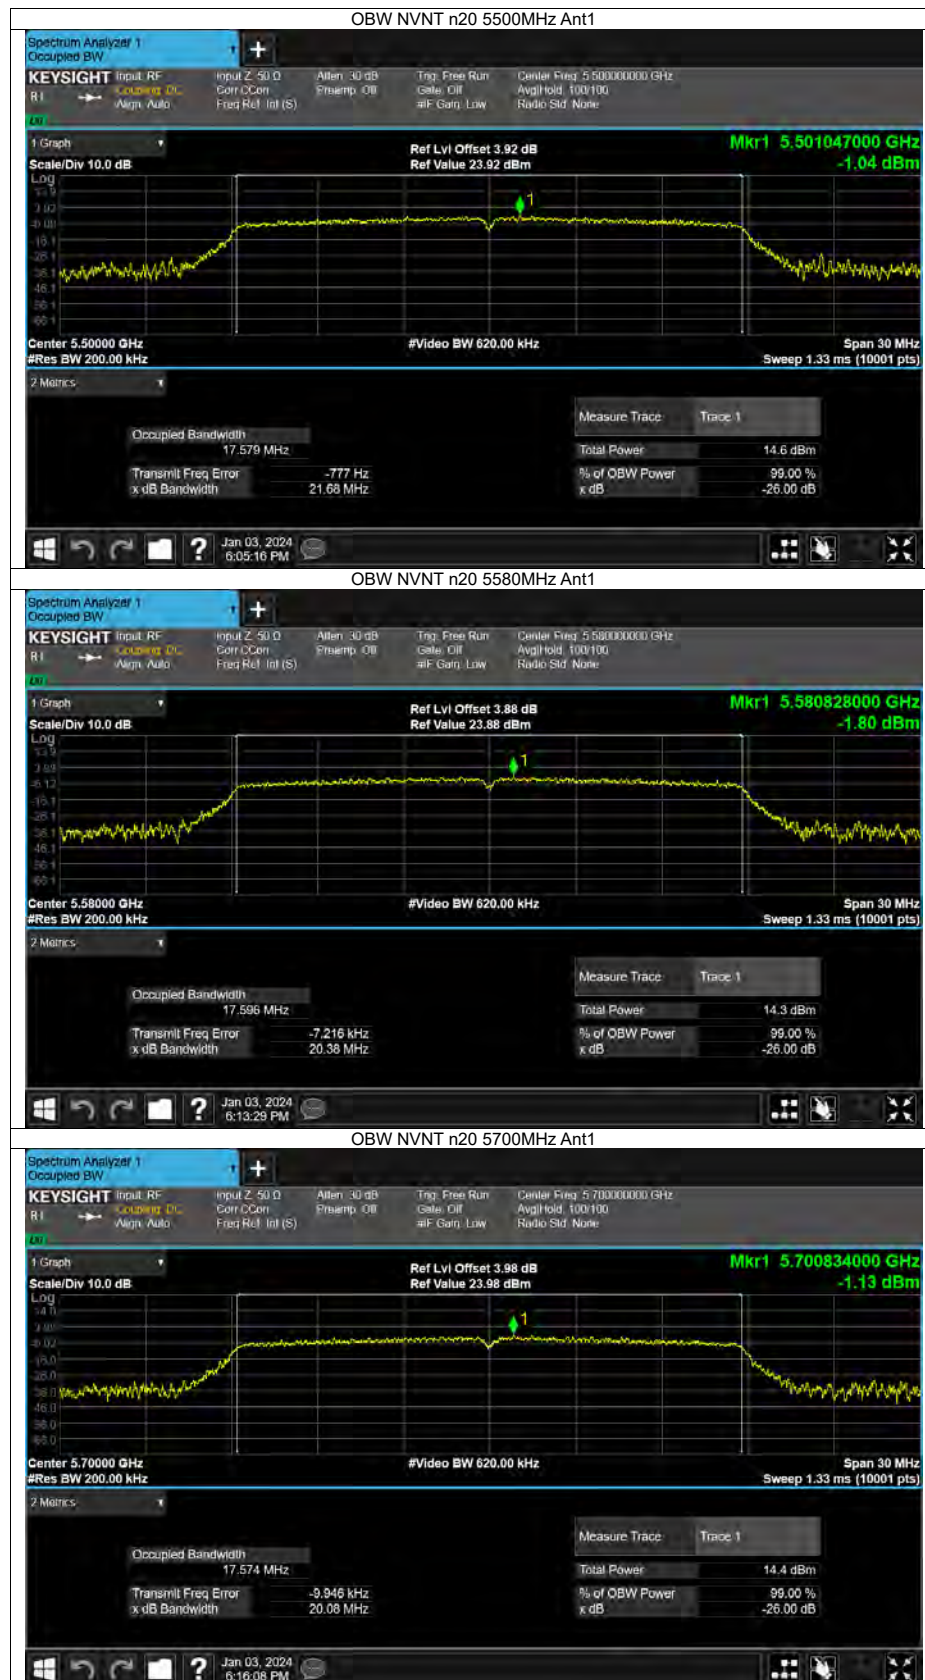


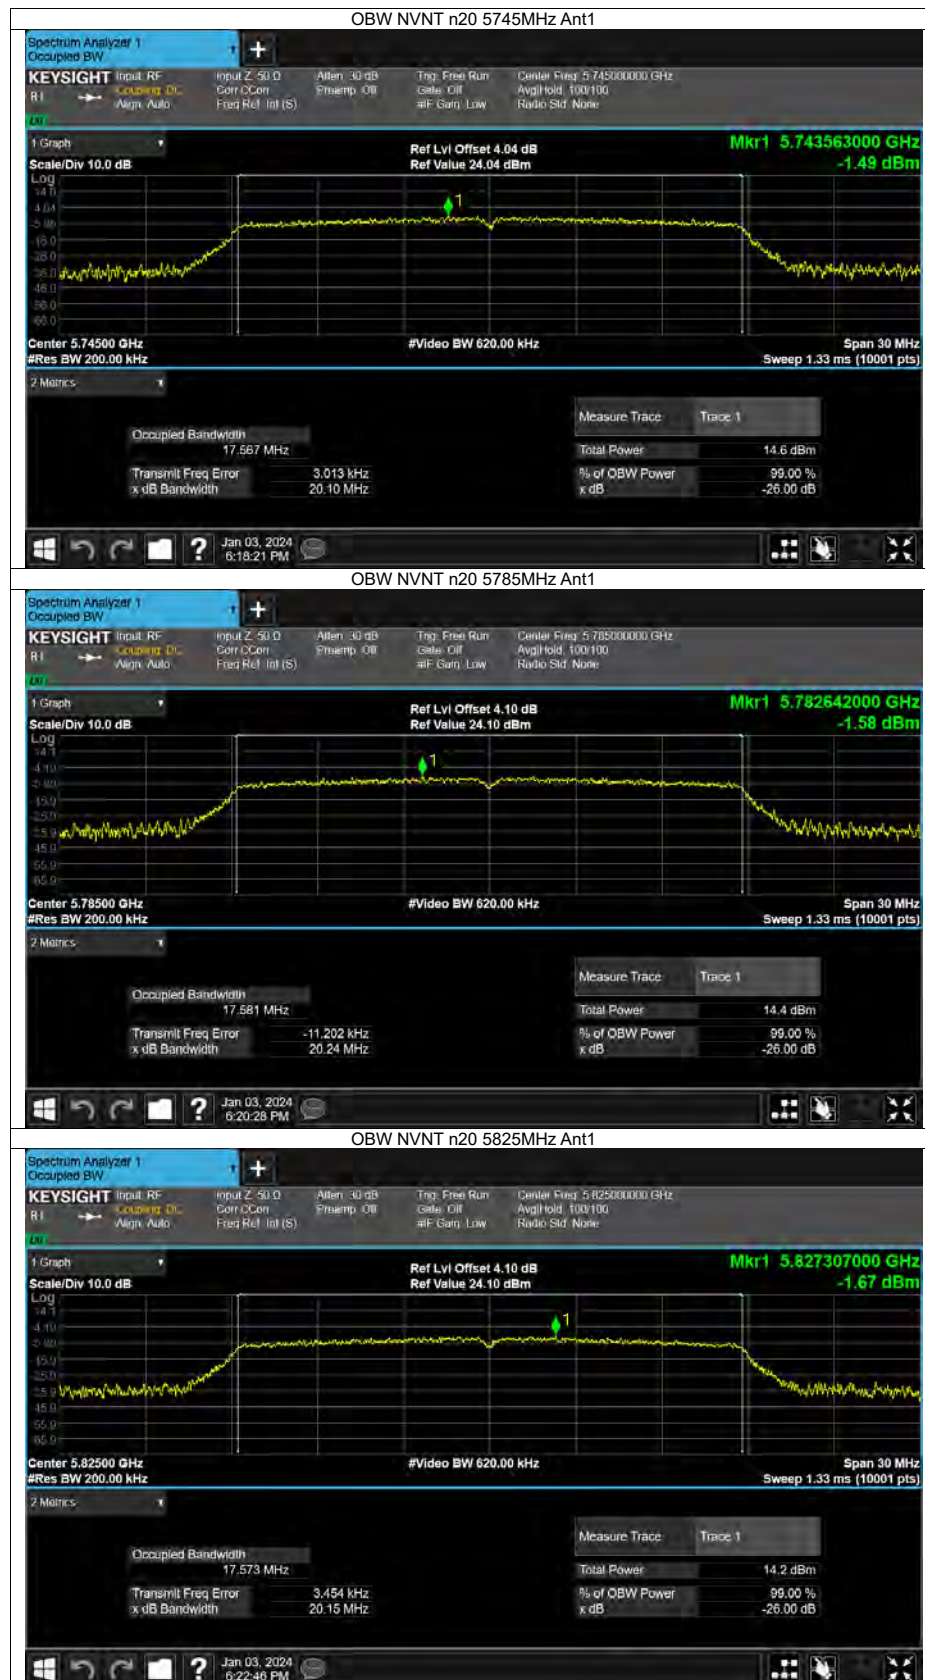


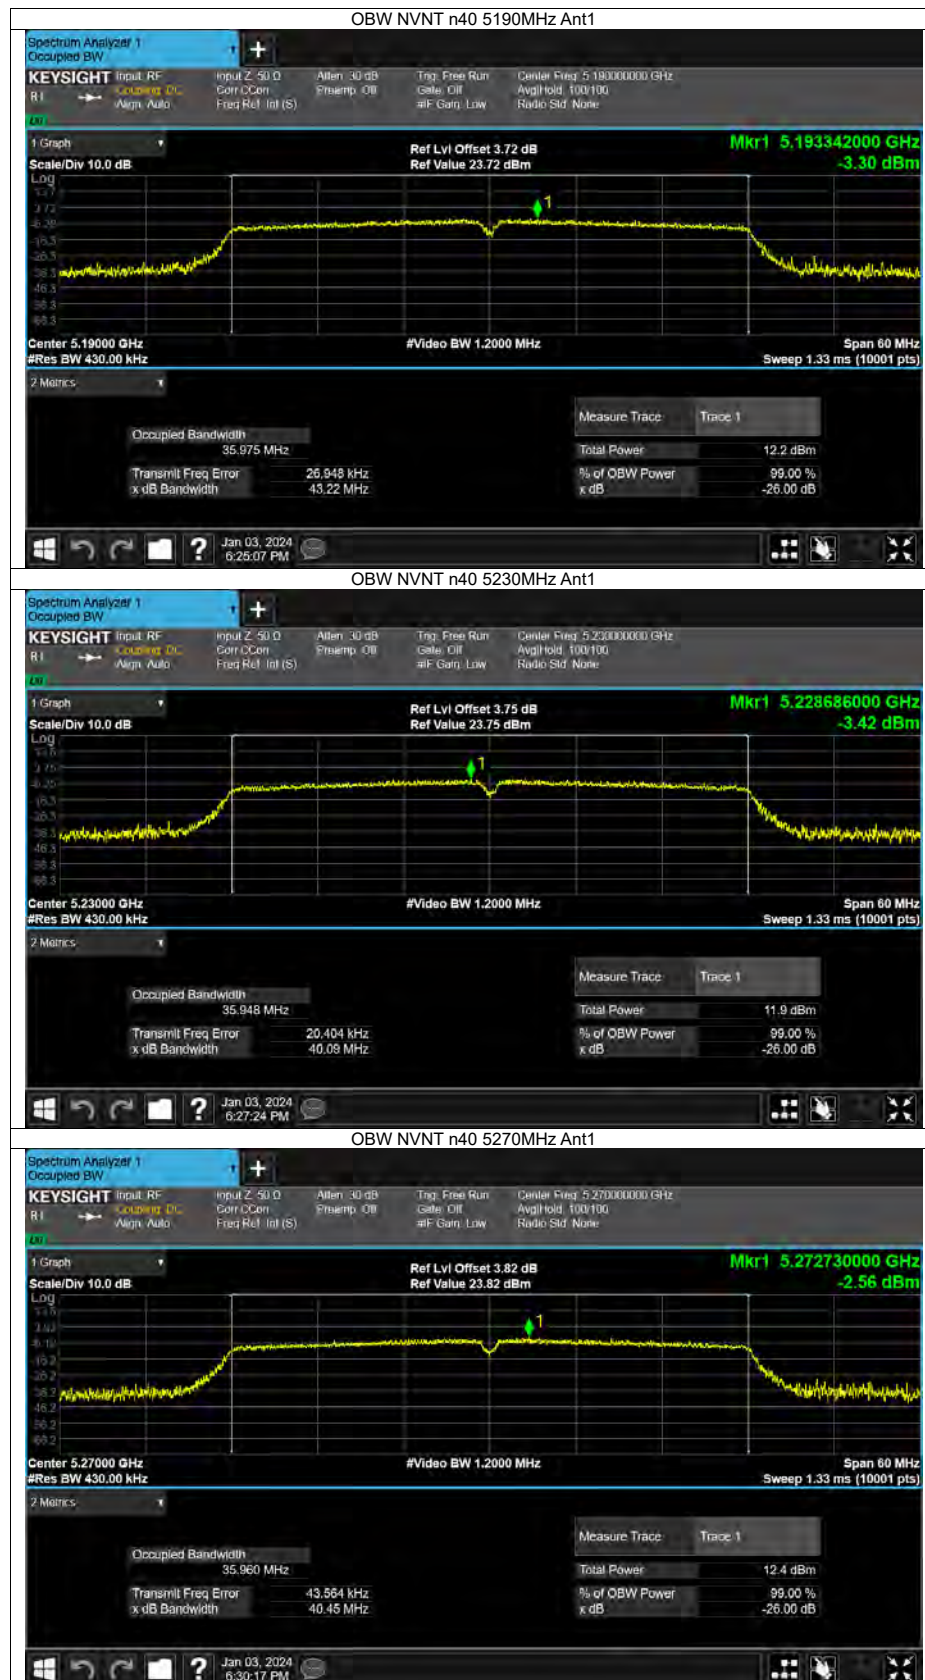


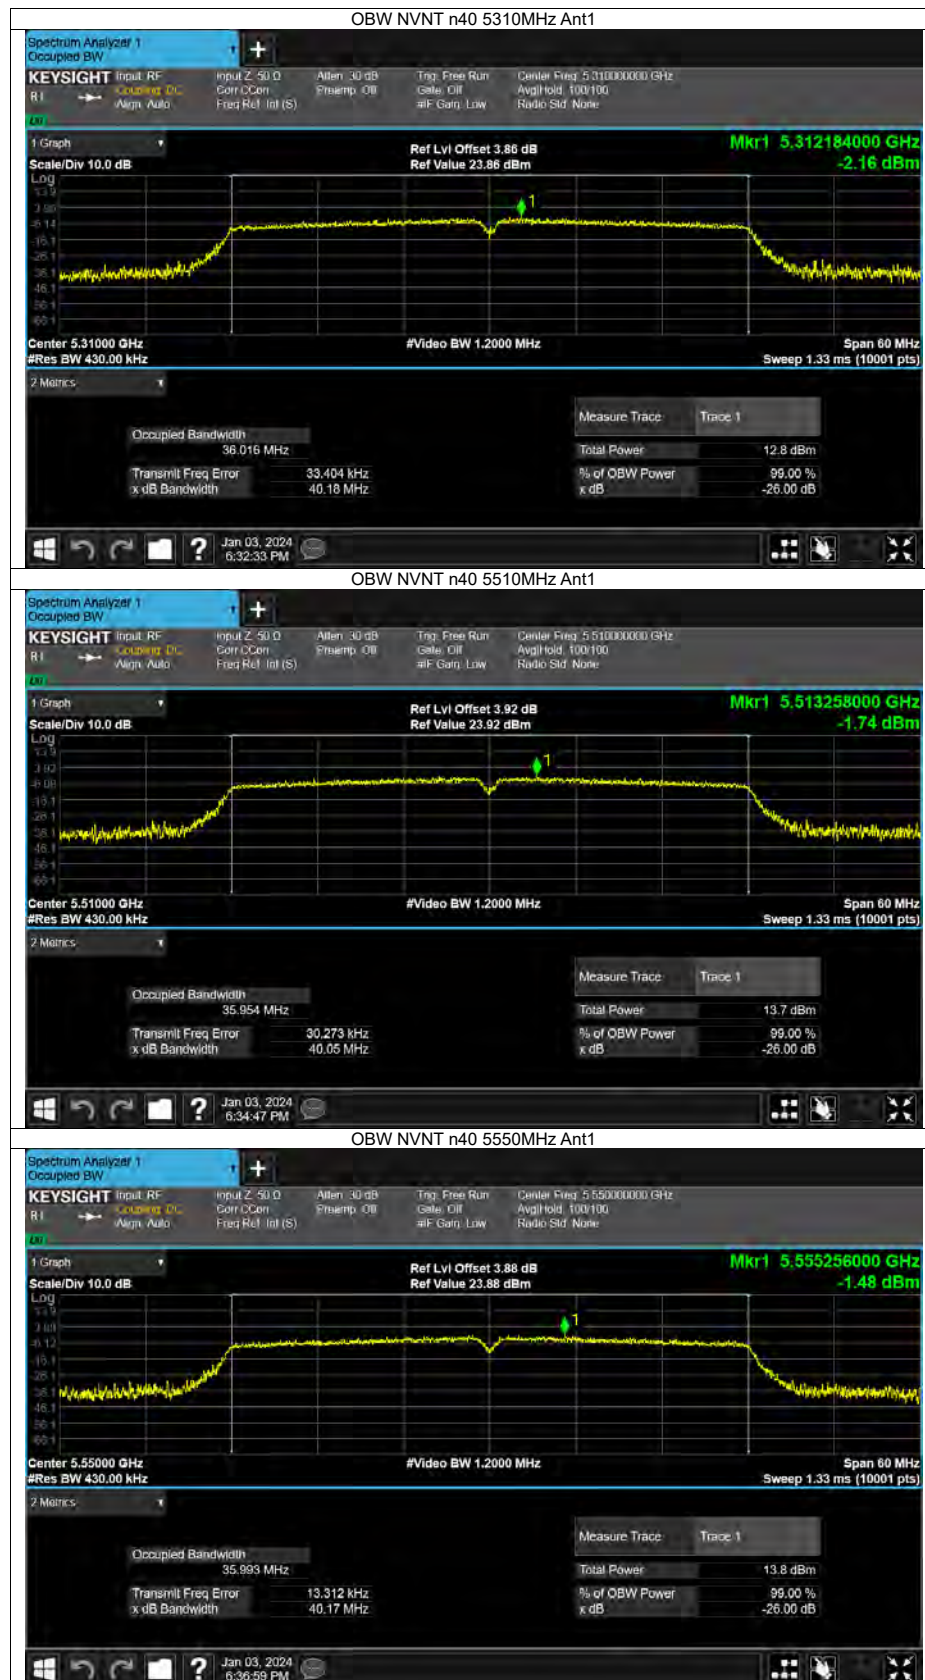


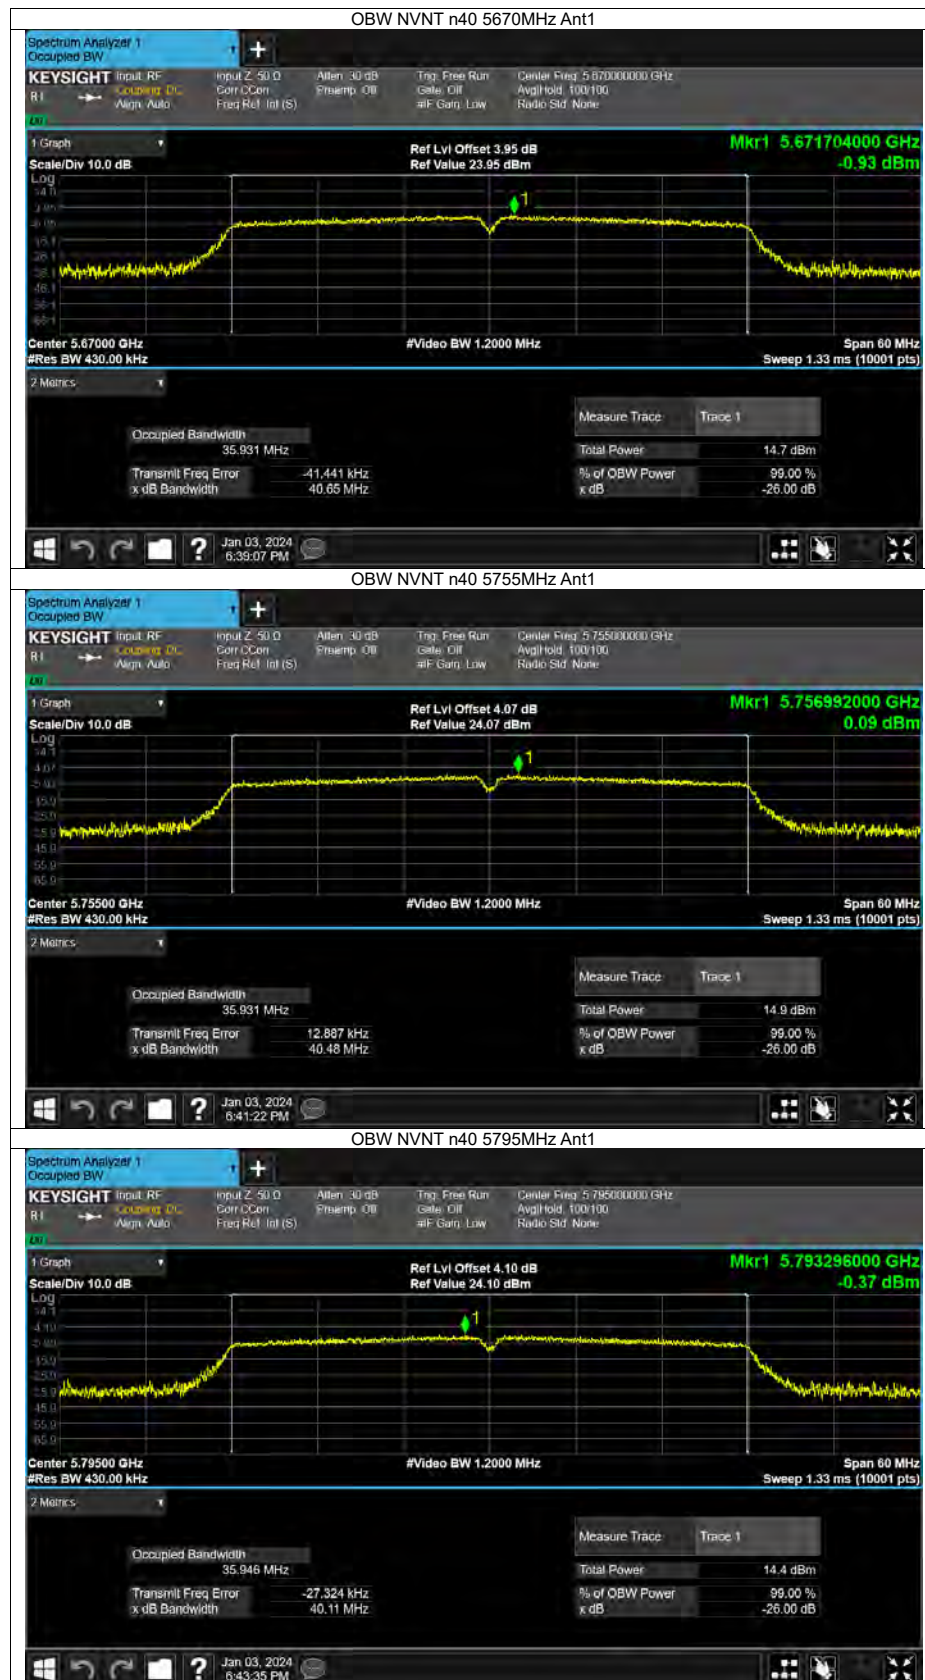


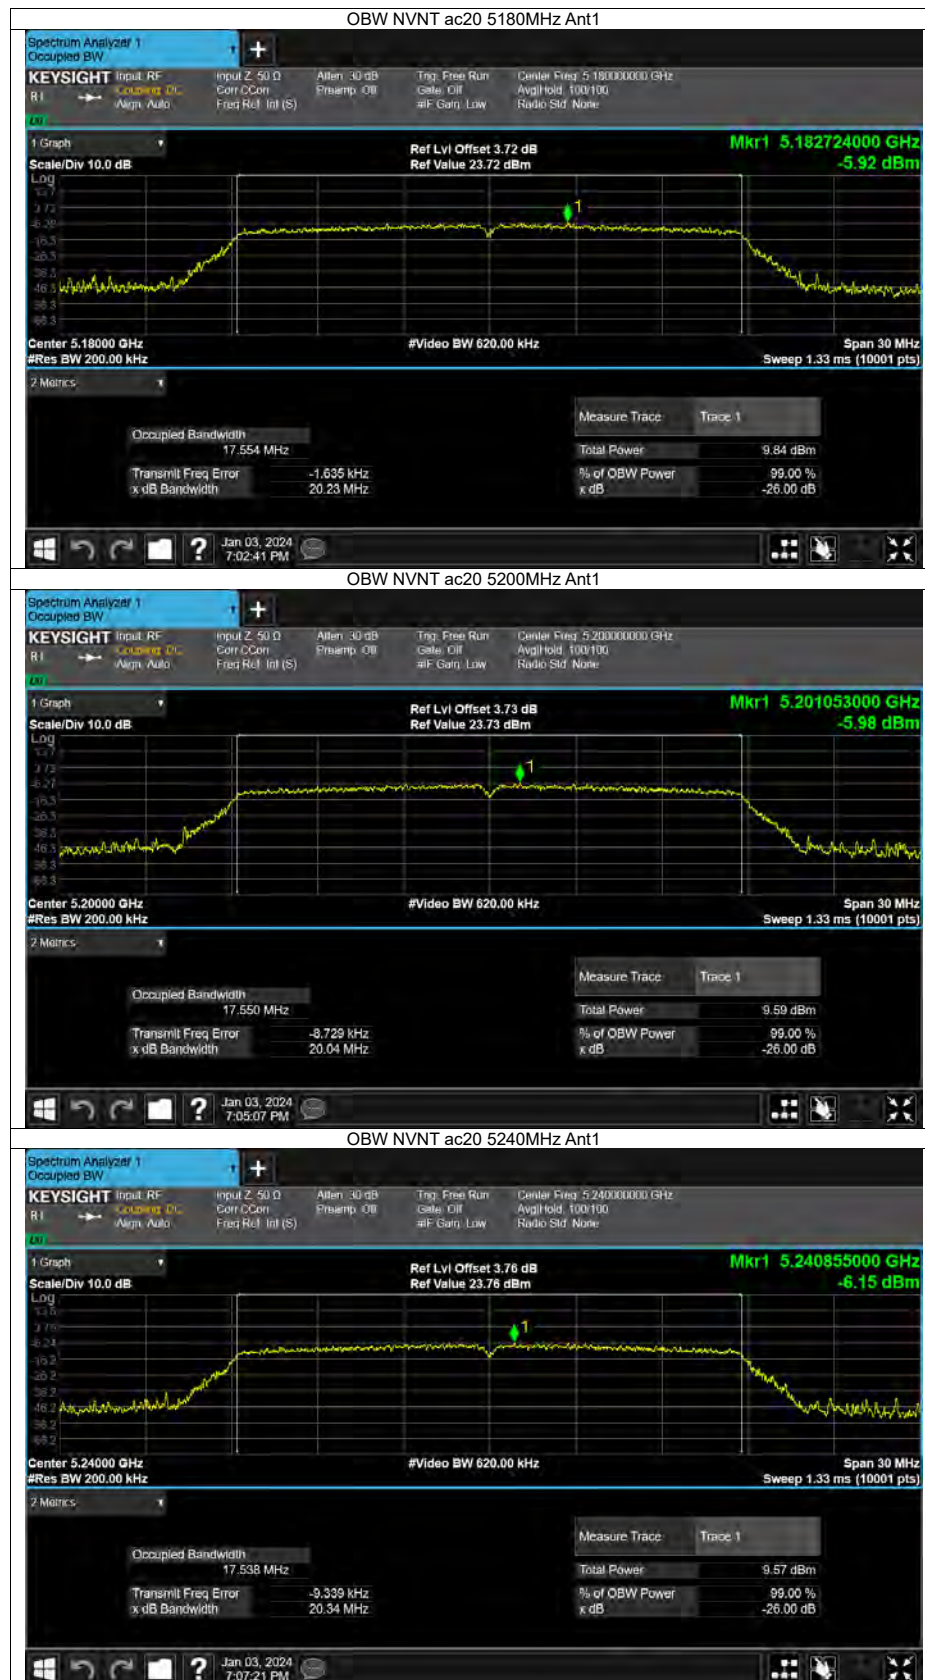


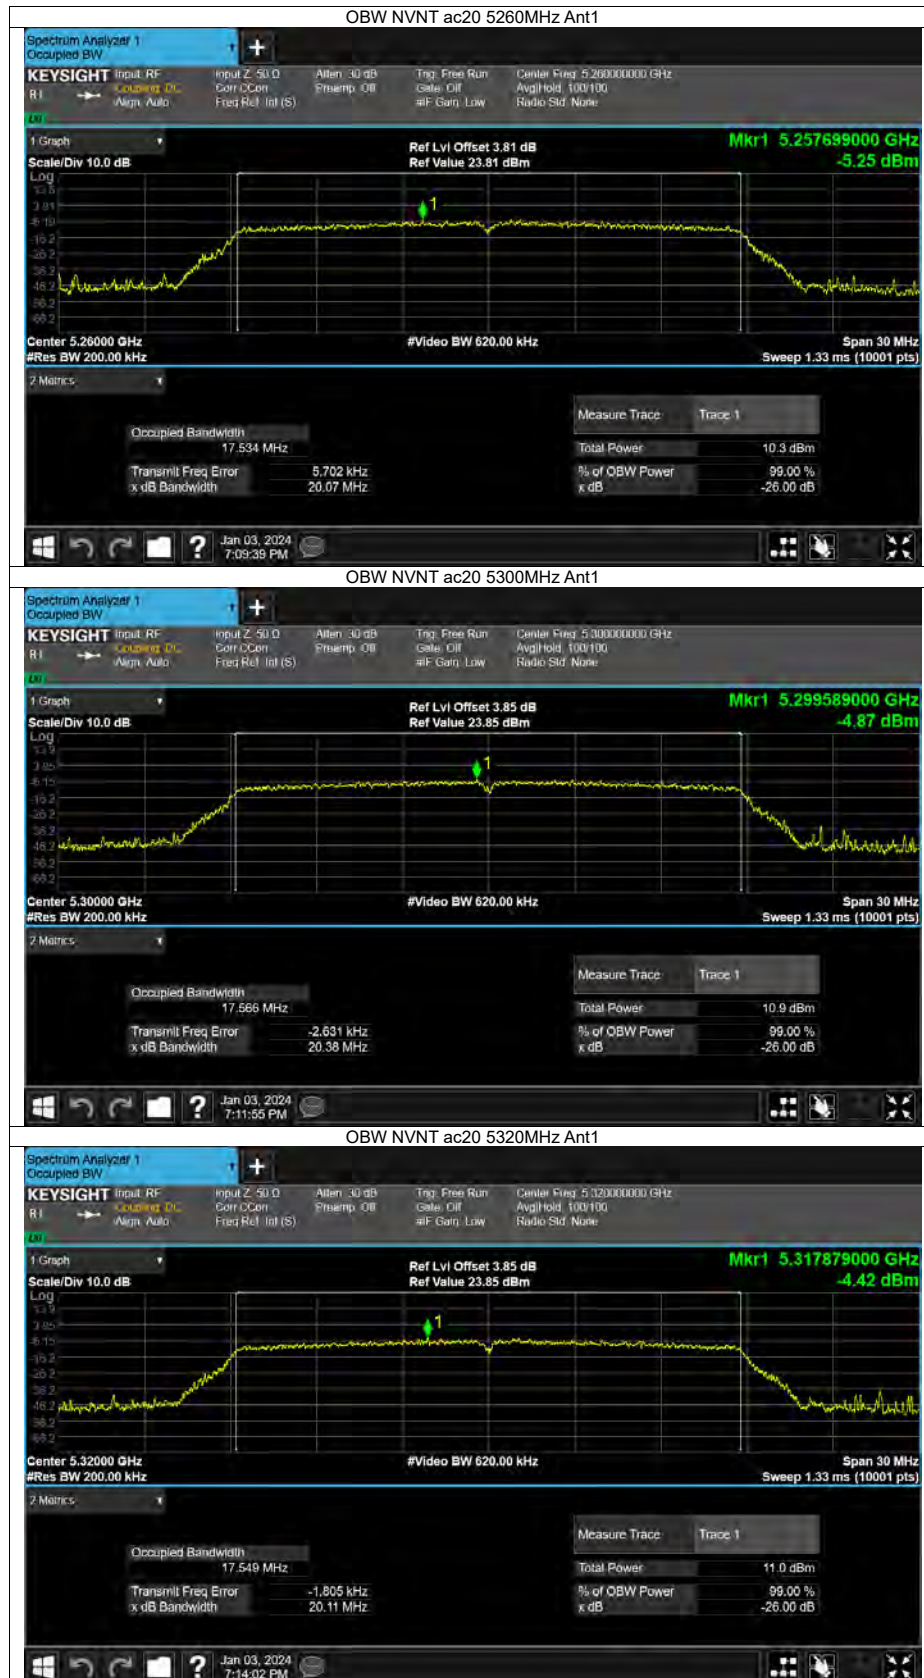


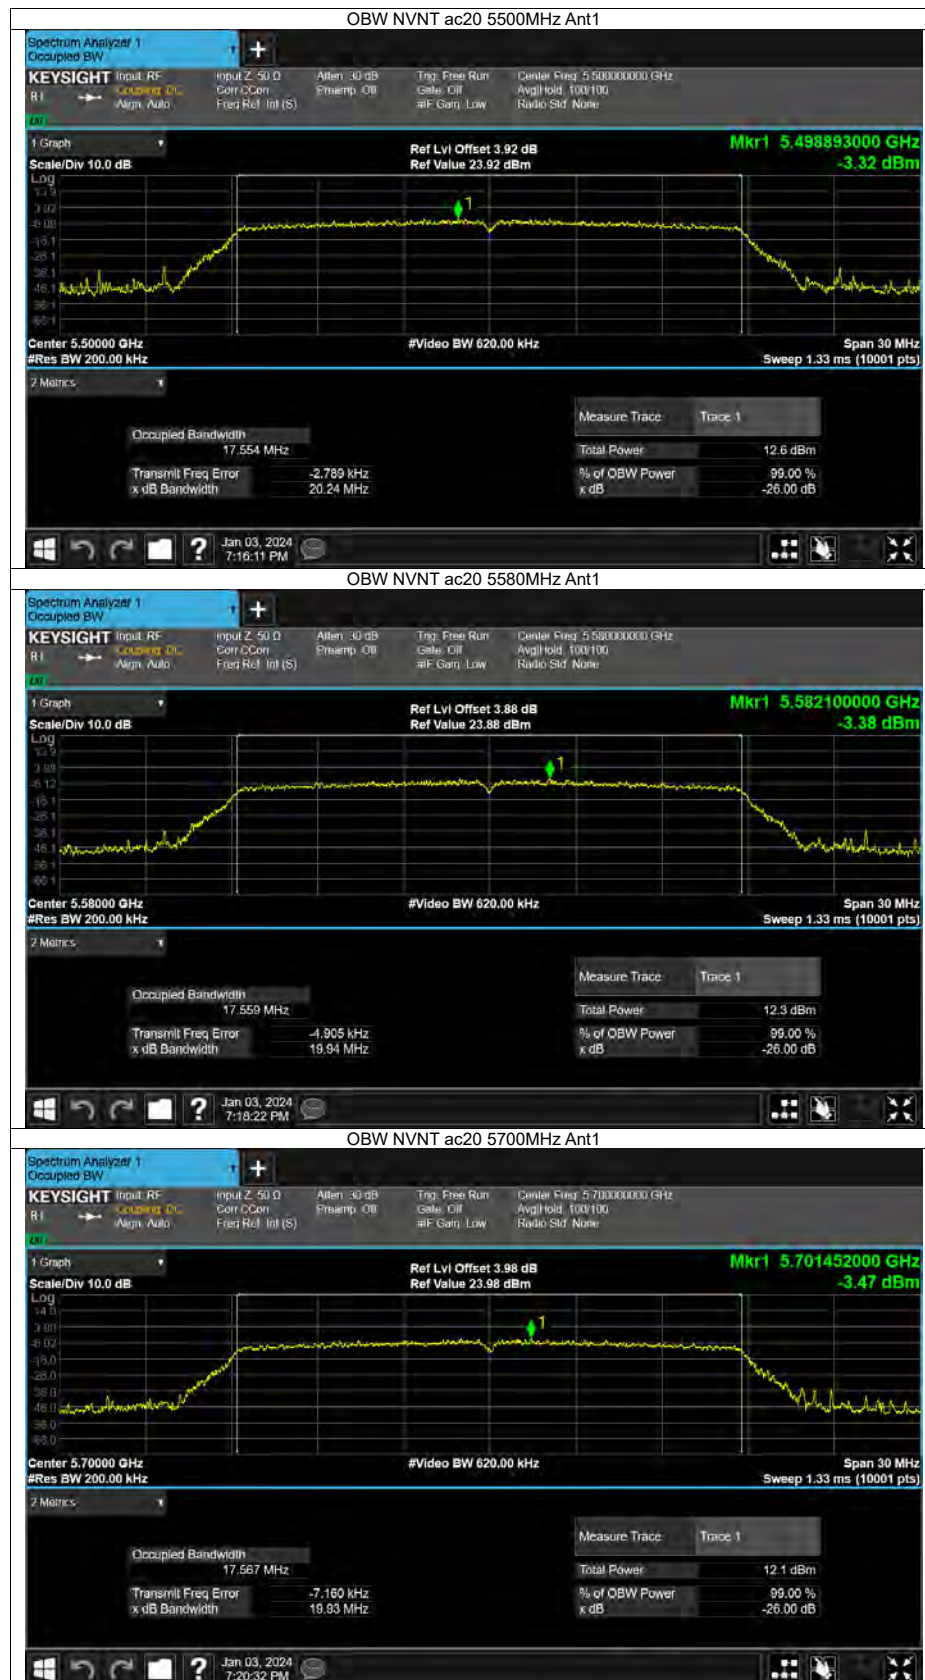


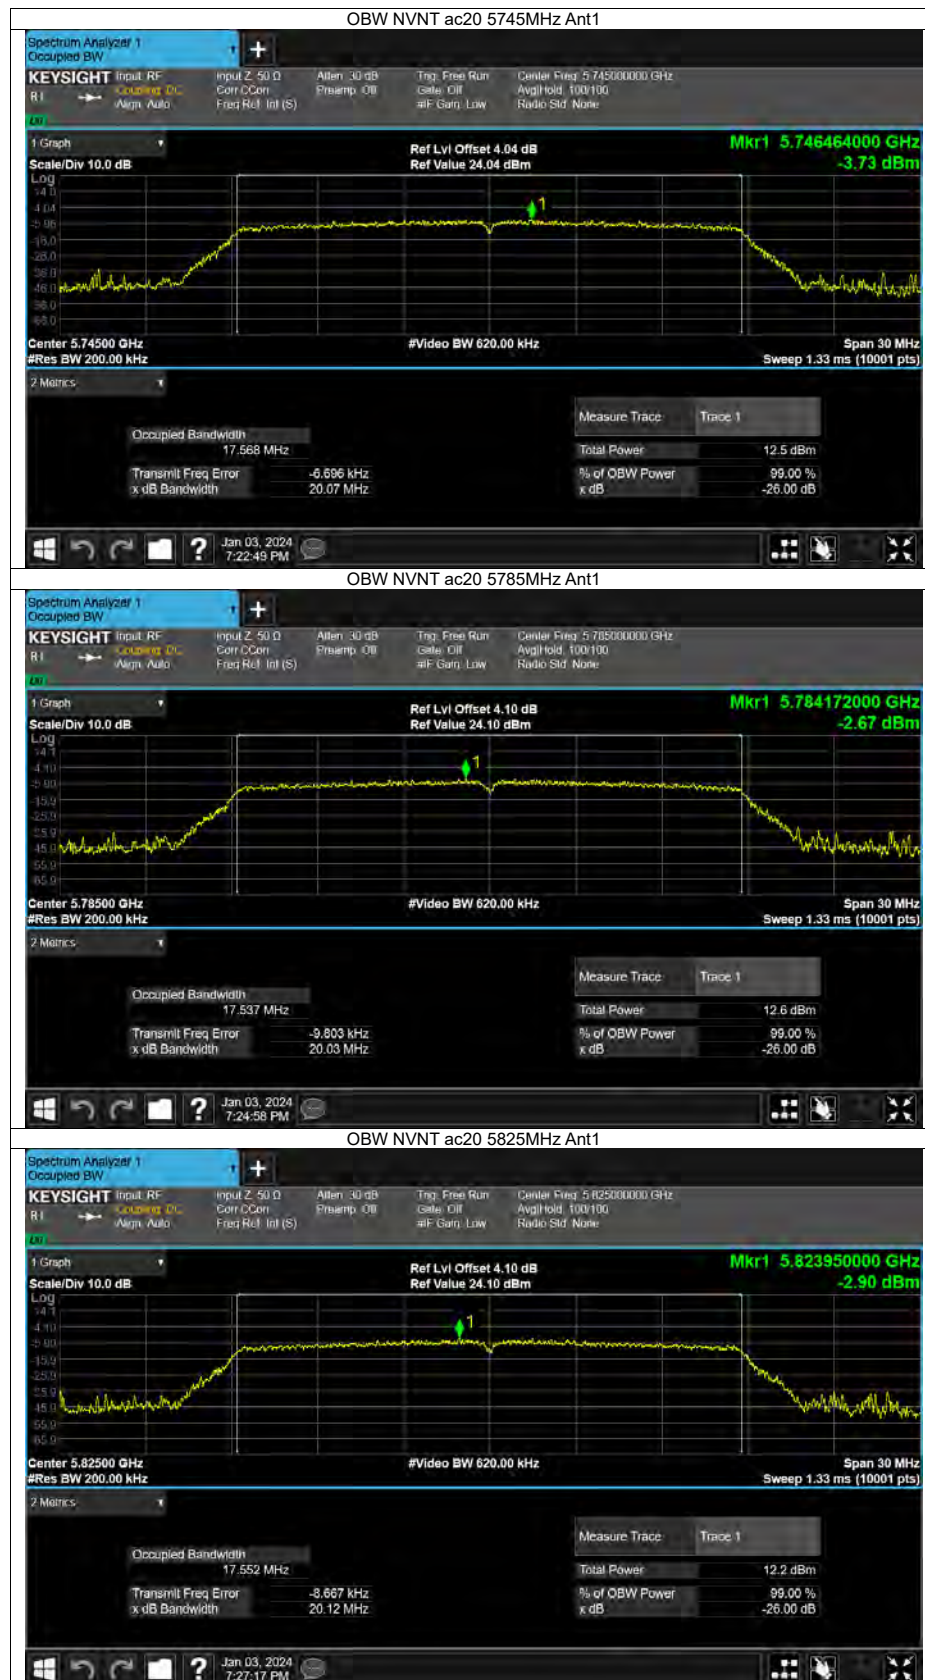


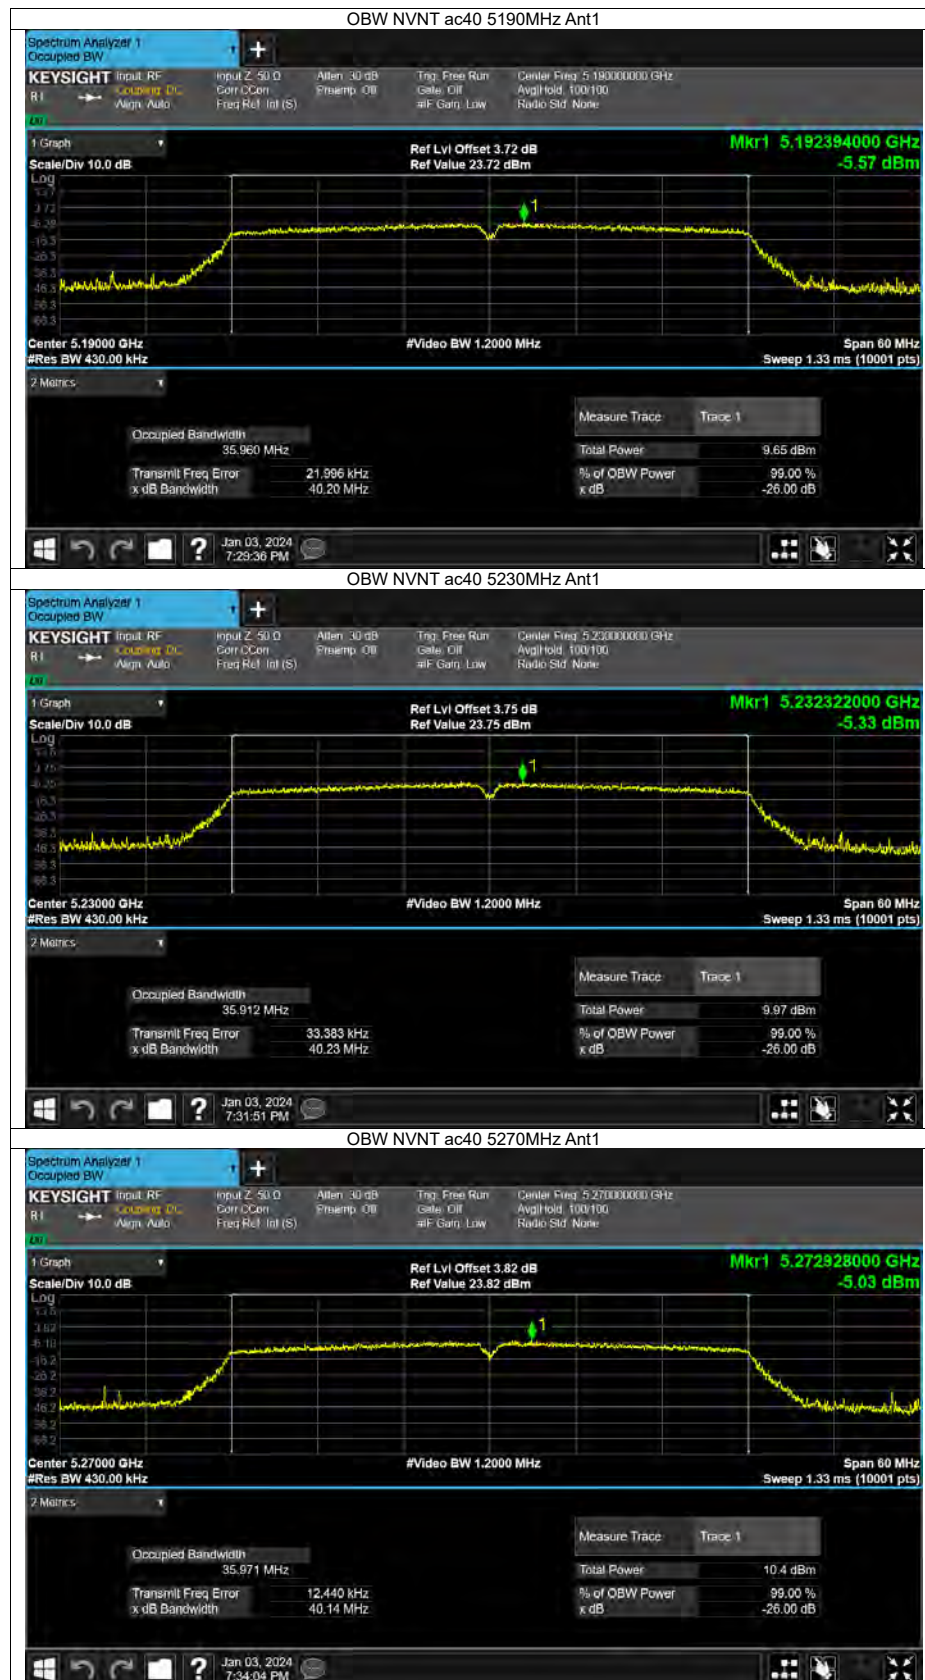

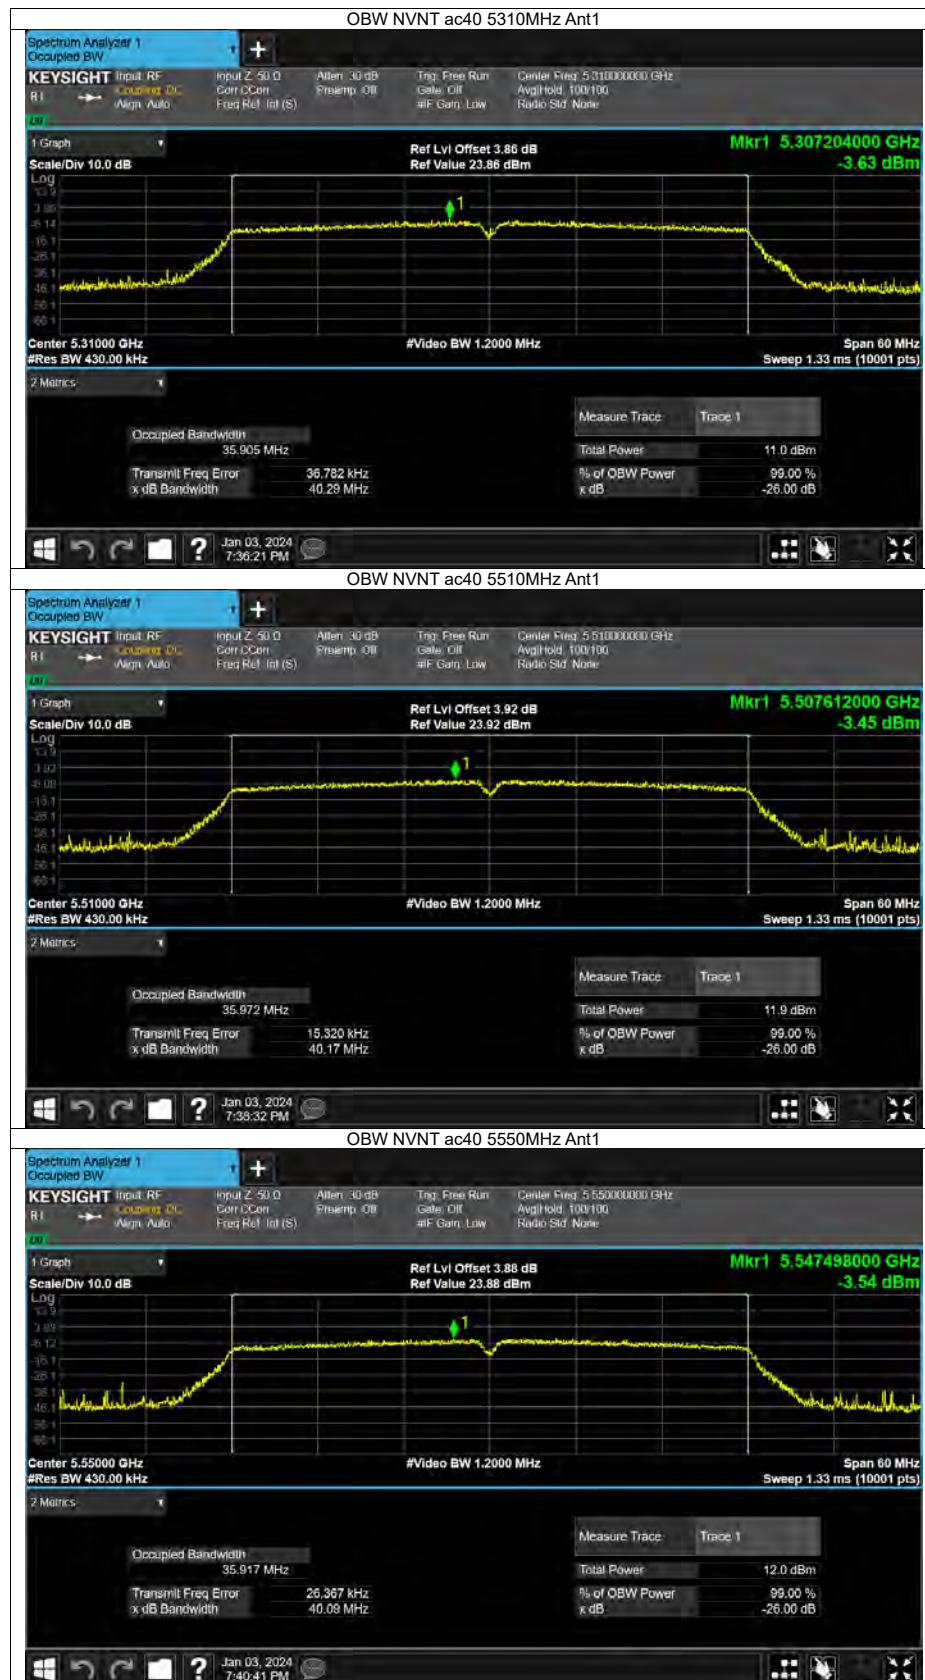

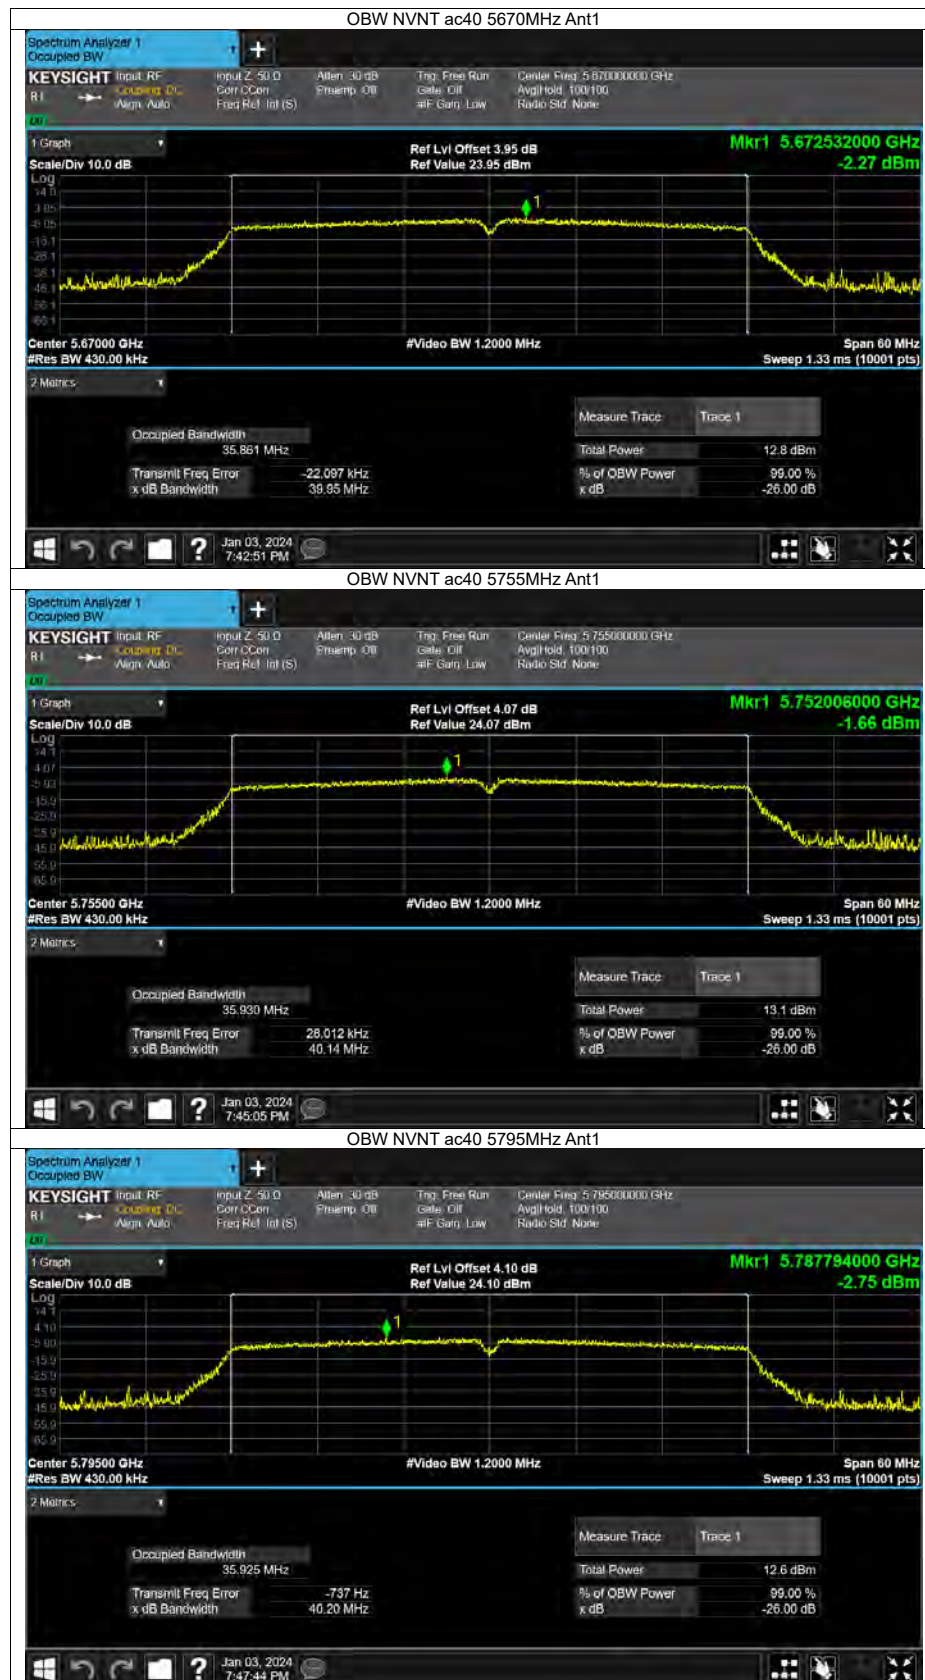

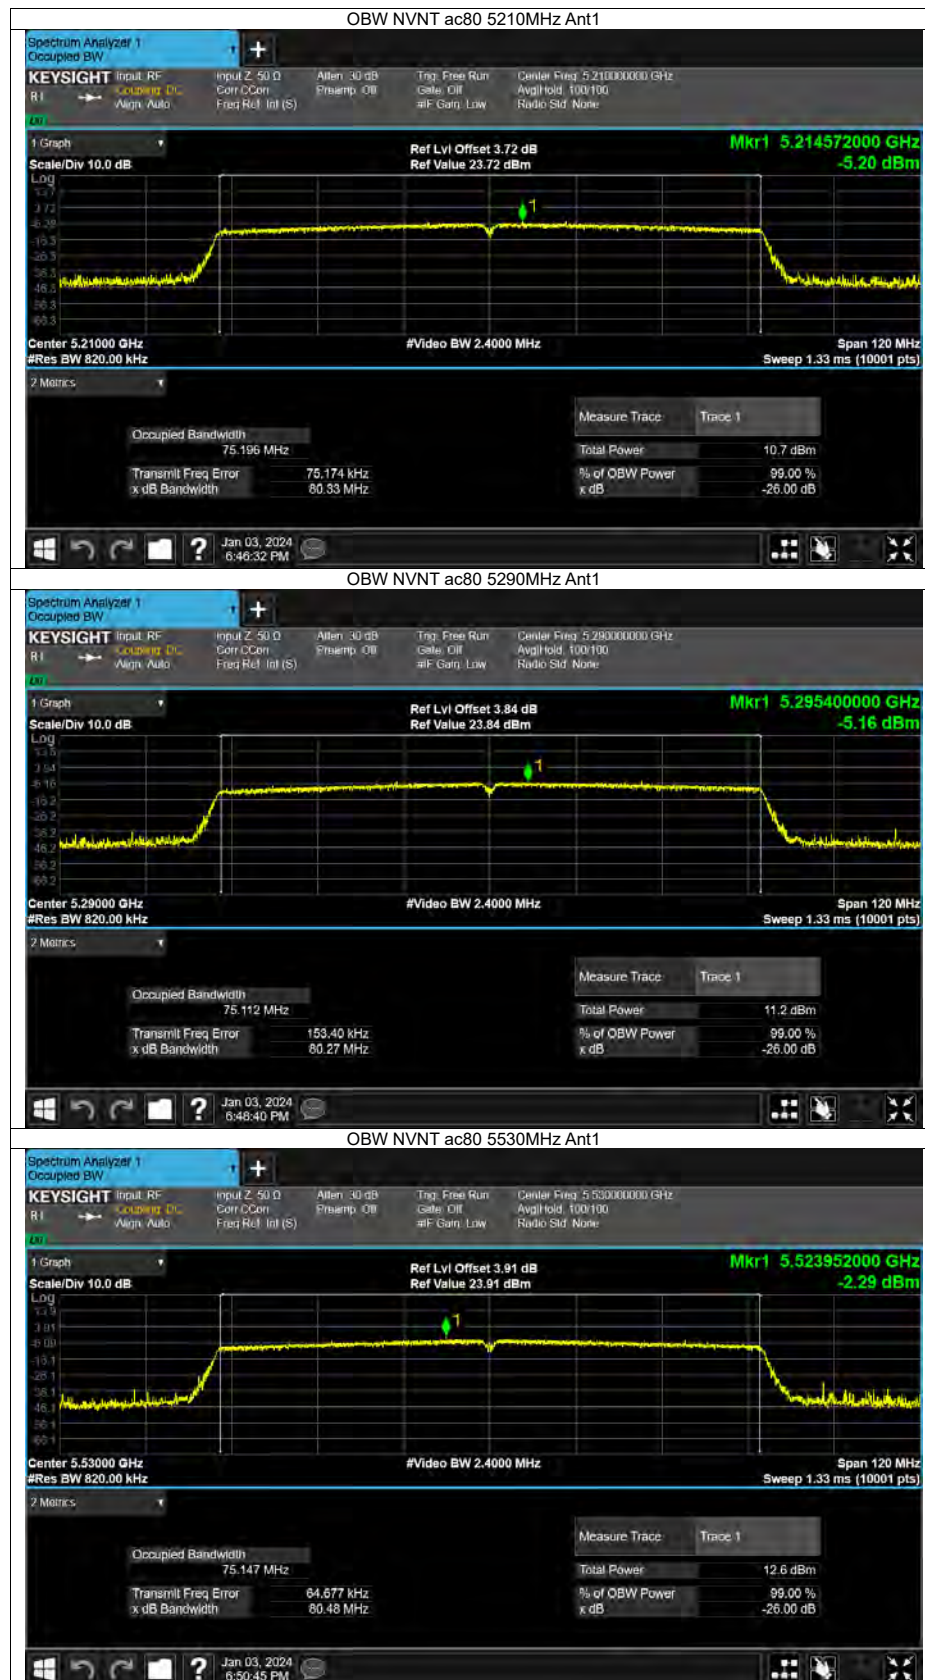


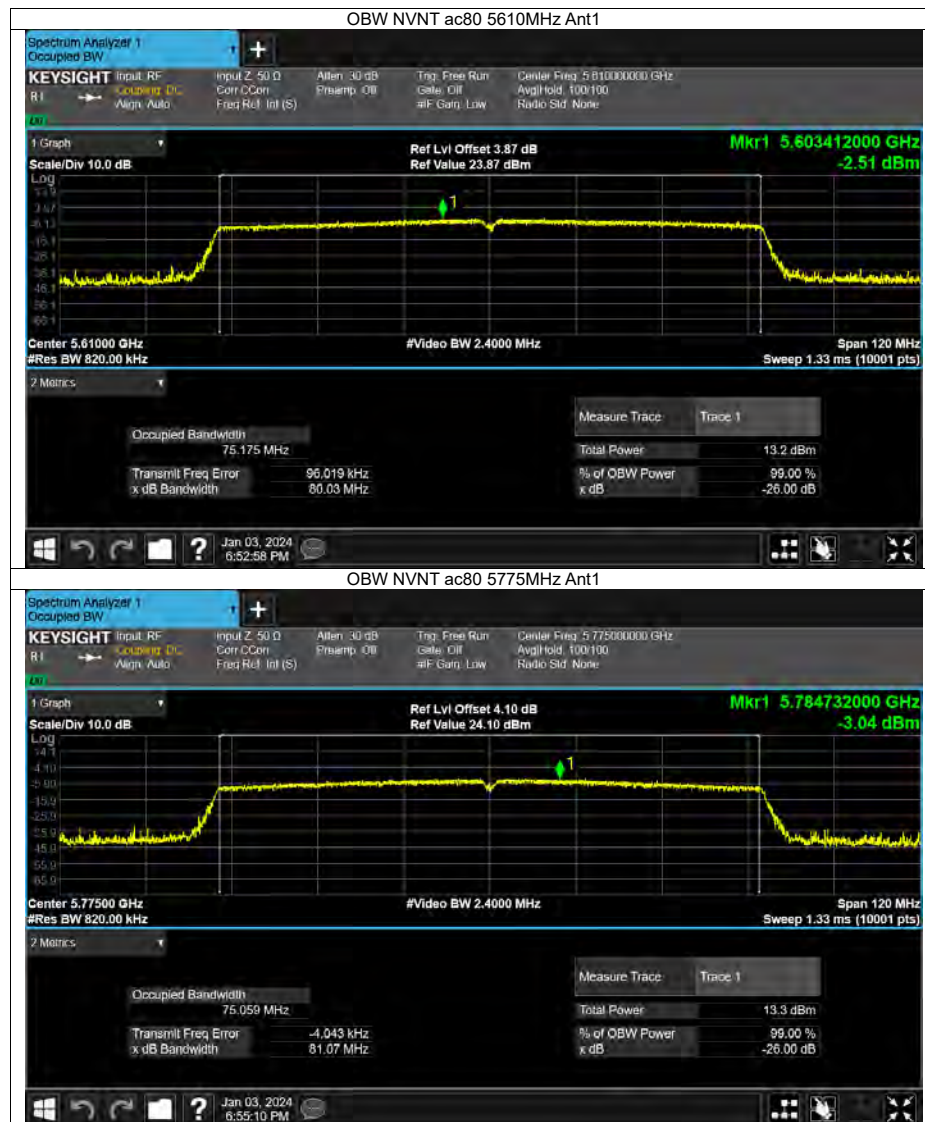






Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	-2.4	0	-2.4	11	Pass
NVNT	a	5200	Ant1	-2.91	0	-2.91	11	Pass
NVNT	a	5240	Ant1	-2.66	0	-2.66	11	Pass
NVNT	a	5260	Ant1	-1.32	0	-1.32	11	Pass
NVNT	a	5300	Ant1	-1.49	0	-1.49	11	Pass
NVNT	a	5320	Ant1	-1.07	0	-1.07	11	Pass
NVNT	a	5500	Ant1	-0.26	0	-0.26	11	Pass
NVNT	a	5580	Ant1	0.07	0	0.07	11	Pass
NVNT	a	5700	Ant1	-0.2	0	-0.2	11	Pass
NVNT	n20	5180	Ant1	-5	0	-5	11	Pass
NVNT	n20	5200	Ant1	-5.69	0	-5.69	11	Pass
NVNT	n20	5240	Ant1	-5	0	-5	11	Pass
NVNT	n20	5260	Ant1	-5.02	0	-5.02	11	Pass
NVNT	n20	5300	Ant1	-1.83	0	-1.83	11	Pass
NVNT	n20	5320	Ant1	-3.81	0	-3.81	11	Pass
NVNT	n20	5500	Ant1	-2.63	0	-2.63	11	Pass
NVNT	n20	5580	Ant1	-2.59	0	-2.59	11	Pass
NVNT	n20	5700	Ant1	-2.87	0	-2.87	11	Pass
NVNT	n40	5190	Ant1	-8.09	0	-8.09	11	Pass
NVNT	n40	5230	Ant1	-8.19	0	-8.19	11	Pass
NVNT	n40	5270	Ant1	-7.78	0	-7.78	11	Pass
NVNT	n40	5310	Ant1	-7.27	0	-7.27	11	Pass
NVNT	n40	5510	Ant1	-6.55	0	-6.55	11	Pass
NVNT	n40	5550	Ant1	-6.38	0	-6.38	11	Pass
NVNT	n40	5670	Ant1	-5.52	0	-5.52	11	Pass
NVNT	ac20	5180	Ant1	-7.49	0	-7.49	11	Pass
NVNT	ac20	5200	Ant1	-7.83	0	-7.83	11	Pass
NVNT	ac20	5240	Ant1	-7.68	0	-7.68	11	Pass
NVNT	ac20	5260	Ant1	-6.89	0	-6.89	11	Pass
NVNT	ac20	5300	Ant1	-5.96	0	-5.96	11	Pass
NVNT	ac20	5320	Ant1	-6.1	0	-6.1	11	Pass
NVNT	ac20	5500	Ant1	-4.35	0	-4.35	11	Pass
NVNT	ac20	5580	Ant1	-4.92	0	-4.92	11	Pass
NVNT	ac20	5700	Ant1	-4.61	0	-4.61	11	Pass
NVNT	ac40	5190	Ant1	-10.3	0	-10.3	11	Pass
NVNT	ac40	5230	Ant1	-10.21	0	-10.21	11	Pass
NVNT	ac40	5270	Ant1	-9.99	0	-9.99	11	Pass
NVNT	ac40	5310	Ant1	-8.98	0	-8.98	11	Pass
NVNT	ac40	5510	Ant1	-8.33	0	-8.33	11	Pass
NVNT	ac40	5550	Ant1	-8.25	0	-8.25	11	Pass
NVNT	ac40	5670	Ant1	-6.98	0	-6.98	11	Pass
NVNT	ac80	5210	Ant1	-13.47	0	-13.47	11	Pass
NVNT	ac80	5290	Ant1	-13.01	0	-13.01	11	Pass
NVNT	ac80	5530	Ant1	-11.58	0	-11.58	11	Pass
NVNT	ac80	5610	Ant1	-10.7	0	-10.7	11	Pass
Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500kHz)	Duty Factor (dB)	Total PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	Ant1	-3.09	0	-3.09	30	Pass
NVNT	a	5785	Ant1	-3.14	0	-3.14	30	Pass
NVNT	a	5825	Ant1	-3.29	0	-3.29	30	Pass
NVNT	n20	5745	Ant1	-5.22	0	-5.22	30	Pass
NVNT	n20	5785	Ant1	-5.45	0	-5.45	30	Pass
NVNT	n20	5825	Ant1	-5.63	0	-5.63	30	Pass
NVNT	n40	5755	Ant1	-7.93	0	-7.93	30	Pass
NVNT	n40	5795	Ant1	-8.96	0	-8.96	30	Pass
NVNT	ac20	5745	Ant1	-7.33	0	-7.33	30	Pass
NVNT	ac20	5785	Ant1	-7.41	0	-7.41	30	Pass
NVNT	ac20	5825	Ant1	-7.57	0	-7.57	30	Pass
NVNT	ac40	5755	Ant1	-9.66	0	-9.66	30	Pass
NVNT	ac40	5795	Ant1	-10.31	0	-10.31	30	Pass
NVNT	ac80	5775	Ant1	-13.37	0	-13.37	30	Pass

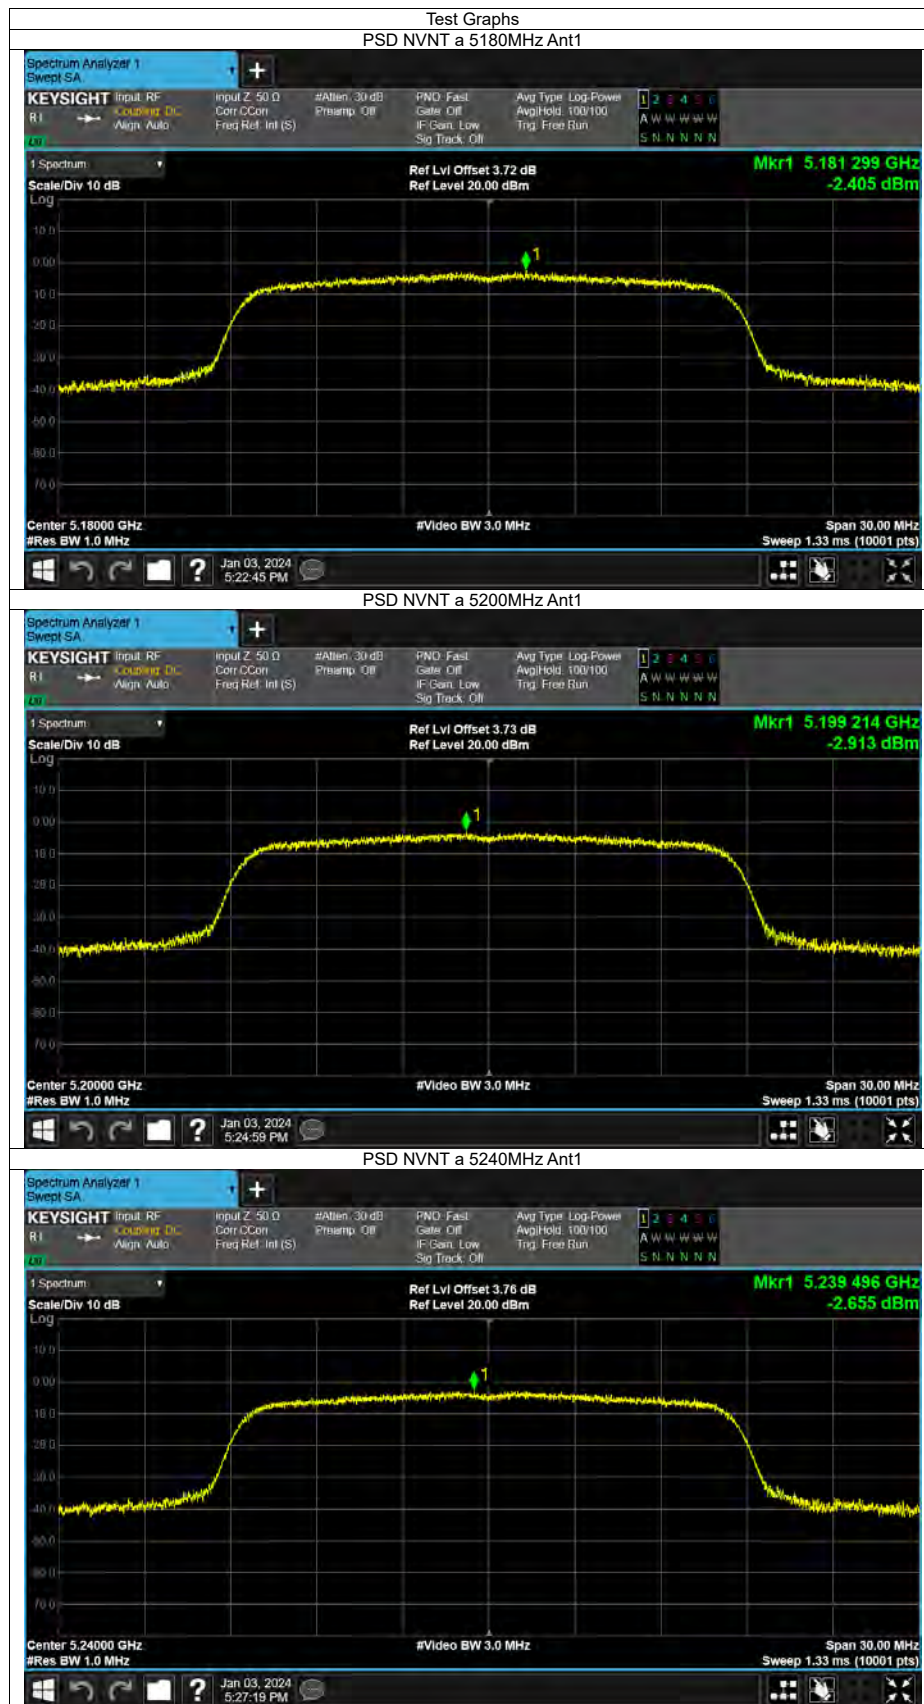


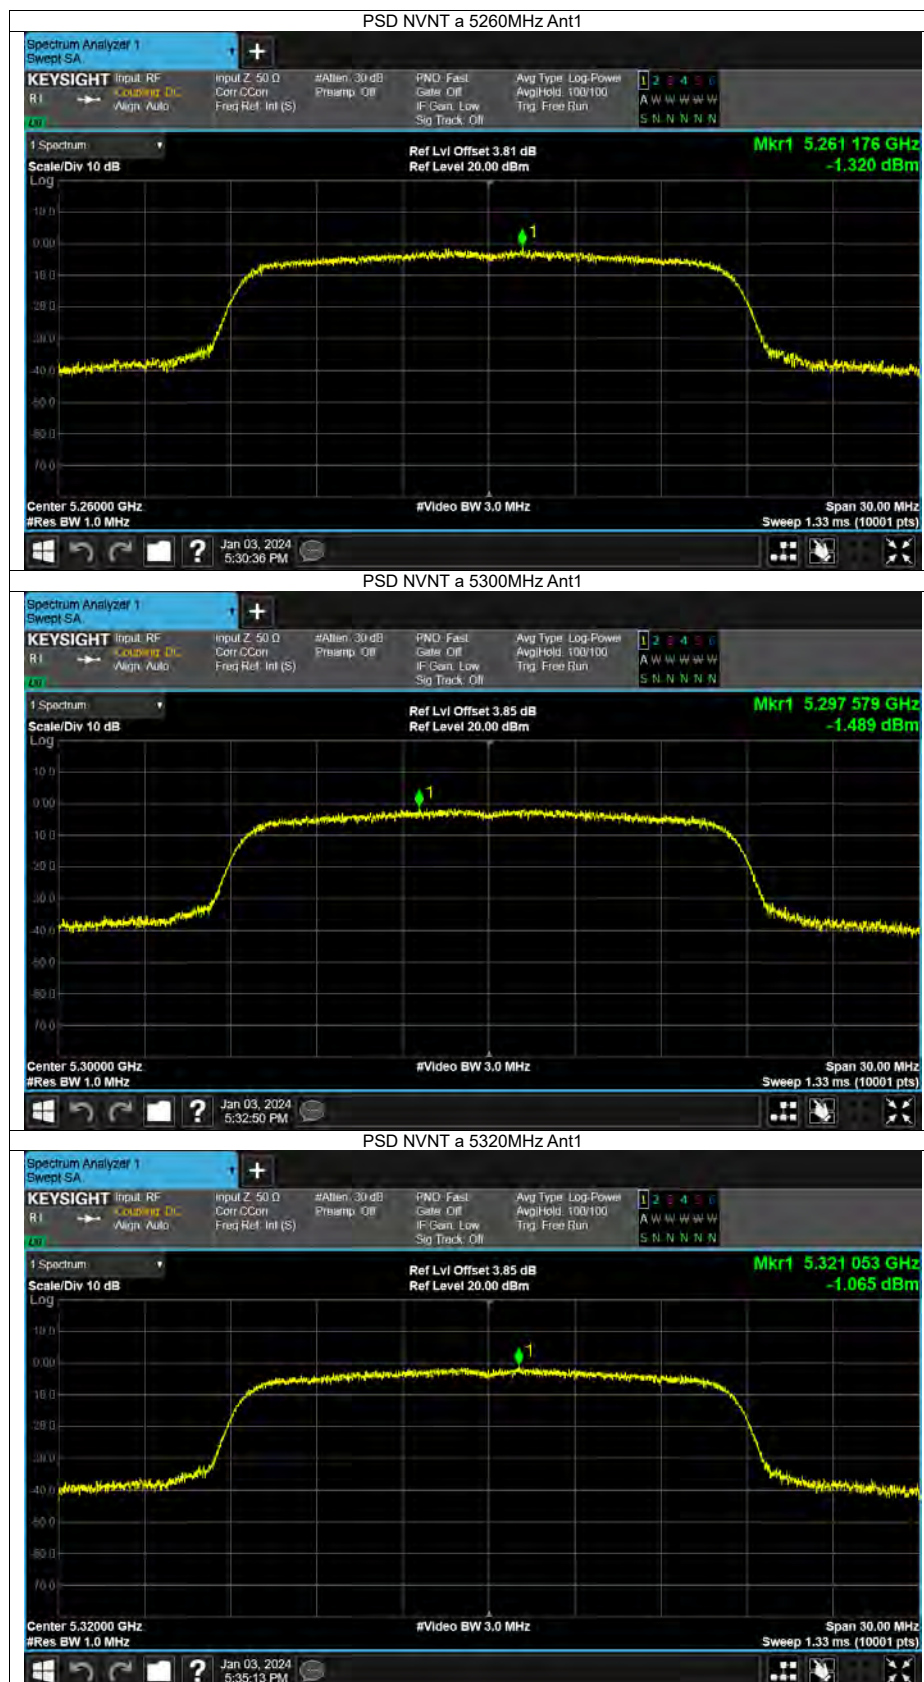


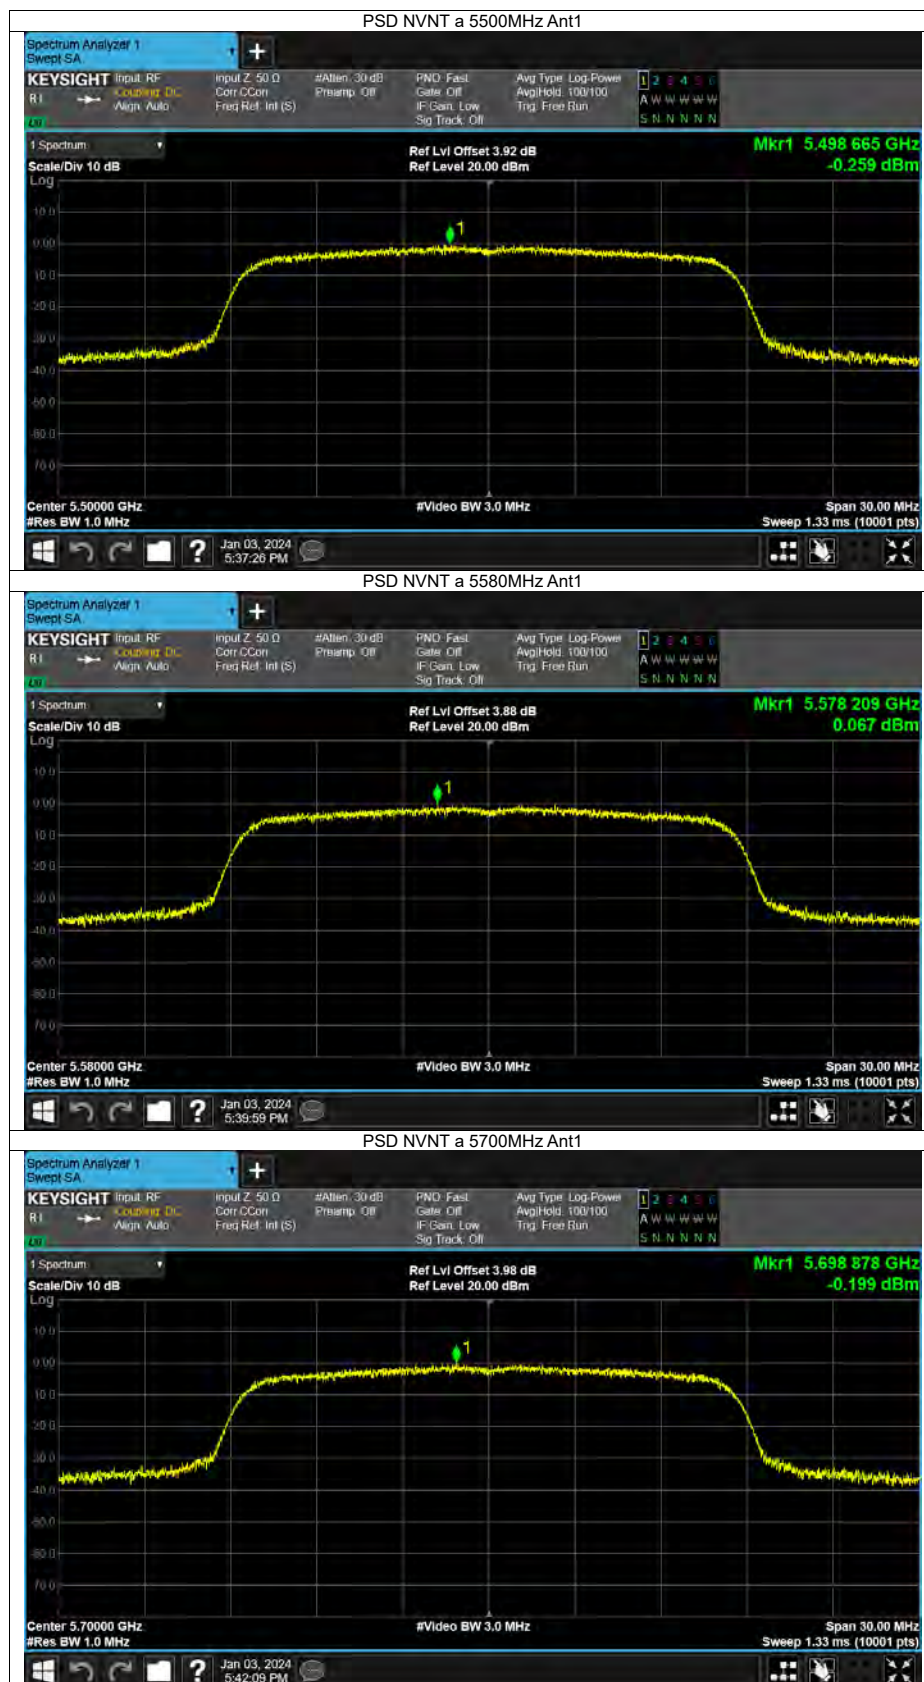


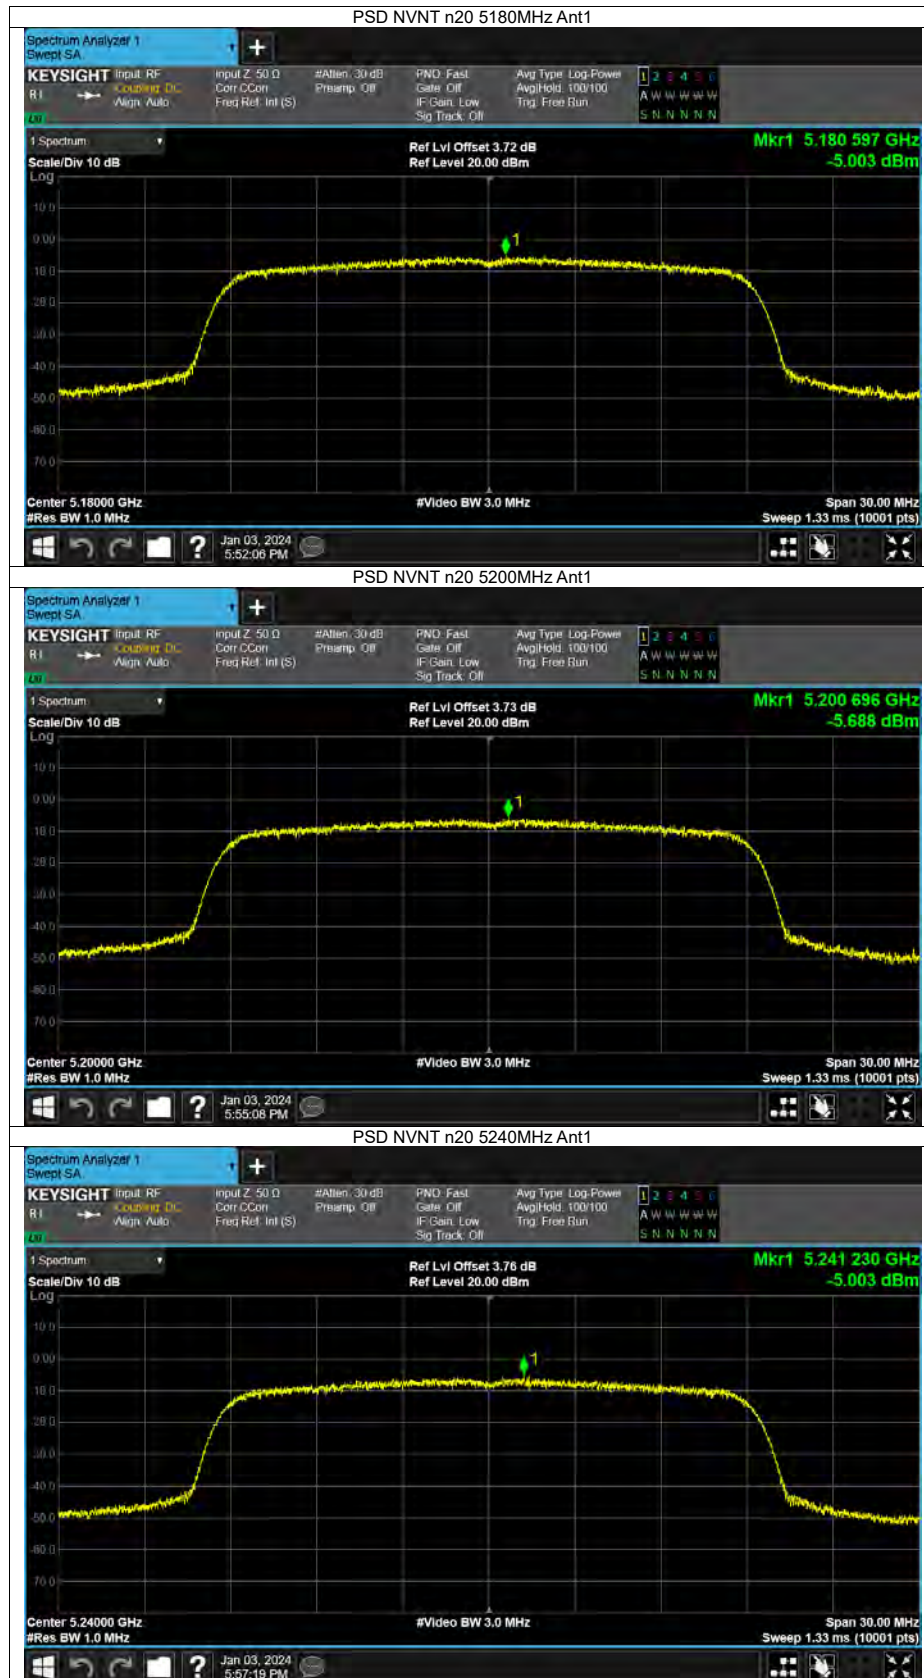


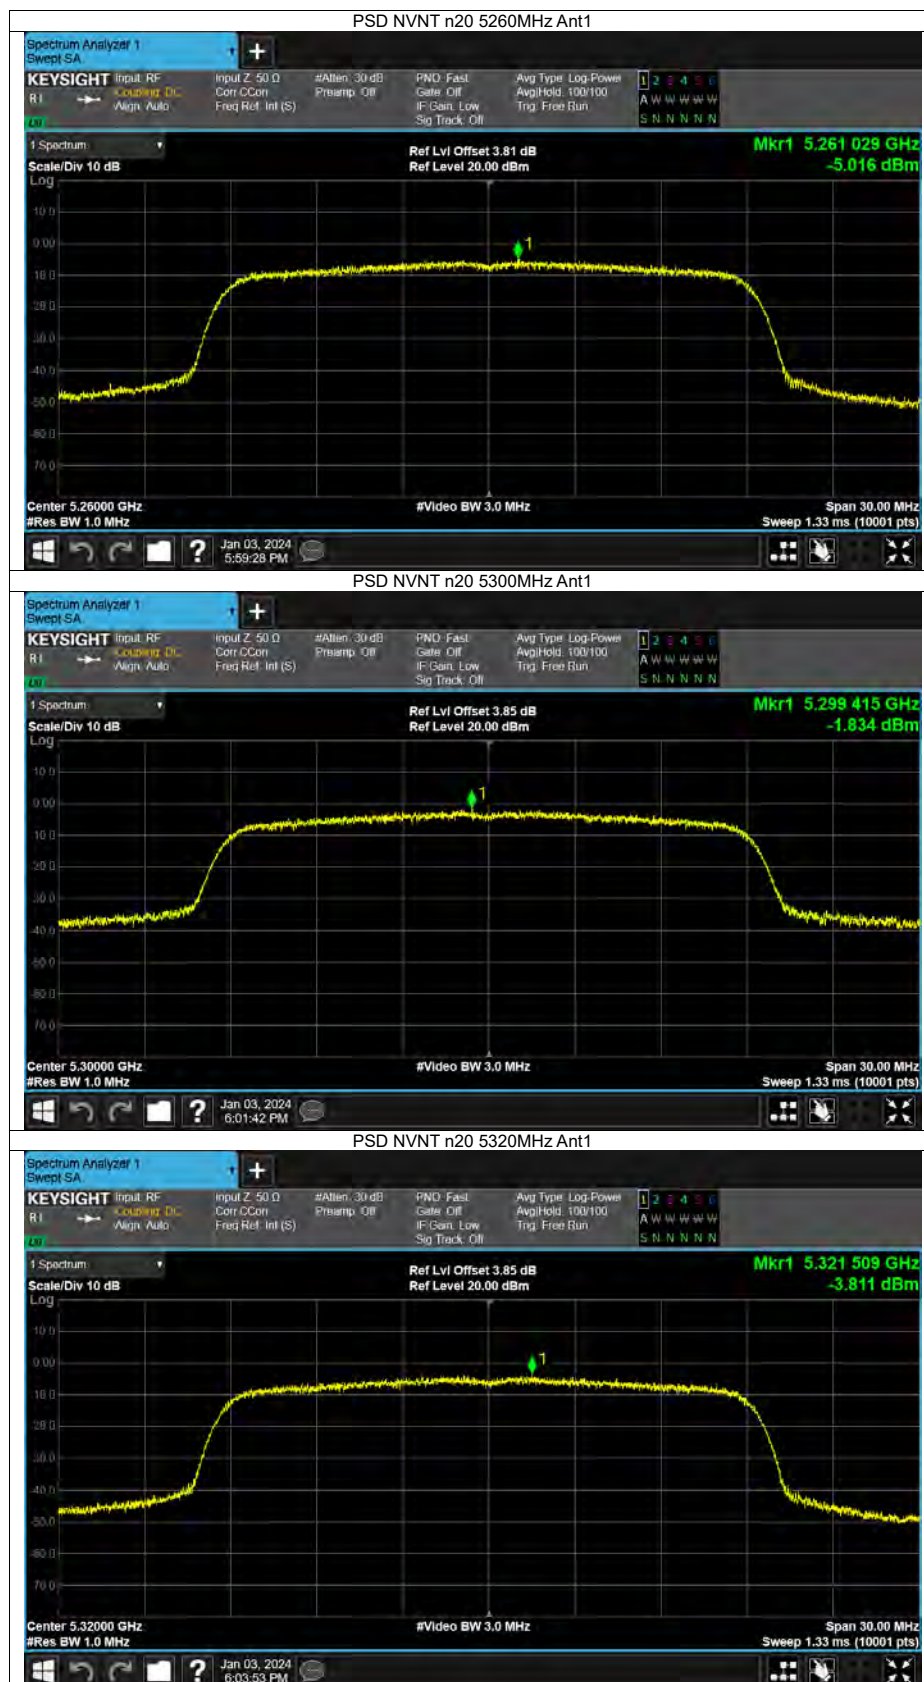


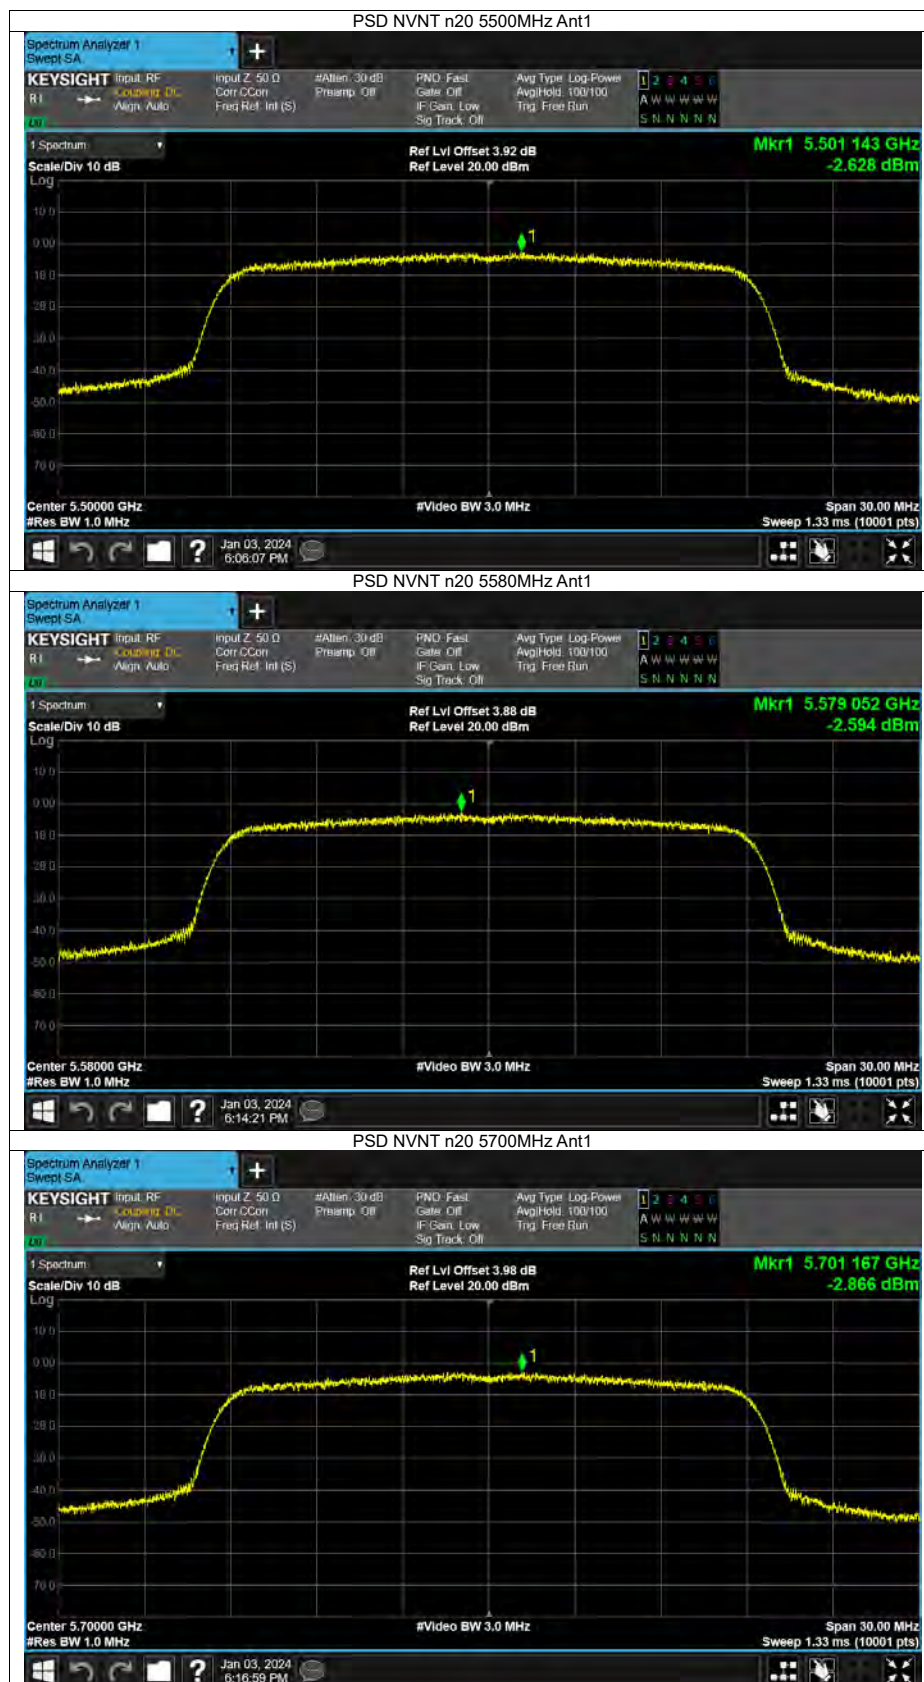


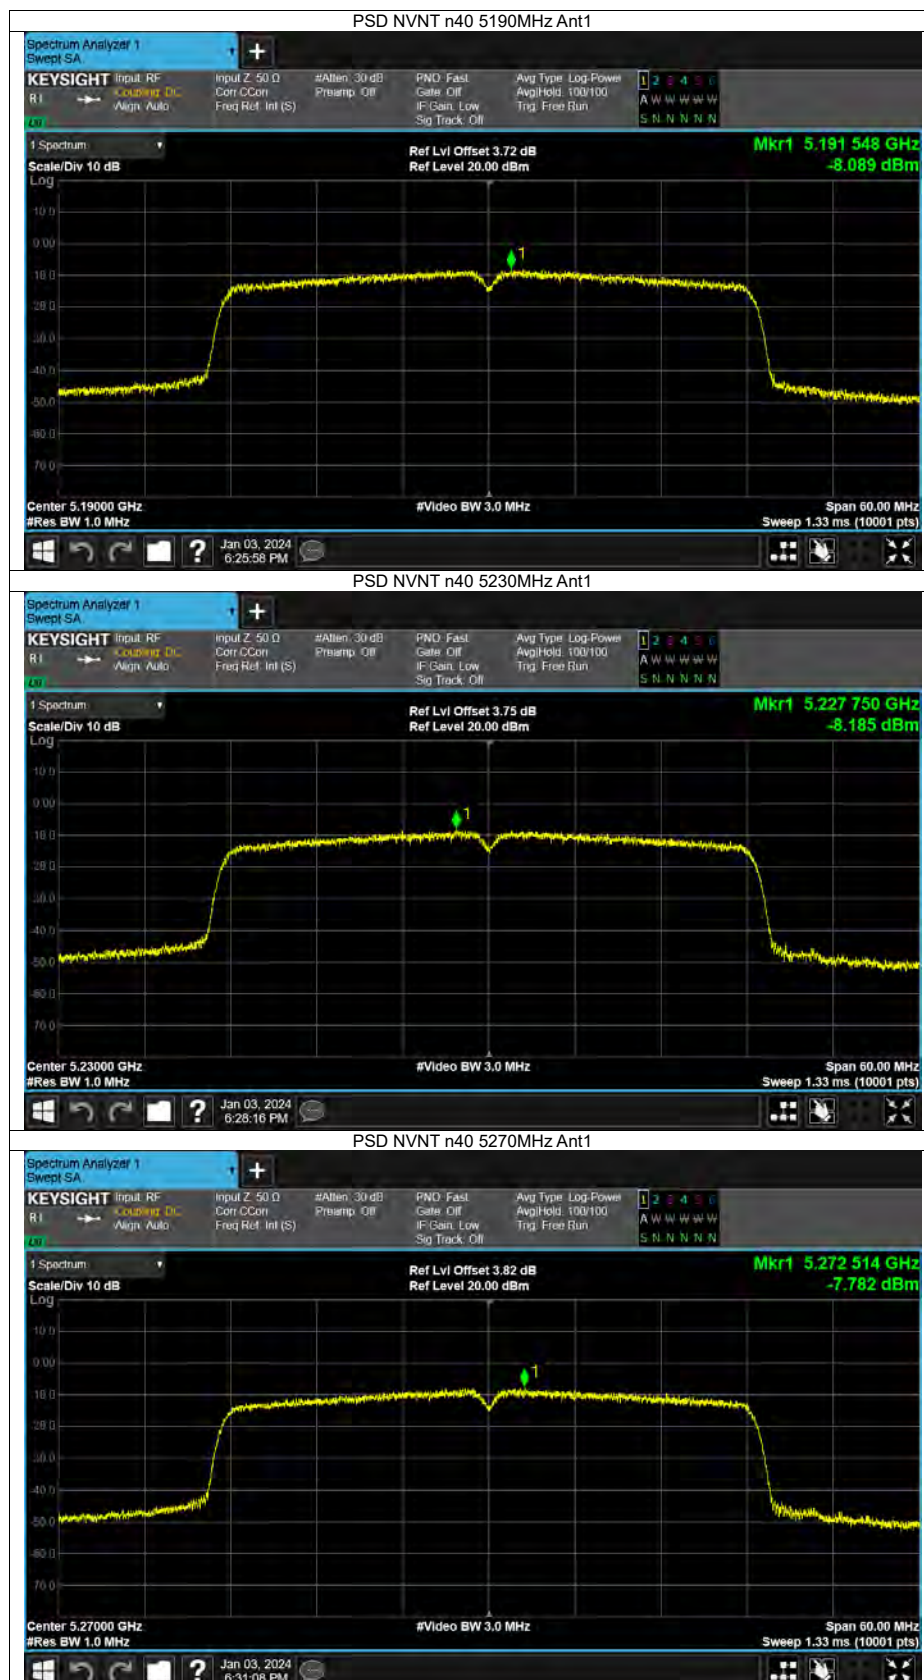


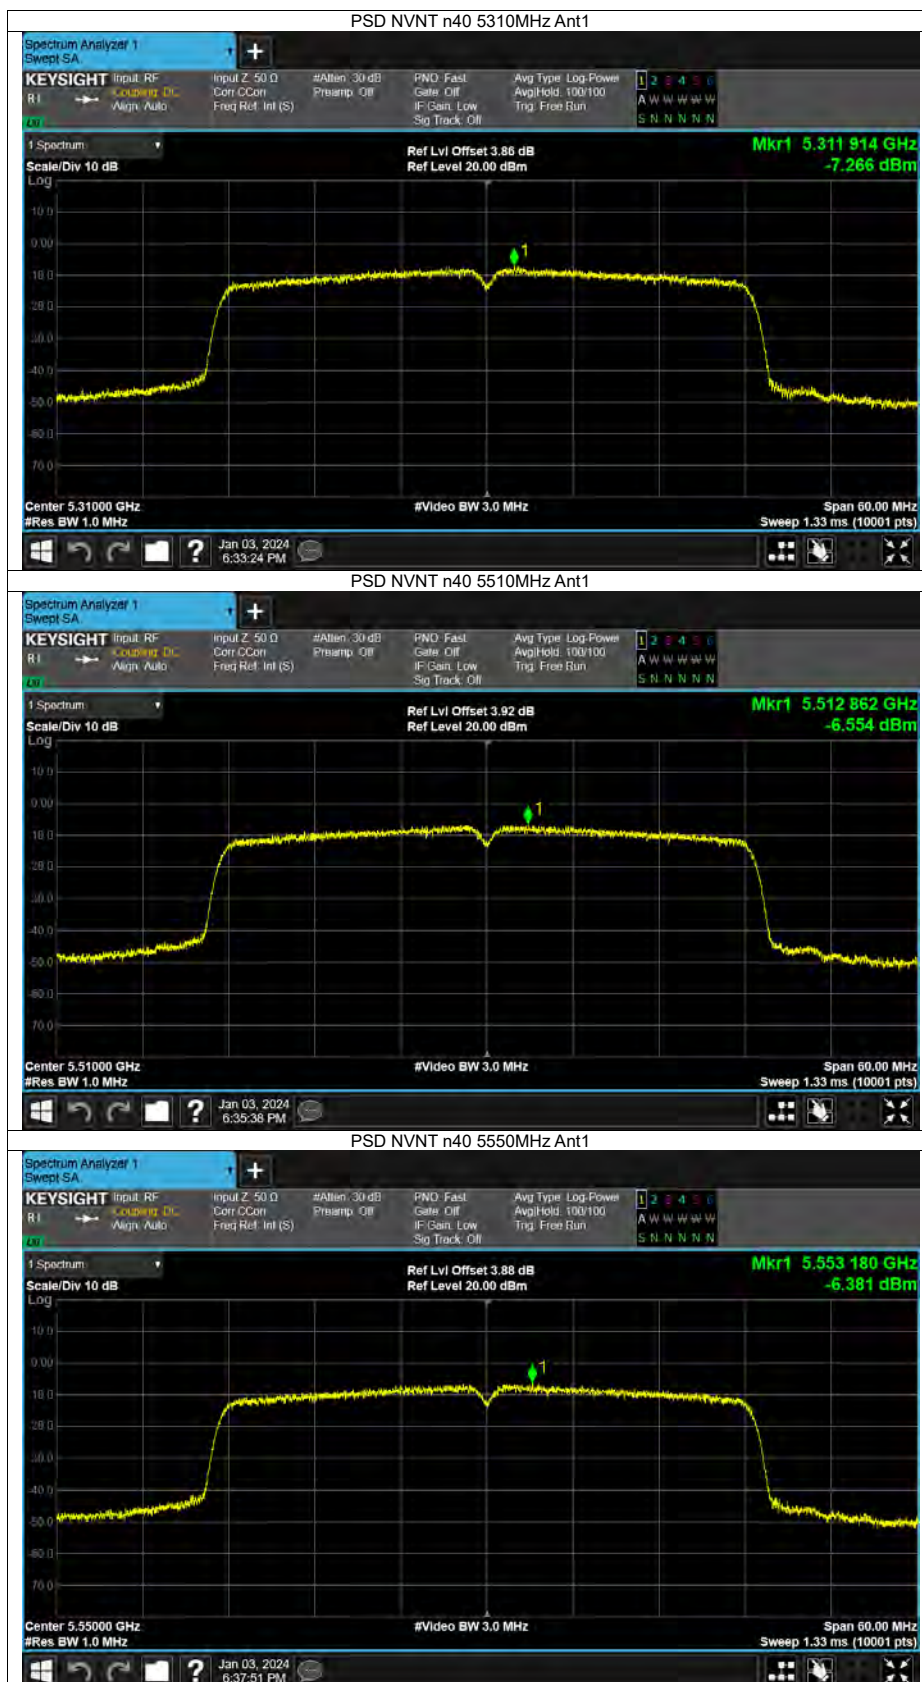


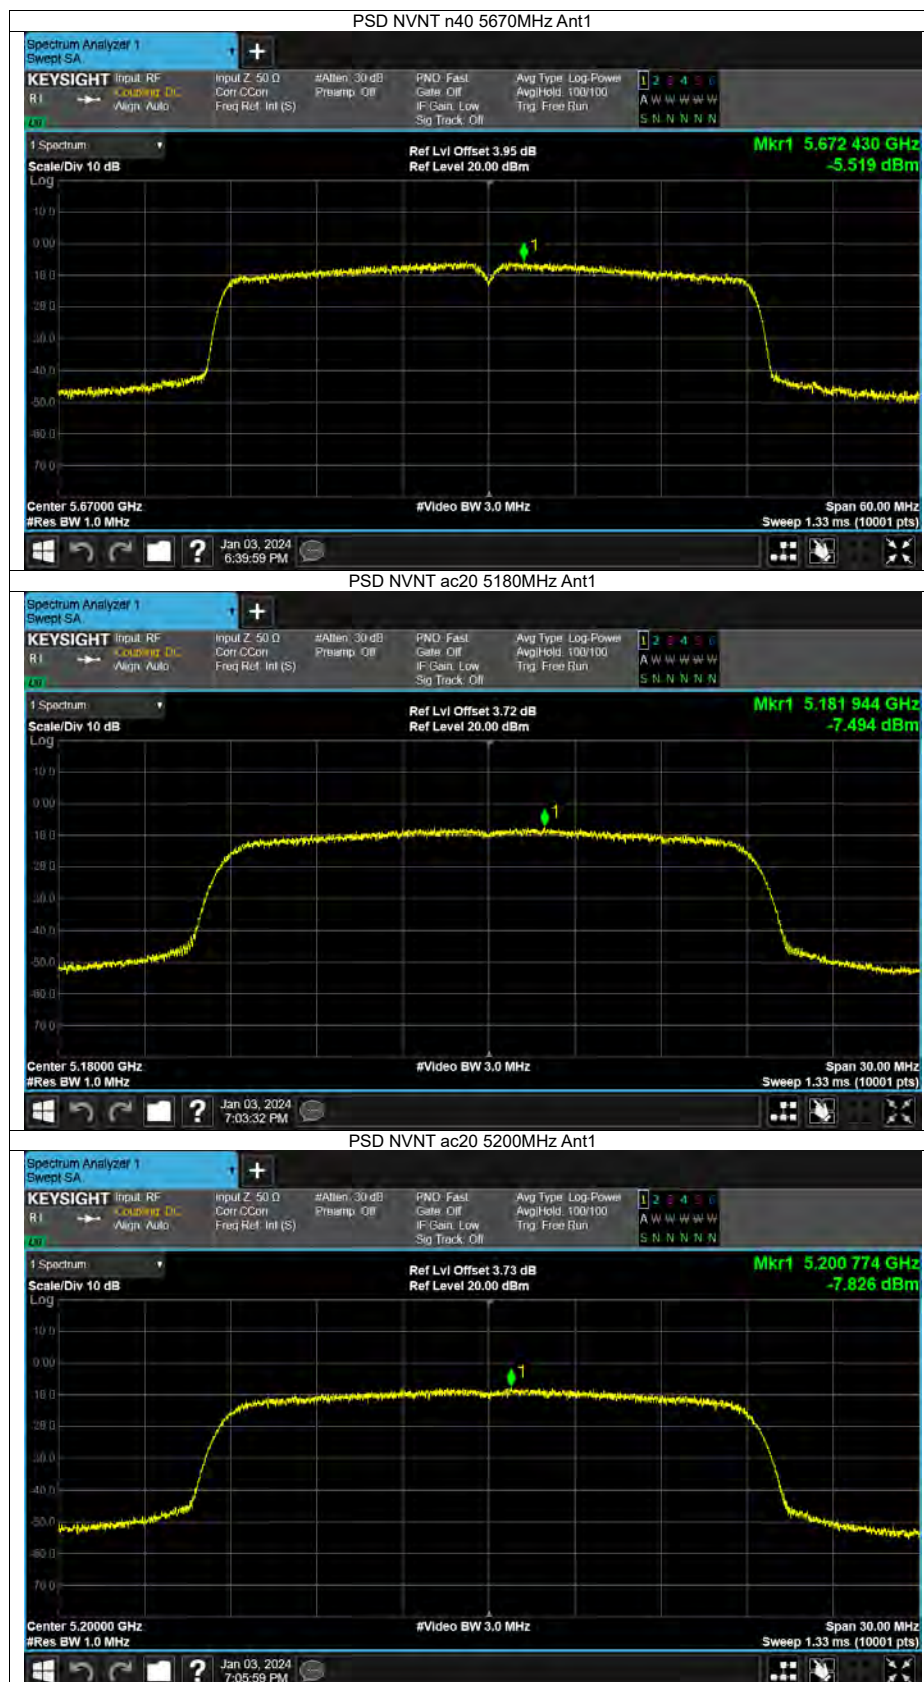


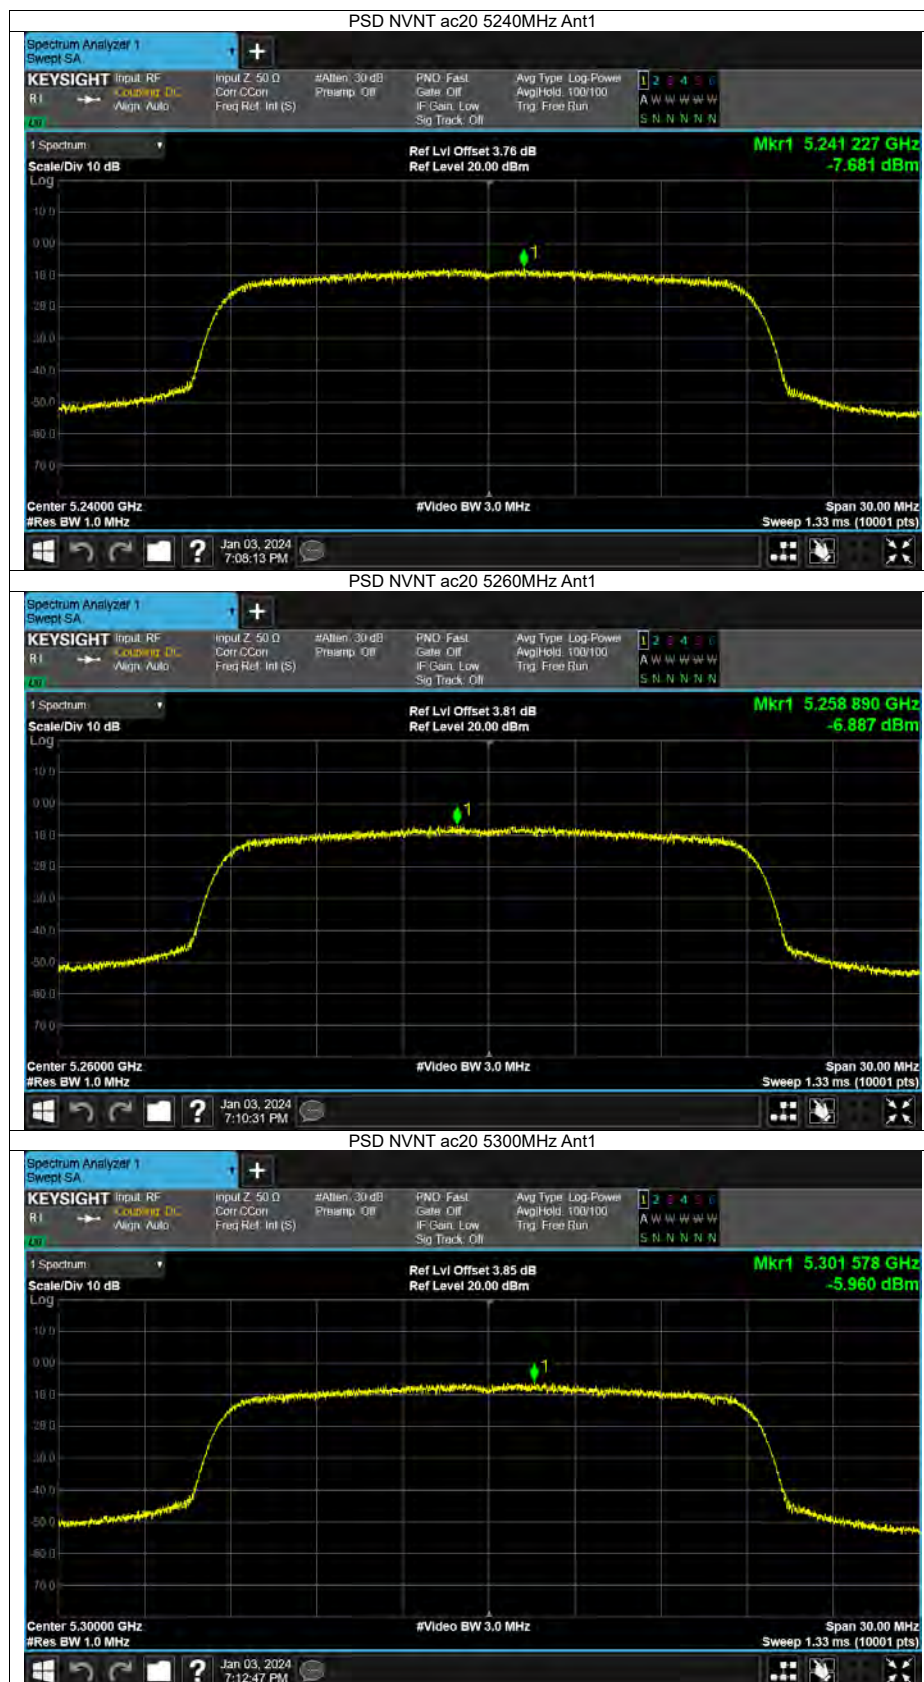

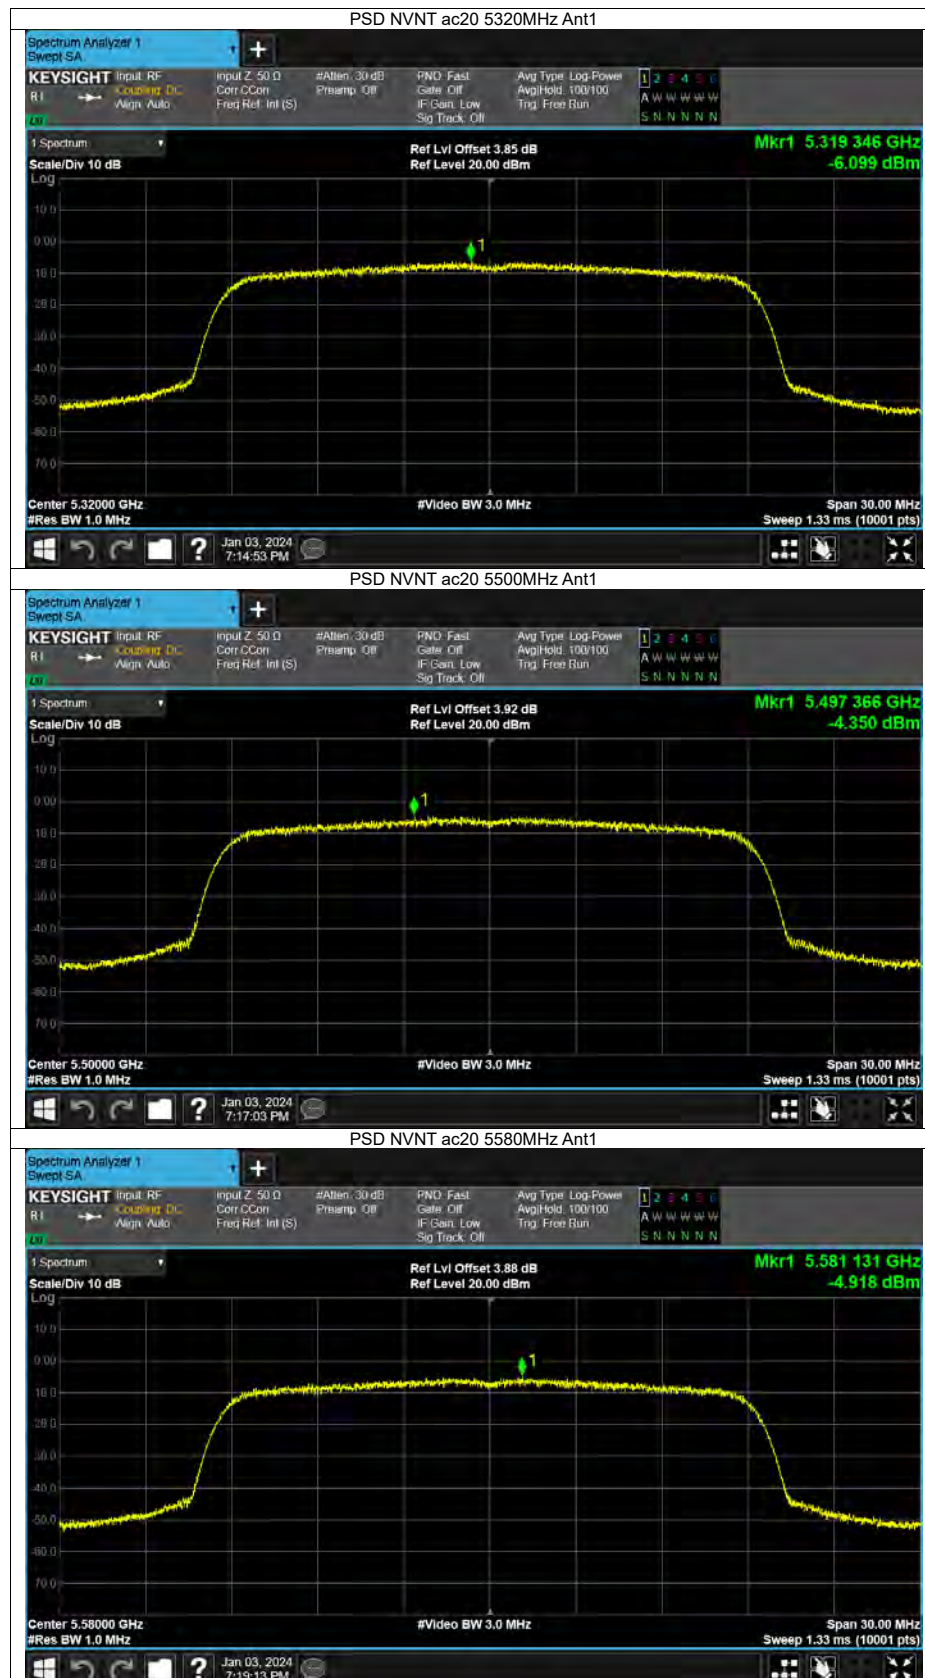


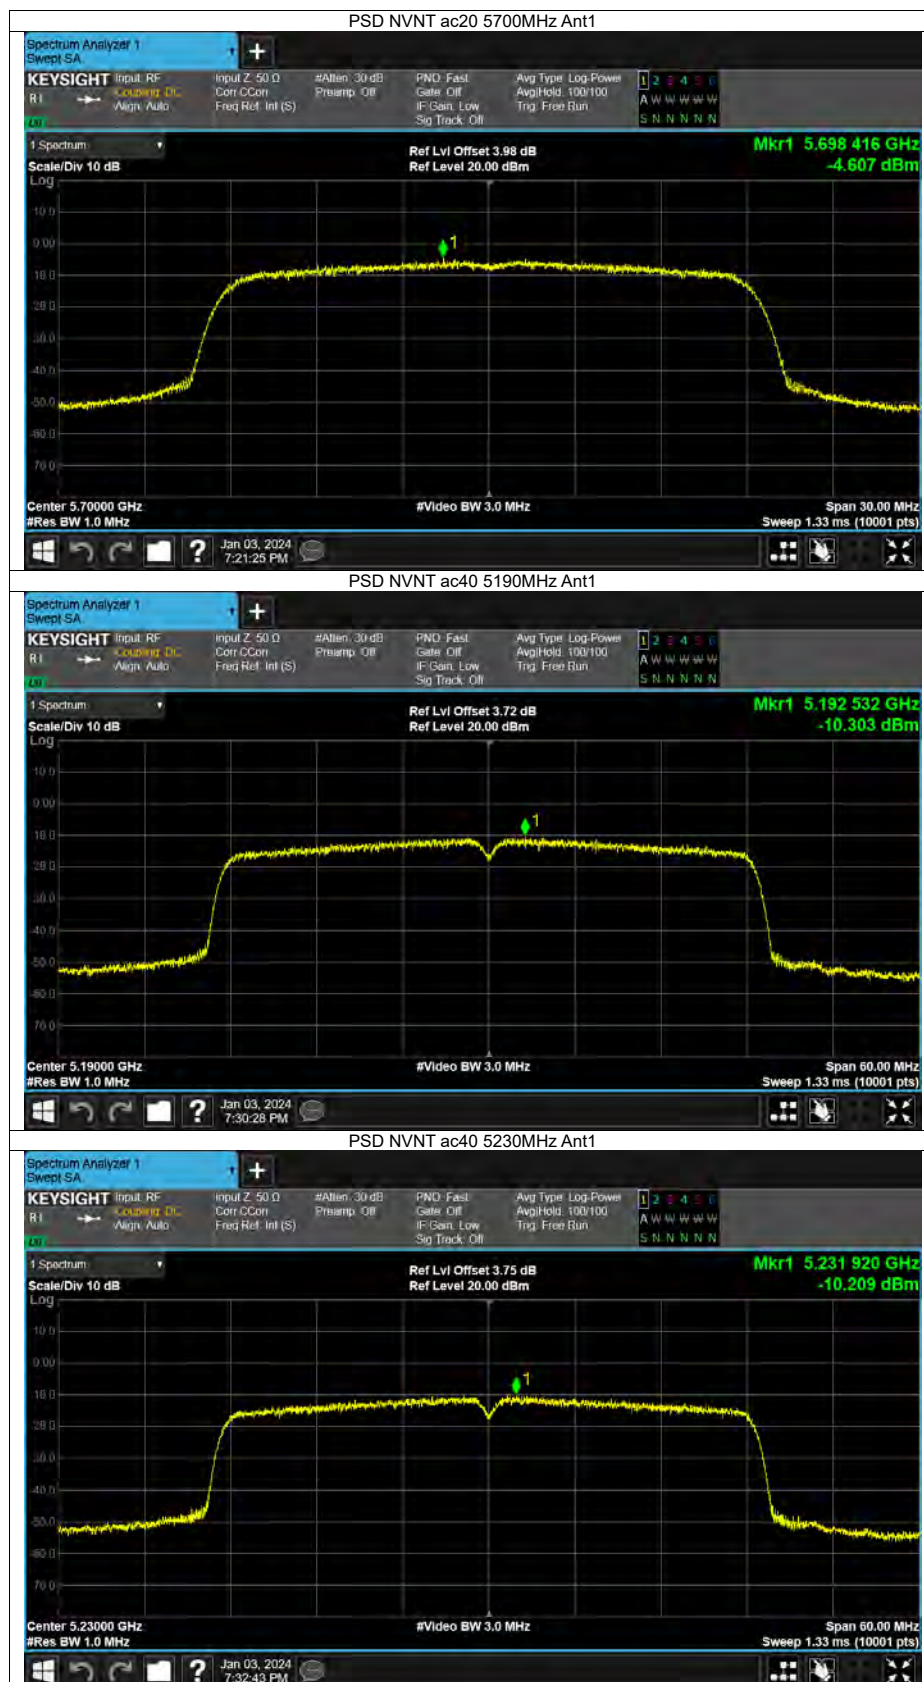


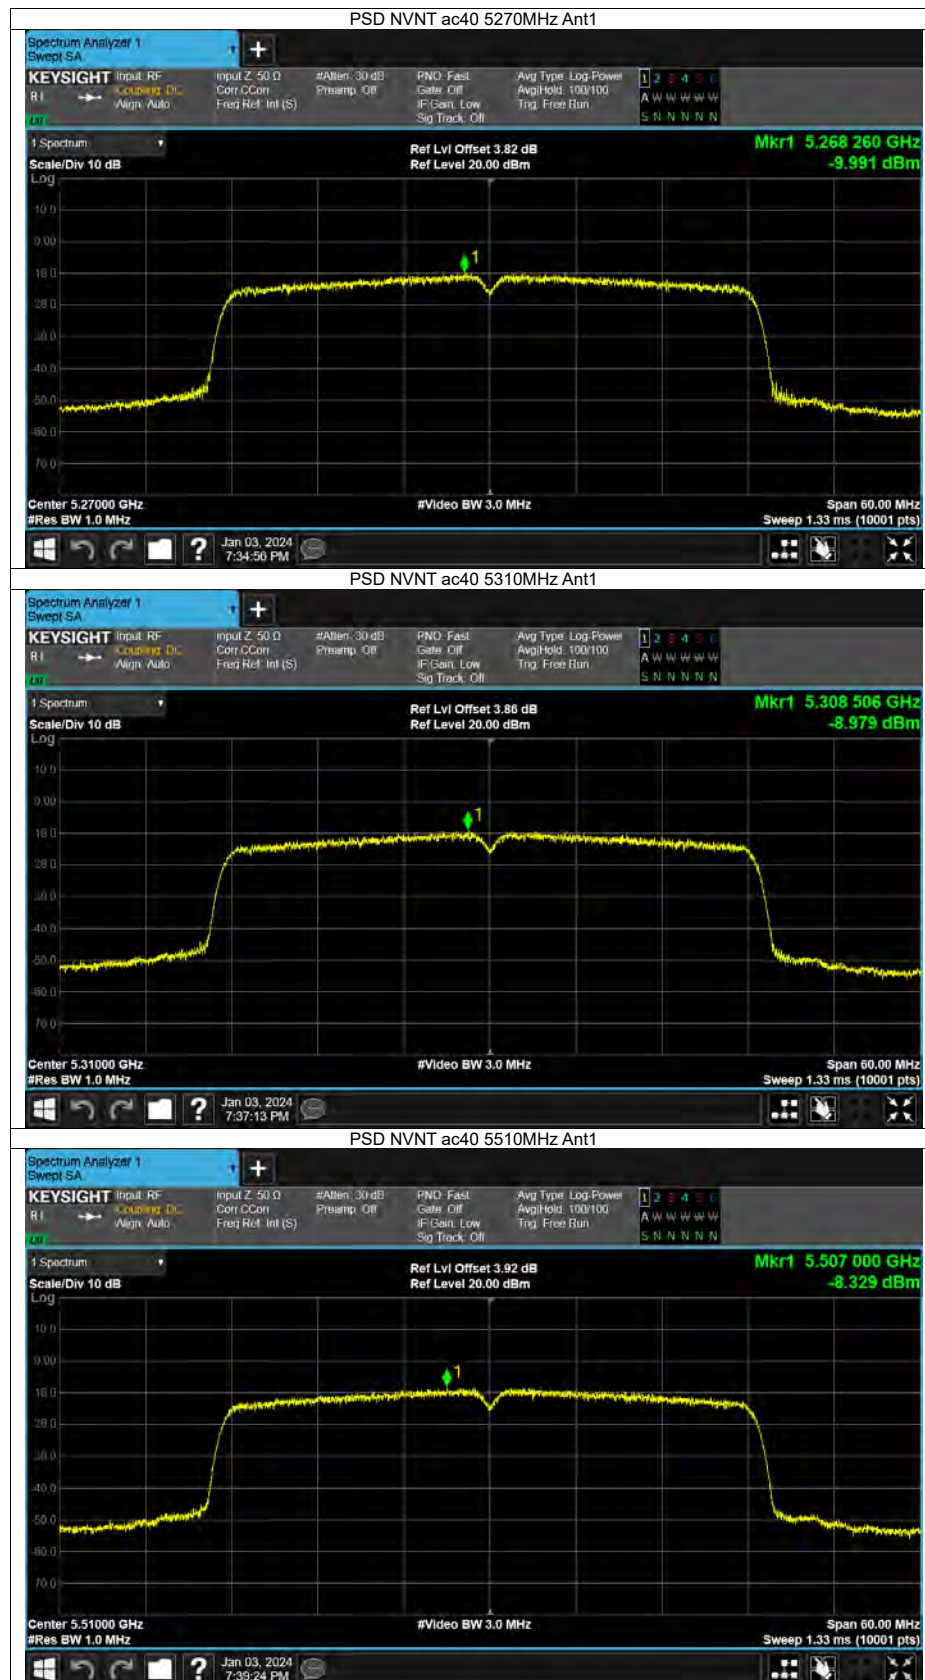


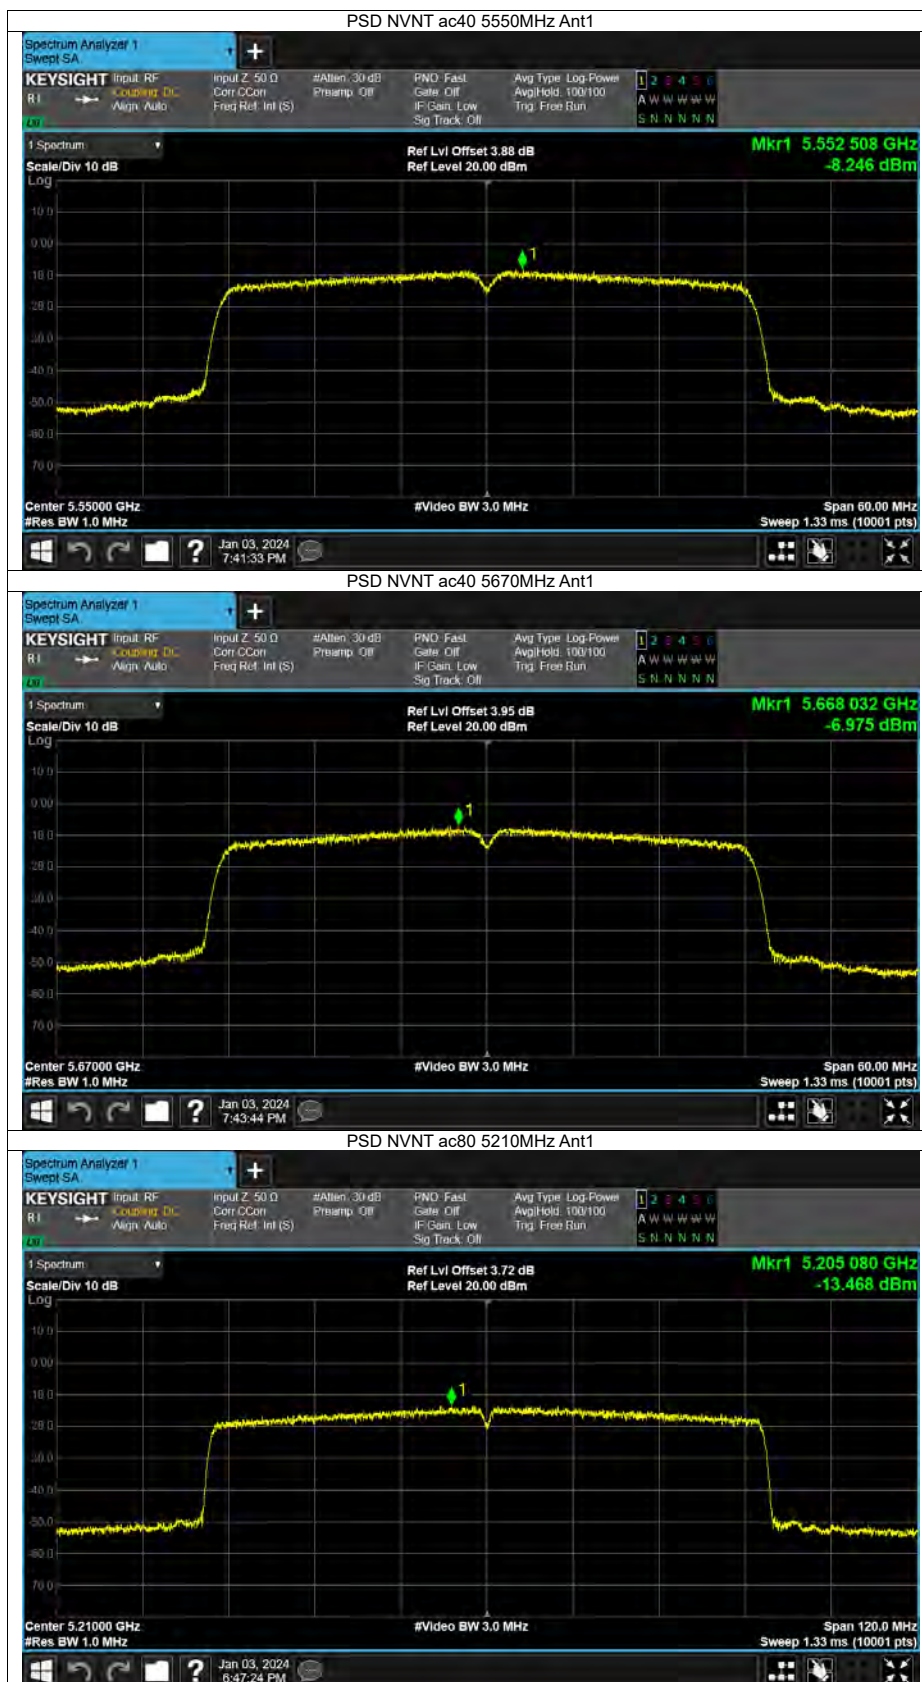





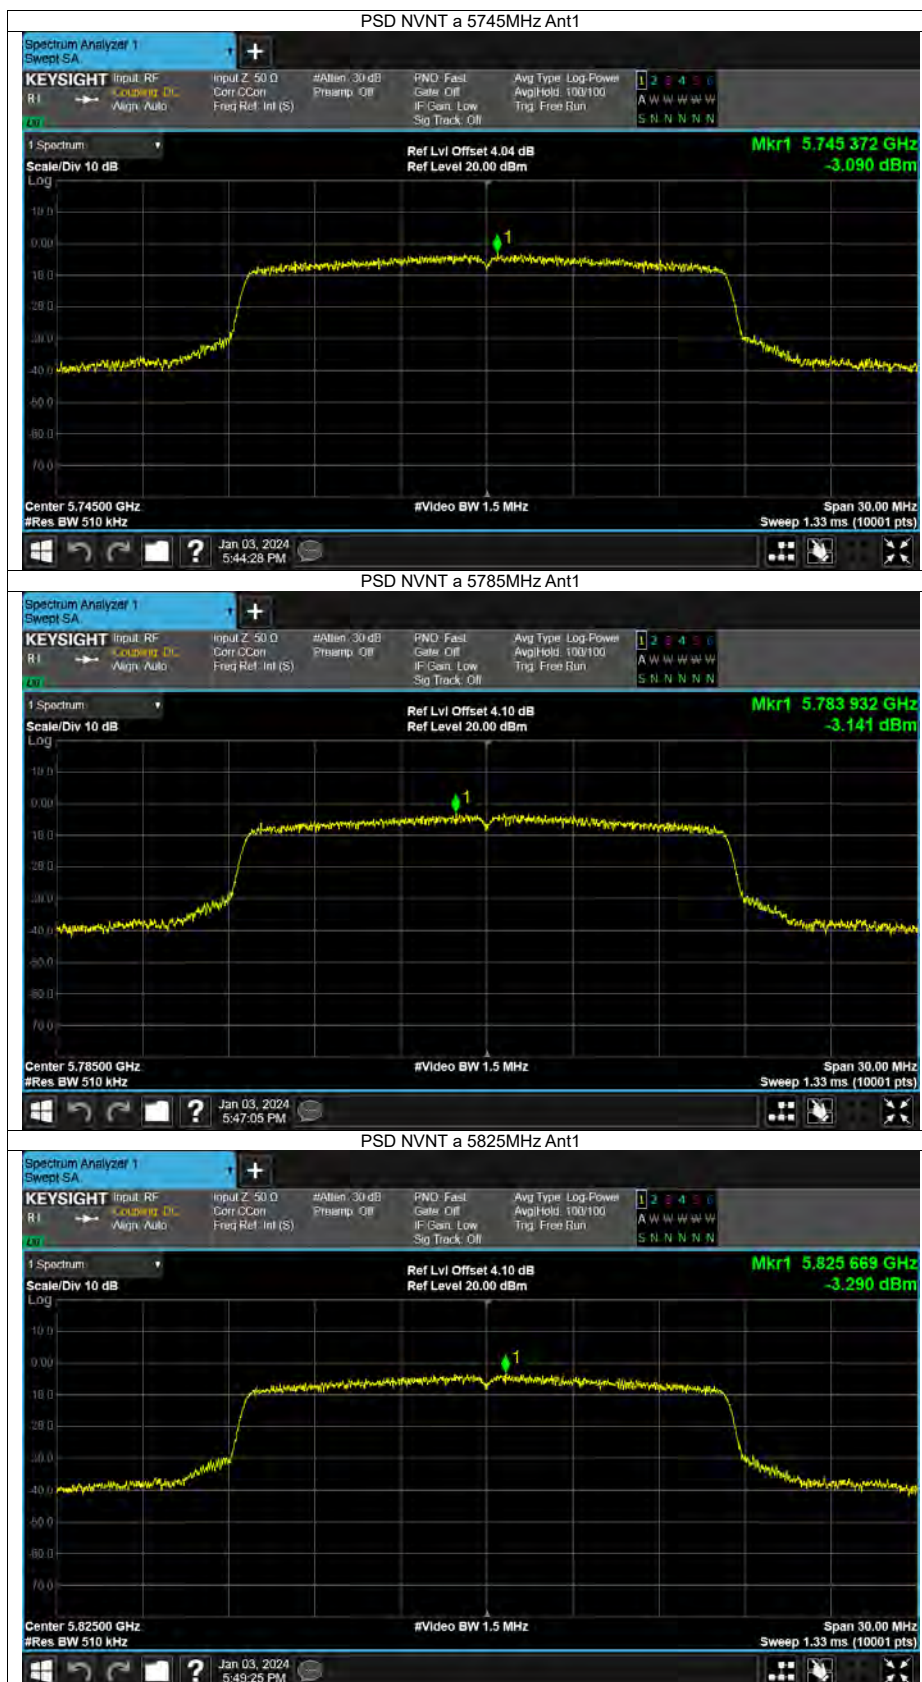

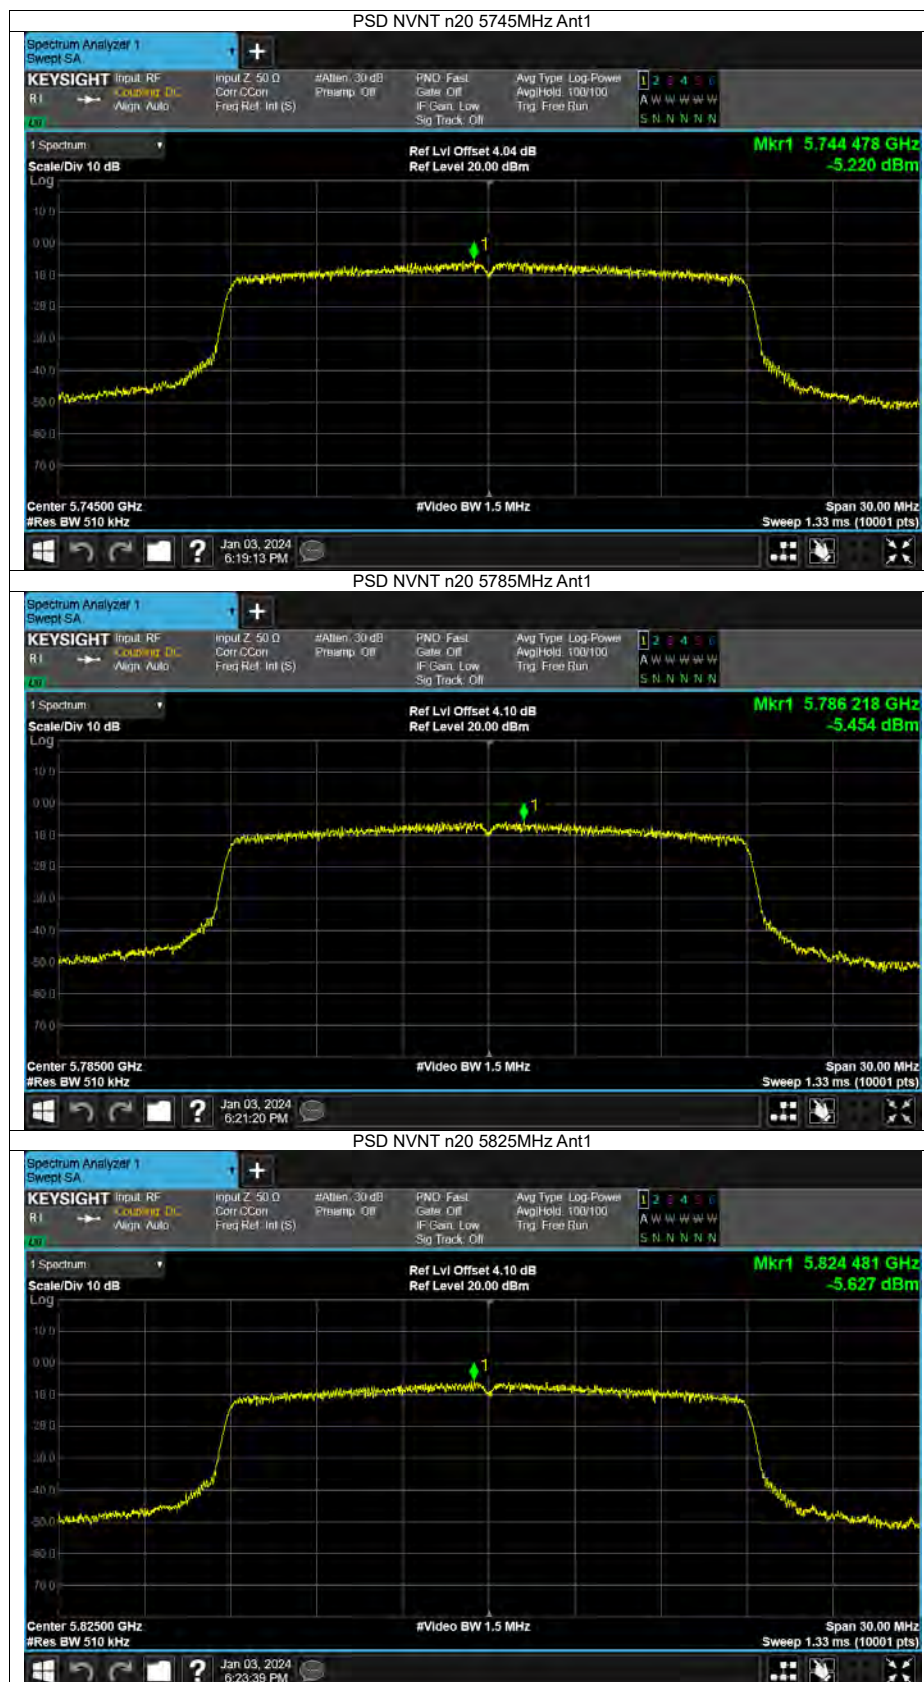

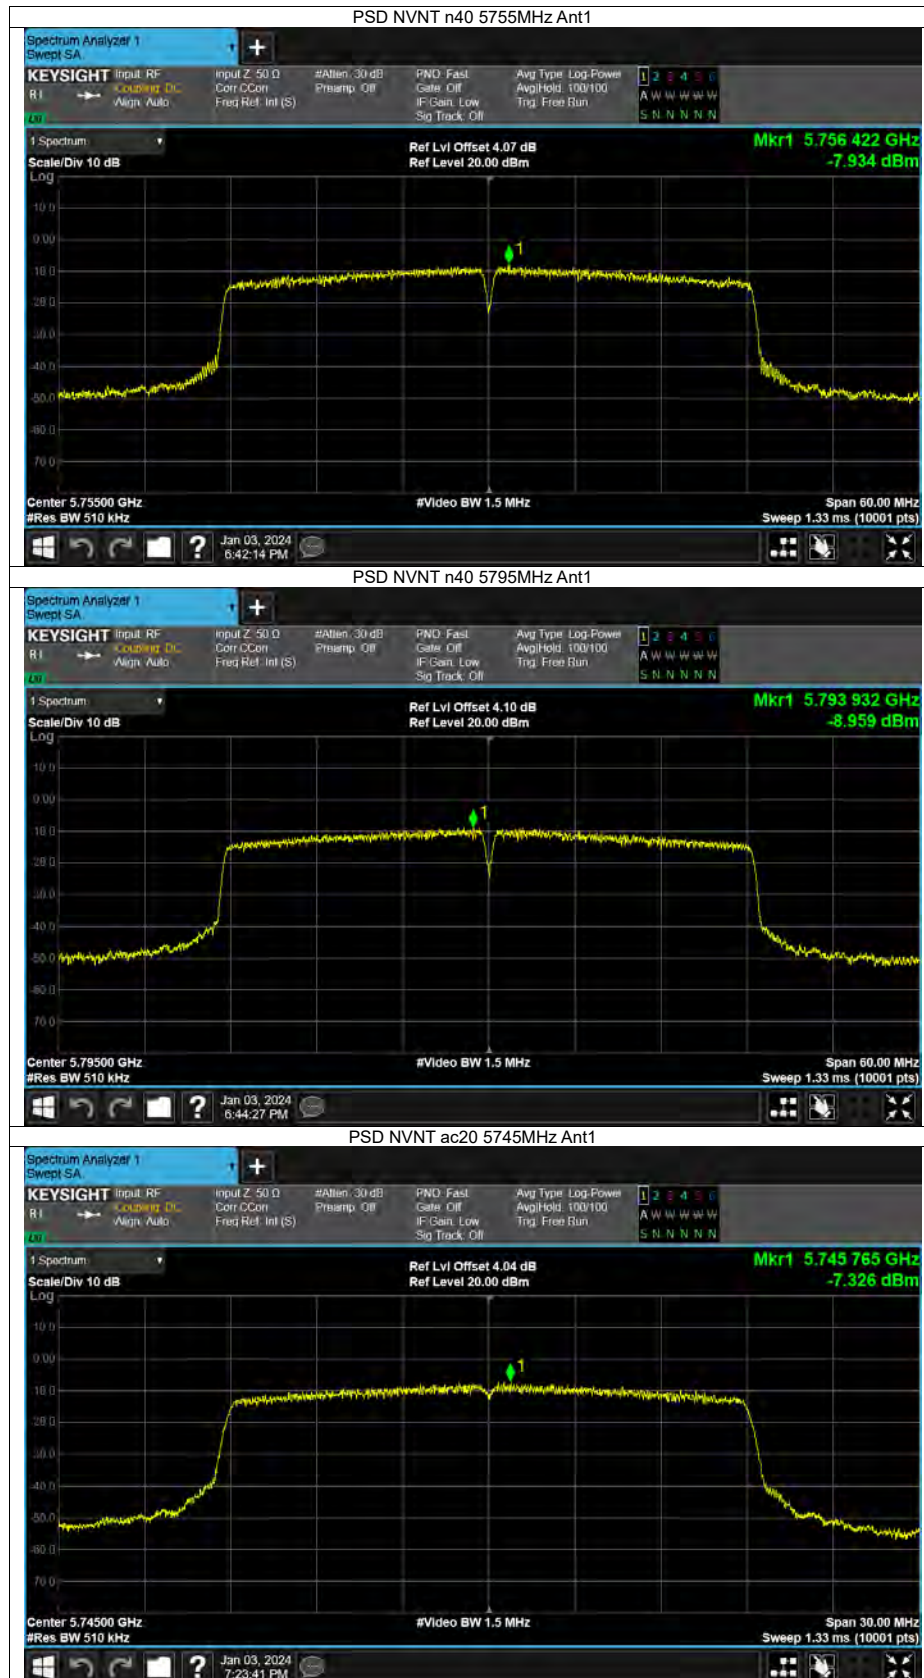

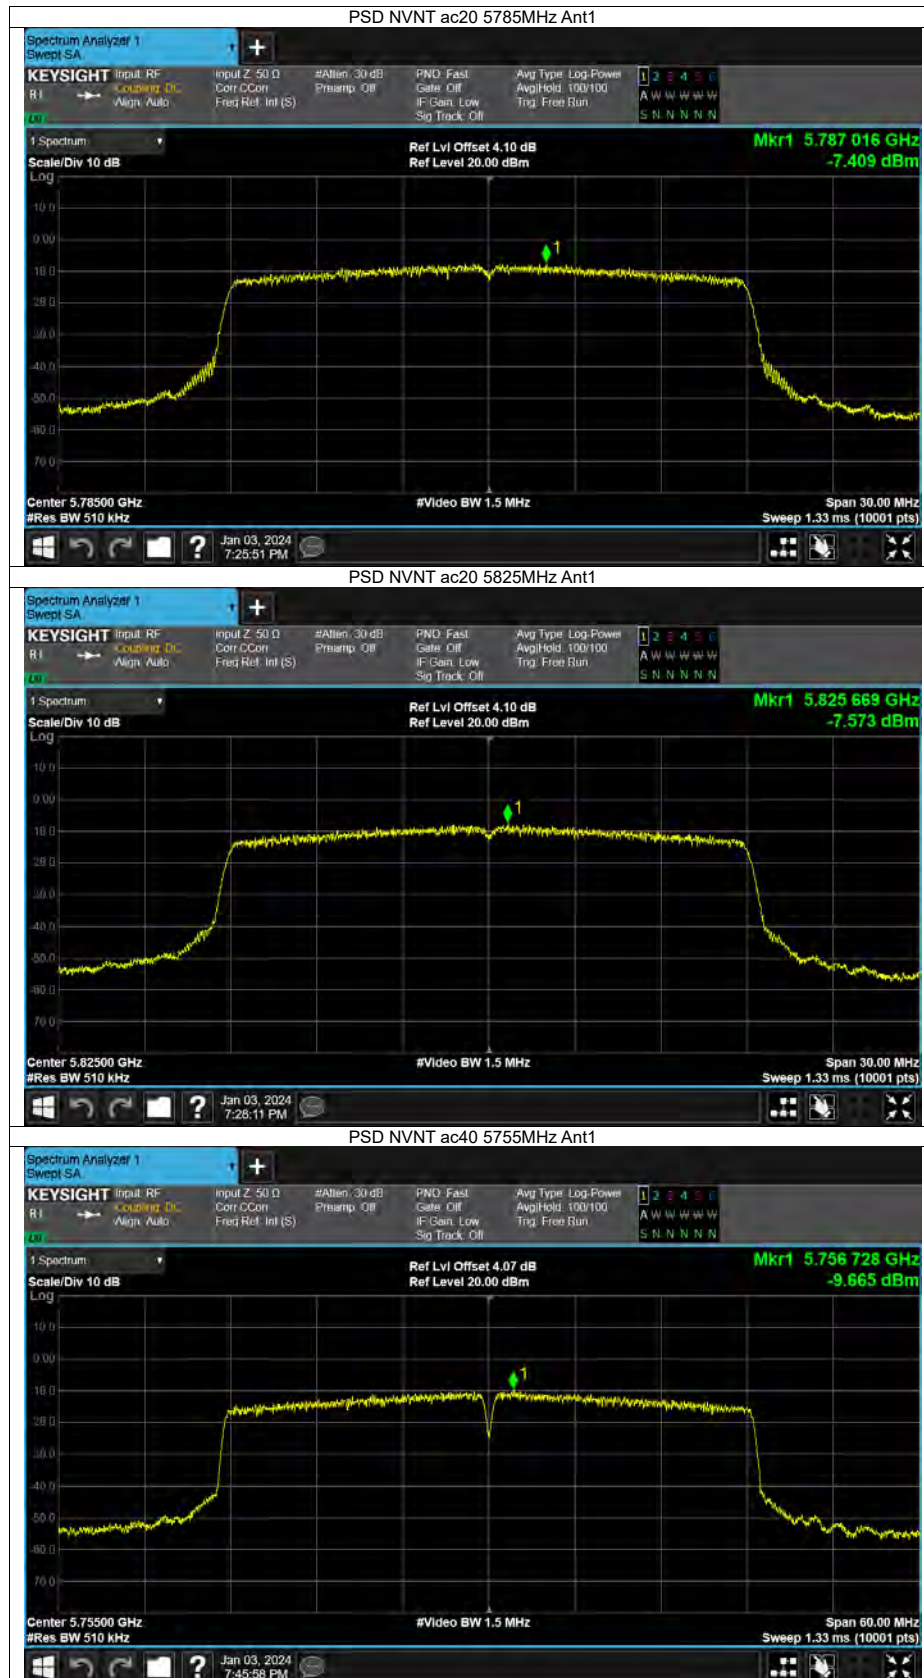


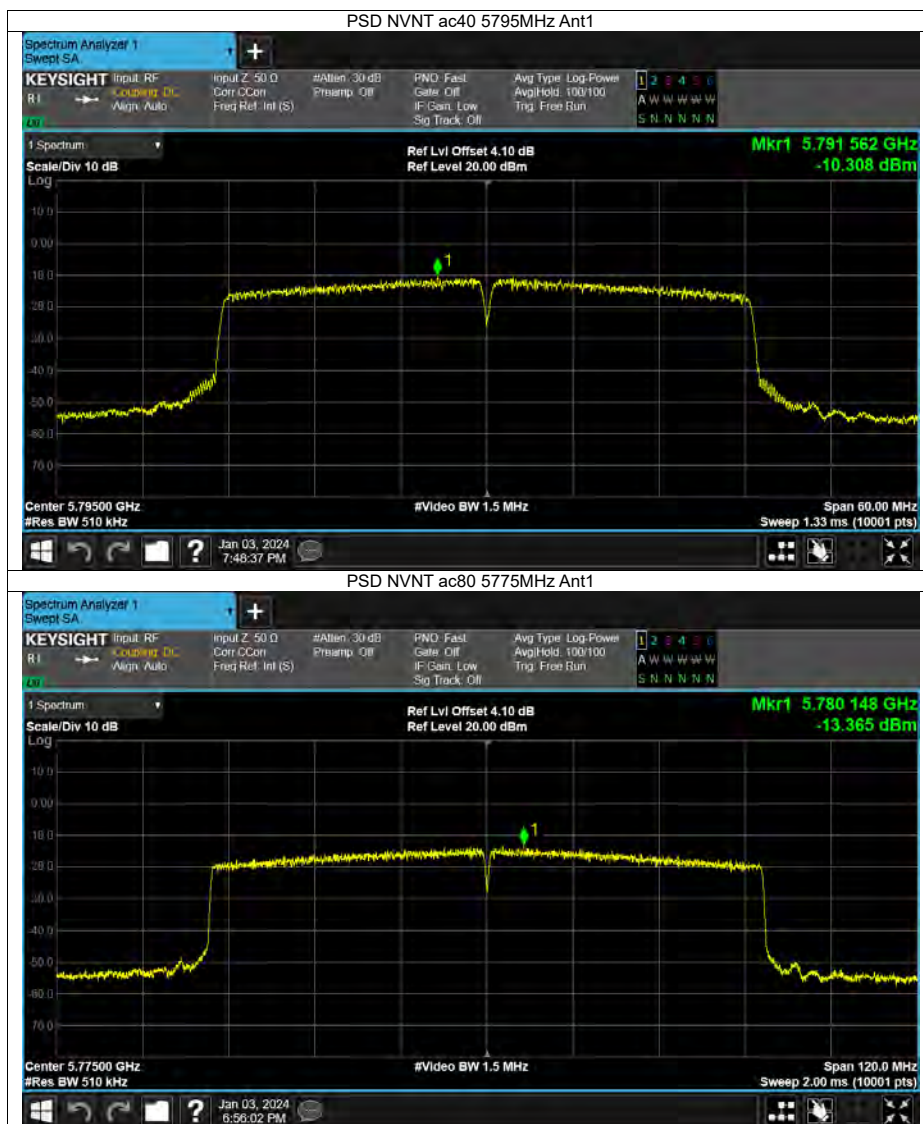



**-6dB Bandwidth**


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.348	0.5	Pass
NVNT	a	5785	Ant1	16.321	0.5	Pass
NVNT	a	5825	Ant1	16.316	0.5	Pass
NVNT	n20	5745	Ant1	17.555	0.5	Pass
NVNT	n20	5785	Ant1	17.568	0.5	Pass
NVNT	n20	5825	Ant1	17.57	0.5	Pass
NVNT	n40	5755	Ant1	35.608	0.5	Pass
NVNT	n40	5795	Ant1	36.298	0.5	Pass
NVNT	ac20	5745	Ant1	17.568	0.5	Pass
NVNT	ac20	5785	Ant1	17.534	0.5	Pass
NVNT	ac20	5825	Ant1	17.562	0.5	Pass
NVNT	ac40	5755	Ant1	36.038	0.5	Pass
NVNT	ac40	5795	Ant1	35.851	0.5	Pass
NVNT	ac80	5775	Ant1	76.318	0.5	Pass



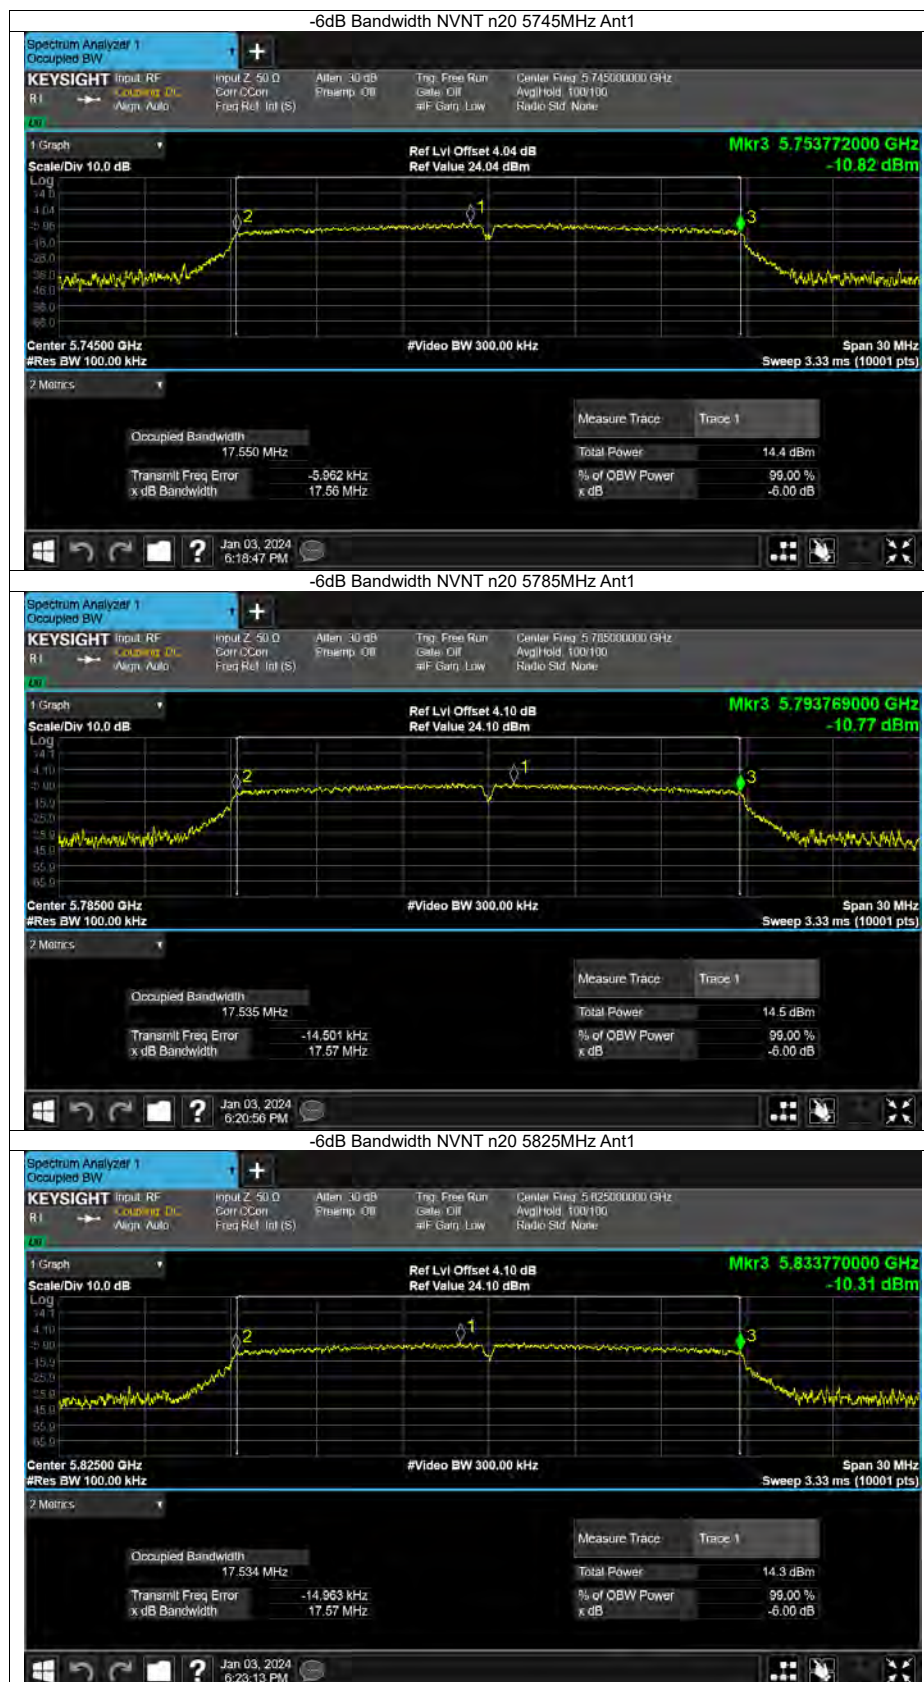

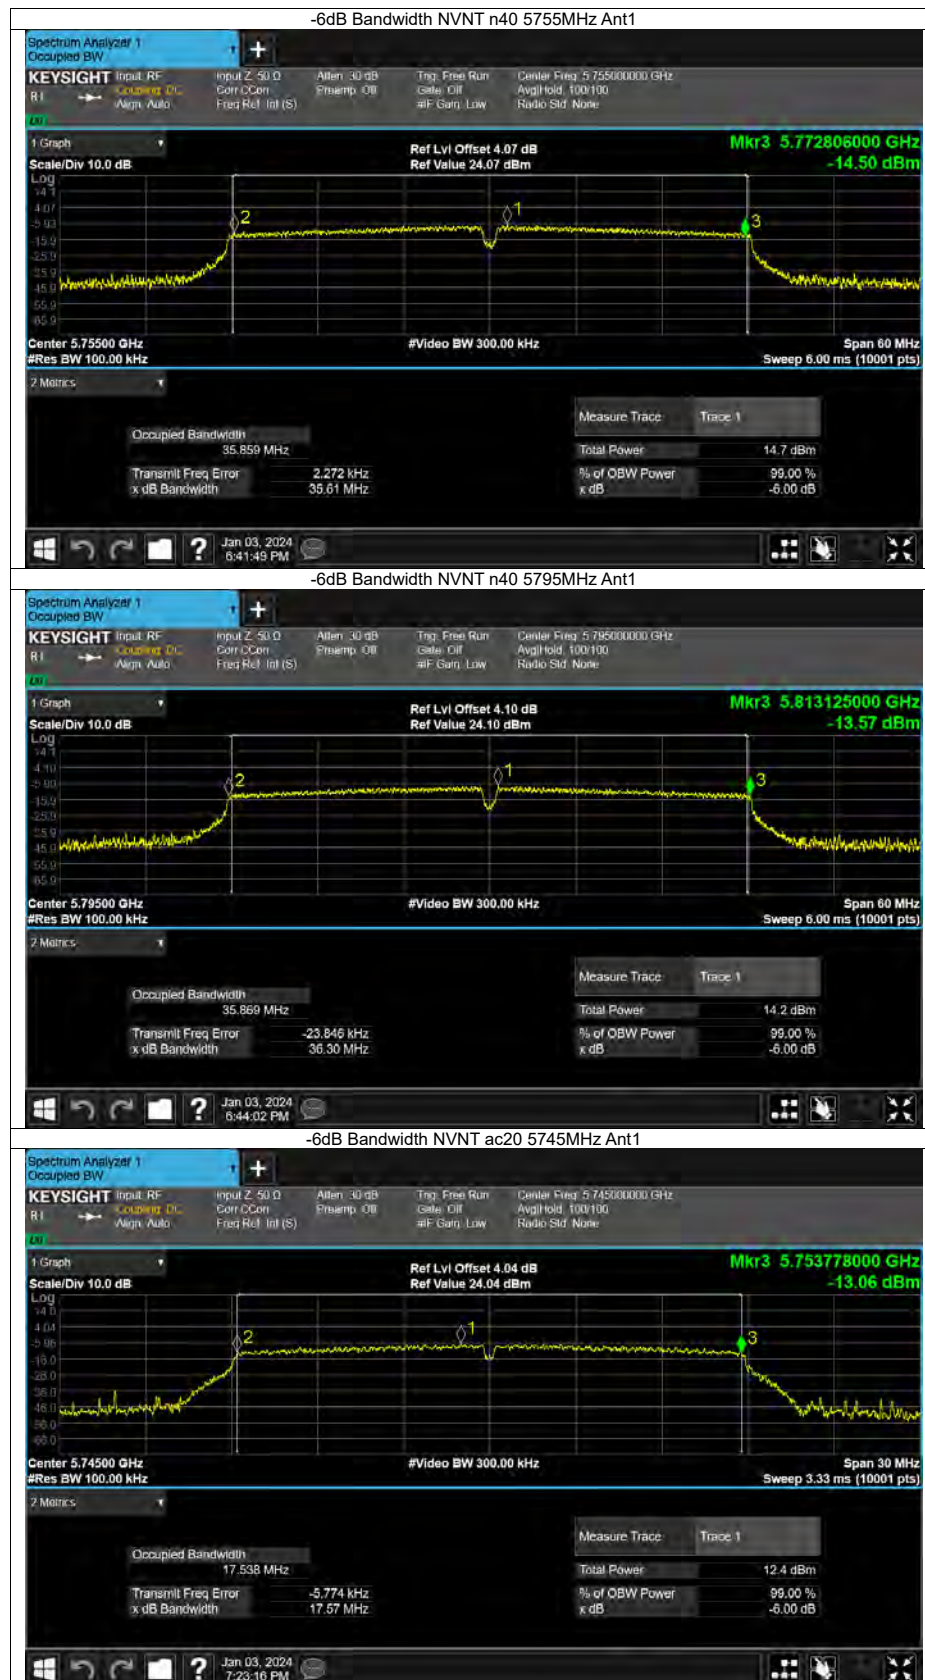

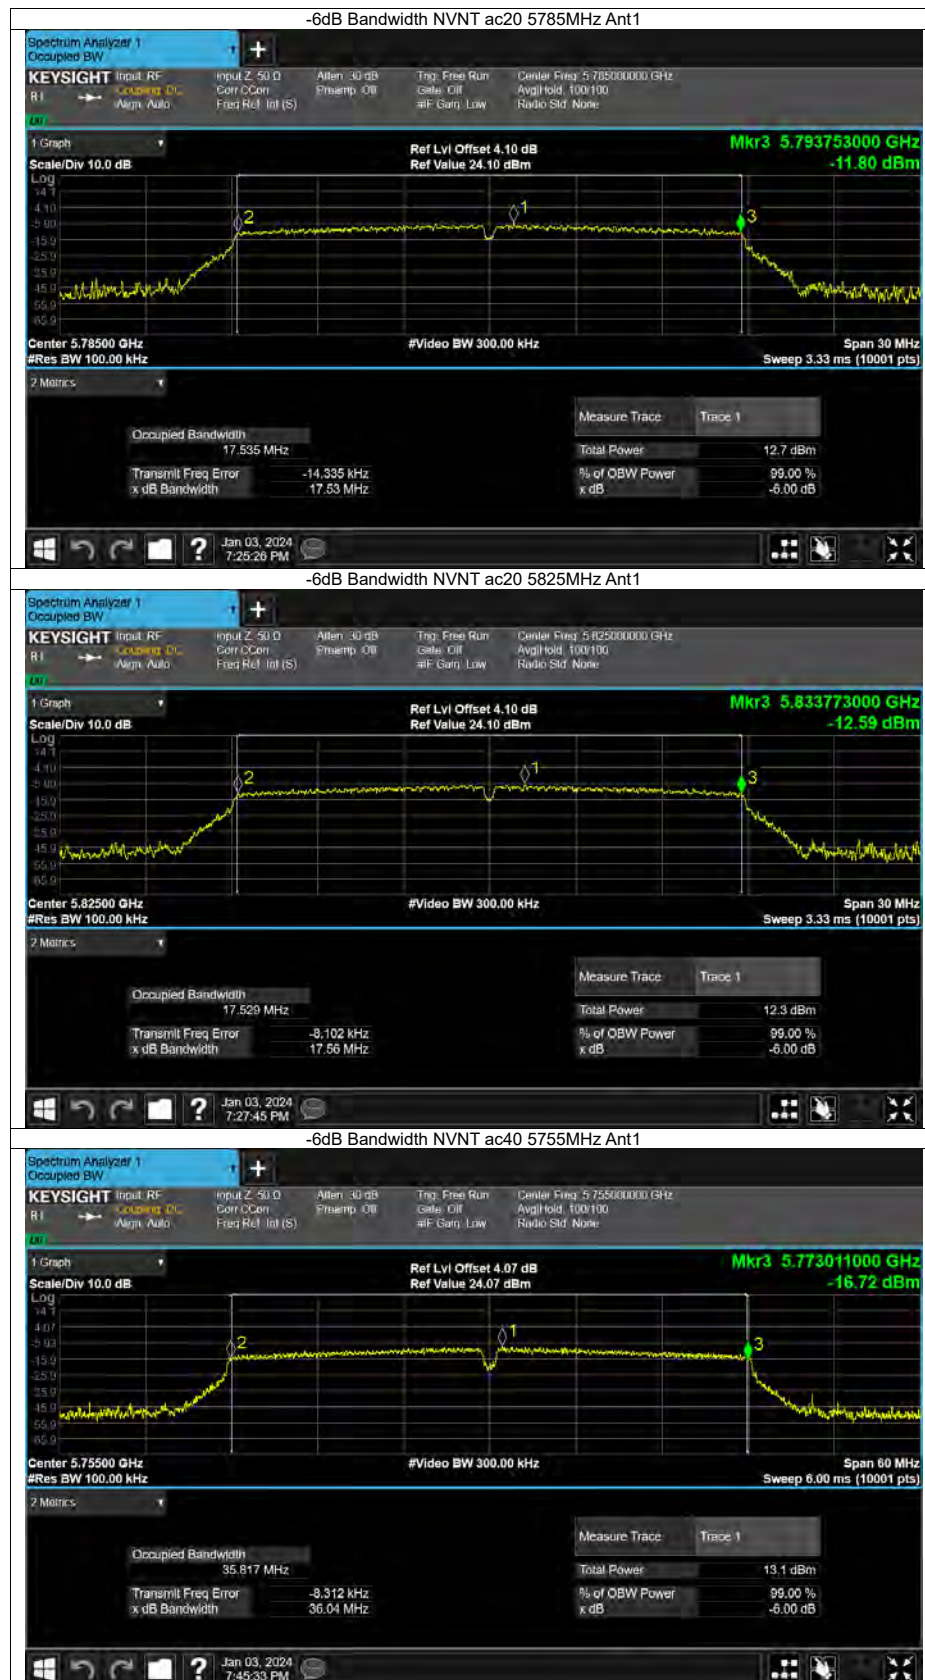

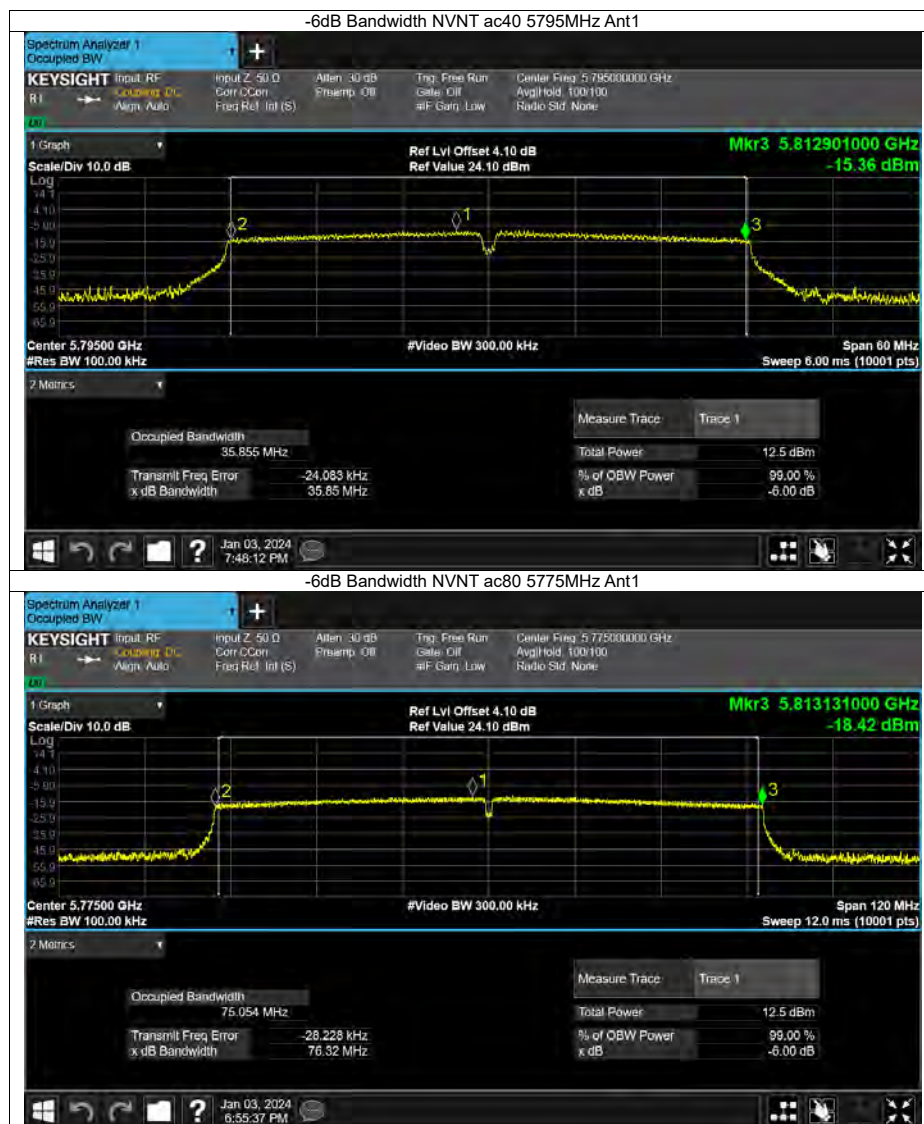

*****END OF THE REPORT*****