



FCC Test Report	
FCC Part 22 & 90	
Report Reference No.:	HK2302270554-17E
FCC ID :	2A2FCBT4101
Compiled by (position+printed name+signature) .:	File administrators Gary Qian
Supervised by (position+printed name+signature) .:	Technique principal Eden Hu
Approved by (position+printed name+signature) .:	Manager Jason Zhou
Date of issue	Apr. 28, 2023
Testing Laboratory Name.....	Shenzhen HUAKE Testing Technology Co., Ltd.
Address	1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Applicant's name	PowUnity GmbH
Address	Feldstrasse 9d Innsbruck, 6020 Austria
Test specification	
Standard.....	FCC Part 22 & 90
Shenzhen HUAKE Testing Technology Co., Ltd.All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd.as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test item description	GPS Tracker
Trade Mark	BikeTrax
Manufacturer	PowUnity GmbH
Model/Type reference	BT41-01
Series Models	T4101-03-04
Ratings	DC 3.7V from battery
Modulation	BPSK, QPSK
Hardware version	V2.2
Software version	V2.2
Frequency	LTE Band 18
Result	PASS

**TEST REPORT****Test Report No. :****HK2302270554-17E**

Apr. 28, 2023

Date of issue

Equipment under Test : GPS Tracker

Model /Type : BT41-01

Series Models : T4101-03-04

Applicant : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Manufacturer : **PowUnity GmbH**

Address : Feldstrasse 9d Innsbruck, 6020 Austria

Test result**Pass**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Table of Contents

1. Summary	5
1.1 Test Standards.....	5
1.2 Test Description.....	6
2. EUT Description	7
3. General Information.....	8
3.1. Test environment and mode.....	8
3.2. Test Mode.....	9
3.3. Description of Support Units.....	9
3.4. Configuration of Tested System	10
3.5. Measurement Results Explanation Example.....	10
3.6. Equipments Used during the Test	11
4. Facilities and Accreditations	12
4.1. Information of The Test Laboratory	12
4.2. Measurement Uncertainty.....	12
5. Test Results and Measurement Data	13
5.1. Conducted Output Power Measurement	13
5.2. Peak to Average Ratio.....	19
5.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	24
5.4. Band Edge and Conducted Spurious Emission Measurement	36
5.5. Frequency Stability Measurement	68
6. Photographs of Test Setup	71
7. Photographs of EUT	72



**** Modified History ****

Revision	Description	Issued Data	Remark
Revision 1.0	Initial Test Report Release	Apr. 28, 2023	Jason Zhou



1. Summary

1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 90](#) : PRIVATE LAND MOBILE RADIO SERVICES

[FCC Part 22 Subpart H](#):PRIVATE LAND MOBILE RADIO SERVICES.

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment
Measurement and Performance Standards.

47 CFR FCC Part 15 Subpart B: - Unintentional Radiators

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL
RULES AND REGULATIONS

[KDB971168 D01 v03r01](#): MEASUREMENT GUIDANCE FOR CERTIFICATION OF
LICENSED DIGITAL TRANSMITTERS



1.2 Test Description

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046; §90.635;	PASS
Effective(Isotropic) Radiated Output Power	§22.913(a)(2)	PASS
Peak-to-Average Ratio	§2.1046;	PASS
Effective Radiated Power	§2.1046; §90.635;	PASS
Occupied Bandwidth	§2.1049;	PASS
Band Edge	§2.1051; §90.691	PASS
Conducted Spurious Emission	§2.1051; §90.691	PASS
Field Strength of Spurious Radiation	§2.1053; §90.691	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §90.231	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.



2. EUT Description

Product Name:	GPS Tracker
Model :	BT41-01
Series Models:	T4101-03-04
Trade Mark:	BikeTrax
Tx Frequency:	LTE Band 18: 815 MHz ~ 830 MHz
Bandwidth:	LTE Band 18: 3.75KHz / 15KHz
Type of Modulation:	BPSK, QPSK
Antenna Type:	Internal Antenna
Antenna Gain:	LTE Band 18: 1dBi
Power Supply:	DC 3.7V from battery



3. General Information

3.1. Test environment and mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

Description Operation Frequency

Mode A:

TX Channel Bandwidth	Frequency (MHz)	channel
3.75KHz	815.1	23851
	819.5	23895
	823.9	23939
15KHz	815.1	23851
	819.5	23895
	823.9	23939

Mode B:

TX Channel Bandwidth	Frequency (MHz)	channel
3.75KHz	824.1	23941
	827.0	23970
	829.9	23999
15KHz	824.1	23941
	827.0	23970
	829.9	23999



3.2. Test Mode

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 18	BPSK Link (3.75KHz/ 15KHz)	QPSK Link (3.75KHz/ 15KHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

3.3. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



3.4. Configuration of Tested System

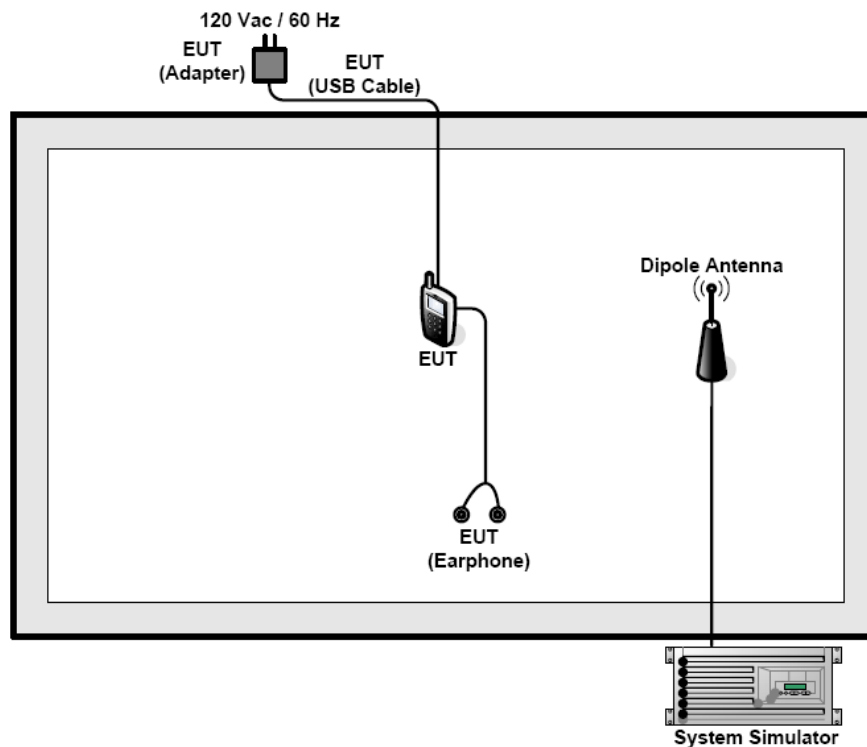

3.5. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$



3.6. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	HKE-059	2023/02/17	2024/02/16
LISN	R&S	ENV216	HKE-002	2023/02/17	2024/02/16
Receiver	R&S	ESR-7	HKE-010	2023/02/17	2024/02/16
Spectrum analyzer	R&S	FSP40	HKE-025	2023/02/17	2024/02/16
Spectrum analyzer	Agilent	N9020A	HKE-048	2023/02/17	2024/02/16
RF automatic control unit	Tonscend	JS0806-1	HKE-060	2023/02/17	2024/02/16
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	2023/02/17	2024/02/16
Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	2023/02/17	2024/02/16
Horn antenna	Schwarzbeck	9120D	HKE-013	2023/02/17	2024/02/16
High gain antenna	Schwarzbeck	LB-180400KF	HKE-054	2023/02/17	2024/02/16
Preamplifier	EMCI	EMC051845SE	HKE-015	2023/02/17	2024/02/16
Preamplifier	Agilent	83051A	HKE-016	2023/02/17	2024/02/16
Preamplifier	Schwarzbeck	BBV 9743	HKE-006	2023/02/17	2024/02/16
Temperature and humidity meter	Boyang	HTC-1	HKE-075	2023/02/17	2024/02/16
High-low temperature chamber	Guangke	HT-80L	HKE-118	2023/02/17	2024/02/16
High pass filter unit	Tonscend	JS0806-F	HKE-055	2023/02/17	2024/02/16
RF Cable(below1GHz)	Times	9kHz-1GHz	HKE-117	2023/02/17	2024/02/16
RF Cable(above 1GHz)	Times	1-40G	HKE-034	2023/02/17	2024/02/16
Power meter	Agilent	E4419B	HKE-085	2023/02/17	2024/02/16
Power Sensor	Agilent	E9300A	HKE-086	2023/02/17	2024/02/16
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A	N/A
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A	N/A
RF test software	Tonscend	JS1120-B Version 2.6	HKE-083	N/A	N/A
RF test software	Tonscend	JS1120-4	HKE-113	N/A	N/A
RF test software	Tonscend	JS1120-3	HKE-114	N/A	N/A
RF test software	Tonscend	JS1120-1	HKE-115	N/A	N/A
Wireless Communication Test Set	R&S	CMW500	HKE-026	2023/02/17	2024/02/16
Wireless Communication Test Set	R&S	CMU200	HKE-029	2023/02/17	2024/02/16



4. Facilities and Accreditations

4.1. Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.

Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization :

A2LA Accreditation Code is 4781.01.

FCC Designation Number is CN1229.

Canada IC CAB identifier is CN0045.

CNAS Registration Number is L9589.

4.2. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)


- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.



5. Test Results and Measurement Data

5.1. Conducted Output Power Measurement

5.1.1. Test Specification

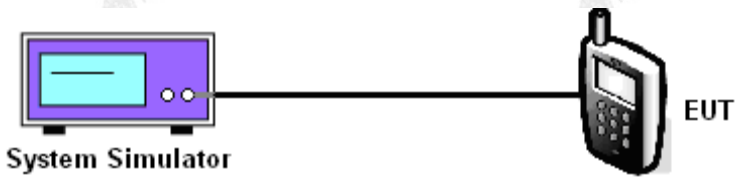Test Requirement:	FCC part 90.635
Test Method:	FCC part 2.1046
Limits:	LTE Band 18: 100W
Test Setup:	 The diagram illustrates the test setup. On the left is a purple rectangular box labeled 'System Simulator' with a blue screen and two small circles. A black line connects this box to a black mobile phone on the right labeled 'EUT'.
Test Procedure:	1. The transmitter output port was connected to the system simulator. 2. Set EUT at maximum power through system simulator. 3. Select lowest, middle, highest channels for each band and different modulation. 4. Measure and record the power level from the system simulator.
Test Result:	PASS

TEST RESULTS



Conducted Measurement:
Mode A:

LTE FDD Band 18				
Modulation	Sub-carrier spacing (KHz)	Tones	Frequency (MHz)	Average Power [dBm]
BPSK	3.75	1@0	815.1	20.82
		1@47	815.1	20.72
		1@0	819.5	21.02
		1@47	819.5	20.06
		1@0	823.9	21.57
		1@47	823.9	20.58
	15	1@0	815.1	21.41
		1@11	815.1	21.35
		12@0	815.1	20.80
		1@0	819.5	20.93
		1@11	819.5	20.96
		12@0	819.5	20.89
		1@0	823.9	21.56
		1@11	823.9	20.32
		12@0	823.9	20.36
		1@0	815.1	22.88
QPSK	3.75	1@47	815.1	21.68
		1@0	819.5	22.09
		1@47	819.5	21.97
		1@0	823.9	22.66
		1@47	823.9	22.56
	15	1@0	815.1	21.39
		1@11	815.1	21.43
		12@0	815.1	21.54
		1@0	819.5	22.05
		1@11	819.5	22.91
		12@0	819.5	21.92
		1@0	823.9	21.56
		1@11	823.9	22.91
		12@0	823.9	21.34

**Mode B:**


LTE FDD Band 18				
Modulation	Sub-carrier spacing (KHz)	Tones	Frequency (MHz)	Average Power [dBm]
BPSK	3.75	1@0	824.1	22.72
		1@47	824.1	22.65
		1@0	827.0	22.89
		1@47	827.0	22.83
		1@0	829.9	23.02
		1@47	829.9	23.07
	15	1@0	824.1	22.50
		1@11	824.1	22.63
		12@0	824.1	22.50
		1@0	827.0	23.01
		1@11	827.0	22.56
		12@0	827.0	22.61
		1@0	829.9	23.02
		1@11	829.9	23.08
		12@0	829.9	23.02
QPSK	3.75	1@0	824.1	22.68
		1@47	824.1	22.73
		1@0	827.0	22.91
		1@47	827.0	22.74
		1@0	829.9	22.16
		1@47	829.9	22.16
	15	1@0	824.1	22.51
		1@11	824.1	22.57
		12@0	824.1	22.53
		1@0	827.0	22.81
		1@11	827.0	22.92
		12@0	827.0	22.52
		1@0	829.9	22.08
		1@11	829.9	22.71
		12@0	829.9	23.04

5.2. Radiated Output Power

LIMIT

This is the test for the maximum radiated power from the EUT.
Rule Part 22H.913(a)(2) specifies, "Mobile/portable stations are limited to 7 watts ERP.

TEST CONFIGURATION

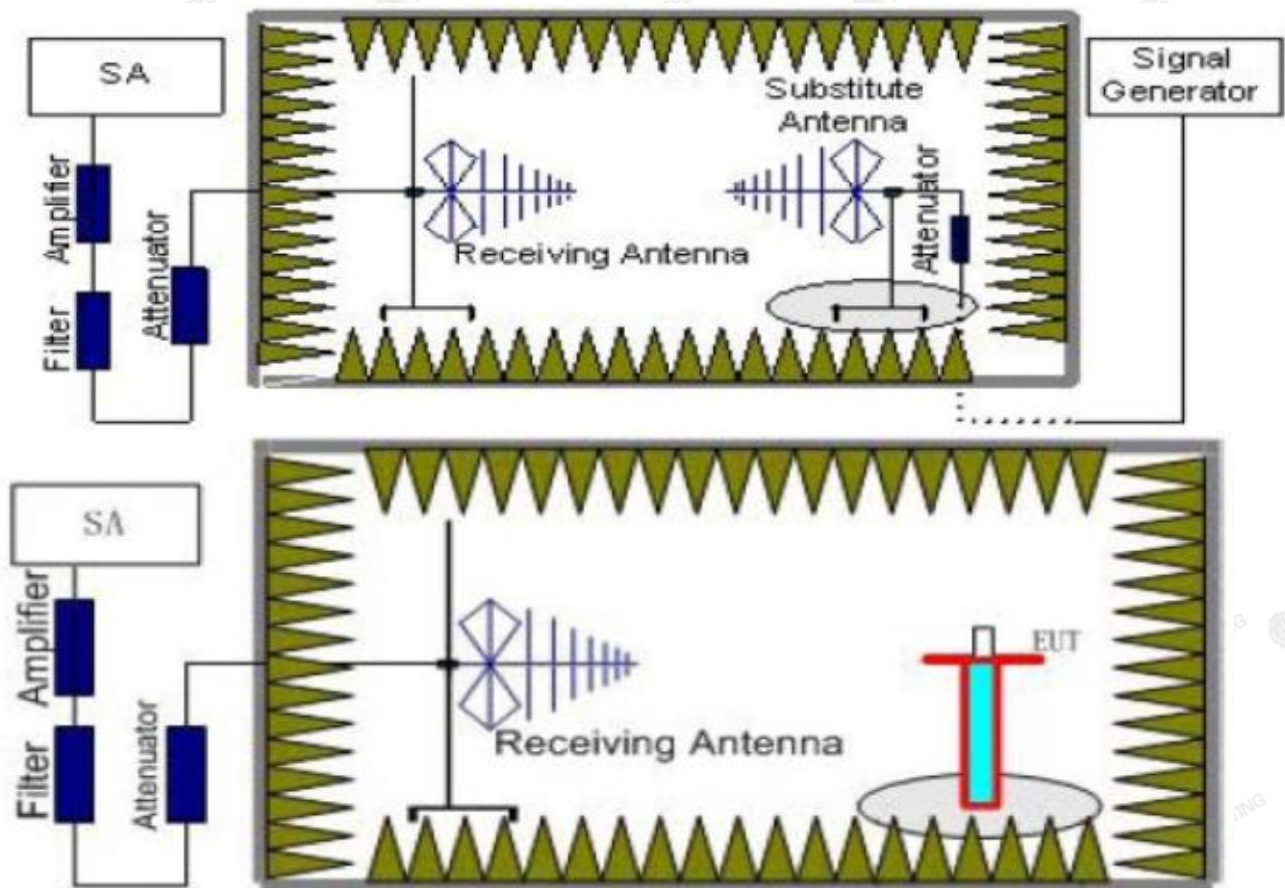

TEST PROCEDURE

1. EUT was placed on a 0.1 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 0.1m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.



- The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (P_r).
- The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
- A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (P_{cl}), the Substitution Antenna Gain (G_a) and the Amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below: $\text{Power(EIRP)} = P_{Mea} - P_{Ag} - P_{cl} + G_a$

We used SMF100A microwave signal generator which signal level can up to 33dBm, so we not used power

Amplifier for substitution test; The measurement results are amend as described below:

$$\text{Power(EIRP)} = P_{Mea} - P_{cl} + G_a$$

- This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
- ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

TEST RESULTS

Radiated Measurement:

Remark:

- We measured all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.
- $\text{EIRP} = P_{Mea}(\text{dBm}) - P_{cl}(\text{dB}) + P_{Ag}(\text{dB}) + G_a(\text{dBi})$
- $\text{Margin} = \text{Limit} - \text{ERP}$
- We measured both Horizontal and Vertical direction, recorded worst case direction.

Mode A:

LTE FDD Band 18-3.75KHz-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.1	-18.23	2.42	8.45	36.82	24.62	22.47	38.45	15.98	V
819.5	-16.92	3.46	8.45	36.82	24.89	22.74	38.45	15.71	V
823.9	-18.83	2.53	8.36	36.82	23.82	21.67	38.45	16.78	V

LTE FDD Band 18-15KHz-BPSK

Frequency (MHz)	P_{Mea} (dBm)	P_{cl} (dB)	G_a Antenna Gain(dB)	P_{Ag} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.1	-18.96	2.42	8.45	36.82	23.89	21.74	38.45	16.71	V
819.5	-17.13	3.46	8.45	36.82	24.68	22.53	38.45	15.92	V
823.9	-17.92	2.53	8.36	36.82	24.73	22.58	38.45	15.87	V

**LTE FDD Band 18-3.75KHz-QPSK**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.1	-17.73	2.42	8.45	36.82	25.12	22.97	38.45	15.48	V
819.5	-17.55	3.46	8.45	36.82	24.26	22.11	38.45	16.34	V
823.9	-19.37	2.53	8.36	36.82	23.28	21.13	38.45	17.32	V

LTE FDD Band 18-15KHz- QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
815.1	-18.84	2.42	8.45	36.82	24.01	21.86	38.45	16.59	V
819.5	-17.18	3.46	8.45	36.82	24.63	22.48	38.45	15.97	V
823.9	-18.56	2.53	8.36	36.82	24.09	21.94	38.45	16.51	V

Mode B:**LTE FDD Band 18-3.75KHz-BPSK**

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.1	-17.95	2.42	8.45	36.82	24.9	22.75	38.45	15.7	V
827.0	-17.33	3.46	8.45	36.82	24.48	22.33	38.45	16.12	V
829.9	-18.85	2.53	8.36	36.82	23.8	21.65	38.45	16.8	V

LTE FDD Band 18-15KHz-BPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.1	-19.11	2.42	8.45	36.82	23.74	21.59	38.45	16.86	V
827.0	-17.51	3.46	8.45	36.82	24.3	22.15	38.45	16.3	V
829.9	-17.77	2.53	8.36	36.82	24.88	22.73	38.45	15.72	V

LTE FDD Band 18-3.75KHz-QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.1	-18.23	2.42	8.45	36.82	24.62	22.47	38.45	15.98	V
827.0	-16.65	3.46	8.45	36.82	25.16	23.01	38.45	15.44	V
829.9	-17.04	2.53	8.36	36.82	25.61	23.46	38.45	14.99	V


LTE FDD Band 18-15KHz- QPSK

Frequency (MHz)	P _{Mea} (dBm)	P _{cl} (dB)	G _a Antenna Gain(dB)	P _{Aq} (dB)	EIRP (dBm)	ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
824.1	-18.15	2.42	8.45	36.82	24.7	22.55	38.45	15.9	V
827.0	-16.64	3.46	8.45	36.82	25.17	23.02	38.45	15.43	V
829.9	-16.01	2.53	8.36	36.82	26.64	24.49	38.45	13.96	V



5.3. Peak to Average Ratio

5.3.1. Test Specification

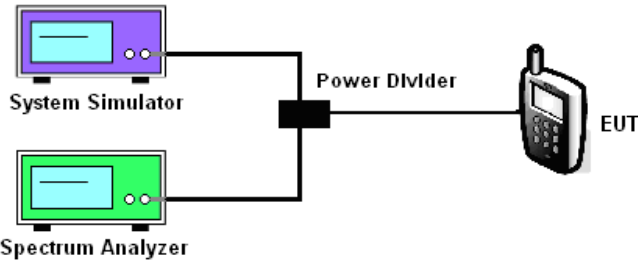Test Method:	FCC KDB 971168 D01v03
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.7.1. 2. The EUT was connected to spectrum analyzer and system simulator via a power divider. 3. Set EUT to transmit at maximum output power. 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.

LTE FDD Band 18				
Mode A:				
Frequency (MHz)	Sub-carrier spacing (KHz)	Tones	Modulation PAPR (dB)	
			BPSK	QPSK
819.5	3.75	1@0	2.71	3.85
		1@47	3.18	3.00
819.5	15	1@0	5.42	9.42
		1@11	3.88	6.11



LTE FDD Band 18-3.75KHz

BPSK

QPSK



1@0

1@0




1@47

1@47



LTE FDD Band 18-15KHz

BPSK

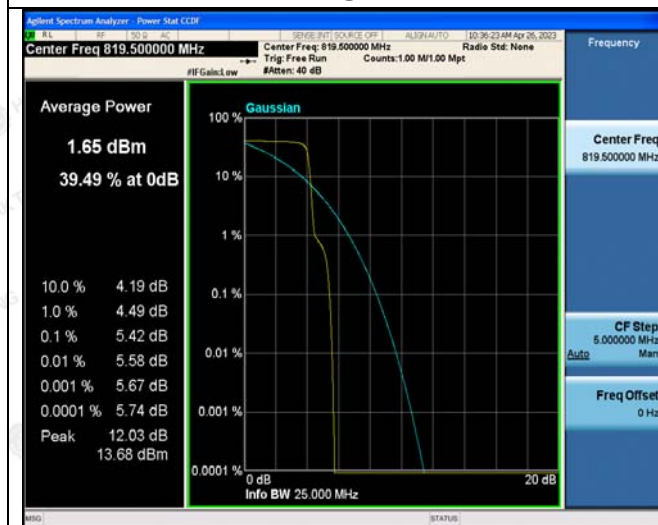

1@0

QPSK



1@0




1@11



1@11




LTE FDD Band 18				
Mode B				
Frequency (MHz)	Sub-carrier spacing (KHz)	Tones	Modulation PAPR (dB)	
			BPSK	QPSK
827.0	3.75	1@0	2.81	3.38
		1@47	2.92	4.05
827.0	15	1@0	5.30	6.42
		1@11	4.89	5.64

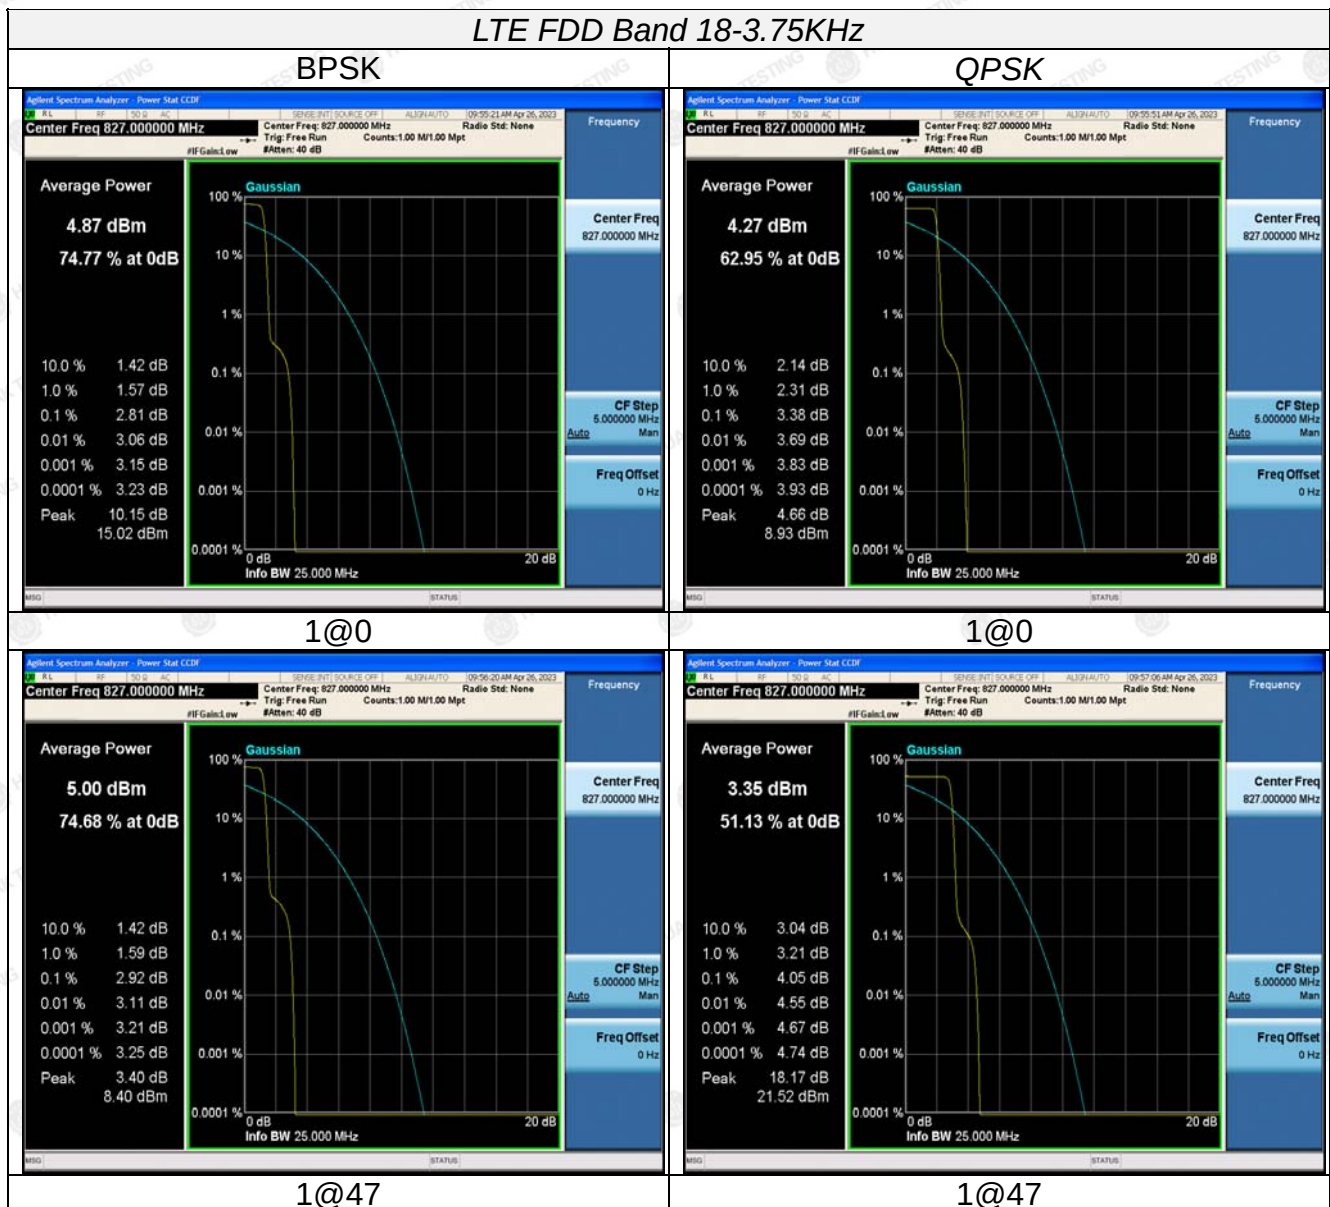



LTE FDD Band 18-15KHz

BPSK

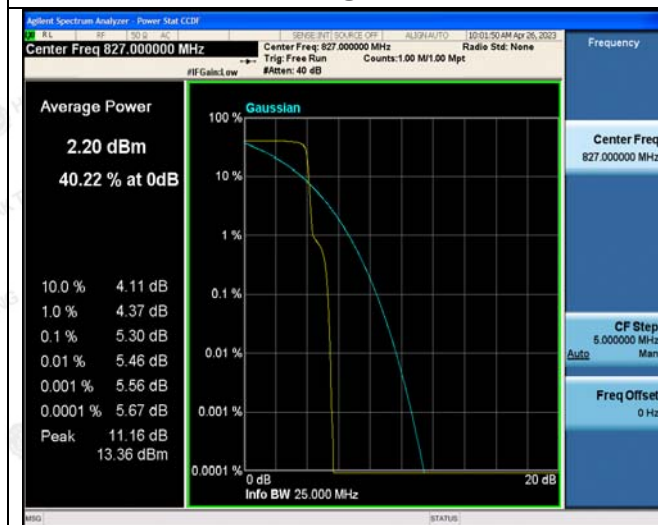

1@0

QPSK



1@0



1@11




1@11



5.4. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

5.4.1. Test Specification

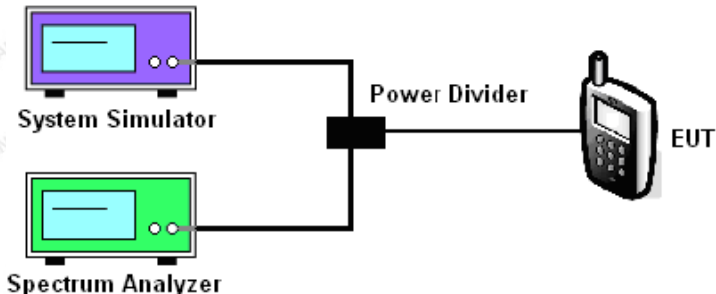Test Method:	FCC part 2.1049
Limit:	N/A
Test Setup:	 The diagram shows a System Simulator (top) and a Spectrum Analyzer (bottom) connected to a central Power Divider. The Power Divider is connected to the EUT (Equipment Under Test) on the right.
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 18; recorded worst case for each Channel Bandwidth of LTE FDD Band 18.




LTE FDD Band 18						
Mode A						
Sub-carrier spacing (KHz)	Tones	Frequency (MHz)	-26dBc Emission bandwidth (KHz)		99% Occupied bandwidth (KHz)	
			BPSK	QPSK	BPSK	QPSK
3.75	1@0	815.1	48.87	49.18	70.934	80.631
	1@0	819.5	46.06	51.28	87.506	82.578
	1@0	823.9	52.11	50.26	69.818	82.649
15	1@0	815.1	111.7	117.7	127.89	125.07
	1@0	819.5	103.8	116.5	126.34	123.59
	1@0	823.9	112.3	116.2	128.31	122.09
	12@0	815.1	249.3	250.6	187.90	186.45
	12@0	819.5	248.5	250.0	185.75	185.14
	12@0	823.9	251.9	248.1	185.73	186.57



LTE FDD Band 18-3.75KHz

BPSK

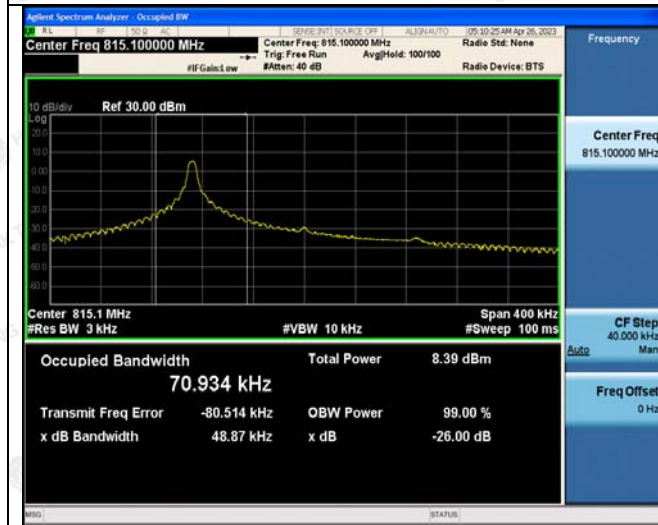

1@0

QPSK



1@0

Low Channel






1@0



1@0

Middle Channel

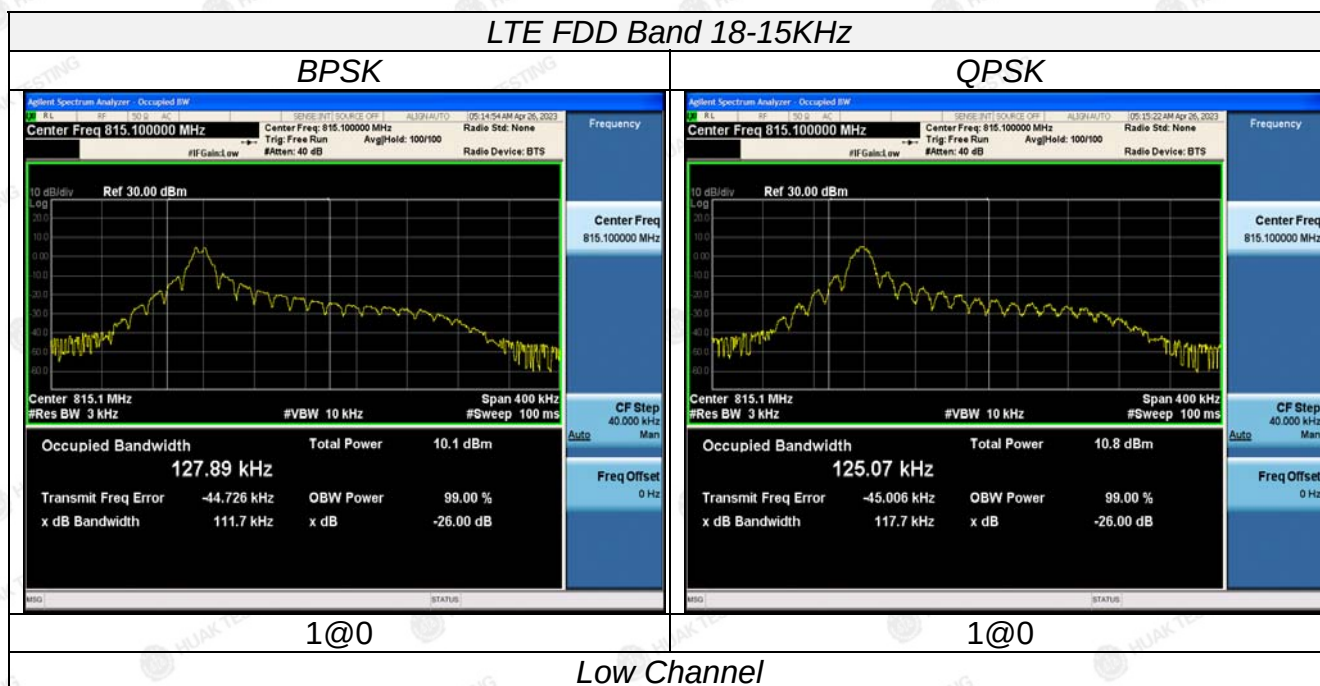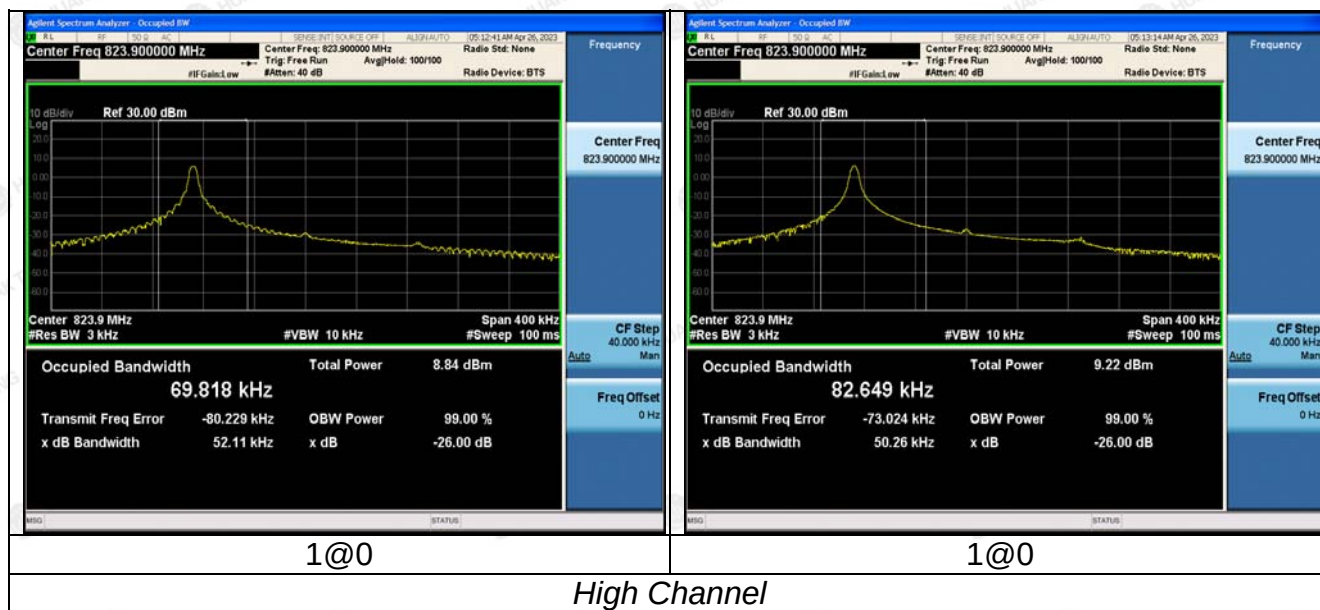


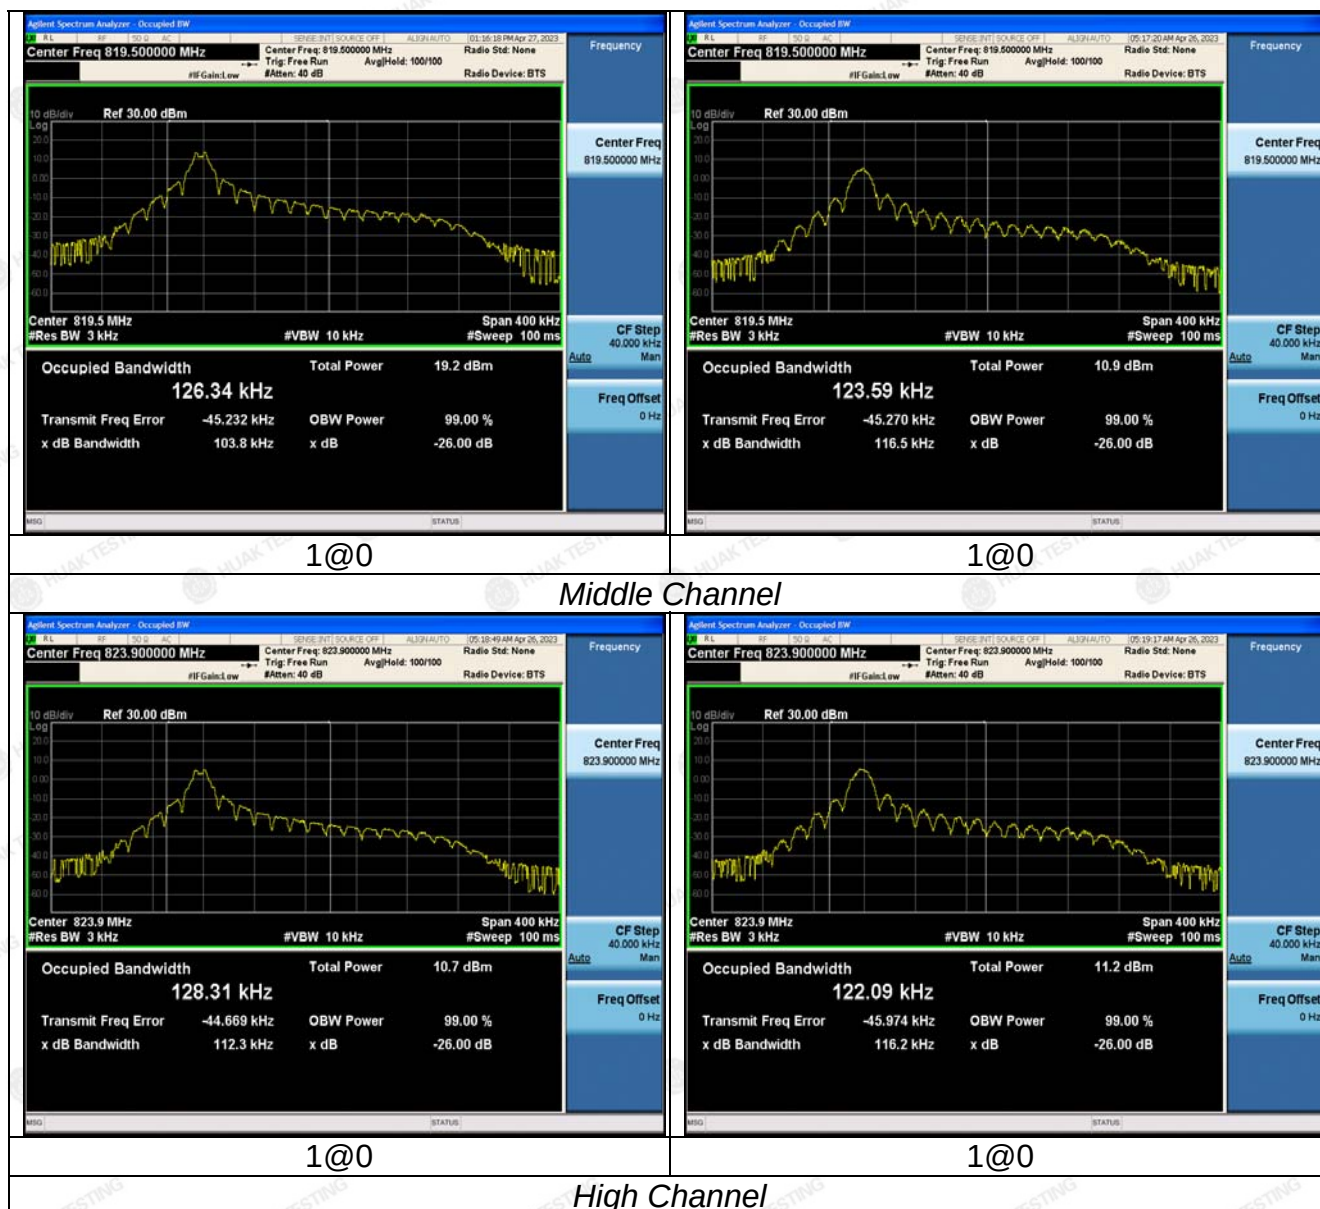



LTE FDD Band 18-15KHz

BPSK

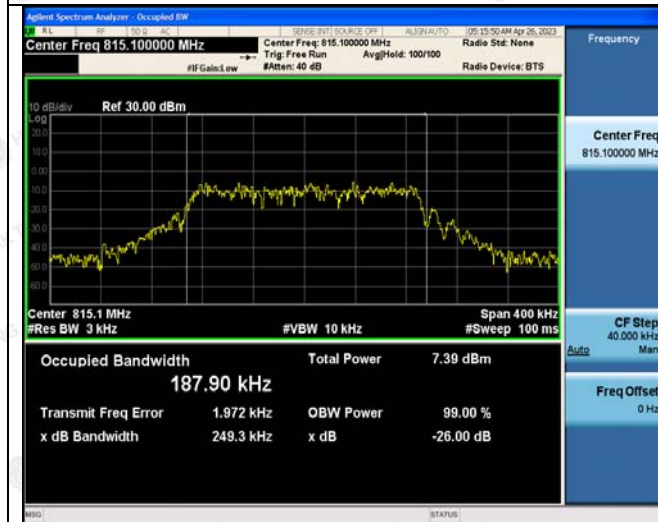


12@0

QPSK



12@0

Low Channel

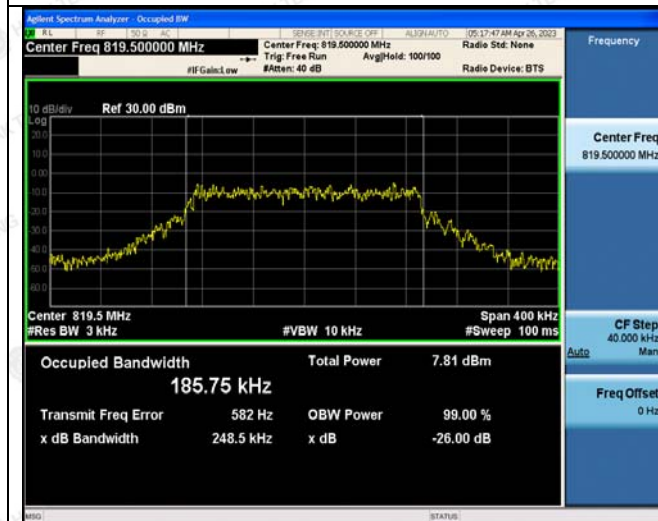


12@0



12@0

Middle Channel

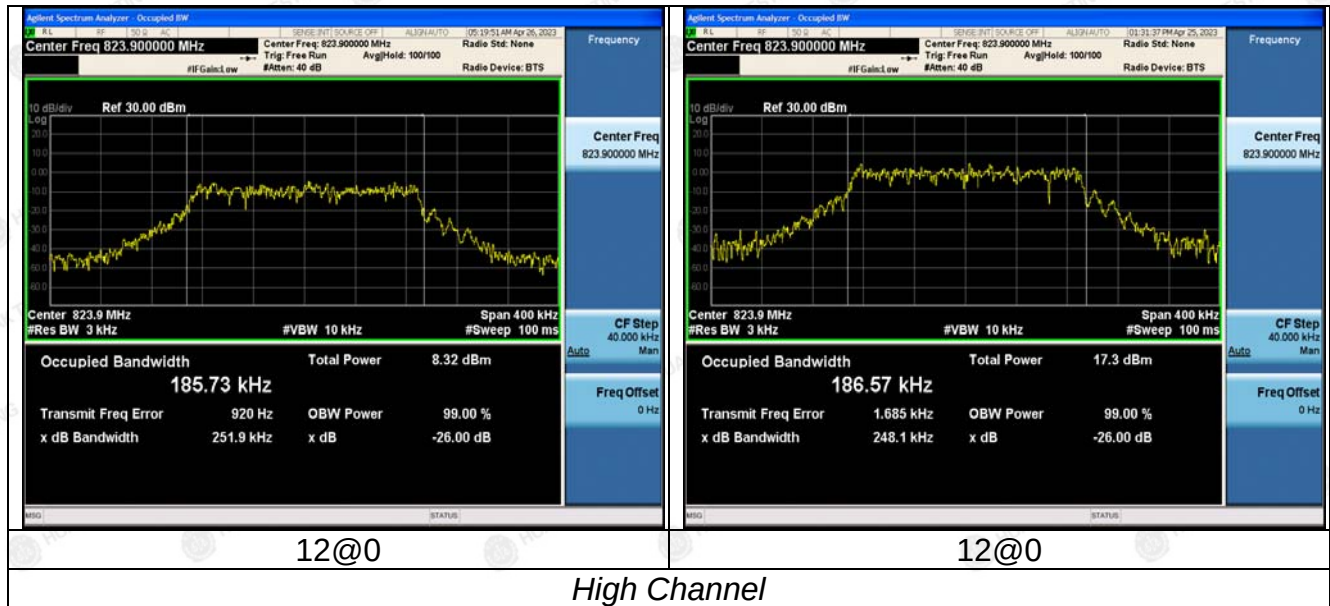


LTE FDD Band 18						
Mode B						
Sub-carrier spacing (KHz)	Tones	Frequency (MHz)	-26dBc Emission bandwidth (KHz)		99% Occupied bandwidth (KHz)	
			BPSK	QPSK	BPSK	QPSK
3.75	1@0	824.1	49.02	51.16	70.849	82.489
	1@0	827.0	48.49	50.85	69.327	82.892
	1@0	829.9	48.90	50.88	71.044	82.576
15	1@0	824.1	105.5	130.3	126.18	124.28
	1@0	827.0	113.4	129.7	127.19	123.86
	1@0	829.9	105.7	116.0	126.78	127.06
	12@0	824.1	239.5	252.3	184.72	186.89
	12@0	827.0	238.4	238.1	186.58	185.15
	12@0	829.9	240.9	249.6	186.37	187.75



LTE FDD Band 18-3.75KHz

BPSK

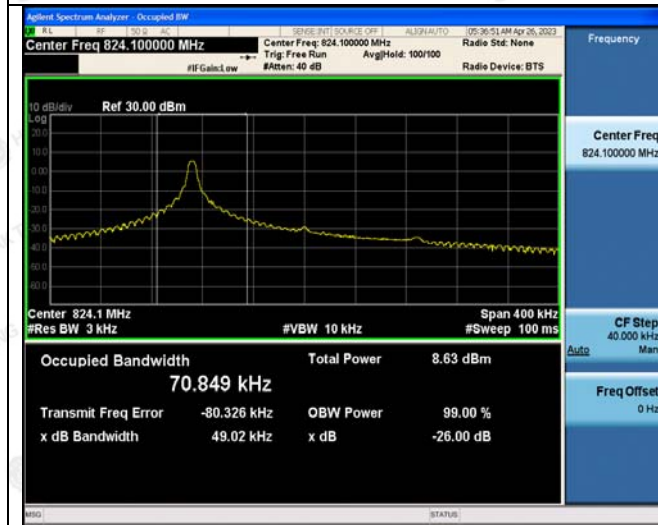

1@0

QPSK



1@0

Low Channel






1@0



1@0


Middle Channel

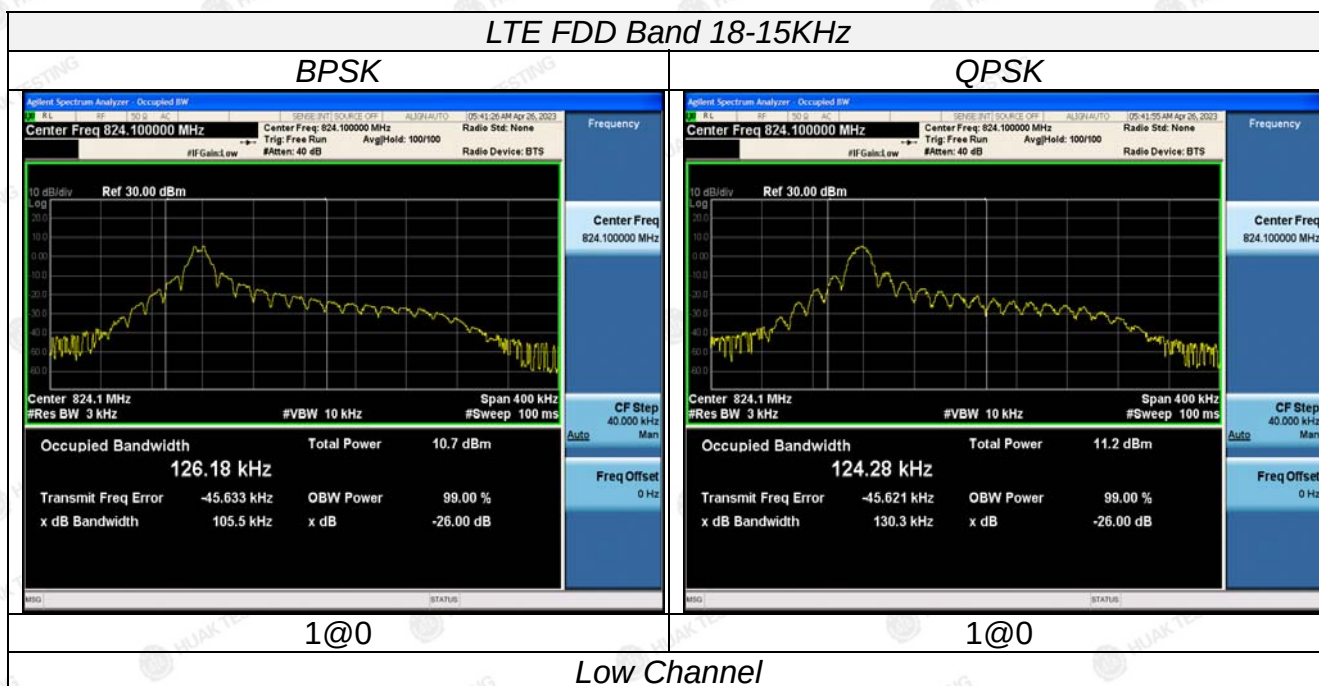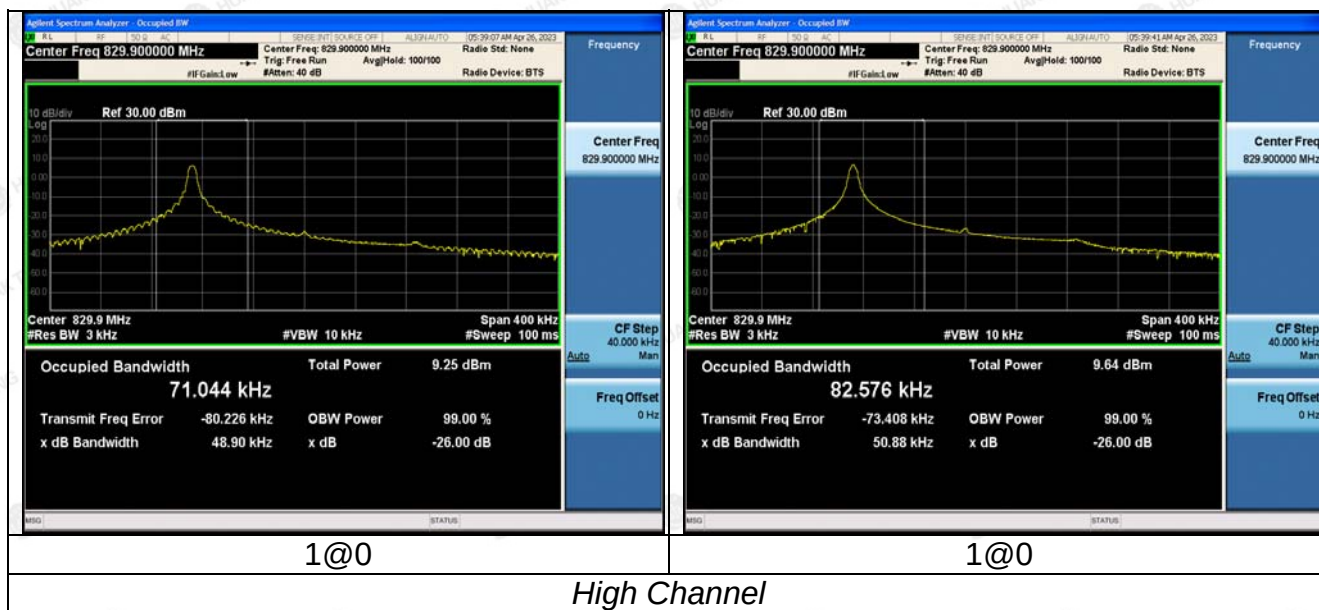

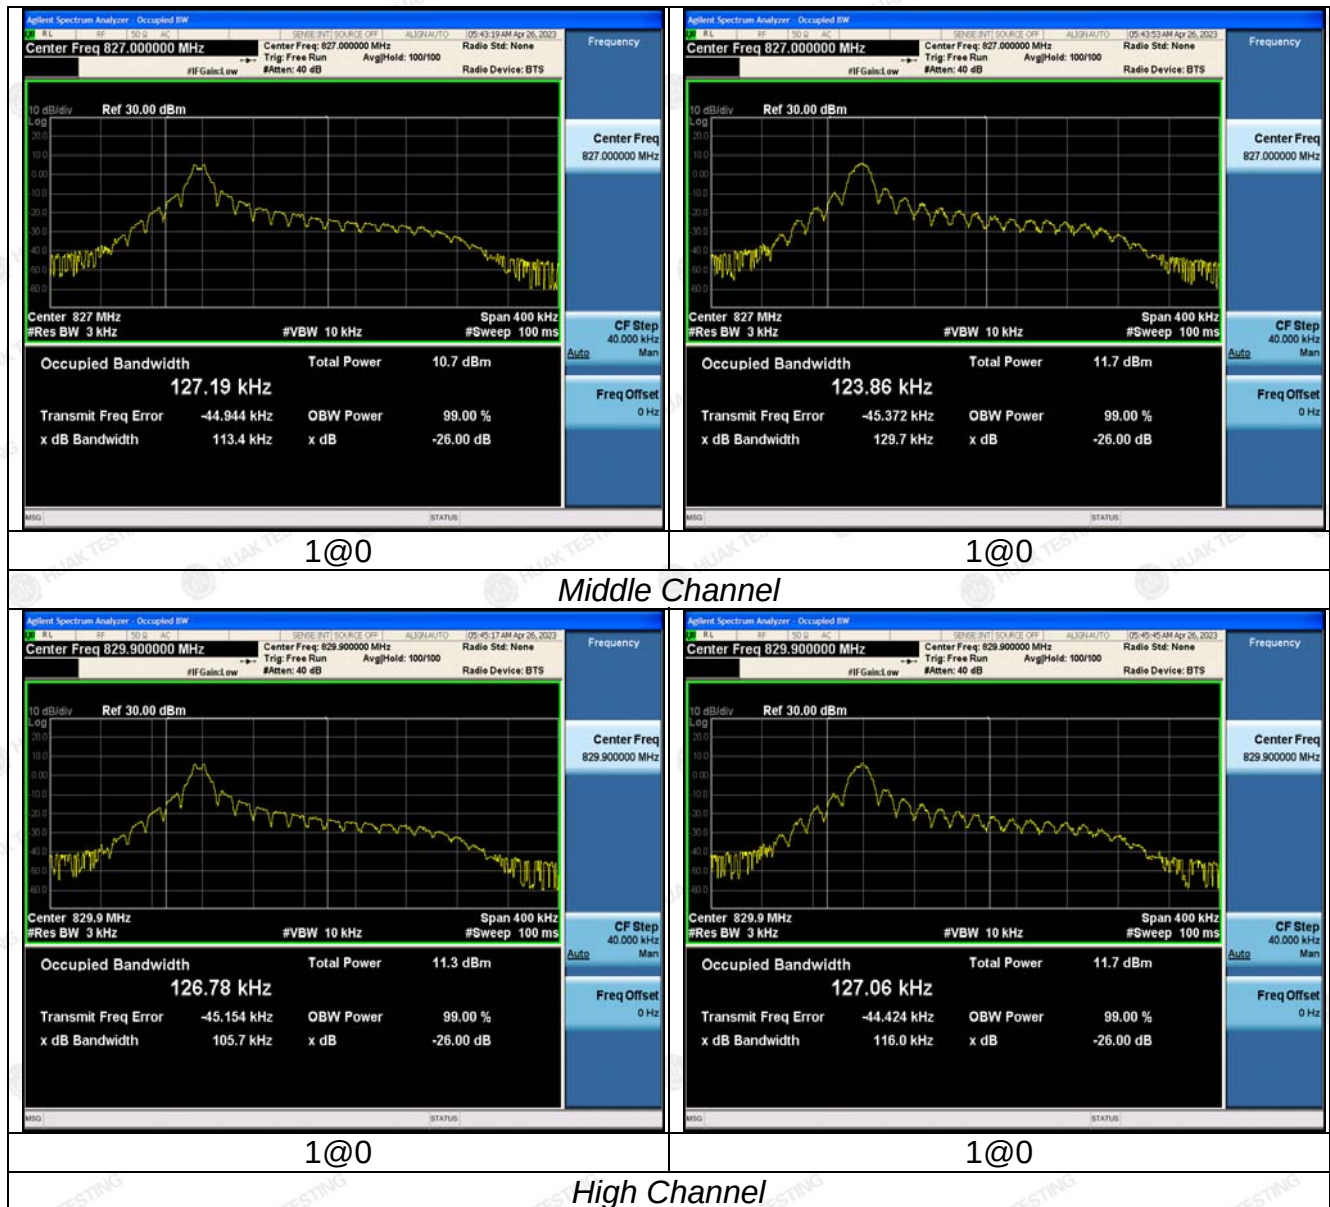


LTE FDD Band 18-15KHz

BPSK

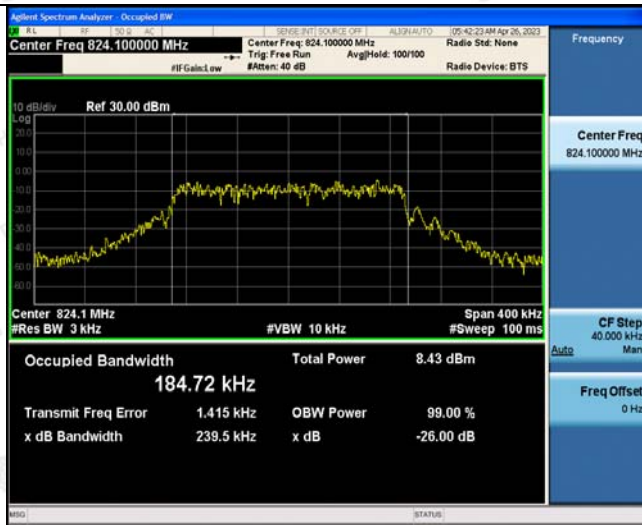

12@0

QPSK

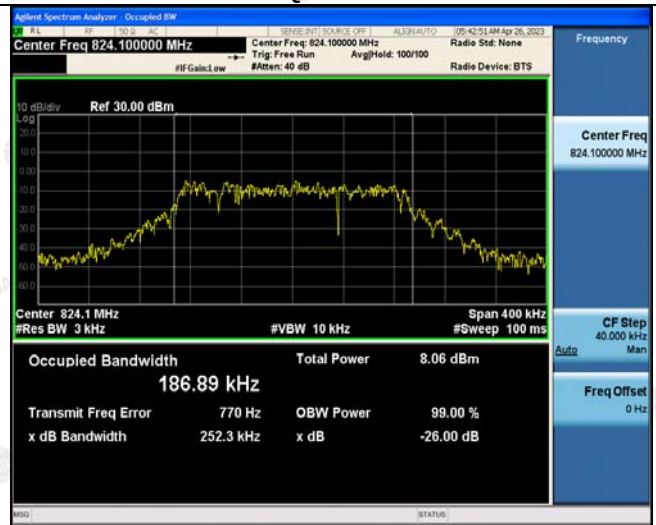

12@0

Low Channel



12@0



12@0

Middle Channel

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

