



WIRELESS MICROPHONE USER MANUAL

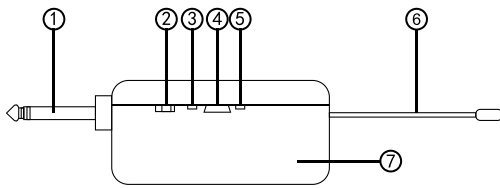

Receiver:

- 【1】6.5mm jack
- 【2】Power switch
- 【3】Power indicator
- 【4】Charging socket
- 【5】Microphone receiving signal indicator
- 【6】Receiving antenna
- 【7】Battery compartment

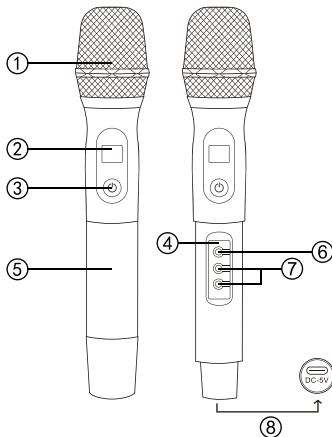


Microphone:

- (1) Microphone head: including net head and audio head module
- (2) Display screen: show working channel, frequency and battery status
- (3) Power switch
- (4) Battery compartment
- (5) Microphone tail cover
- (6) Adjustment frequency
- (7) Adjusting the volume
- (8) Type-C charging port

Basic operating instructions:

Microphone:

- Unscrew the battery compartment (5), and insert 18650 lithium battery batteries, paying attention that the positive and negative polarity cannot be reversed.
- Short press the microphone power switch (3) to turn on mic, the display (2) will turn bright, showing the working frequency, channel and battery real-time power; long press the switch to turn off mic.

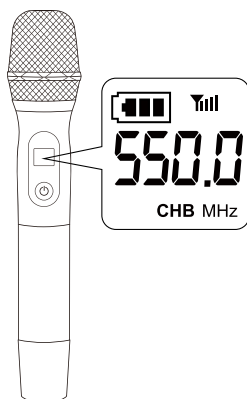

Receiver:

- Open the battery compartment 【7】 , insert a lithium battery, and note that the positive and negative polarities cannot be reversed
- Turn the receiver switch 【2】 key to the "ON" position, when the power indicator 【3】 turns green, the receiver will work normally
- The receiver signal indicator [5] shows green, indicating that the receiver has successfully connected to the microphone of the CHA channel, and the microphone can be used
- When the receiver's battery is under low power status, the green light 【3】 will slightly dim; When charging, the power indicator light 【3】 will turn and keep red, after fully charged, the red light will turn off, 【3】 not light.

Product features

- Digital audio transmission technology
- Unique digital ID code pilot technology, ID code 32bit, completely solve the same frequency crosstalk phenomenon
- Ultra-low audio latency.
- Audio sampling mode: 48KHz.
- Frequency range: 80Hz-18KHz
- Receive automatic scan
- Theoretical transmission distance of open environment: 25-80 meters

Specification of hand-held microphone

Capsule	Dynamic
Polar pattern	Cardioid
Radio frequency bandwidth	60 MHz
Transmission power	20mW
Frequency response	80Hz-18KHz
Dynamic range	96 db
Harmonic radiation	< - 50 DBC
The distortion degree of	≤0.5%
The power supply mode	one 18650 lithium battery

Receiver specification

RF bandwidth	60MH
Frequency points	2*50↑
Signal-to-noise ratio	> 105dB
Receiving sensitivity	10-20dBuV
Frequency response	80Hz-18KHz
Distortion	≤0.5%
Dynamic Range	96dB
Receive delay	2.5ms
Power supply	One 18650 lithium battery (3.7V)


Common troubleshooting:

The microphone cannot be turned on	Please replace two new AA batteries and check the positive and negative directions of the batteries to make sure they are in the correct direction.
The microphone is automatically turned off	Please replace two new AA batteries
The receiver cannot be turned on	Please charge the receiver and check the positive and negative direction of the battery. If the problem cannot be solved, please replace a new 18650 (3.7V) lithium battery
The receiver cannot be charged	Please follow these methods: 1. Check the positive and negative direction of the battery to ensure that the direction is correct. 2. Replace a charging cable with the same interface for charging. 3. Replace with a new 18650 (3.7V) lithium battery.
The receiver and microphone have sufficient power, but the microphone has no sound, or only one microphone has sound	Please check the channels of the two microphones from the microphone display, make sure that the two microphones are on the CHA and CHB channels respectively, the two microphones cannot be set on the same channel.
Microphone whistling	The microphone is too close to the speaker or the volume is adjusted too high, please turn down the volume of speaker or keep away from speaker

Note:


- The lithium battery in the package is just for testing the mics, it can only last for 1 to 2 hours, so after testing, please charge before use.
- This receiver has a 6.5mm plug and a 3.5mm converter plug, which is suitable for various devices.
- If there are any problems during using this mics set, please contact us via our customer service email (you can find out the email address on the customer service card that is in the package), we will try our best to provide you the best service

MANUAL DE USUARIO DEL MICR FONO INALÁMBRICO

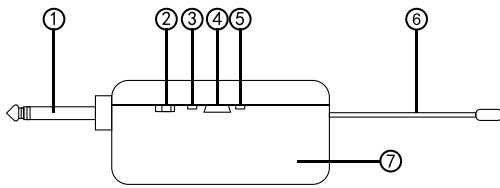

Receptor:

- 【1】 Conector de 6,5 mm
- 【2】 Interruptor de encendido
- 【3】 Indicador de encendido
- 【4】 Toma de carga
- 【5】 Indicador de señal de recepción de micrófono
- 【6】 Antena receptora
- 【7】 Compartimiento de la batería

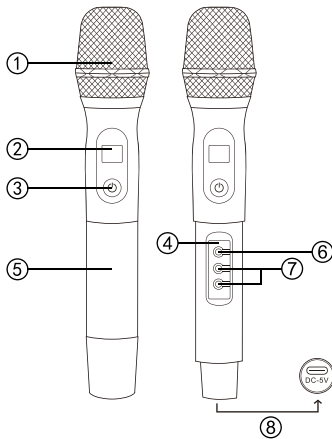


Micrófono:

- (1) Cabezal de micrófono: incluye cabezal de red y módulo de cabezal de audio
- (2) Pantalla de visualización: muestra el canal de trabajo, la frecuencia y el estado de la batería
- (3) Interruptor de encendido
- (4) Compartimiento de la batería
- (5) Cubierta trasera del micrófono
- (6) Frecuencia de ajuste
- (7) Ajustar el volumen
- (8) Puerto de carga tipo C

Instrucciones de funcionamiento básicas:

Micrófono:

1. Desatorille la bandeja de la batería (5), e insertar pilas de litio 18650, preste atención a la polaridad positiva y negativa, no puede ser contrario.
2. Presione CORTO Presione el interruptor de micrófono (3) Arranque, la pantalla (2) se ilumina, muestra el punto de frecuencia de funcionamiento, el canal y la batería POWER en tiempo real; Pulse de largo interruptor para apagar.

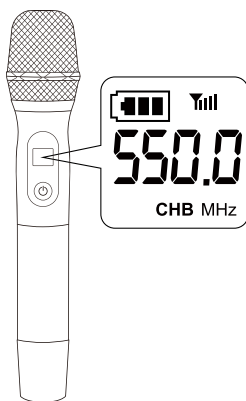

Receptor:

1. Abra el borde de la batería [7], cargue una batería de litio, preste atención a la polaridad positiva y negativa
2. Coloque el interruptor del receptor [2] a la posición "ON", el indicador de alimentación [3] significa que el receptor está funcionando normalmente.
3. El indicador de señal del receptor [5] muestra verde, lo que indica que el receptor se ha conectado correctamente al micrófono del canal de CHA, y se puede usar el micrófono
4. Cuando el receptor está bajo, [3] Verde es ligeramente sombrío, cuando la carga [3] está siempre encendida, llena de electricidad [3] indicador está apagado.

Características del producto

Tecnología de transmisión de audio digital
Tecnología piloto de código D digital única, código 1D 32bt, resuelve completamente el fenómeno de la misma diafonía de frecuencia
Retardo de audio ultrabajo
Modo de muestreo de audio: 48 KHz
Rango de frecuencia: 80Hz-18KHz
Recibir escaneo automático
Distancia de transmisión teórica en ambiente abierto: 25-80 metros

Especificación del micrófono de mano.

Cápsula	Dinámica
Patrón polar	Cardioide
Ancho de banda de radiofrecuencia	60 MHz
Poder de transmision	20mw
Respuesta frecuente	80hz-18khz
Gama dinámica	96 db
Radiación armónica	<- 50 dbc
El grado de distorsión de	≤0.5%
El modo de suministro de energía	una batería de litio 18650

Especificación del receptor

Ancho de banda de rf	60mh
Puntos de frecuencia	2 * 50 ↑
Relación de señal a ruido	> 105db
Recepción de sensibilidad	10-20dbuv
Respuesta frecuente	80hz-18khz
Distorsión	≤0.5%
Gama dinámica	96db
Recibir un retraso	2.5ms
Fuente de alimentación	Una batería de litio 18650 (3.7V)

►►Solución de problemas común:

El micrófono no puede usar	Reemplace dos baterías AA nuevas y verifique las direcciones positivas y negativas de las baterías para asegurarse de que estén en la dirección correcta.
El micrófono se apaga automáticamente	Por favor, reemplace dos baterías AA nuevas
El receptor no puede arrancar	Cargue el receptor y verifique la dirección positiva y negativa de la batería. Si el problema no se puede resolver, reemplace una nueva batería de litio 18650 (3.7V)
El receptor no se puede cargar	Por favor, por debajo de los métodos: 1. Verifique la dirección positiva y negativa de la batería para asegurarse de que la dirección sea correcta. 2. Reemplace un cable de carga con la misma interfaz para cargar. 3. Reemplace con una nueva batería de litio 18650 (3.7V).
El receptor y la potencia del micrófono son suficientes, el micrófono no tiene sonido, o solo un micrófono tiene sonido.	Verifique los canales de los dos micrófonos desde la pantalla del micrófono, asegúrese de que los dos micrófonos estén en los canales CHA y CHB, respectivamente, los dos micrófonos no se pueden configurar en el mismo canal.
El micrófono tiene un silbido.	El micrófono está demasiado cerca del altavoz o el volumen se ajusta demasiado alto, rechace el volumen de altavoz o mantenga alejado del altavoz

Nota:

1. La batería de litio en el paquete son sólo para probar los micrófonos, sólo puede durar de 1 a 2 horas, por lo que después de la prueba, Por favor, cargue antes de su uso.
2. Este receptor tiene un tapón de 6,5 mm y un enchufe de convertidor de 3,5 mm, que es adecuado para varios dispositivos.
3. Si hay algún problema durante el uso de este conjunto de MIC, comuníquese con nosotros a través de nuestro correo electrónico de servicio al cliente (puede encontrar la dirección de correo electrónico en la tarjeta de servicio al cliente que en el paquete), haremos todo lo posible para proporcionarle lo mejor. Servicio

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.