



PRODUCT MANUAL



16V30Ah
(30A BMS)

Fishing Pro Marine



www.redodopower.com

LiFePO₄



PRODUCT OVERVIEW

EN

JP

DE

16V 30Ah Battery

Operating Voltage: 16V

Charging Voltage: 18±0.25V

Recommended Charge Current: 6A (0.2C)

Max. Continuous Discharge Current: 30A

Max. Continuous Output Power: 480W




ADDITIONAL COMPONENTS

M6- 15/32" (12mm) Terminal Bolts

The terminal bolts are used to secure multiple cable lugs to a single battery terminal. The bolts can be replaced with [M6](#) bolts of other lengths based on actual needs.



Insulating Caps for Bolts





24/7 MONITORING VIA REDODO APP

This product, integrated with Bluetooth 5.0, enables accurate and effortless real-time tracking and management of the battery status.


Step
1

Download the Redodo APP and register your account.



Step
2

Pair the battery with the Redodo APP by **scanning QR code** or **searching Bluetooth** and effortlessly keep track of the battery's real-time status.

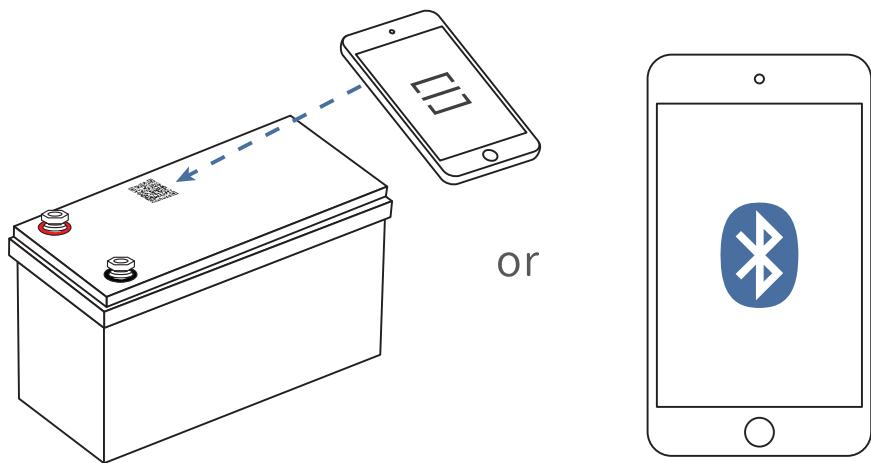



FCC STATEMENT

EN

JP

DE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Information

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



IMPORTANT SAFETY INSTRUCTION

1. Please keep the battery away from heat sources, sparks, flames, and hazardous chemicals.

2. Maintain Adequate Ventilation and Heat Dissipation

Place the battery in a well-ventilated area with sufficient heat dissipation to prevent overheating and damage.

3. Size the Battery Cables and Connectors Appropriately

Use high-stranded copper connectors and heavy gauge cables to handle possible battery loads. Make sure to keep identical cable lengths.

Avoid accidents caused by unsuitable connectors or cables that make the connection a heat source during battery operation.

4. Please tighten all cable connections, as loose cable connections can cause terminal meltdown or fire.

5. DO NOT puncture, drop, crush, burn, penetrate, shake, or strike the battery.

The battery should be securely fastened during handling to prevent impact or dropping.

It should be safely secured to a solid plane and the cables safely tied to a suitable location to avoid arcing and sparking due to friction.

DO NOT press it by placing heavy stuff on top of it for long periods, which may damage it due to an internal short circuit.

6. DO NOT immerse the battery in water whether the battery is in use or on standby.

7. DO NOT open, dismantle, or modify the battery.

8. DO NOT touch the exposed electrolyte or powder if the battery casing is damaged.

9. Uncovered electrolyte or powder that has contacted the skin or eyes MUST be flushed out with plenty of clean water immediately. Seek medical attention afterward.

10. Avoid Short Circuit

Please use circuit breakers, fuses, or disconnects that have been properly sized by certified electricians, licensed installers, or regional code authorities to protect all the electrical equipment in your system. The battery has a built-in battery management system (BMS) that protects the battery cells from over-charge, over-discharge, and over-current, however this alone will not protect your system from severe electrical conditions.

EN

JP

DE

11. Trained and certified technicians are required for safe and reliable installation. This product manual can only serve as a guideline as it cannot cover all possible scenarios.

12. Verify Correct Polarity

Please verify the polarity before connecting the wiring. Reverse polarity can and will destroy the battery and other electrical equipment. Use a multimeter to determine proper polarity.

13. Avoid Exposed Metal Terminals or Connectors

The terminals of this battery are always live. Avoid exposed metal terminals or connectors; DO NOT place tools on the terminals or touch them with bare hands; DO NOT short circuit or use outside of specified electrical ratings.

14. DO NOT dispose of the battery as household waste. Please use recycling channels in accordance with local, state, and federal regulations.



WARNING

1. Batteries are potentially dangerous and proper precautions must be taken during operation and maintenance.
2. Improper use of the battery can lead to battery failure or other potential damage.
3. Improper configuration, installation, or use of related equipment in the battery system may damage the battery and other related equipment.
4. Please wear proper personal protective equipment when working on the battery.
5. Battery installation and maintenance must be performed by trained and certified technicians.
6. Failure to follow the warnings above can result in potential damage.

If you have any questions or need any help, please feel free to contact us (and leave your contact phone number) at service@redodopower.com, we will offer phone or email support in 12hrs.



BATTERY PARAMETERS

Item	Parameter
Cell Type	LiFePO4
Nominal Voltage	16V
Rated Capacity	30Ah
Energy	480Wh
Internal Resistance	$\leq 40\text{m}\Omega$
Cycle Life	≥ 4000 times
Battery Management System (BMS)Board	30A
Charge Method	CC/CV
Charge Voltage	$18 \pm 0.25\text{V}$
Recommended Charge Current	6A (0.2C)
Max. Continuous Charge Current	30A
Max. Continuous Discharge Current	30A
Surge Discharge Current	150A@1 second
Max. Continuous Output Power	480W

Item	Parameter
Dimension	L8.78*W3.74*H6.89 inch L223*W95*H175 mm
Housing Material	ABS
Recommended Terminal Torque	61.96 to 79.66 inch·lbs / 7 to 9 N·m
Protection Class	IP65
Temperature Range	Charge: 0°C to 50°C / 32°F to 122°F Discharge: -20°C to 60°C / -4°F to 140°F Storage: -10°C to 50°C / 14°F to 122°F
Low Temperature Charging Protection (LTCP) Function ^①	Yes
Resume Charging Temperature Under LTCP	5°C/41°F (Battery Temperature)
FCC ID	2BE5H-16V30

① This product supports Low Temperature Charging Protection (LTCP), where the BMS stops battery charging when the battery temperature falls below 0°C/32°F and resumes charging when the temperature rises above 5°C/41°F.



CHARGING METHODS

EN

JP

DE

SOLAR PANEL(S) & CONTROLLER

Solar Panel

- Recommended Power: $\geq 200W$
- The battery can be fully charged in one day (with effective sunshine 4.5hrs/day) by 200W solar panels.
- It may take more than one day to fully charge the battery by $\geq 200W$ solar panels since the duration and intensity of light would be a great factor for their charging efficiency.

Controller

- Recommended Charging Current:

6A (0.2C)	The battery will be fully charged in around 5hrs.
15A (0.5C)	The battery will be fully charged in around 2hrs.

- Recommended Charging Mode: [User](#)

Controller Settings

Refer to the below parameters if you need to manually set up your controller.


As different types of batteries have different charging modes, [it is recommended to set only the following parameters for LiFePO4 batteries](#). The settings for other types of batteries do not apply to LiFePO4 batteries except for the following settings.

CHARGING	Charge /Bulk /Boost Voltage	$18 \pm 0.25V$
	Absorption Voltage	$18 \pm 0.25V$
	Over Voltage Disconnect	18.75V
	Over Voltage Reconnect	17.75V
	Tail Current	0.6A (0.02C)

HOW TO CONNECT BATTERIES

Step1 Wear Insulating Gloves

Wear Insulating Gloves for protection before connecting. Please pay attention to operation safety in the process of connection.

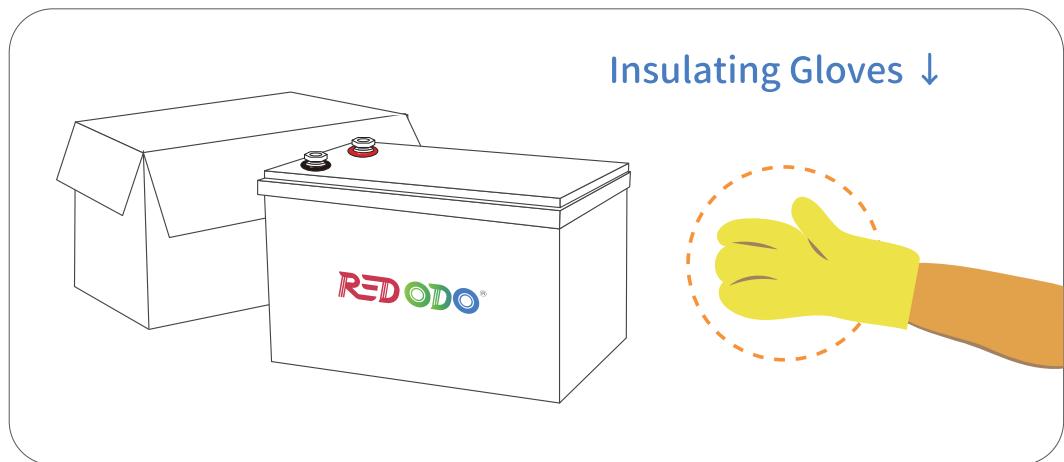

Step2 Voltage Balancing Before Connection

Below two steps are necessary to reduce the voltage difference between batteries and let the battery system perform the best of it in parallel.


Step
1

Fully charge the batteries separately.
(voltage at rest: $\geq 16.66V$)

Step
2

Connect all the positive and negative output cables of the batteries to bus bars^① separately.

Connect Batteries in Parallel to to

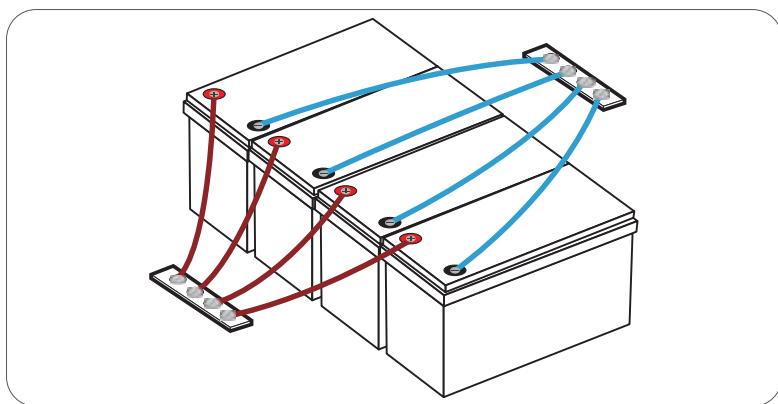

①Bus Bar: It can help ensure the input & output currents of each battery are balanced and improve the conversion efficiency of the input & output currents for the battery.

Step
3

Leave them together for 12-24hrs until the battery voltages have been balanced, the paralleled battery system can be connected to the load.

Step 3 Complete the System Connection

Connect the  and  of the load to the bus bars. The cable gauge used in this step should be able to support the total input & output current of the entire battery system.

