


1. Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5260	Ant1	80.46	0.94	5.17
NVNT	a	5300	Ant1	80.21	0.96	5.19
NVNT	a	5320	Ant1	80.04	0.97	5.19
NVNT	a	5260	Ant2	80.21	0.96	5.19
NVNT	a	5300	Ant2	80.21	0.96	5.19
NVNT	a	5320	Ant2	80.21	0.96	5.19
NVNT	n20	5260	Ant1	88.13	0.55	2.84
NVNT	n20	5300	Ant1	88.01	0.55	2.84
NVNT	n20	5320	Ant1	87.91	0.56	2.84
NVNT	n20	5260	Ant2	88.13	0.55	2.84
NVNT	n20	5300	Ant2	88.13	0.55	2.84
NVNT	n20	5320	Ant2	88.13	0.55	2.84
NVNT	n40	5270	Ant1	87.76	0.57	2.94
NVNT	n40	5310	Ant1	87.2	0.59	2.94
NVNT	n40	5270	Ant2	87.76	0.57	2.94
NVNT	n40	5310	Ant2	87.2	0.59	2.94
NVNT	ac20	5260	Ant1	87.33	0.59	3.12
NVNT	ac20	5300	Ant1	87.21	0.59	3.12
NVNT	ac20	5320	Ant1	86.97	0.61	3.12
NVNT	ac20	5260	Ant2	86.86	0.61	3.12
NVNT	ac20	5300	Ant2	86.86	0.61	3.12
NVNT	ac20	5320	Ant2	86.97	0.61	3.12
NVNT	ac40	5270	Ant1	86.1	0.65	3.33
NVNT	ac40	5310	Ant1	85.86	0.66	3.33
NVNT	ac40	5270	Ant2	86.1	0.65	3.33
NVNT	ac40	5310	Ant2	85.61	0.67	3.33
NVNT	ac80	5290	Ant1	85.36	0.69	3.47
NVNT	ac80	5290	Ant2	85.21	0.7	3.47
NVNT	ax20	5260	Ant1	91.09	0.41	2.06
NVNT	ax20	5300	Ant1	91.09	0.41	2.06
NVNT	ax20	5320	Ant1	91	0.41	2.06
NVNT	ax20	5260	Ant2	91.09	0.41	2.06
NVNT	ax20	5300	Ant2	91.09	0.41	2.06
NVNT	ax20	5320	Ant2	91.17	0.4	2.06
NVNT	ax40	5270	Ant1	84.68	0.72	3.73
NVNT	ax40	5310	Ant1	84.12	0.75	3.74
NVNT	ax40	5270	Ant2	84.65	0.72	3.74
NVNT	ax40	5310	Ant2	84.12	0.75	3.74
NVNT	ax80	5290	Ant1	83.55	0.78	3.94
NVNT	ax80	5290	Ant2	83.42	0.79	3.94

Duty Cycle NVNT a 5320MHz Ant1


Duty Cycle NVNT a 5300MHz Ant2

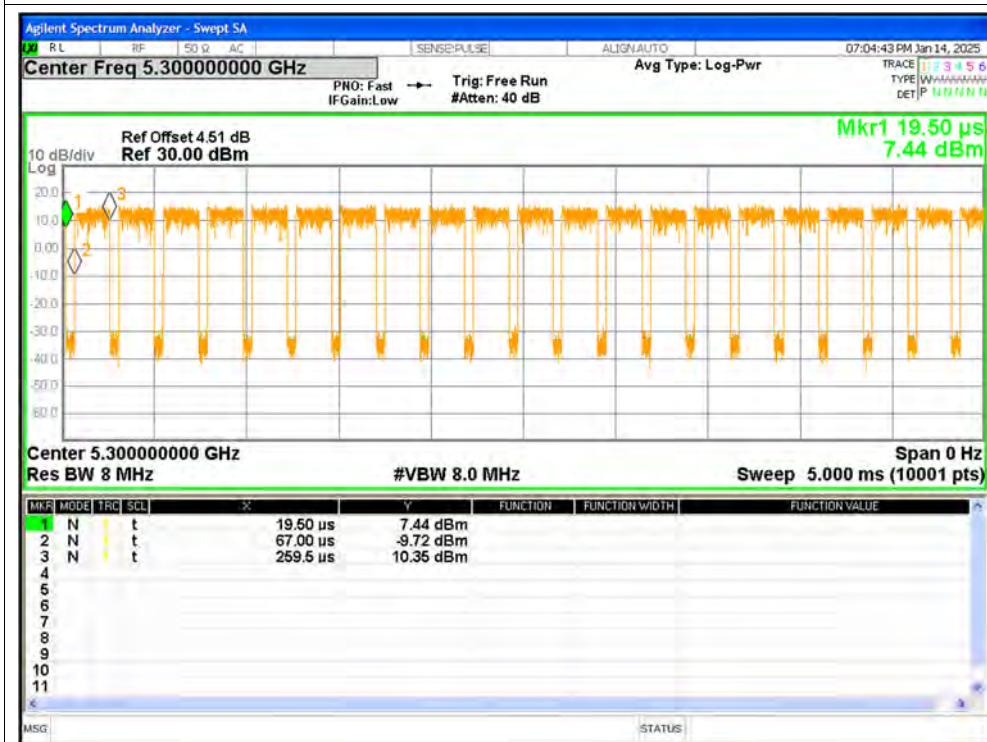


Duty Cycle NVNT a 5320MHz Ant2

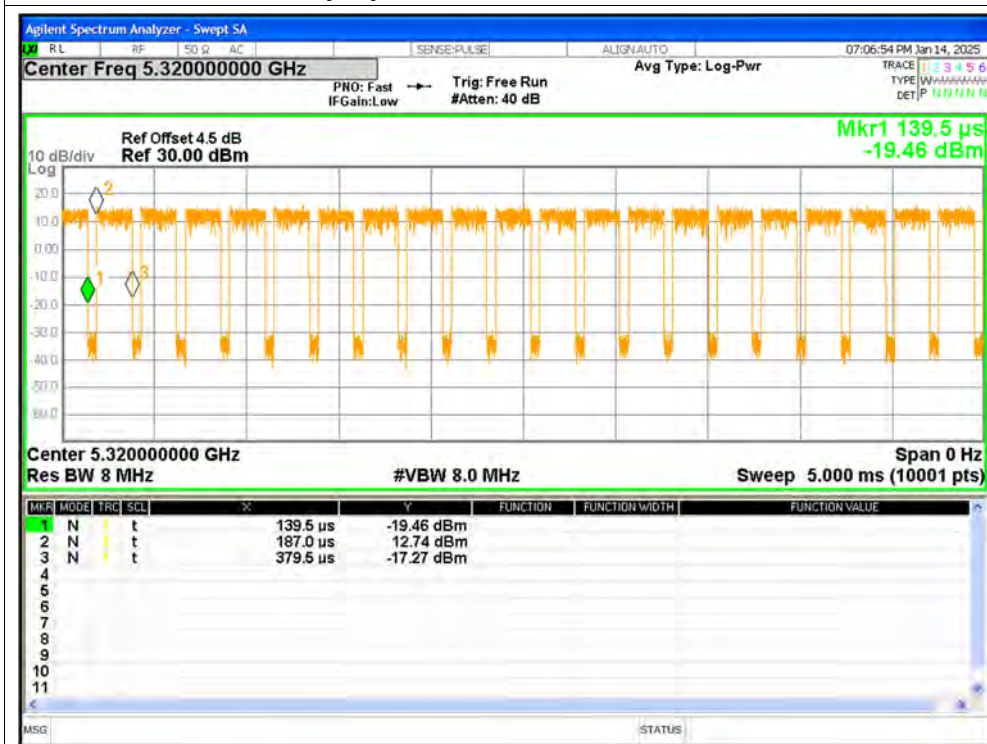

Duty Cycle NVNT n20 5260MHz Ant1

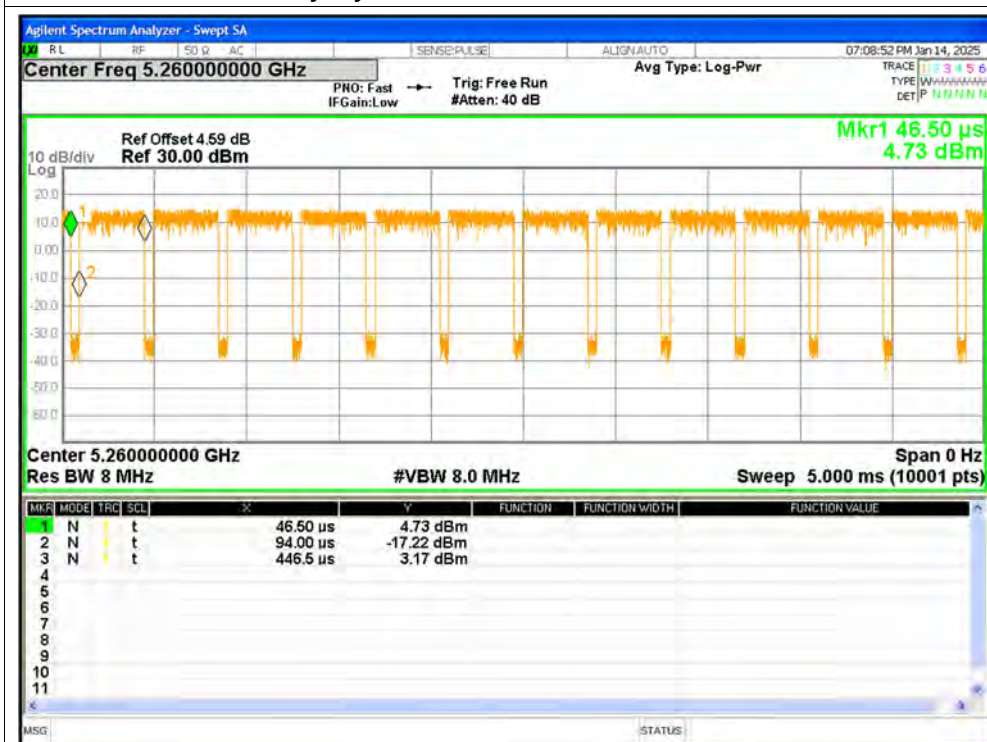


Duty Cycle NVNT n20 5300MHz Ant1

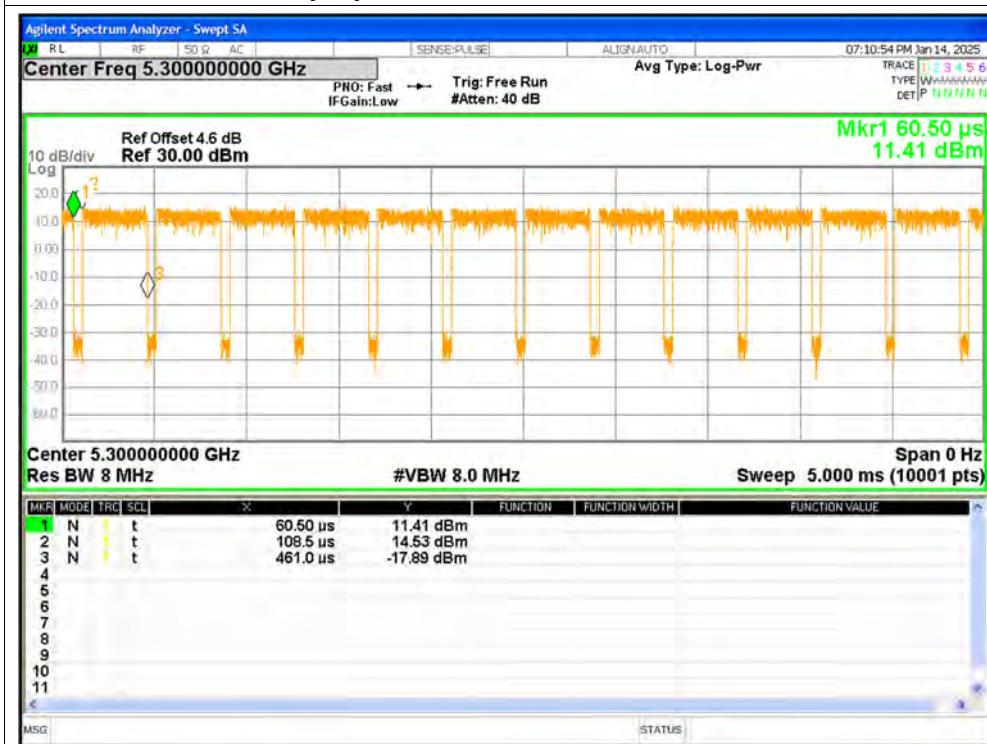


Duty Cycle NVNT n20 5320MHz Ant1


Duty Cycle NVNT n20 5300MHz Ant2

Duty Cycle NVNT n40 5270MHz Ant1

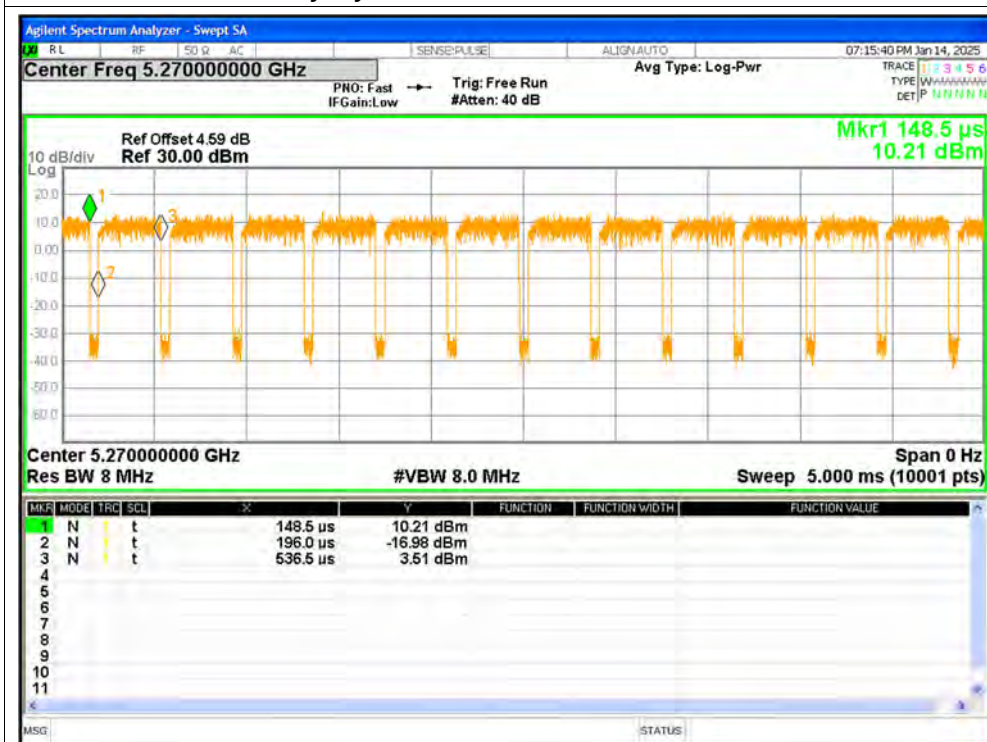


Duty Cycle NVNT n40 5310MHz Ant1

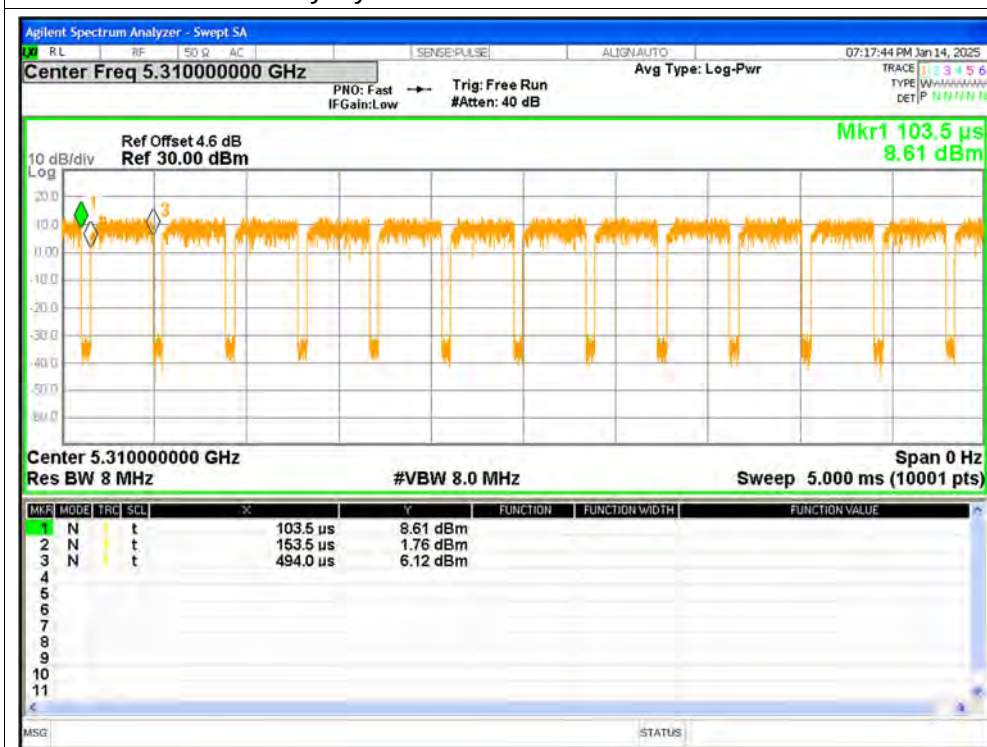


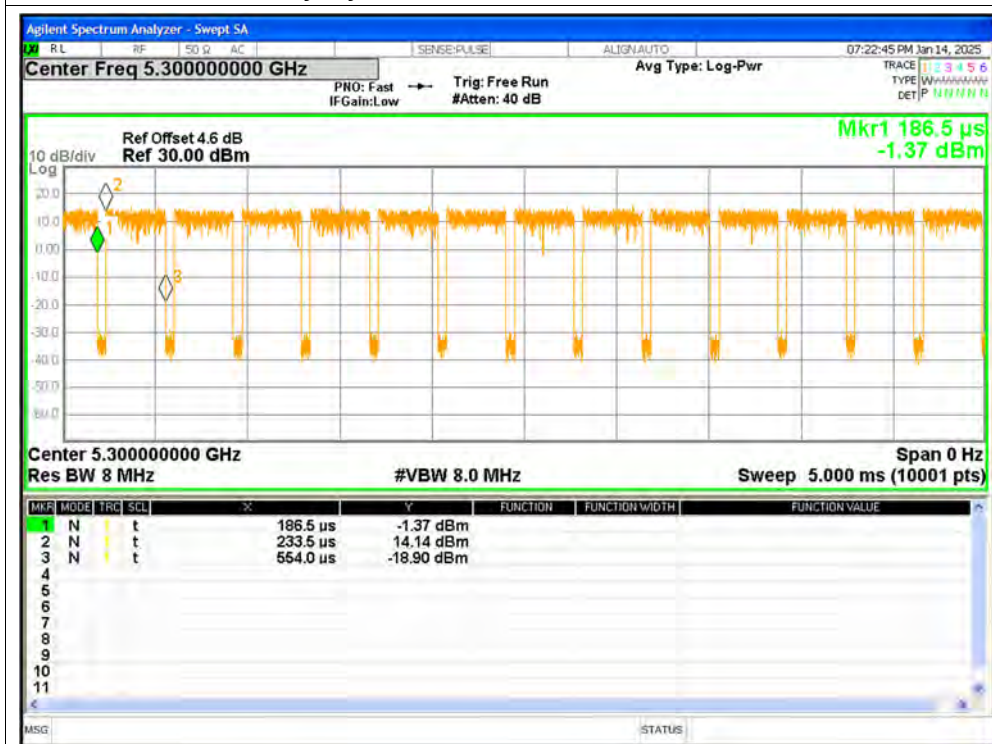


Duty Cycle NVNT ac20 5320MHz Ant1

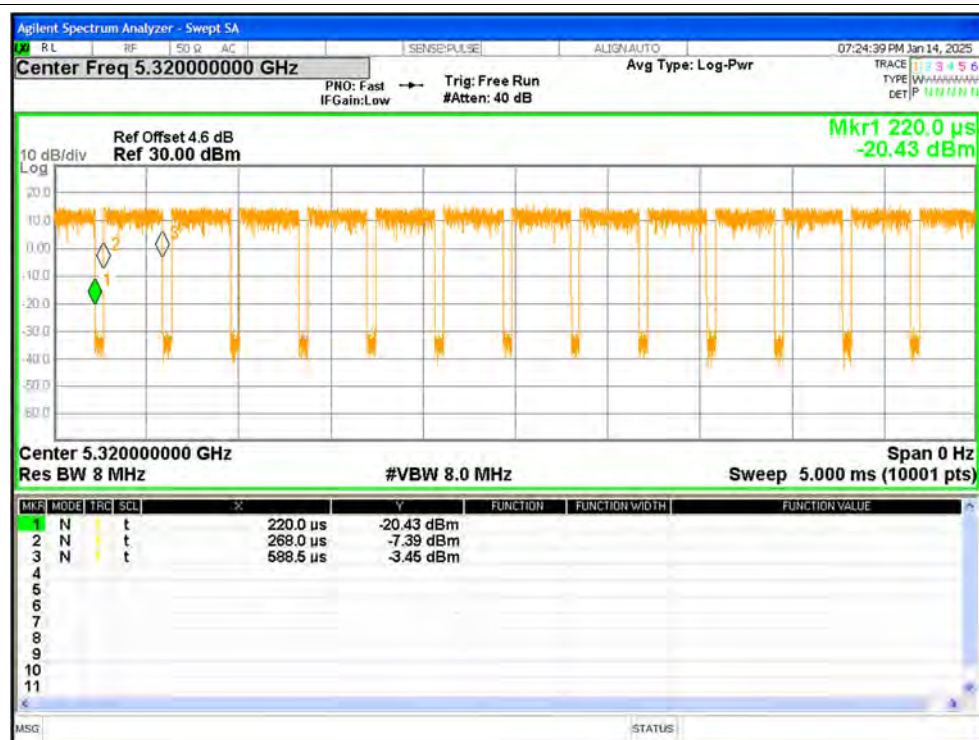


Duty Cycle NVNT ac20 5260MHz Ant2

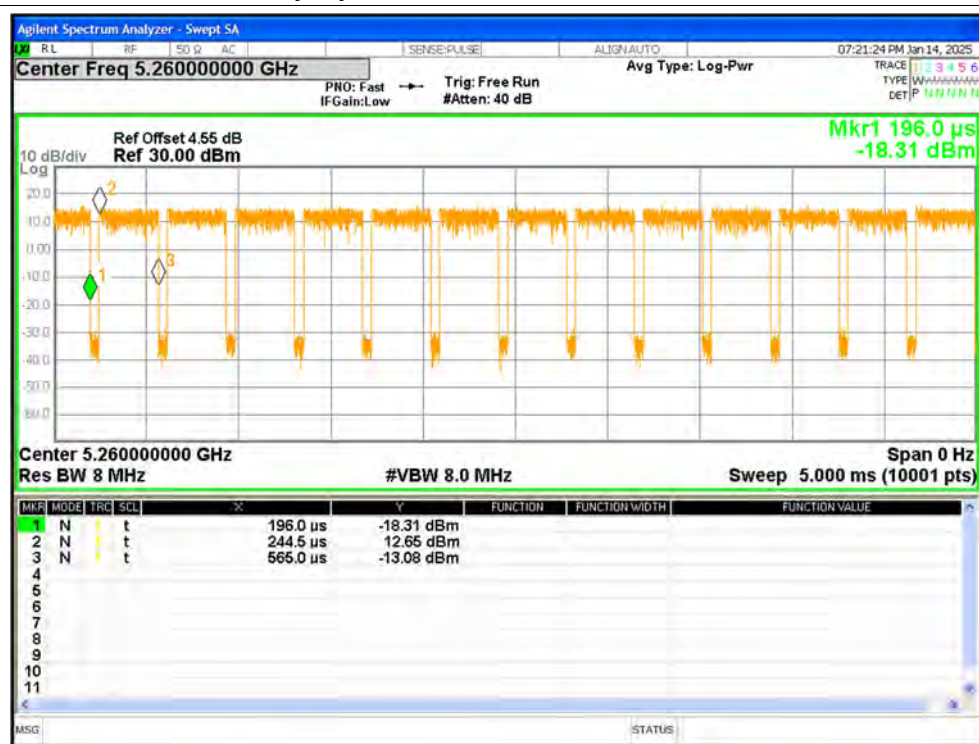


Duty Cycle NVNT ac20 5300MHz Ant2

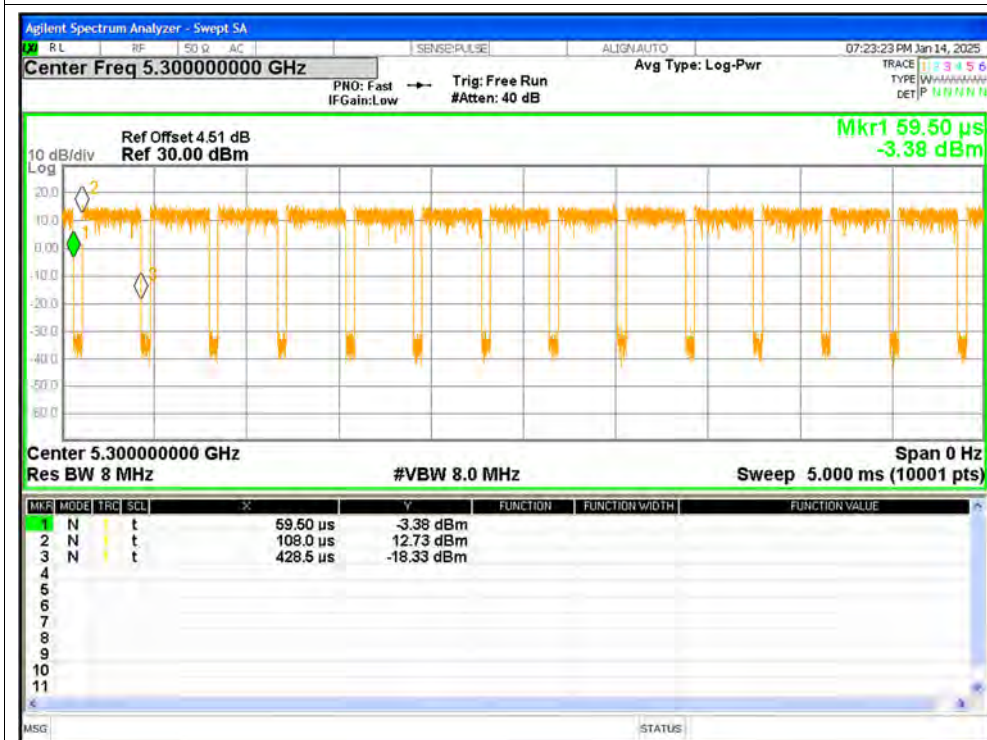


Duty Cycle NVNT ac20 5320MHz Ant2

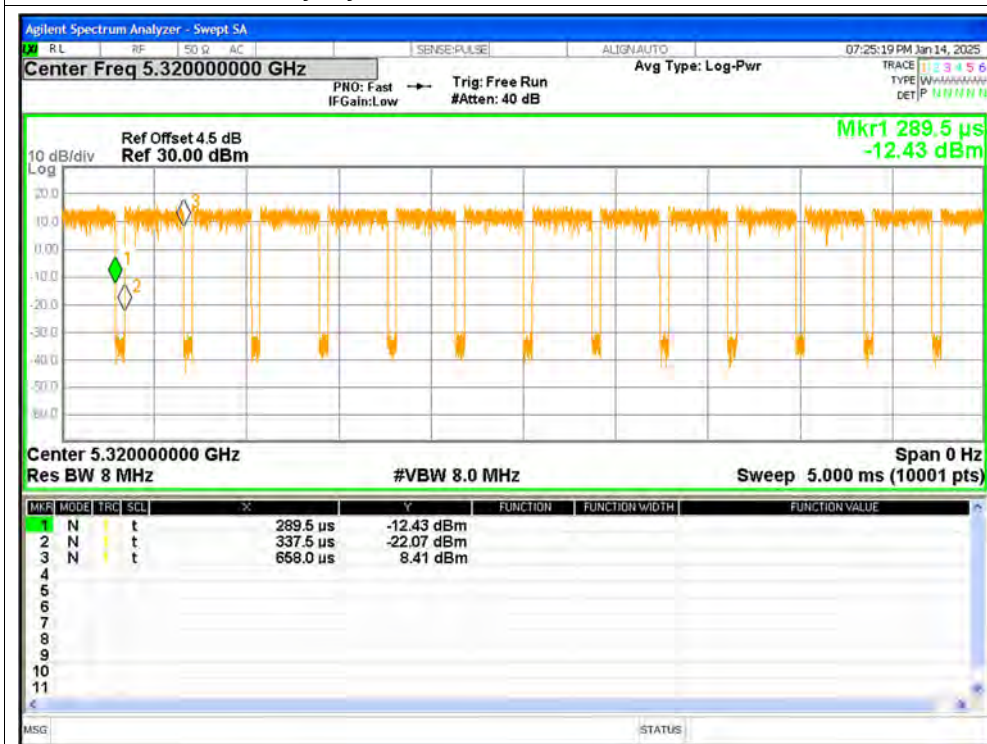


Duty Cycle NVNT ac40 5270MHz Ant1

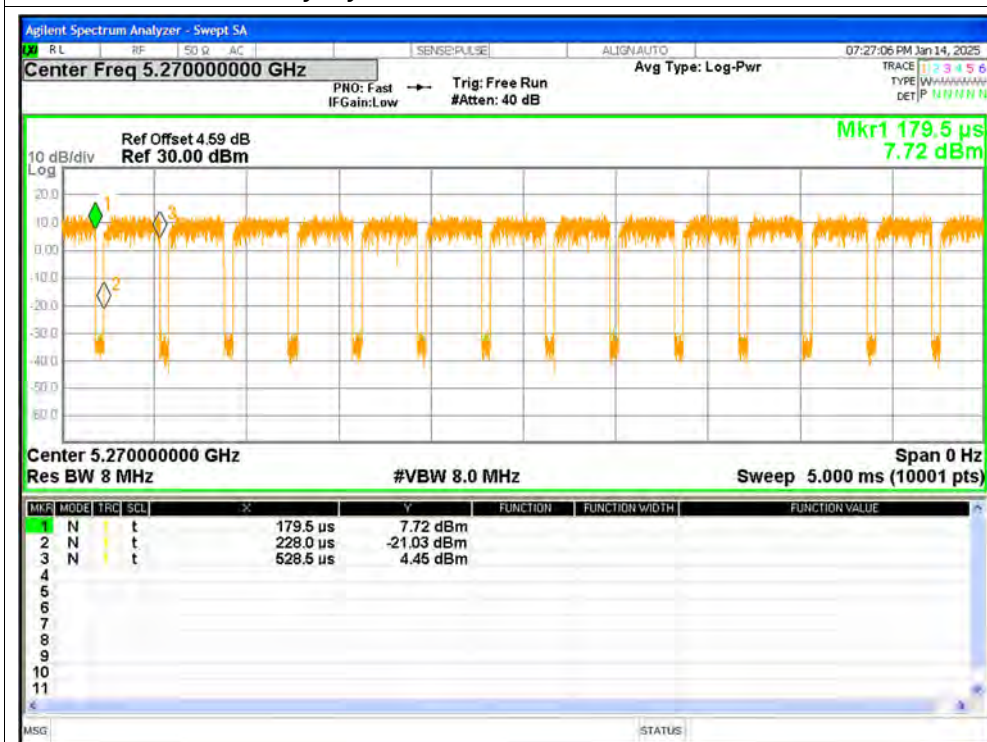


Duty Cycle NVNT ac40 5310MHz Ant1

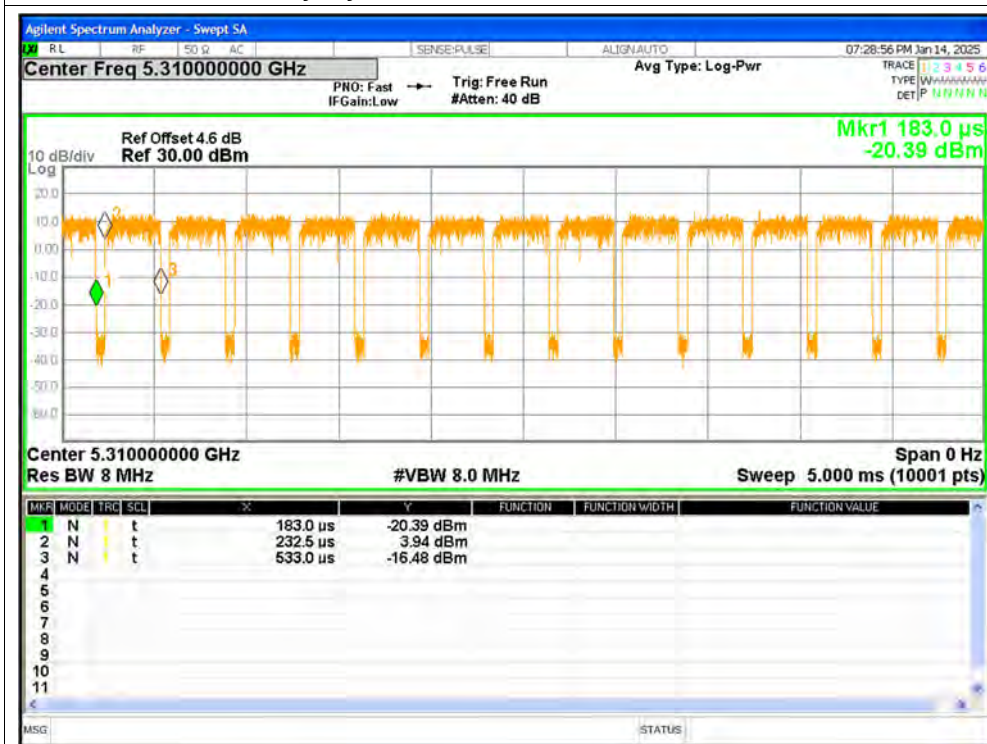

Duty Cycle NVNT ac40 5270MHz Ant2

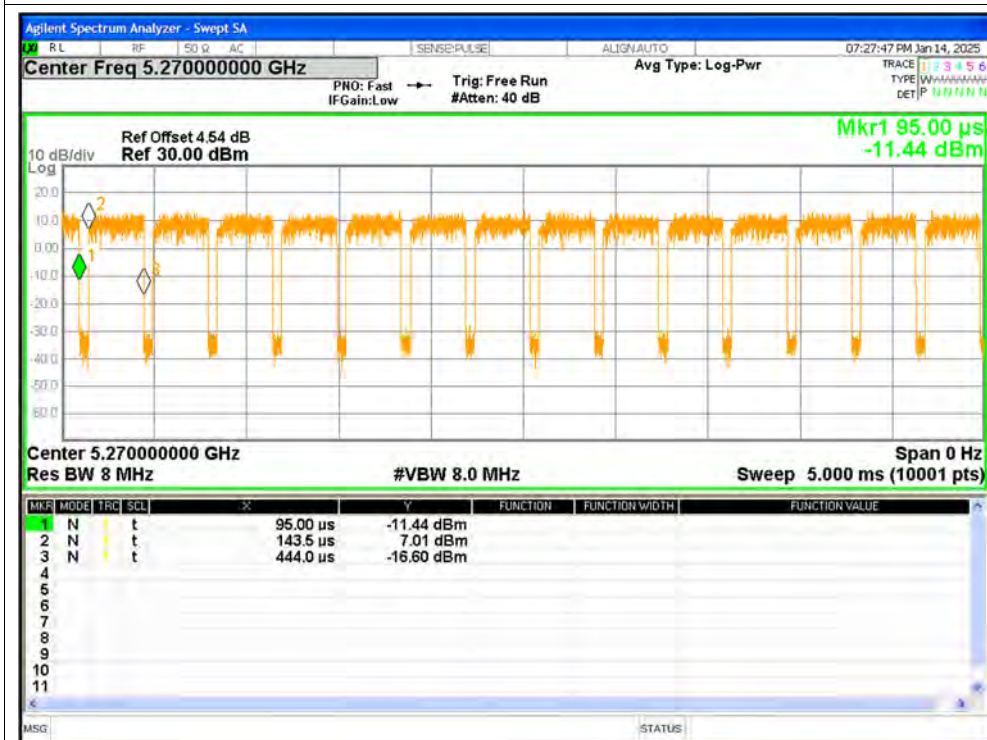


Duty Cycle NVNT ac40 5310MHz Ant2

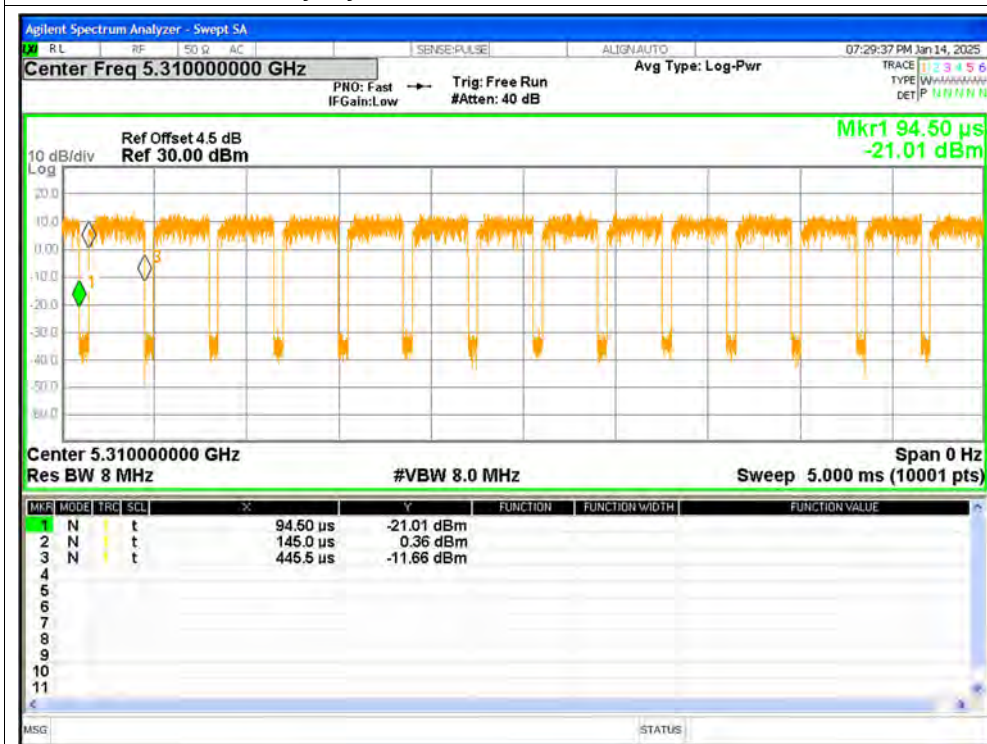


Duty Cycle NVNT ac80 5290MHz Ant1


Duty Cycle NVNT ax20 5260MHz Ant1

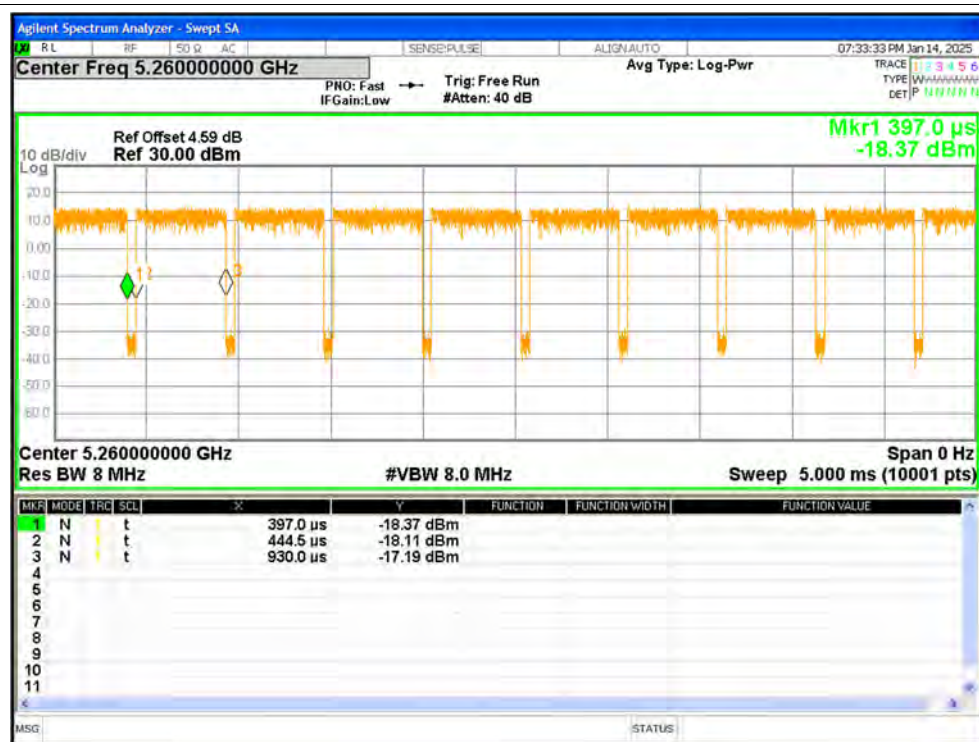


Duty Cycle NVNT ax20 5300MHz Ant1

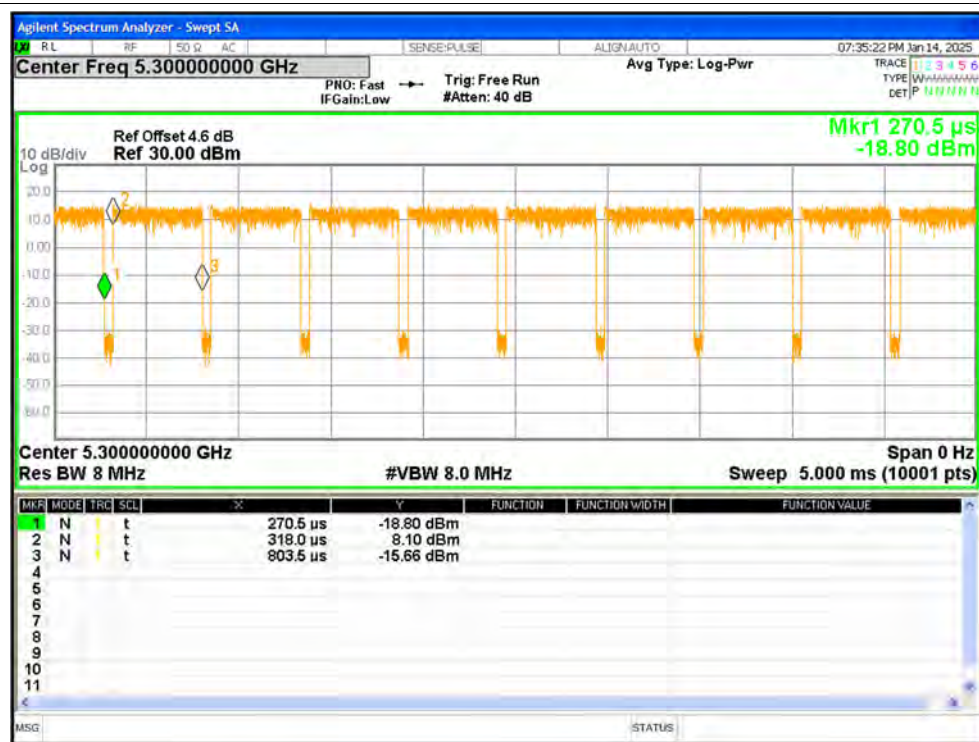


Duty Cycle NVNT ax20 5320MHz Ant1

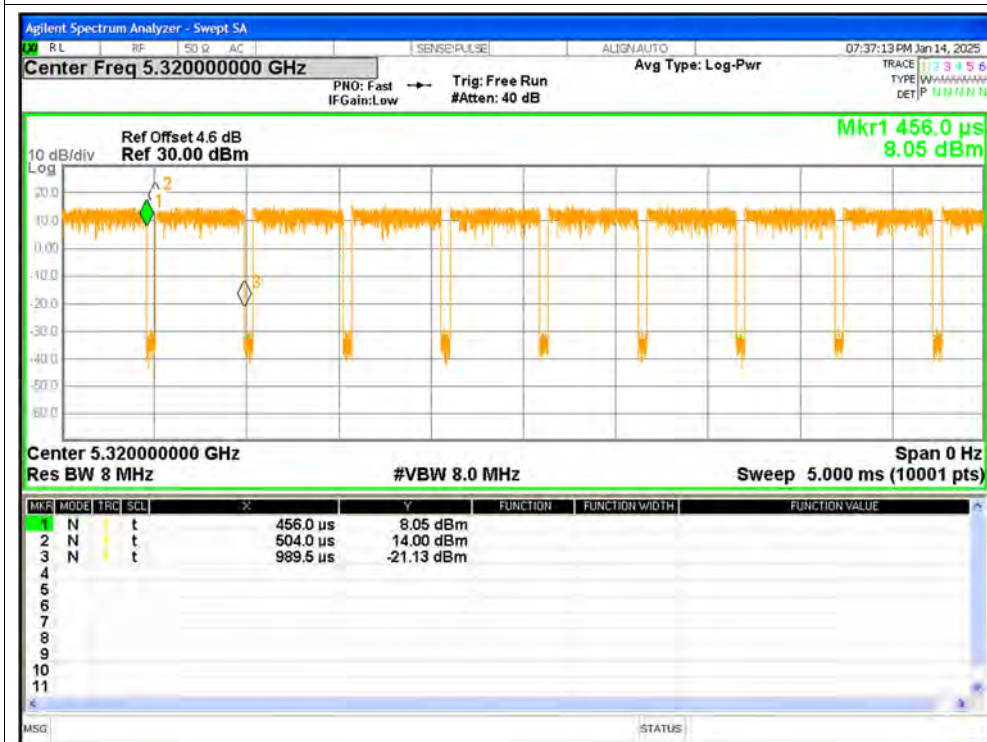


Duty Cycle NVNT ax20 5260MHz Ant2

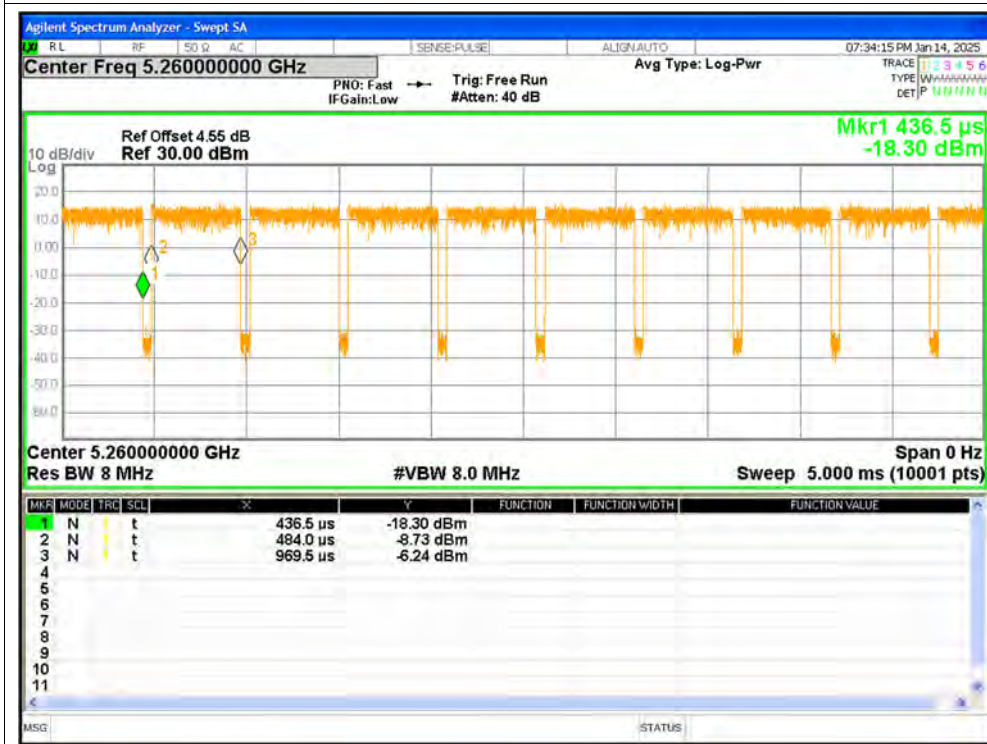


Duty Cycle NVNT ax20 5300MHz Ant2

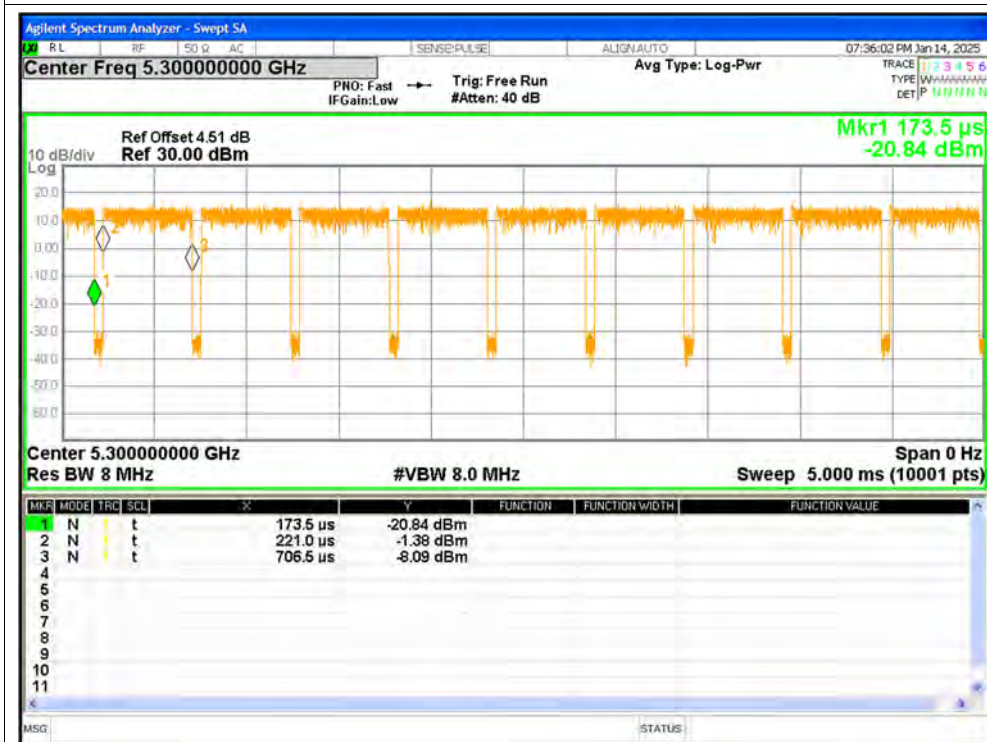


Duty Cycle NVNT ax20 5320MHz Ant2

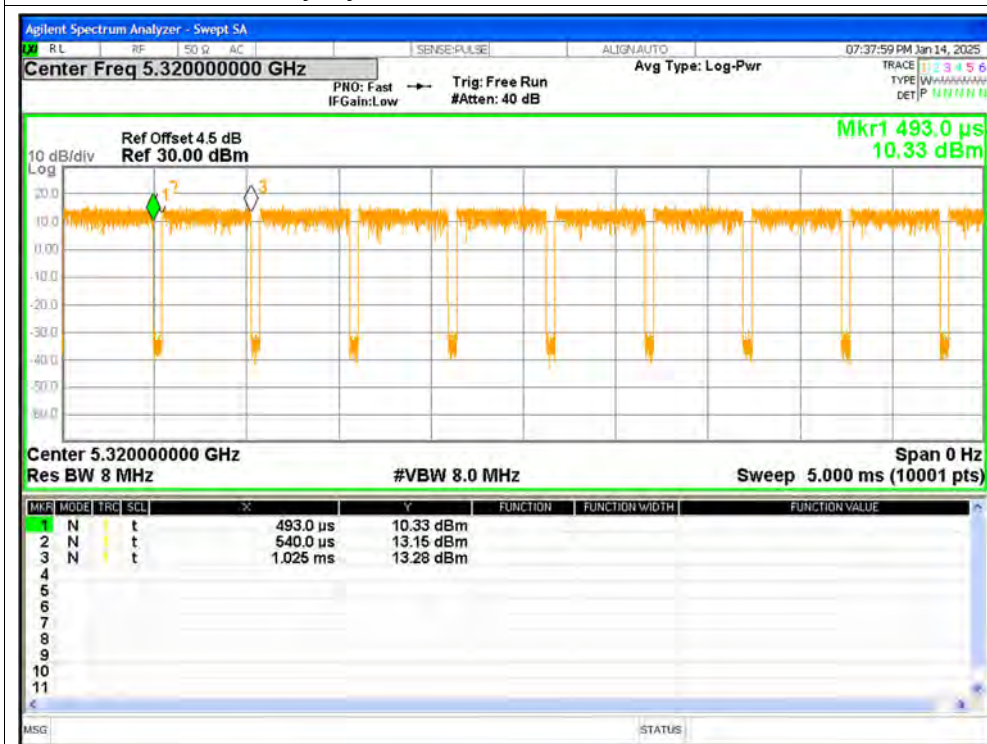

Duty Cycle NVNT ax40 5270MHz Ant1

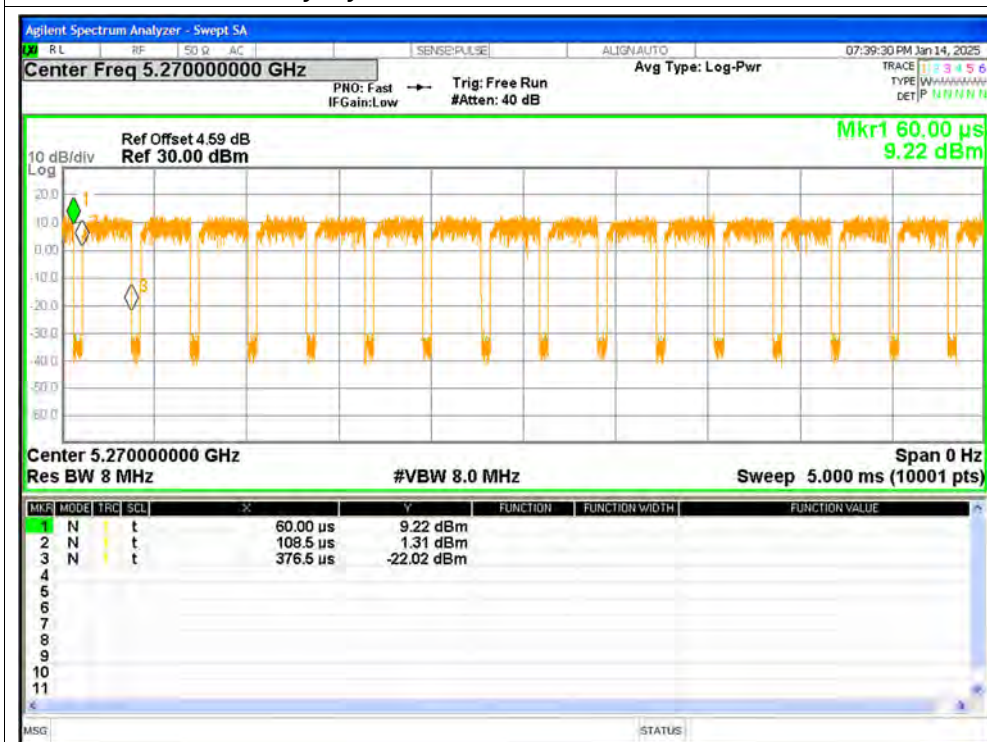

Duty Cycle NVNT ax40 5310MHz Ant1

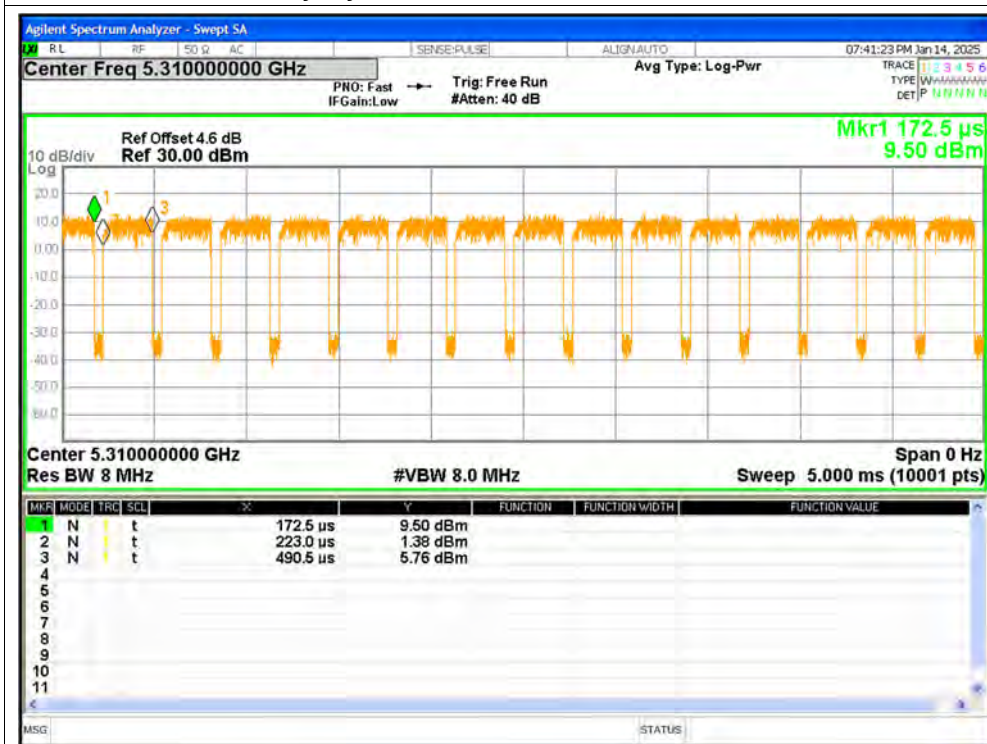

Duty Cycle NVNT ax40 5270MHz Ant2

Duty Cycle NVNT ax80 5290MHz Ant1


2. Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	10.4	0.94	11.34	<=24	Pass
NVNT	a	5300	Ant1	10.46	0.96	11.42	<=24	Pass
NVNT	a	5320	Ant1	10.35	0.97	11.32	<=24	Pass
NVNT	a	5260	Ant2	10.54	0.96	11.5	<=24	Pass
NVNT	a	5300	Ant2	10.67	0.96	11.63	<=24	Pass
NVNT	a	5320	Ant2	10.62	0.96	11.58	<=24	Pass
NVNT	n20	5260	Ant1	10.65	0.55	11.2	<=24	Pass
NVNT	n20	5300	Ant1	10.72	0.55	11.27	<=24	Pass
NVNT	n20	5320	Ant1	10.66	0.56	11.22	<=24	Pass
NVNT	n20	5260	Ant2	10.69	0.55	11.24	<=24	Pass
NVNT	n20	5300	Ant2	10.91	0.55	11.46	<=24	Pass
NVNT	n20	5320	Ant2	10.99	0.55	11.54	<=24	Pass
NVNT	n40	5270	Ant1	11.06	0.57	11.63	<=24	Pass
NVNT	n40	5310	Ant1	11.09	0.59	11.68	<=24	Pass
NVNT	n40	5270	Ant2	11.13	0.57	11.7	<=24	Pass
NVNT	n40	5310	Ant2	11.27	0.59	11.86	<=24	Pass
NVNT	ac20	5260	Ant1	10.59	0.59	11.18	<=24	Pass
NVNT	ac20	5300	Ant1	10.61	0.59	11.2	<=24	Pass
NVNT	ac20	5320	Ant1	10.55	0.61	11.16	<=24	Pass
NVNT	ac20	5260	Ant2	10.64	0.61	11.25	<=24	Pass
NVNT	ac20	5300	Ant2	10.81	0.61	11.42	<=24	Pass
NVNT	ac20	5320	Ant2	10.89	0.61	11.5	<=24	Pass
NVNT	ac40	5270	Ant1	10.95	0.65	11.6	<=24	Pass
NVNT	ac40	5310	Ant1	10.99	0.66	11.65	<=24	Pass
NVNT	ac40	5270	Ant2	11.11	0.65	11.76	<=24	Pass
NVNT	ac40	5310	Ant2	11.13	0.67	11.8	<=24	Pass
NVNT	ac80	5290	Ant1	10.69	0.69	11.38	<=24	Pass
NVNT	ac80	5290	Ant2	11	0.7	11.7	<=24	Pass
NVNT	ax20	5260	Ant1	10.88	0.41	11.29	<=24	Pass
NVNT	ax20	5300	Ant1	10.84	0.41	11.25	<=24	Pass
NVNT	ax20	5320	Ant1	10.83	0.41	11.24	<=24	Pass
NVNT	ax20	5260	Ant2	11.12	0.41	11.53	<=24	Pass
NVNT	ax20	5300	Ant2	11.24	0.41	11.65	<=24	Pass
NVNT	ax20	5320	Ant2	11.25	0.4	11.65	<=24	Pass
NVNT	ax40	5270	Ant1	10.65	0.72	11.37	<=24	Pass
NVNT	ax40	5310	Ant1	10.67	0.75	11.42	<=24	Pass
NVNT	ax40	5270	Ant2	10.73	0.72	11.45	<=24	Pass
NVNT	ax40	5310	Ant2	10.85	0.75	11.6	<=24	Pass
NVNT	ax80	5290	Ant1	10.34	0.78	11.12	<=24	Pass

NVNT	ax80	5290	Ant2	10.63	0.79	11.42	<=24	Pass
------	------	------	------	-------	------	-------	------	------

Test Graphs


Power NVNT a 5260MHz Ant1

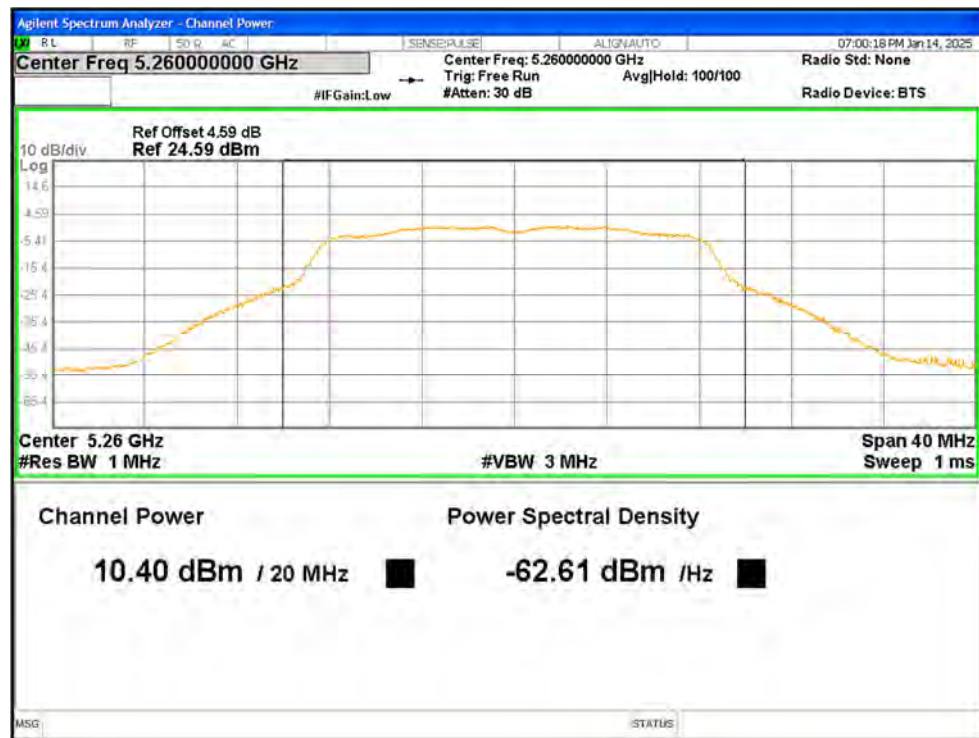

Power NVNT a 5300MHz Ant1



Power NVNT a 5320MHz Ant1

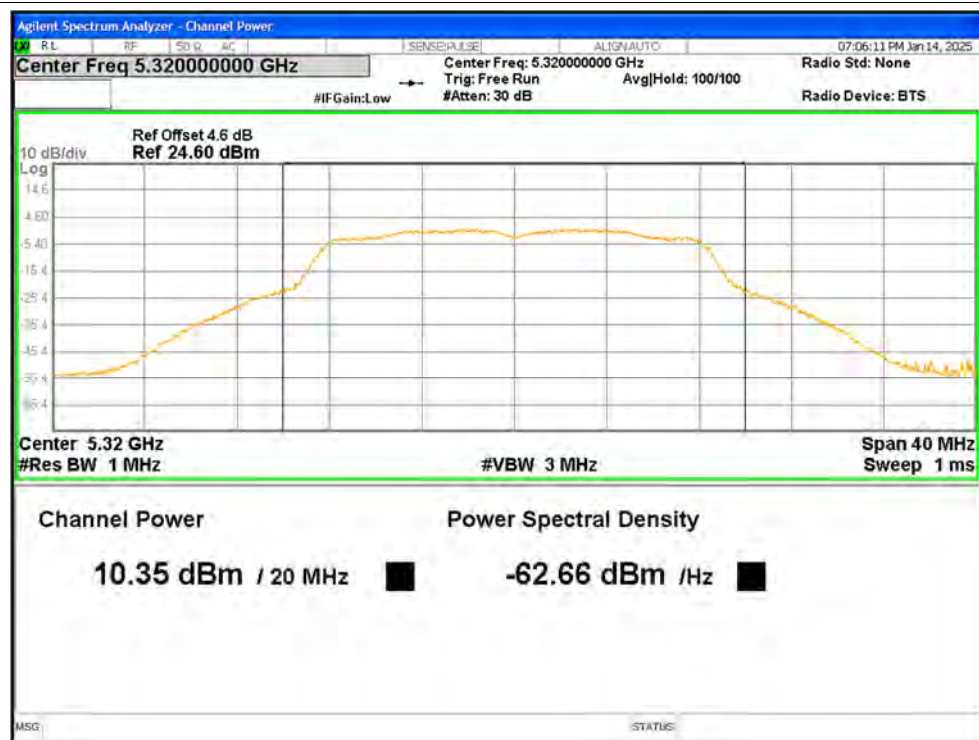

Power NVNT a 5260MHz Ant2



Power NVNT a 5300MHz Ant2



Power NVNT a 5320MHz Ant2




Power NVNT n20 5260MHz Ant1




Power NVNT n20 5300MHz Ant1




Power NVNT n20 5320MHz Ant1

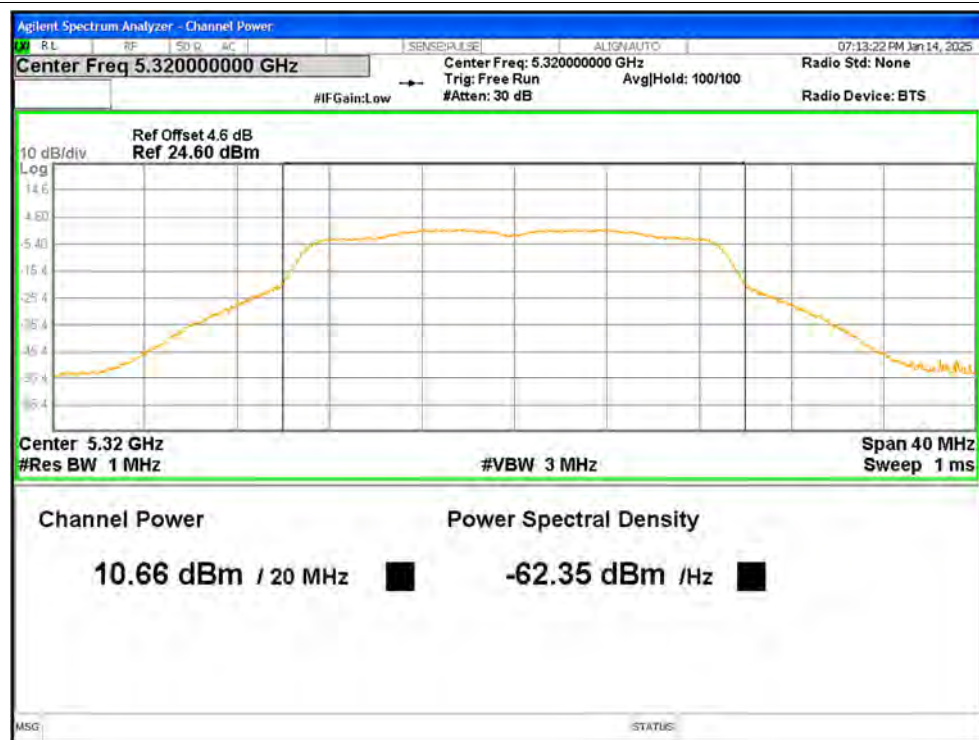


Power NVNT n20 5260MHz Ant2

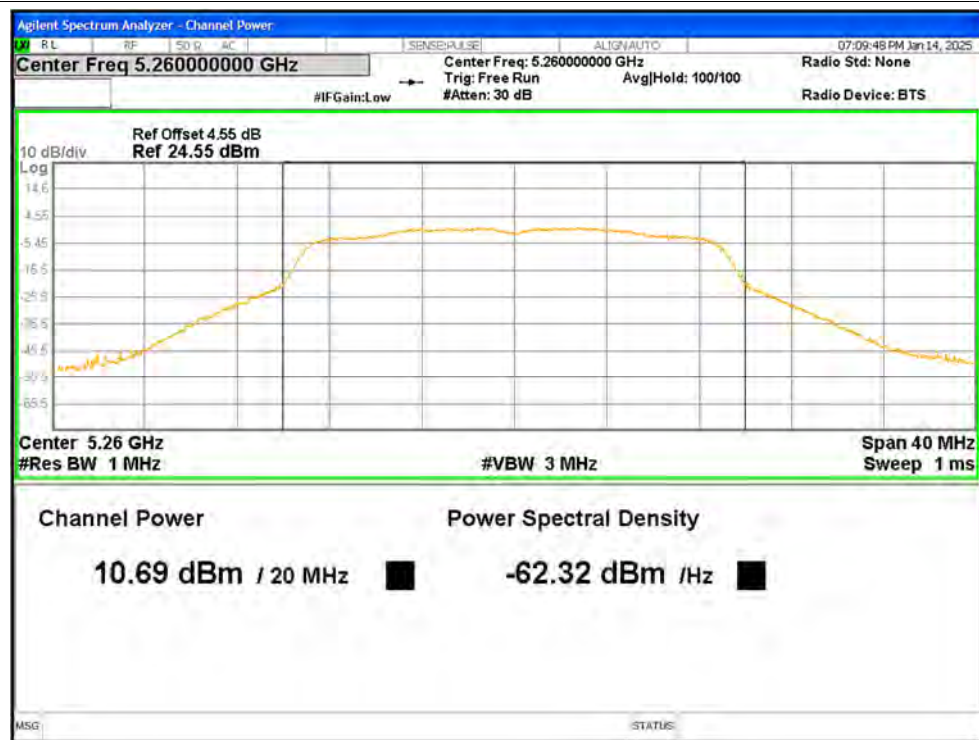

Power NVNT n20 5300MHz Ant2

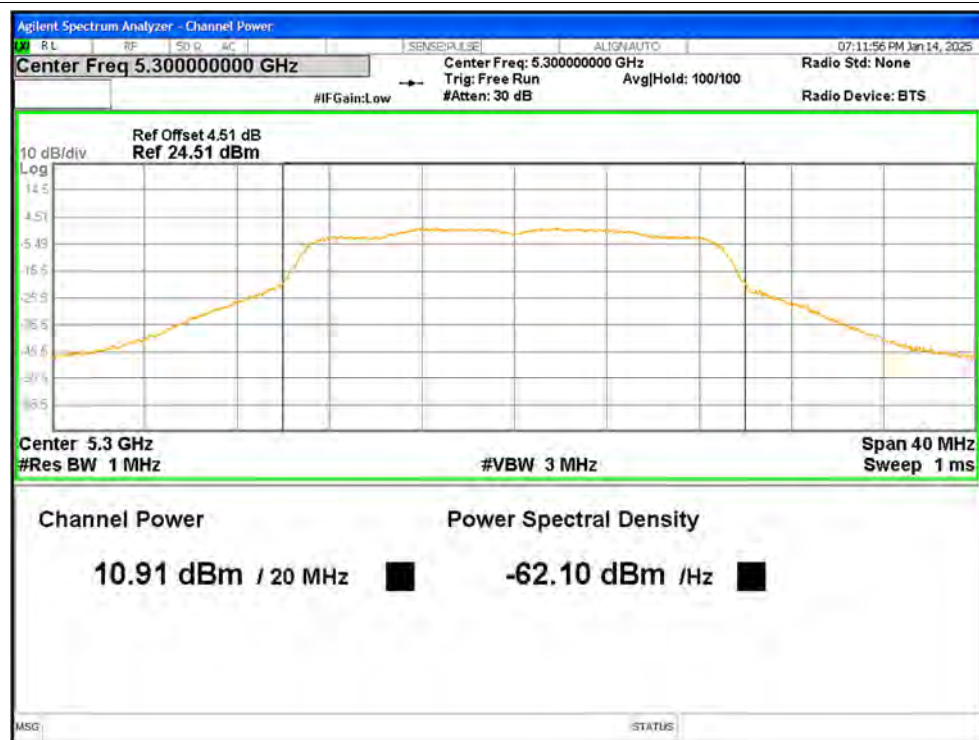


Power NVNT n20 5320MHz Ant2

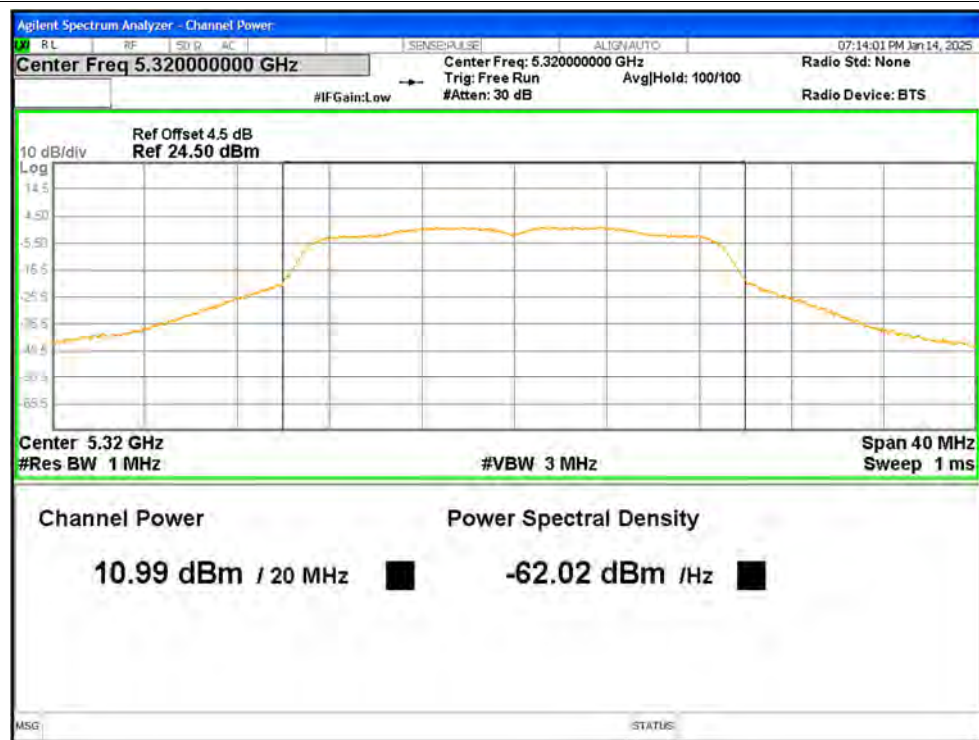


Power NVNT n40 5270MHz Ant1




Power NVNT n40 5310MHz Ant1

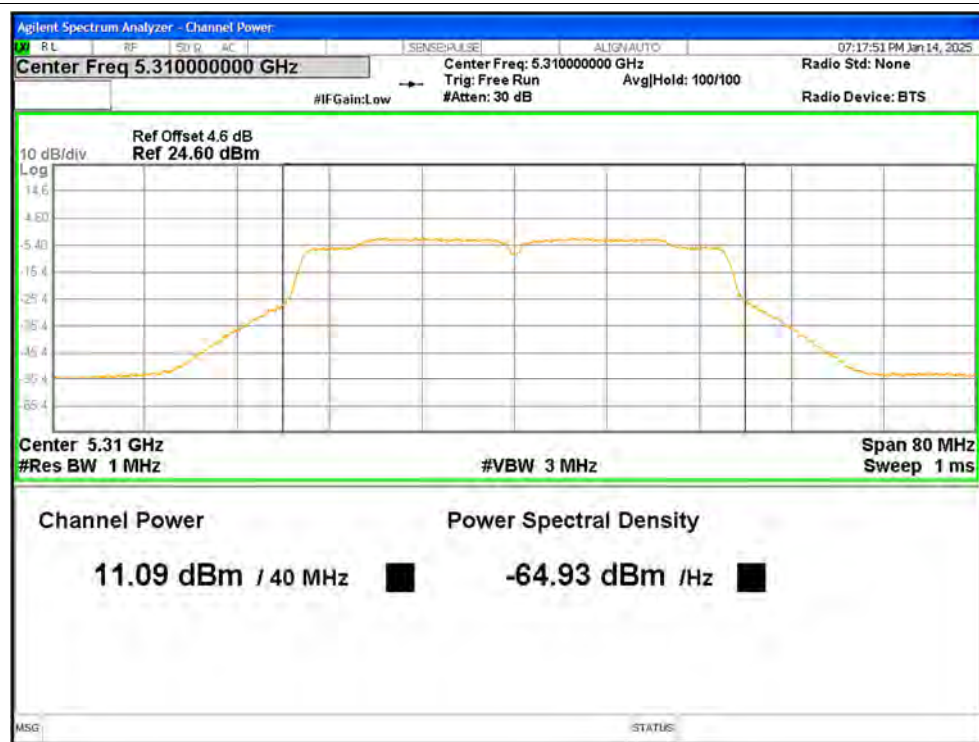

Power NVNT n40 5270MHz Ant2

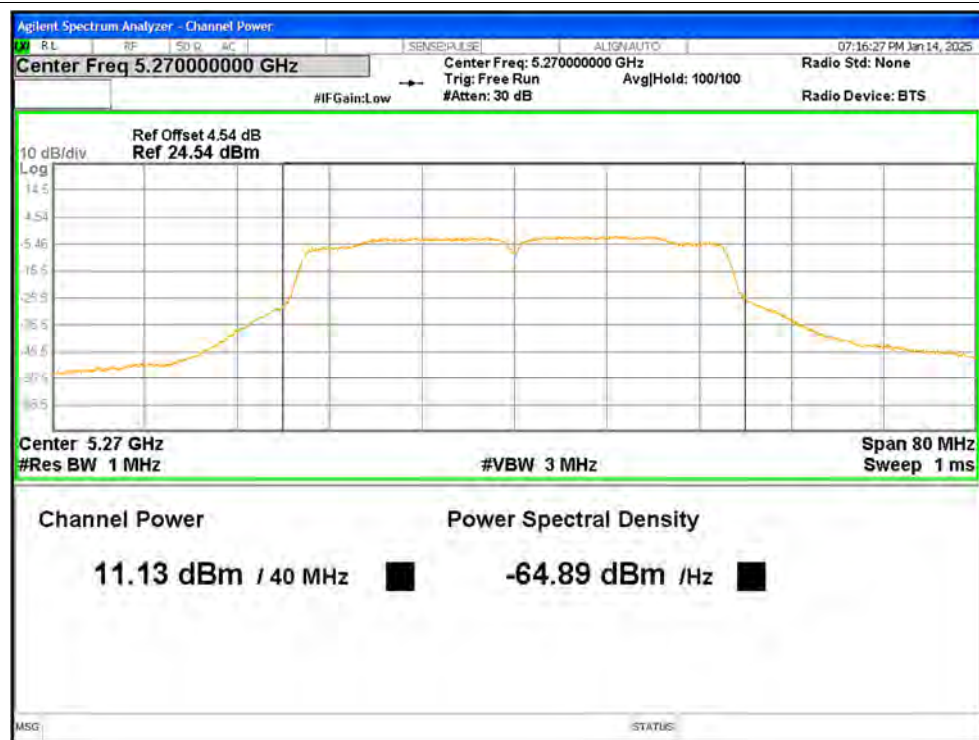

Power NVNT n40 5310MHz Ant2

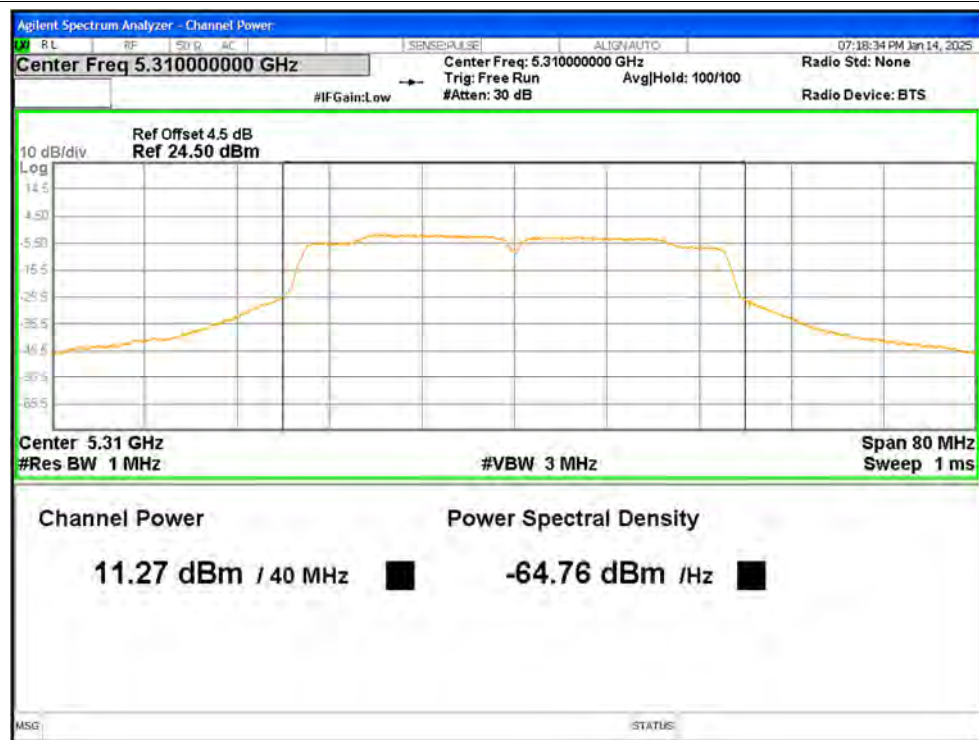


Power NVNT ac20 5260MHz Ant1




Power NVNT ac20 5300MHz Ant1



Power NVNT ac20 5320MHz Ant1

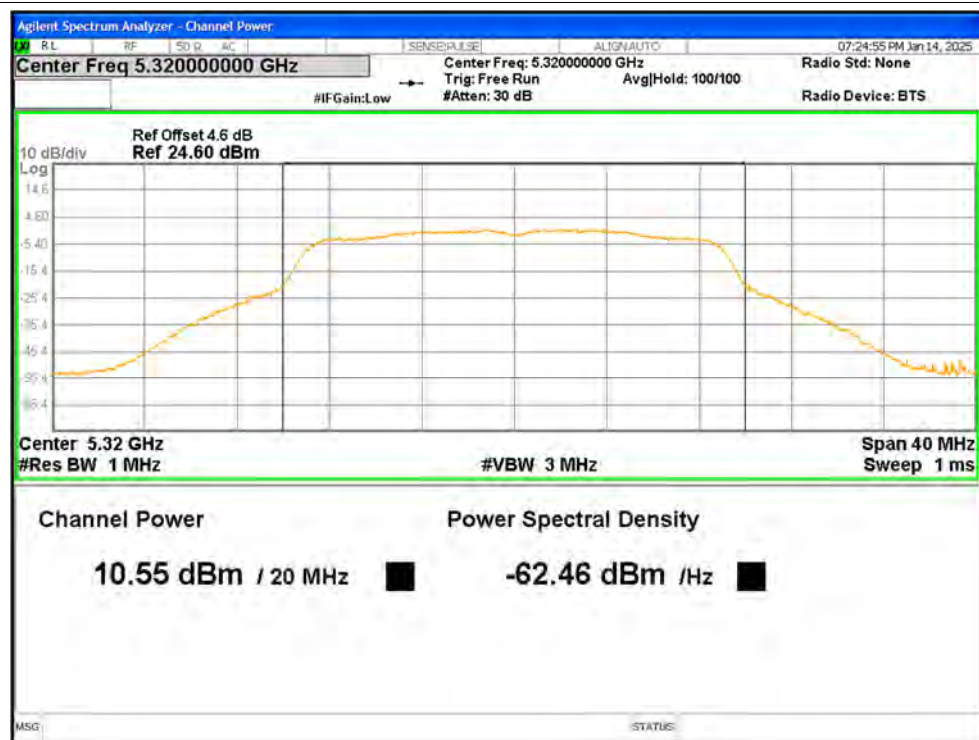


Power NVNT ac20 5260MHz Ant2

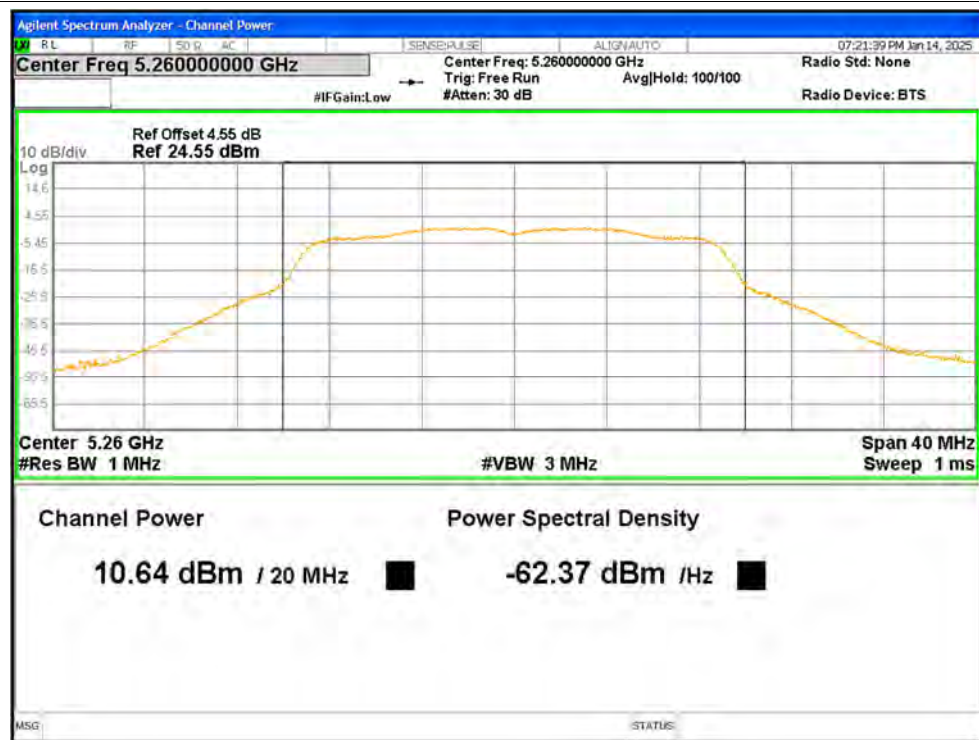


Power NVNT ac20 5300MHz Ant2




Power NVNT ac20 5320MHz Ant2

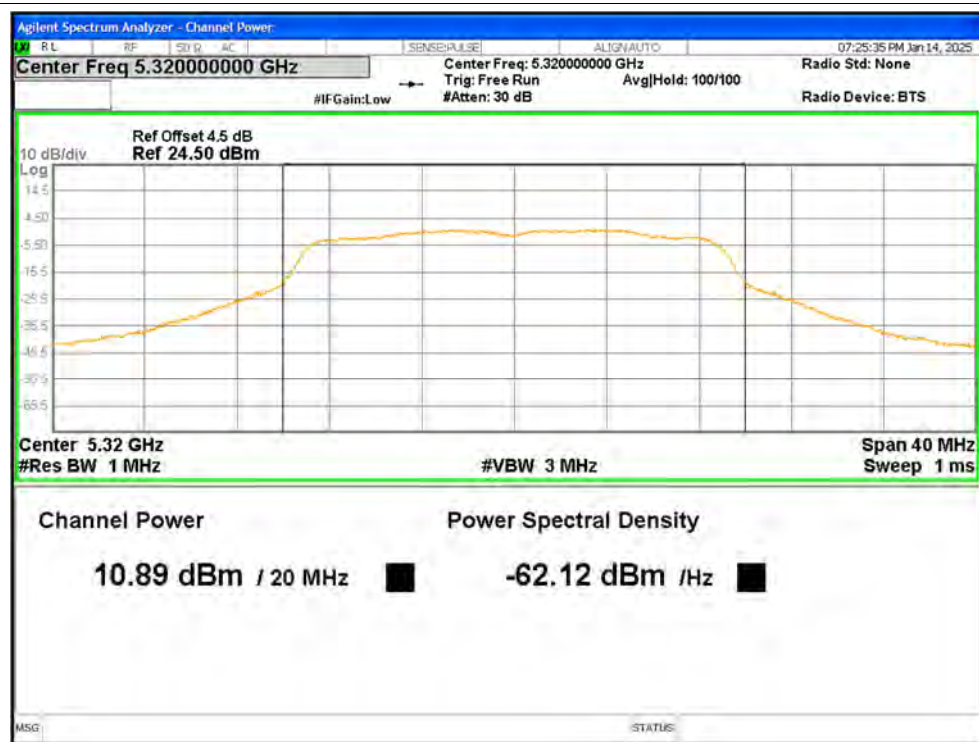


Power NVNT ac40 5270MHz Ant1

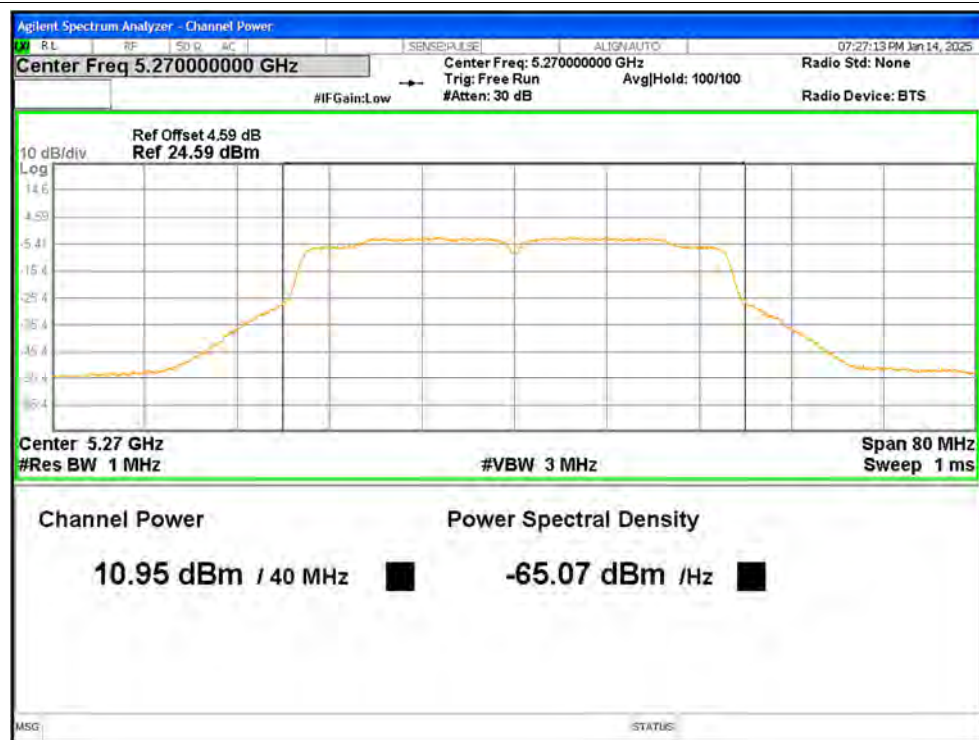


Power NVNT ac40 5310MHz Ant1

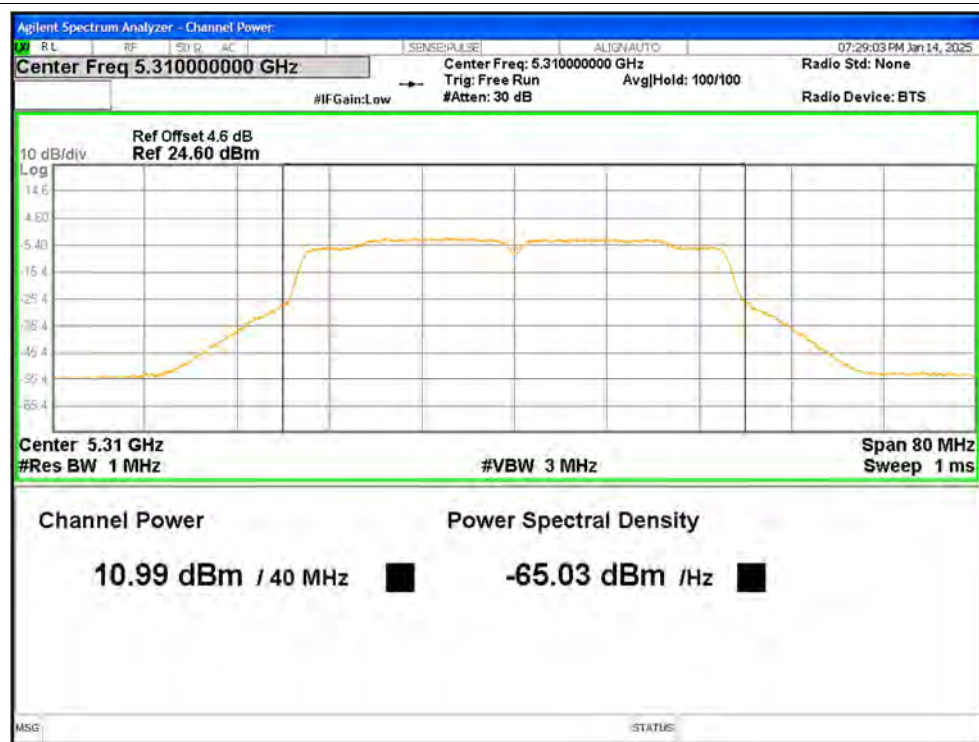


Power NVNT ac40 5270MHz Ant2

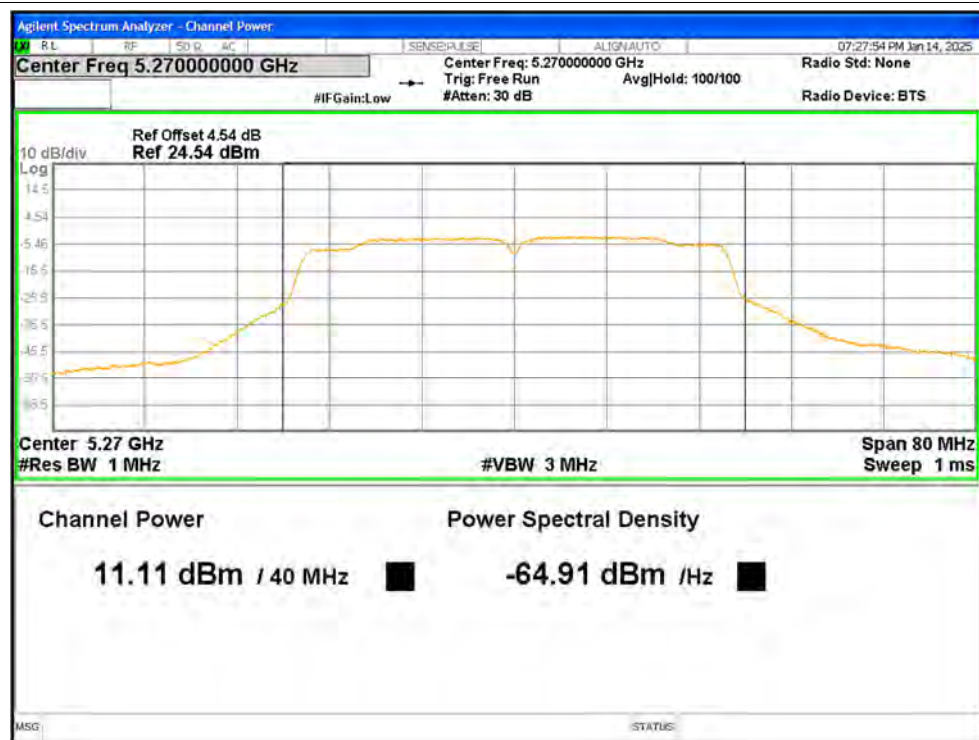

Power NVNT ac40 5310MHz Ant2

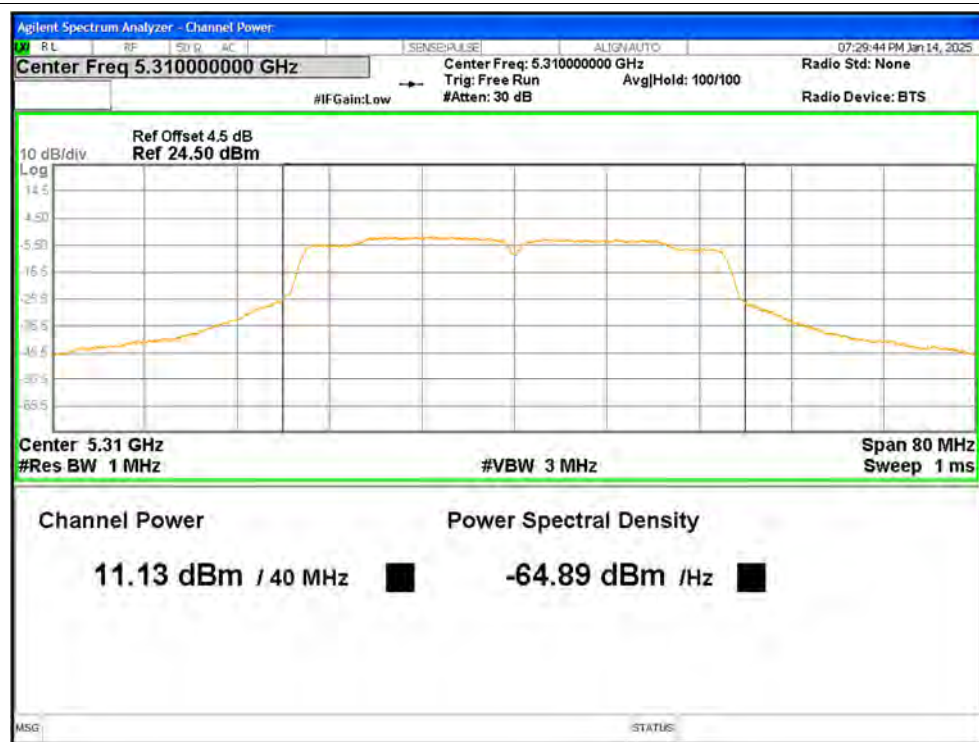


Power NVNT ac80 5290MHz Ant1

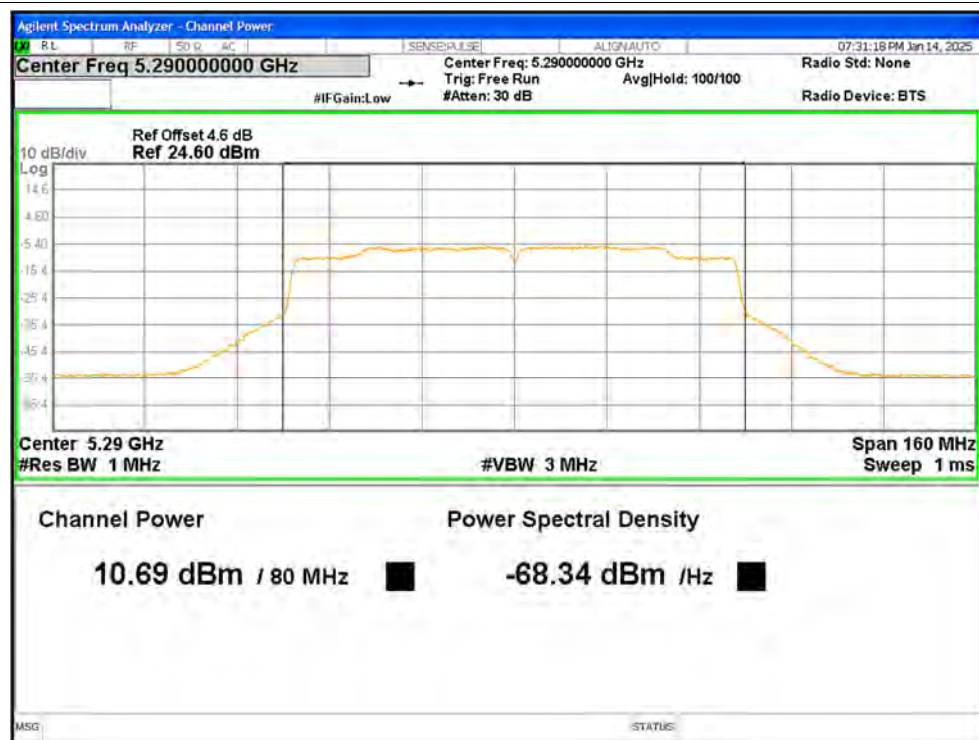

Power NVNT ac80 5290MHz Ant2




Power NVNT ax20 5260MHz Ant1

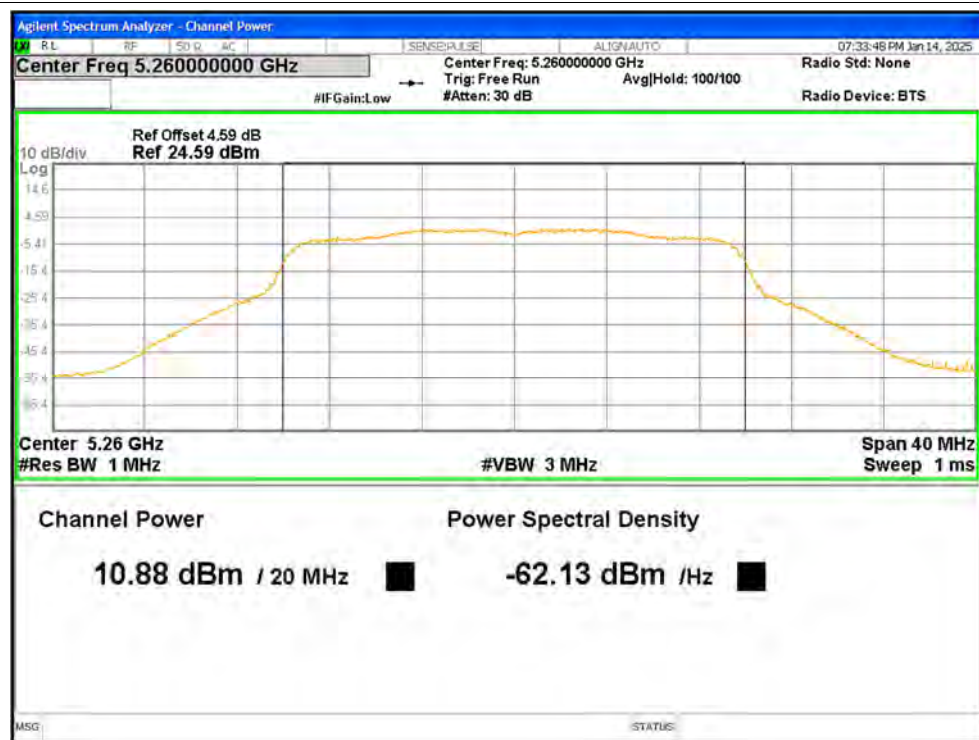


Power NVNT ax20 5300MHz Ant1




Power NVNT ax20 5320MHz Ant1

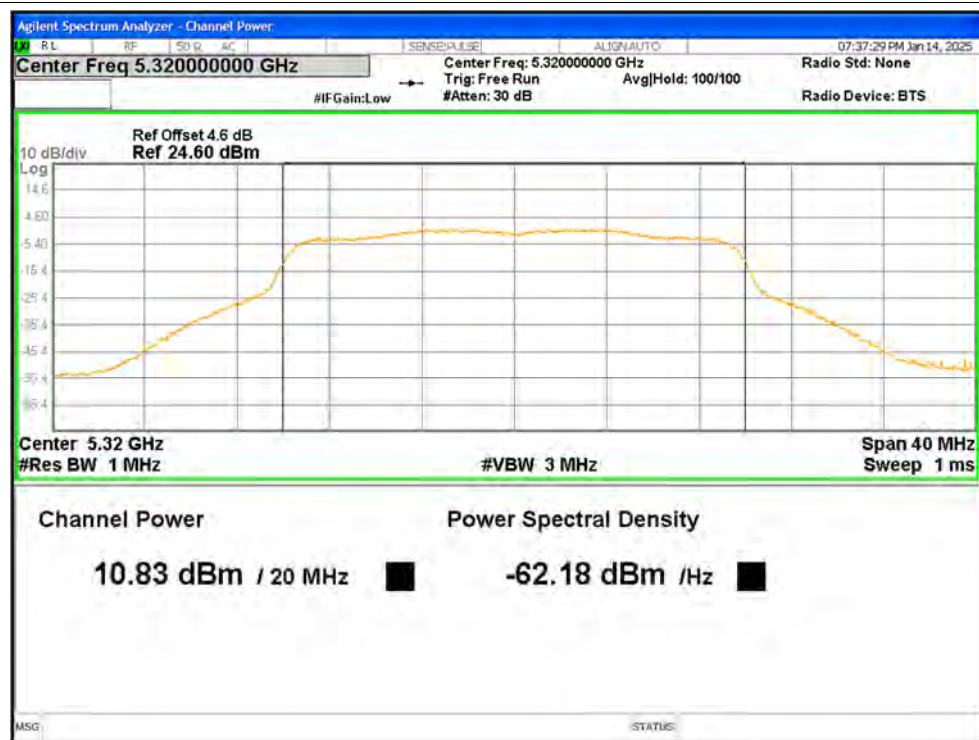


Power NVNT ax20 5260MHz Ant2

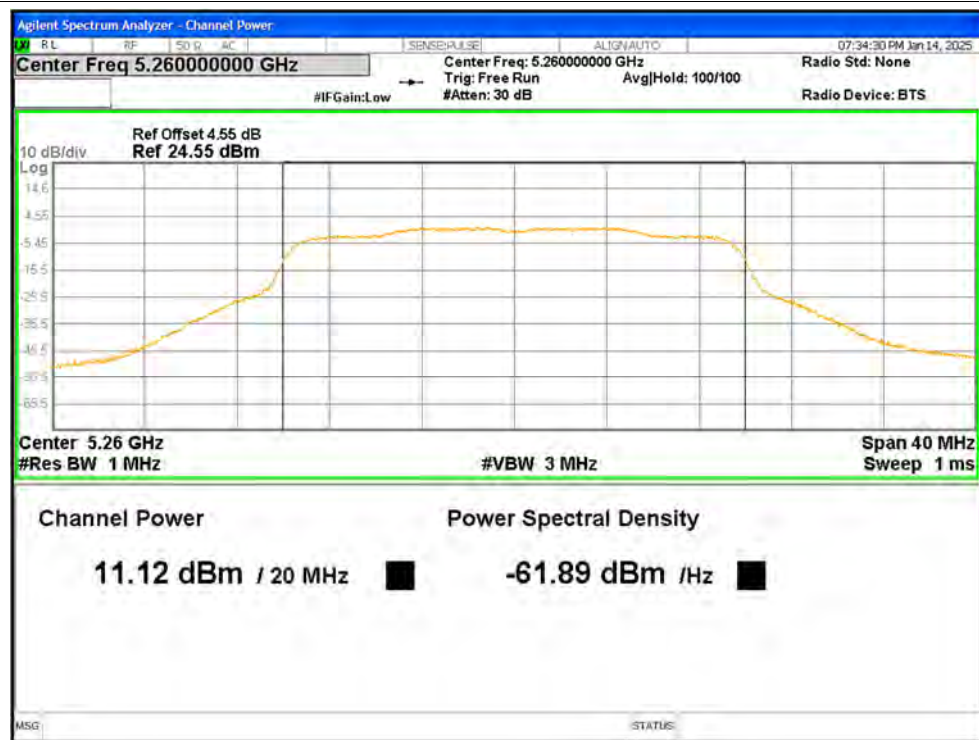


Power NVNT ax20 5300MHz Ant2

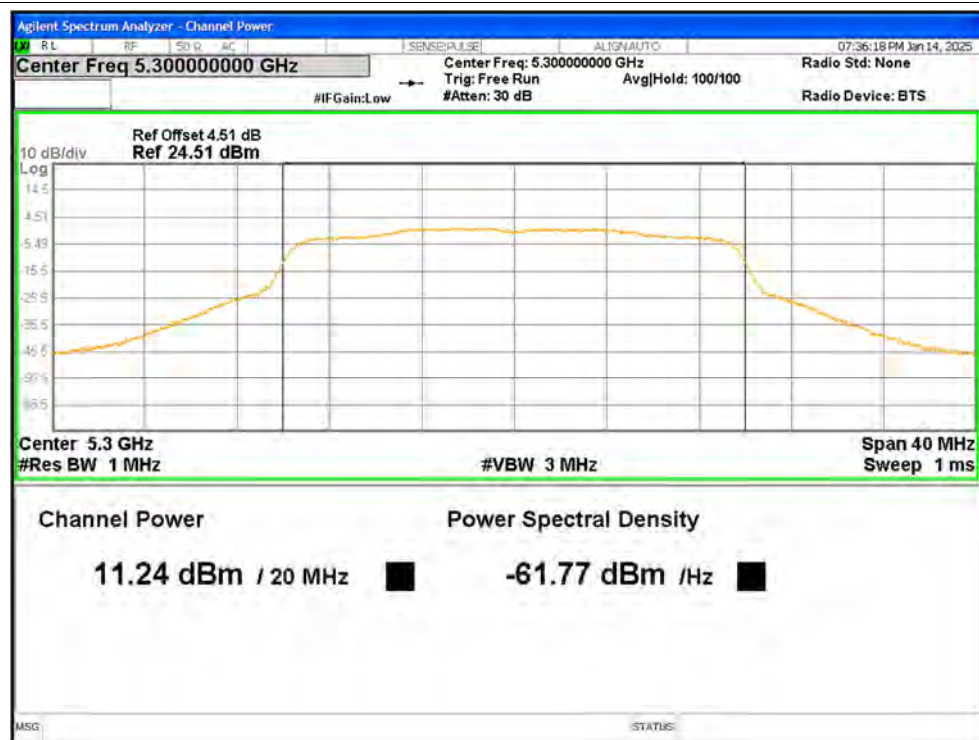

Power NVNT ax20 5320MHz Ant2

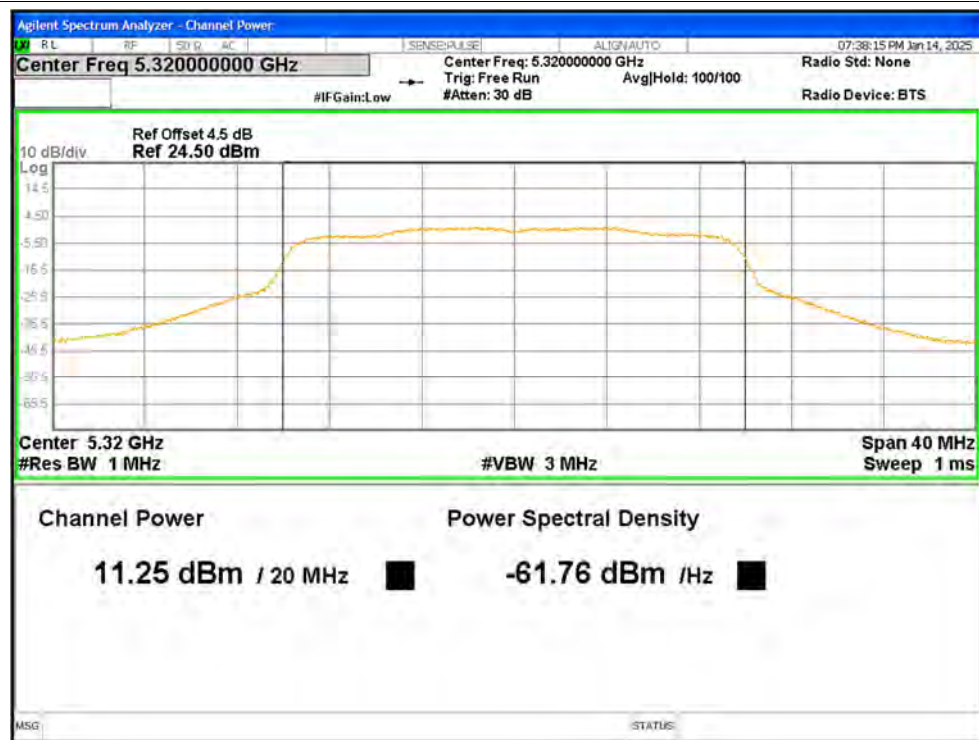


Power NVNT ax40 5270MHz Ant1

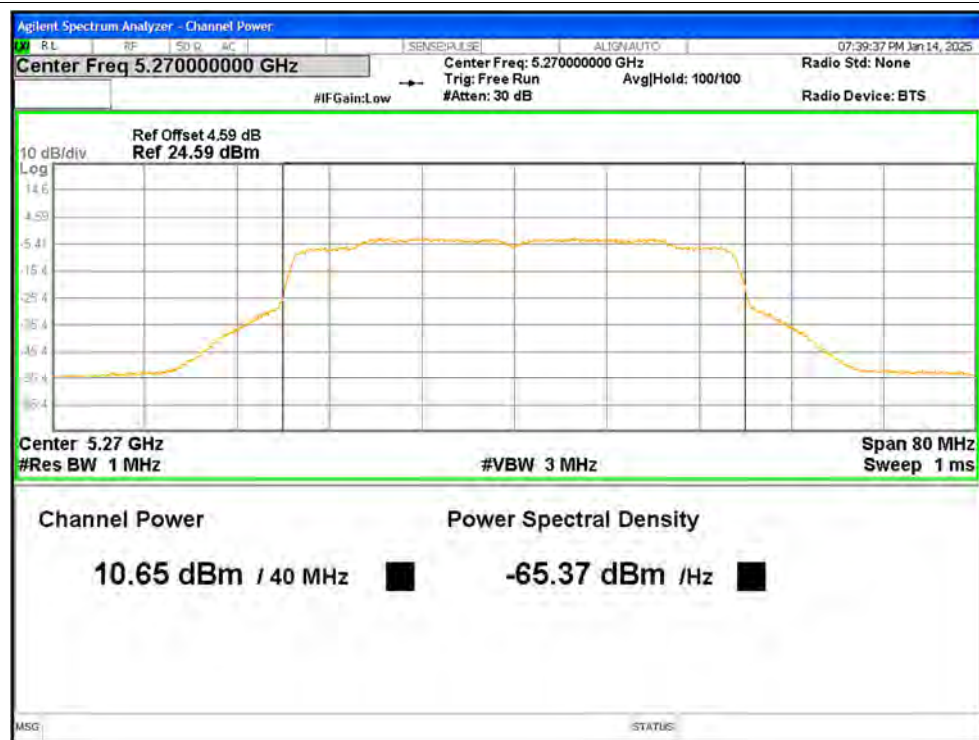

Power NVNT ax40 5310MHz Ant1




Power NVNT ax40 5270MHz Ant2

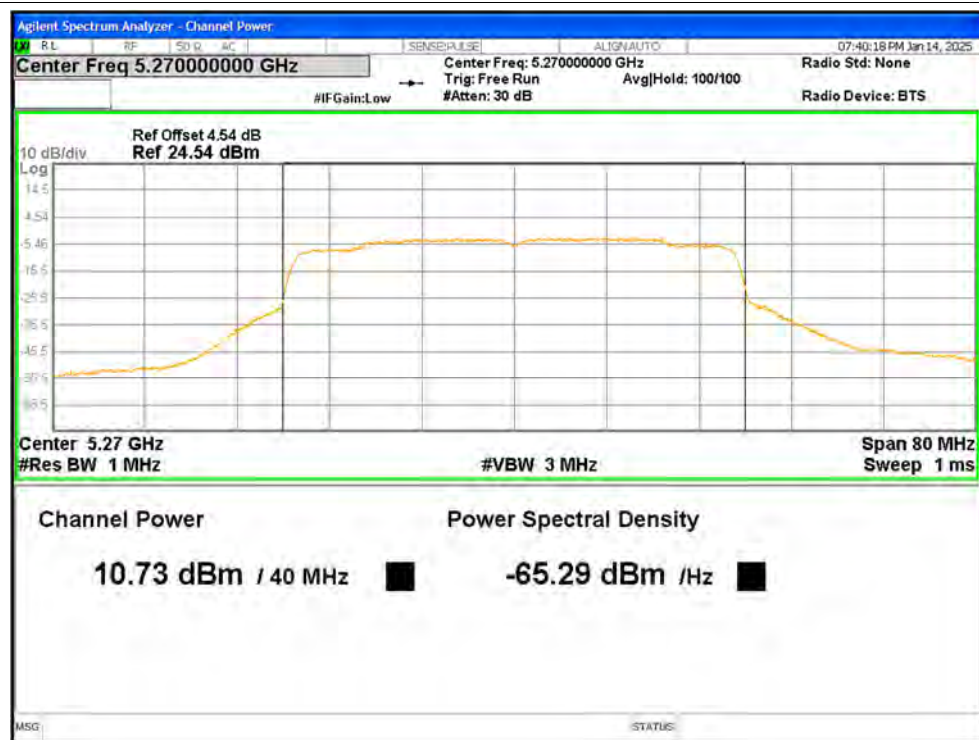


Power NVNT ax40 5310MHz Ant2



Power NVNT ax80 5290MHz Ant1

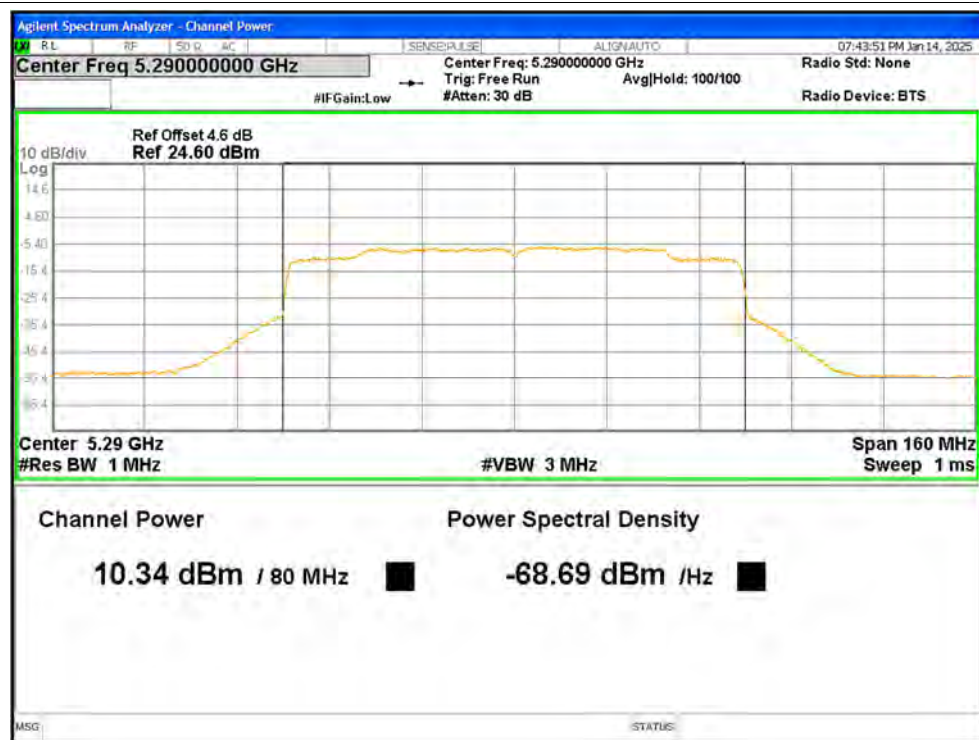

Power NVNT ax80 5290MHz Ant2

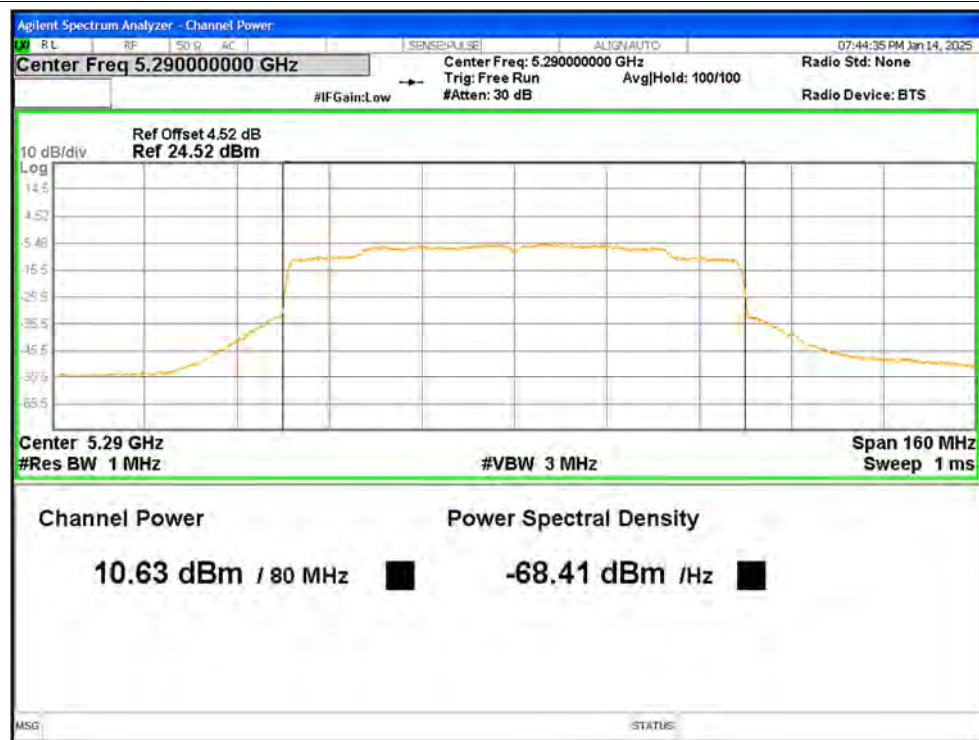


3. -26dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5260	Ant1	23.3657	Pass
NVNT	a	5300	Ant1	23.3189	Pass
NVNT	a	5320	Ant1	24.1579	Pass
NVNT	a	5260	Ant2	23.4598	Pass
NVNT	a	5300	Ant2	24.0957	Pass
NVNT	a	5320	Ant2	24.397	Pass
NVNT	n20	5260	Ant1	23.6245	Pass
NVNT	n20	5300	Ant1	23.6086	Pass
NVNT	n20	5320	Ant1	24.4338	Pass
NVNT	n20	5260	Ant2	23.6945	Pass
NVNT	n20	5300	Ant2	24.0009	Pass
NVNT	n20	5320	Ant2	26.0306	Pass
NVNT	n40	5270	Ant1	42.9211	Pass
NVNT	n40	5310	Ant1	43.8971	Pass
NVNT	n40	5270	Ant2	43.4754	Pass
NVNT	n40	5310	Ant2	42.9014	Pass
NVNT	ac20	5260	Ant1	24.3277	Pass
NVNT	ac20	5300	Ant1	23.8858	Pass
NVNT	ac20	5320	Ant1	23.2948	Pass
NVNT	ac20	5260	Ant2	23.9359	Pass
NVNT	ac20	5300	Ant2	24.3129	Pass
NVNT	ac20	5320	Ant2	25.3093	Pass
NVNT	ac40	5270	Ant1	42.7076	Pass
NVNT	ac40	5310	Ant1	43.5245	Pass
NVNT	ac40	5270	Ant2	42.7464	Pass
NVNT	ac40	5310	Ant2	42.6342	Pass
NVNT	ac80	5290	Ant1	85.1784	Pass
NVNT	ac80	5290	Ant2	83.5974	Pass
NVNT	ax20	5260	Ant1	23.2506	Pass
NVNT	ax20	5300	Ant1	23.0905	Pass
NVNT	ax20	5320	Ant1	23.5653	Pass
NVNT	ax20	5260	Ant2	23.4606	Pass
NVNT	ax20	5300	Ant2	24.0993	Pass
NVNT	ax20	5320	Ant2	23.3093	Pass
NVNT	ax40	5270	Ant1	42.4068	Pass
NVNT	ax40	5310	Ant1	41.4951	Pass
NVNT	ax40	5270	Ant2	42.3908	Pass
NVNT	ax40	5310	Ant2	43.3624	Pass
NVNT	ax80	5290	Ant1	82.2863	Pass
NVNT	ax80	5290	Ant2	80.6927	Pass

Test Graphs


-26dB Bandwidth NVNT a 5260MHz Ant1

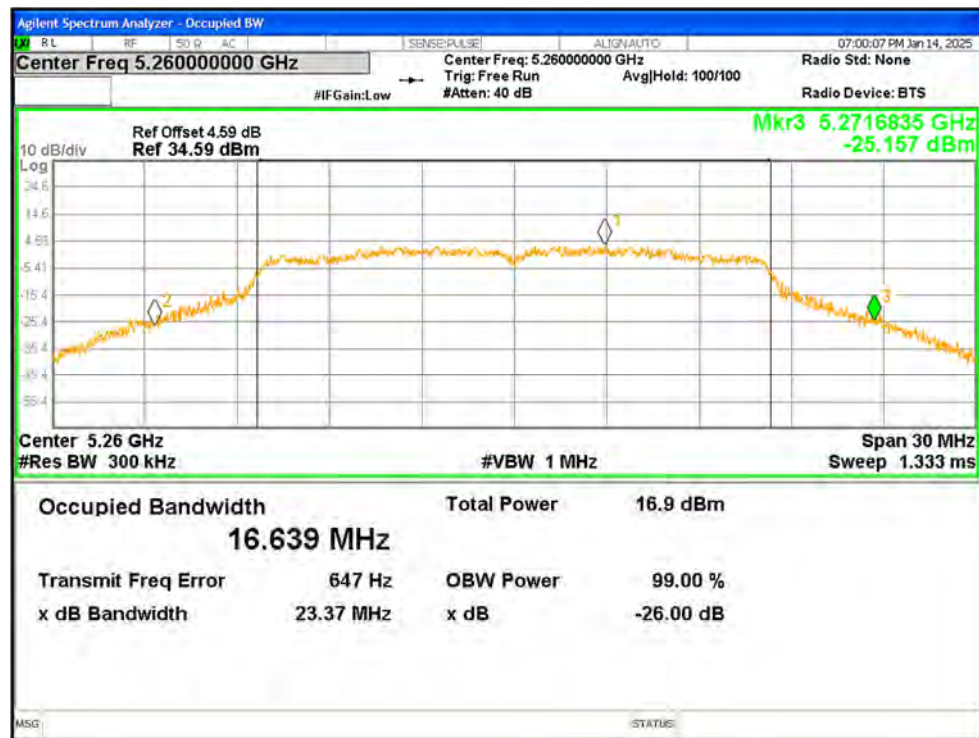


-26dB Bandwidth NVNT a 5300MHz Ant1

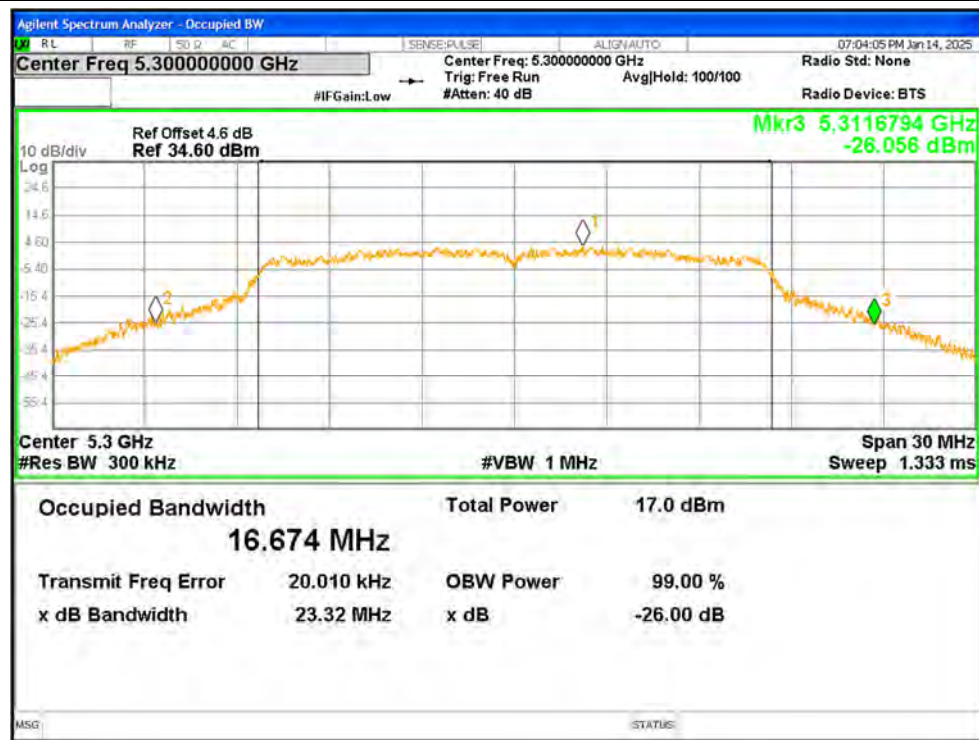


-26dB Bandwidth NVNT a 5320MHz Ant1

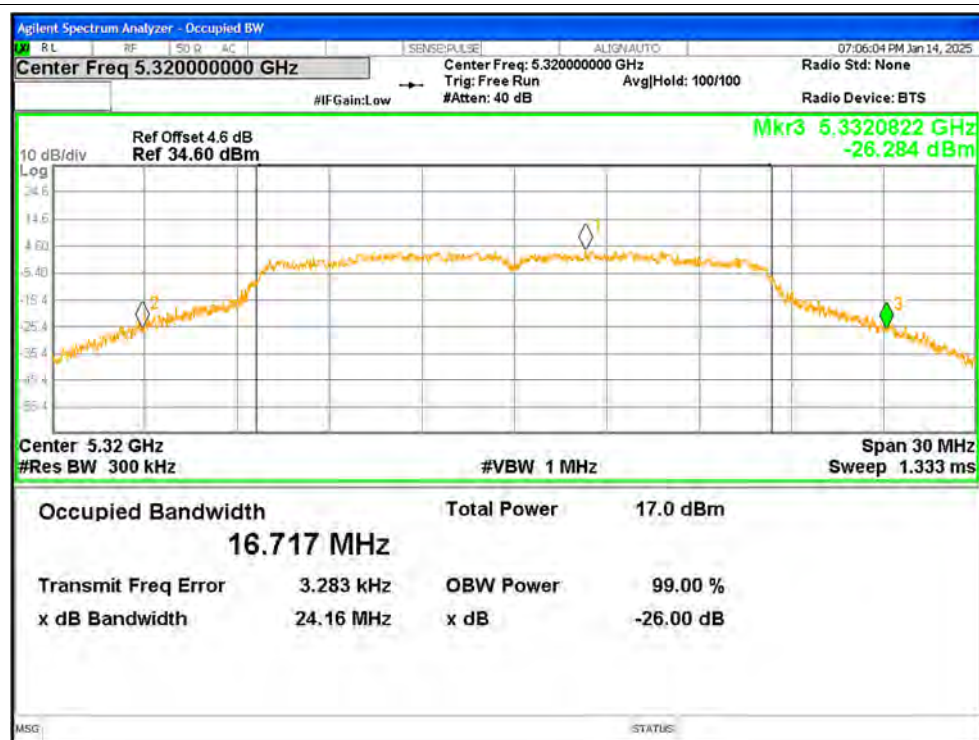


-26dB Bandwidth NVNT a 5260MHz Ant2


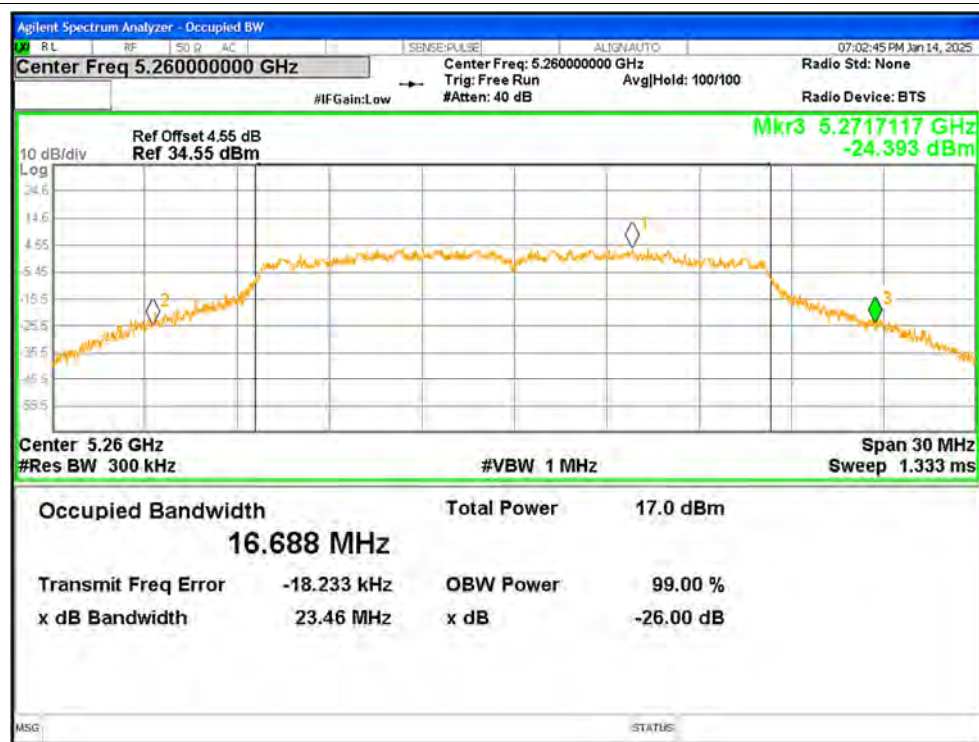


-26dB Bandwidth NVNT a 5300MHz Ant2

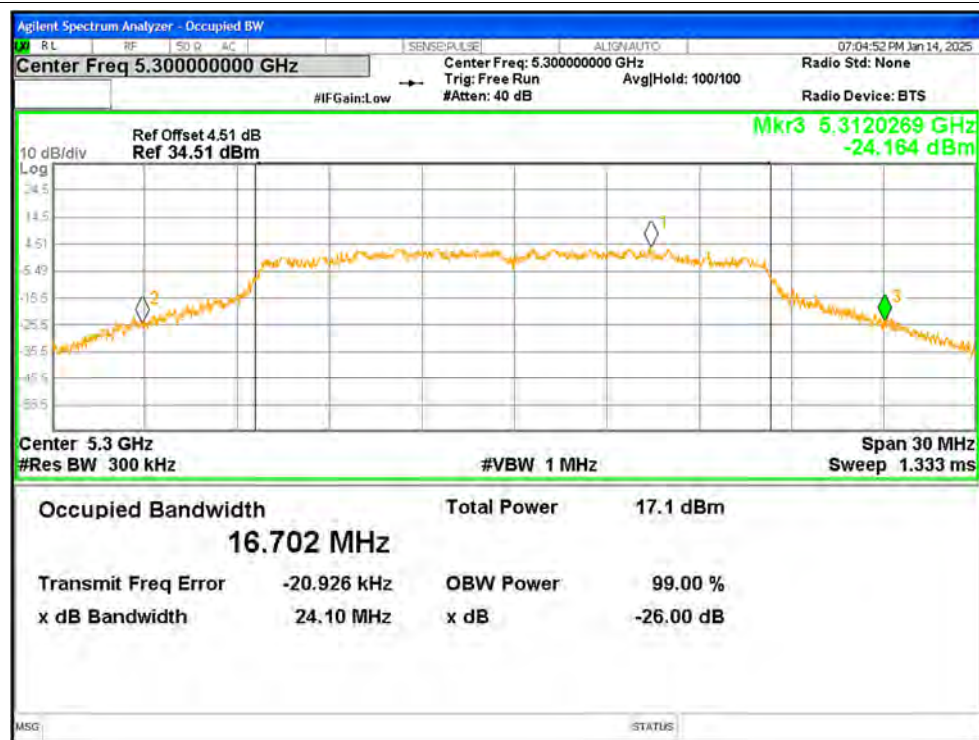


-26dB Bandwidth NVNT a 5320MHz Ant2

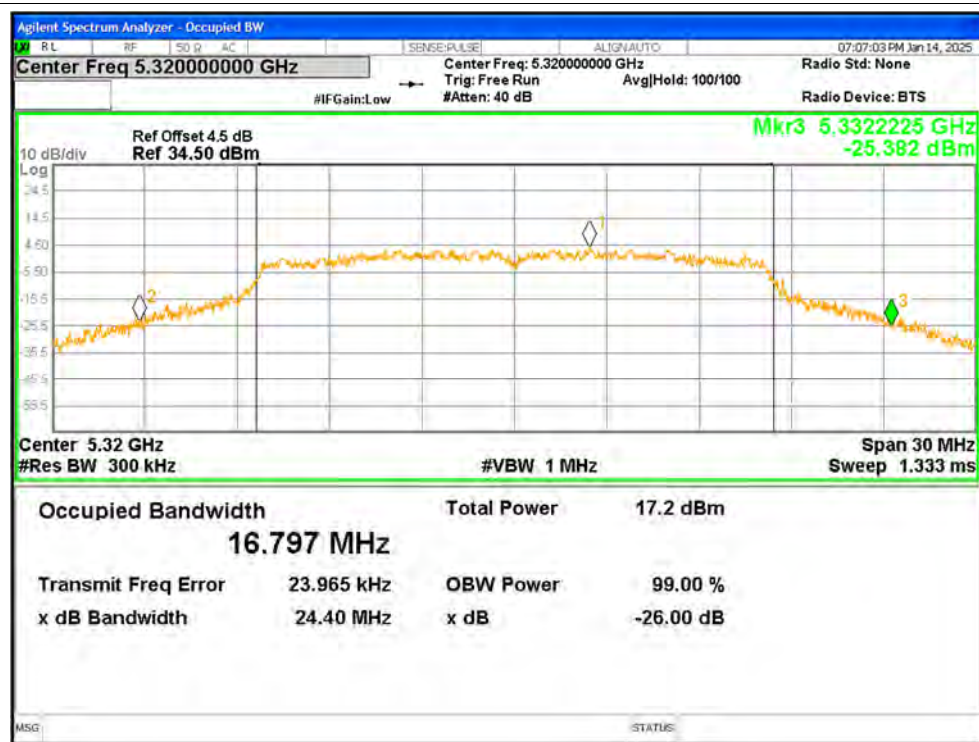


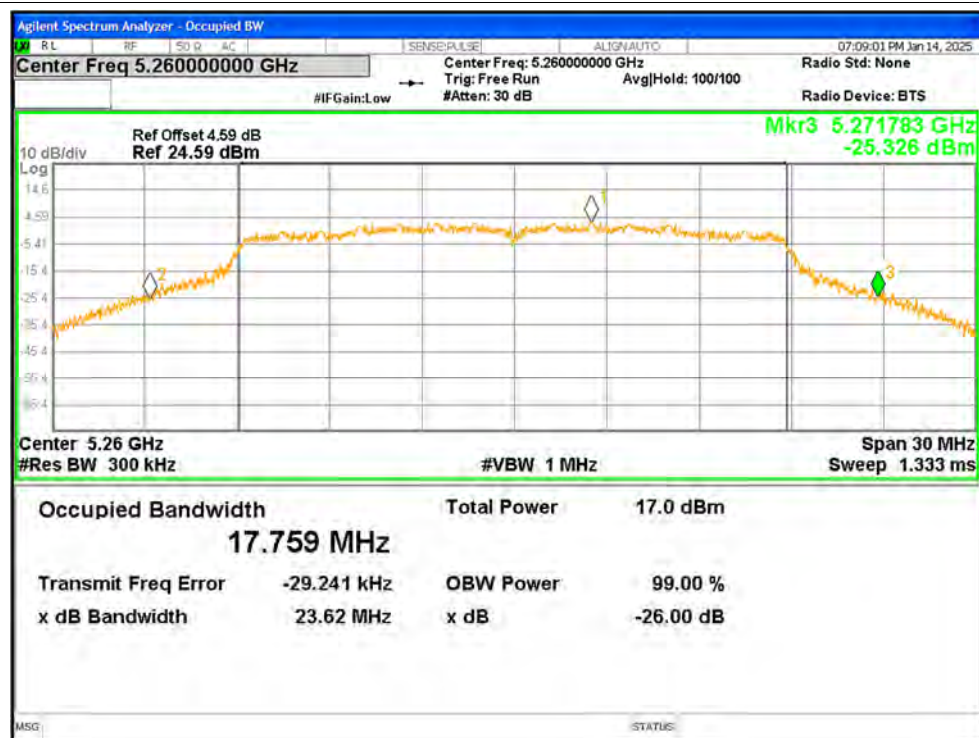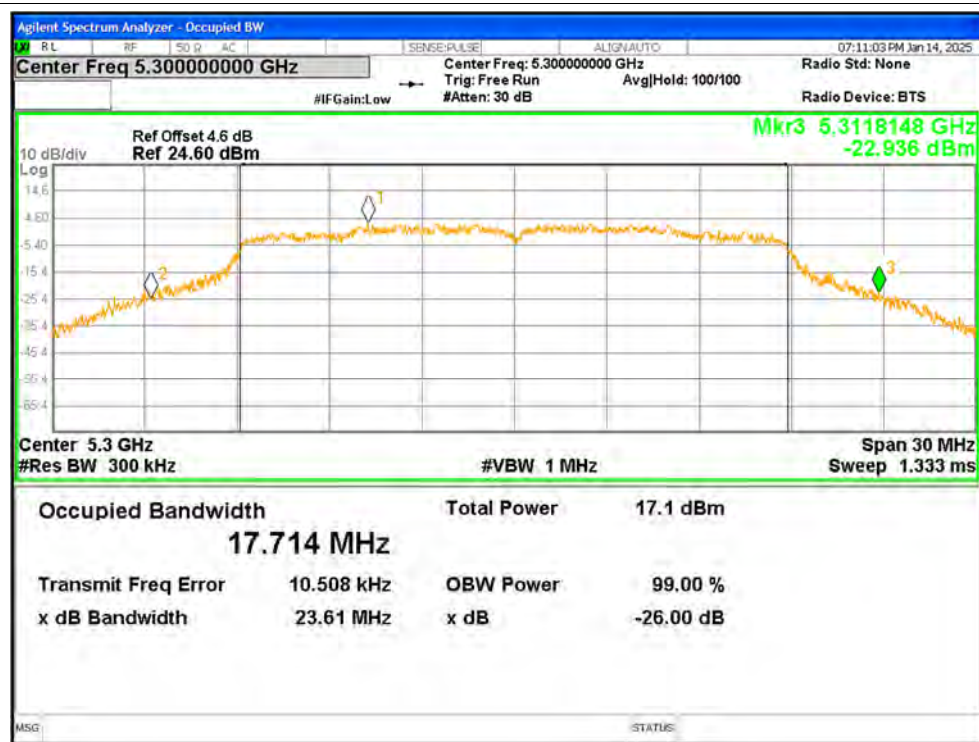-26dB Bandwidth NVNT n20 5260MHz Ant1**-26dB Bandwidth NVNT n20 5300MHz Ant1**


-26dB Bandwidth NVNT n20 5320MHz Ant1

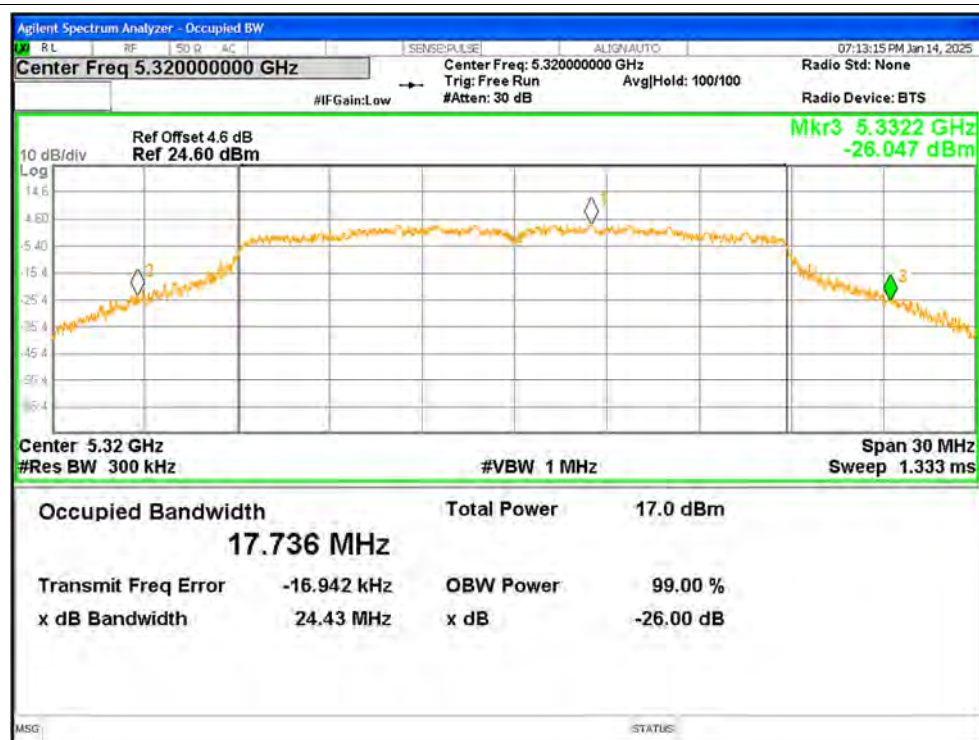


-26dB Bandwidth NVNT n20 5260MHz Ant2

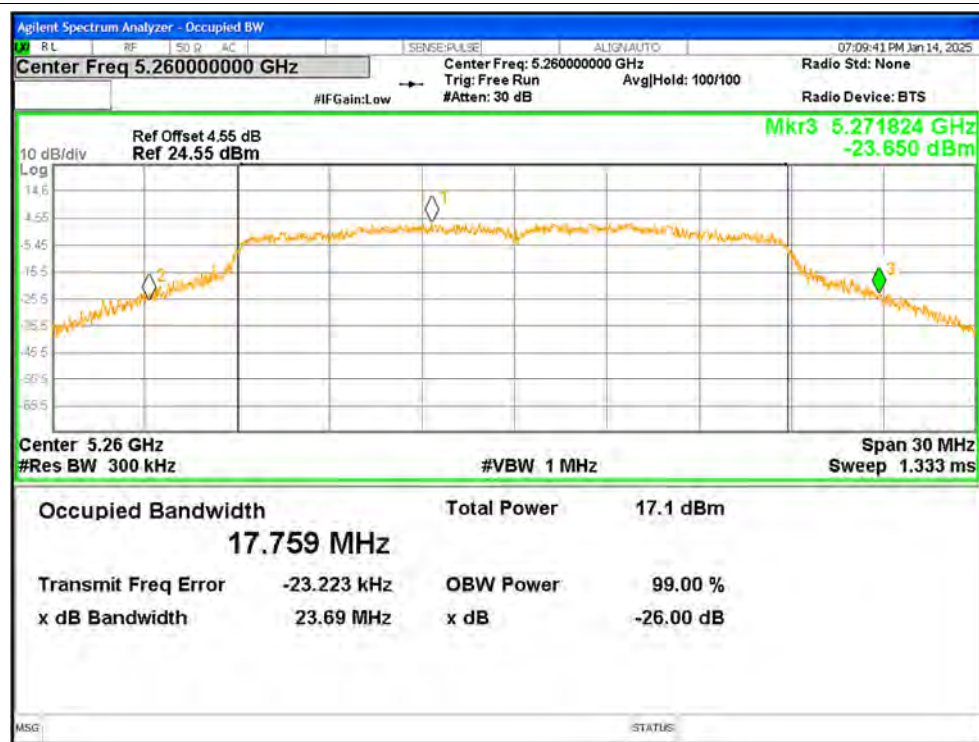



-26dB Bandwidth NVNT n20 5300MHz Ant2


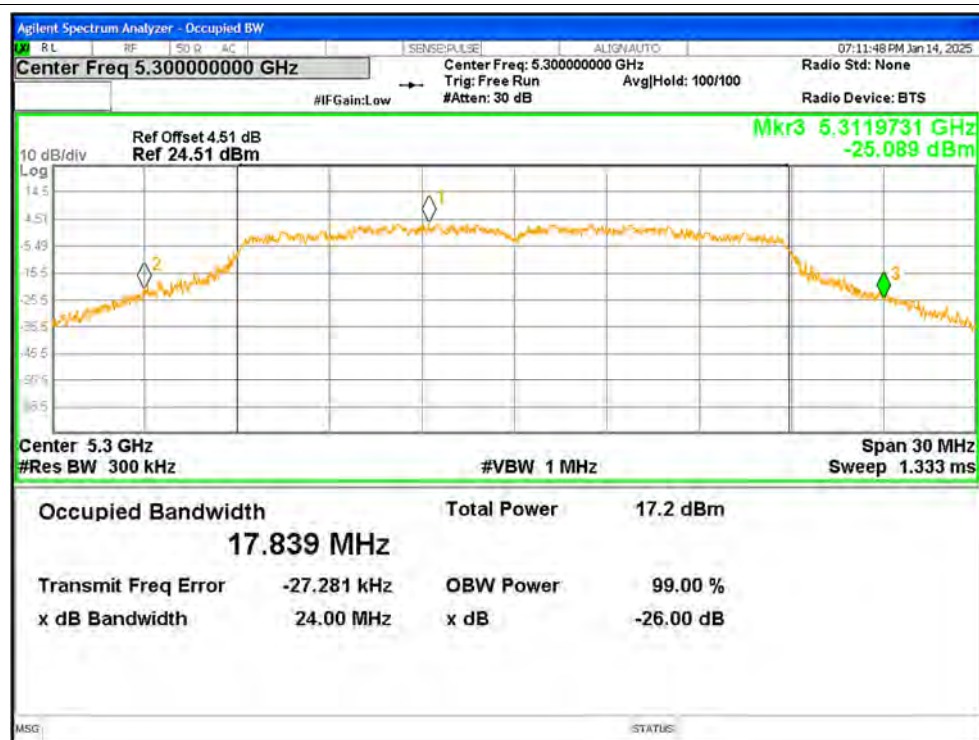




-26dB Bandwidth NVNT n20 5320MHz Ant2


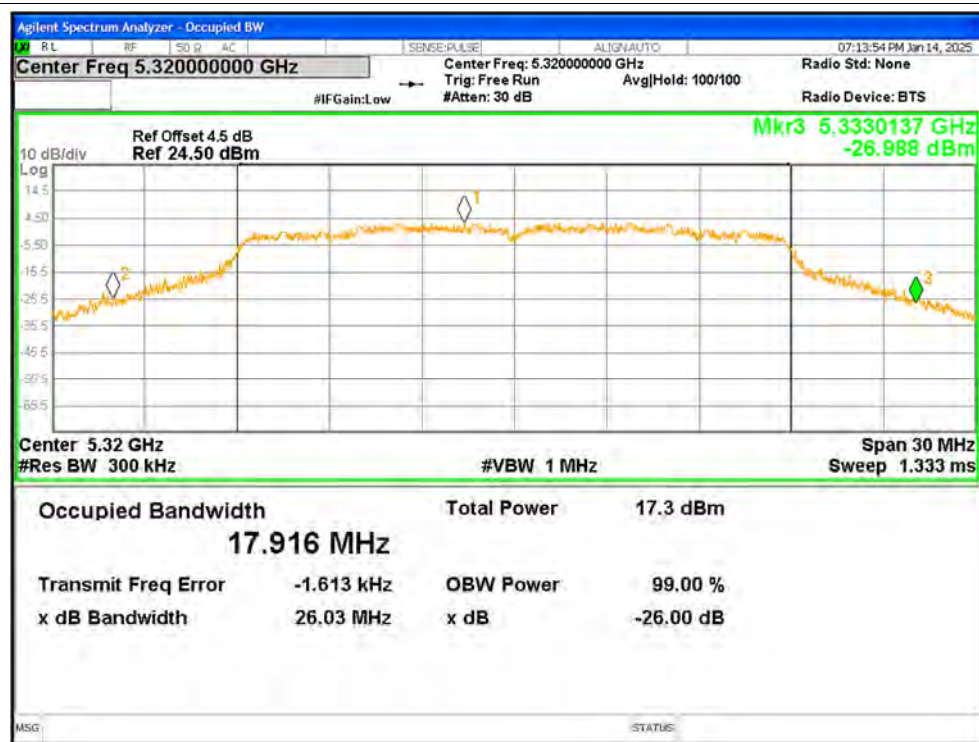


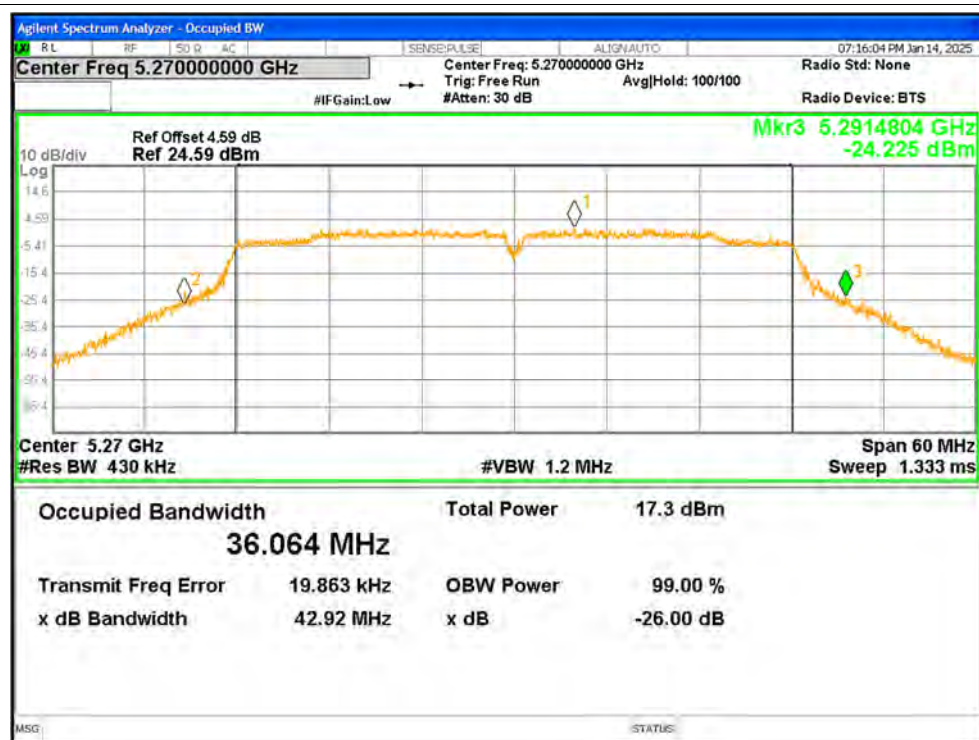
-26dB Bandwidth NVNT n40 5270MHz Ant1**-26dB Bandwidth NVNT n40 5310MHz Ant1**

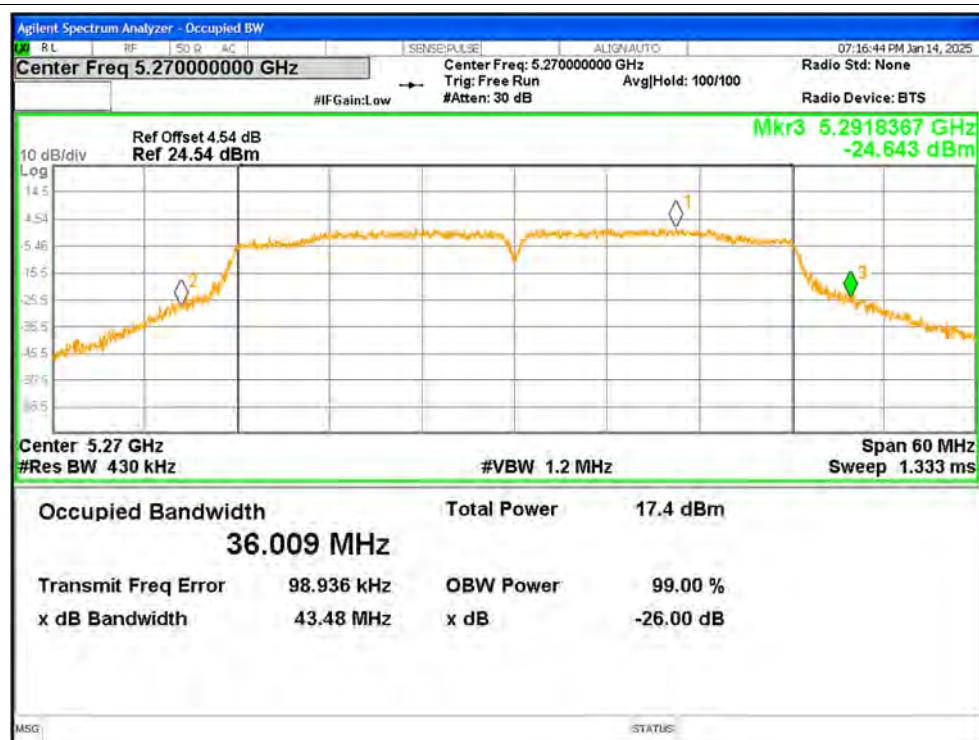-26dB Bandwidth NVNT n40 5270MHz Ant2**-26dB Bandwidth NVNT n40 5310MHz Ant2**

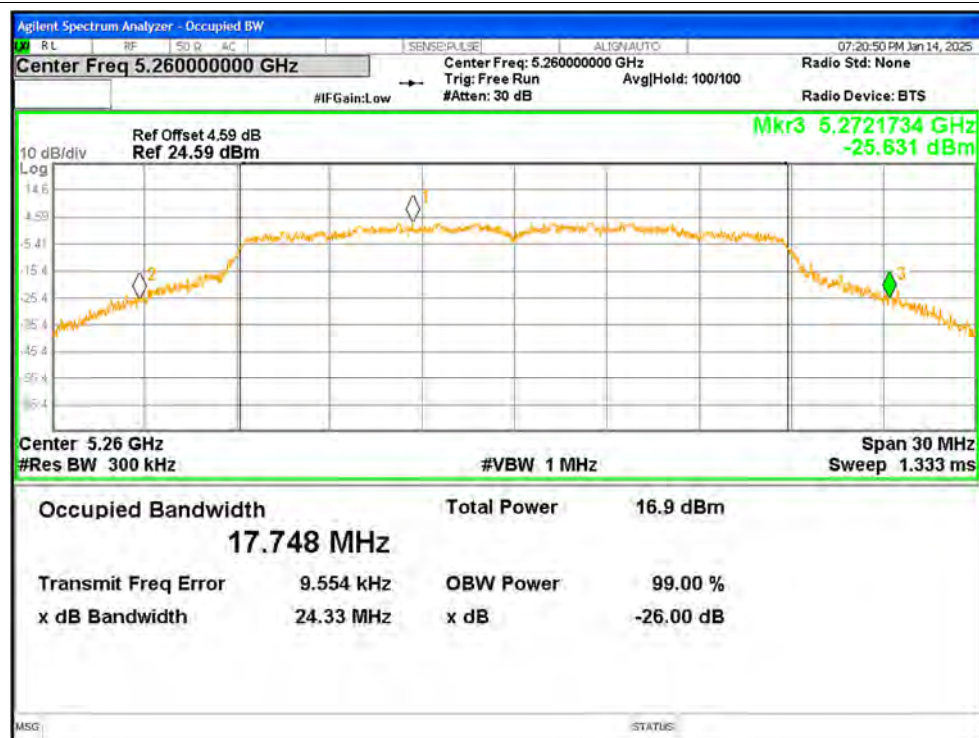
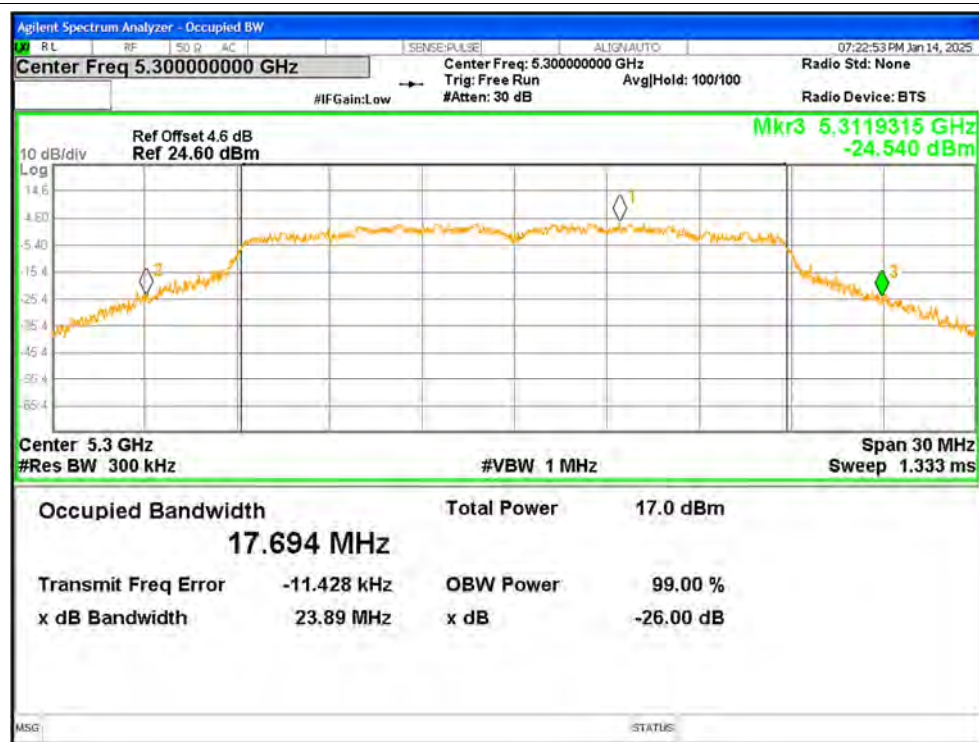
-26dB Bandwidth NVNT ac20 5260MHz Ant1**-26dB Bandwidth NVNT ac20 5300MHz Ant1**

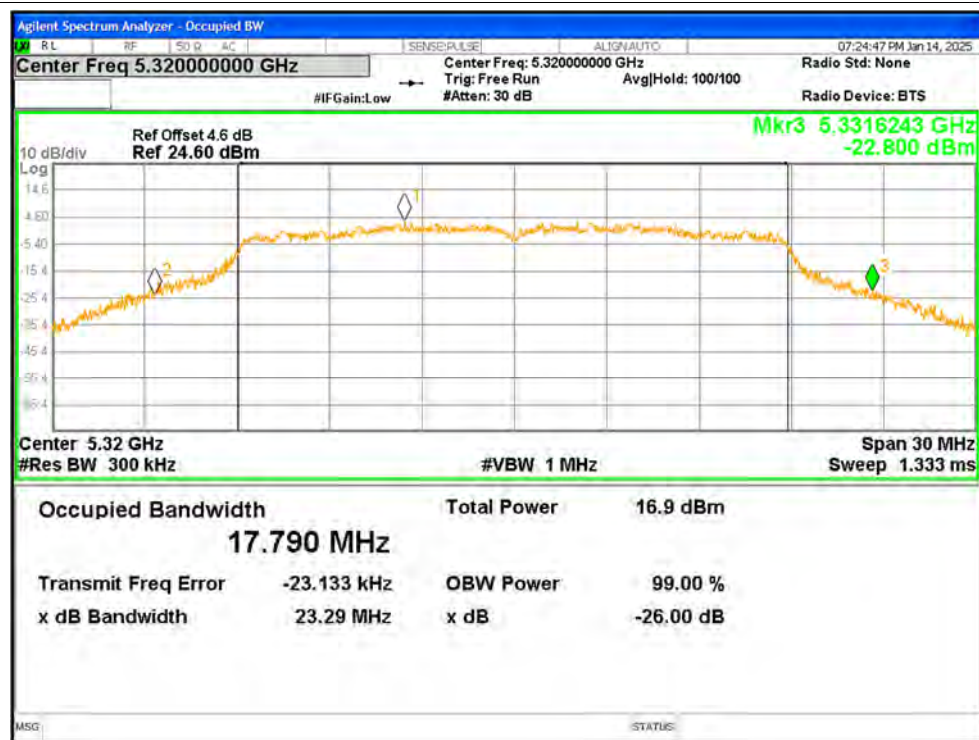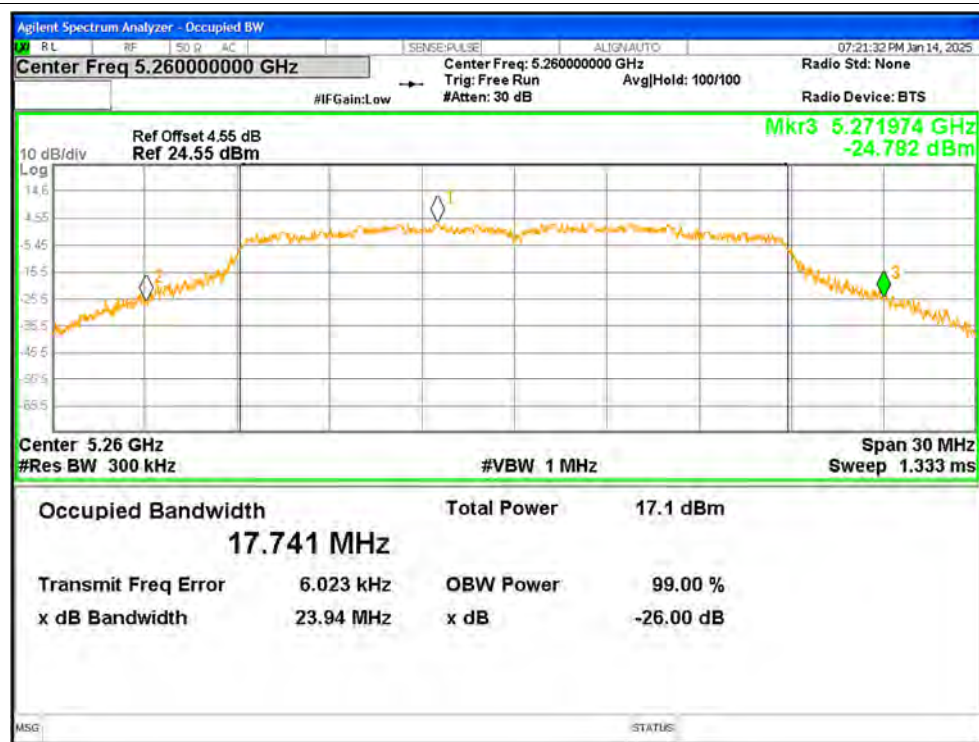-26dB Bandwidth NVNT ac20 5320MHz Ant1**-26dB Bandwidth NVNT ac20 5260MHz Ant2**

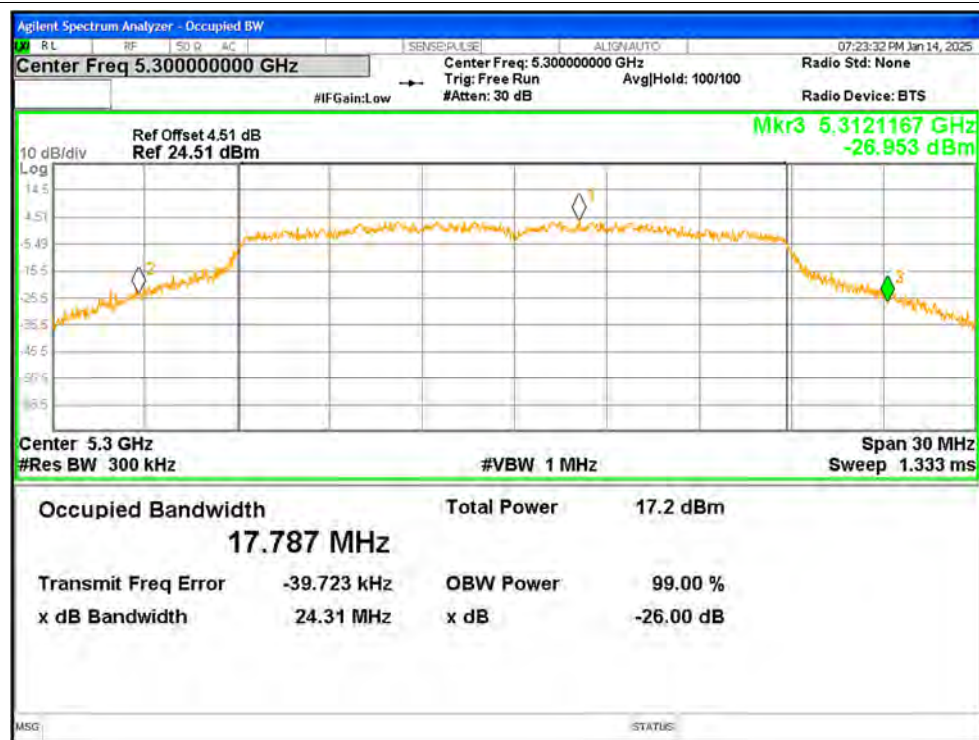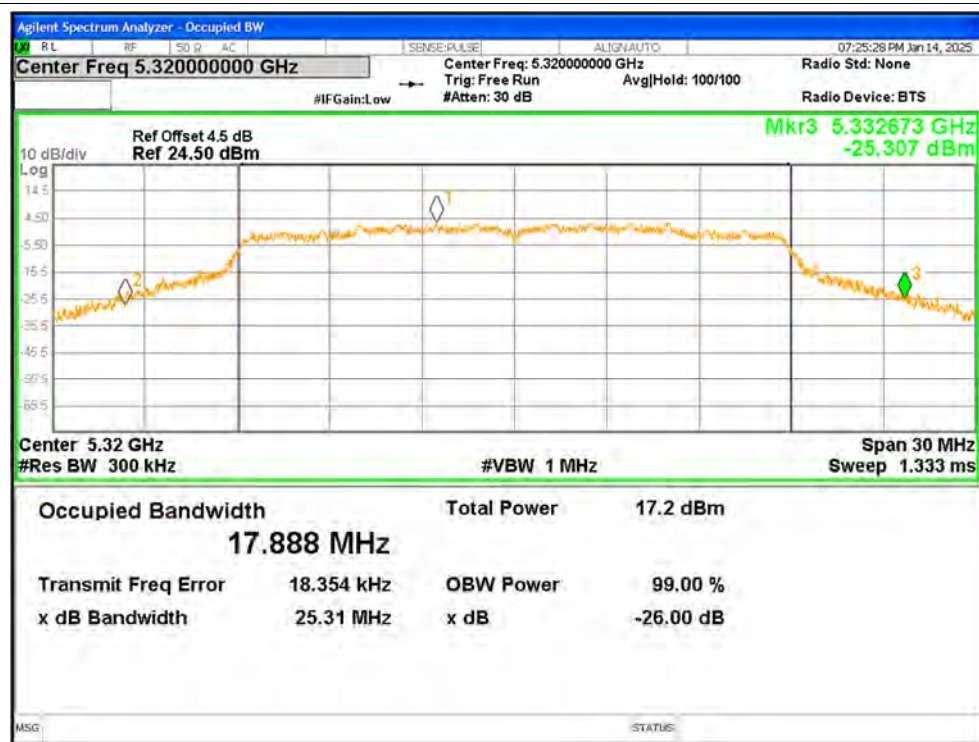
-26dB Bandwidth NVNT ac20 5300MHz Ant2**-26dB Bandwidth NVNT ac20 5320MHz Ant2**

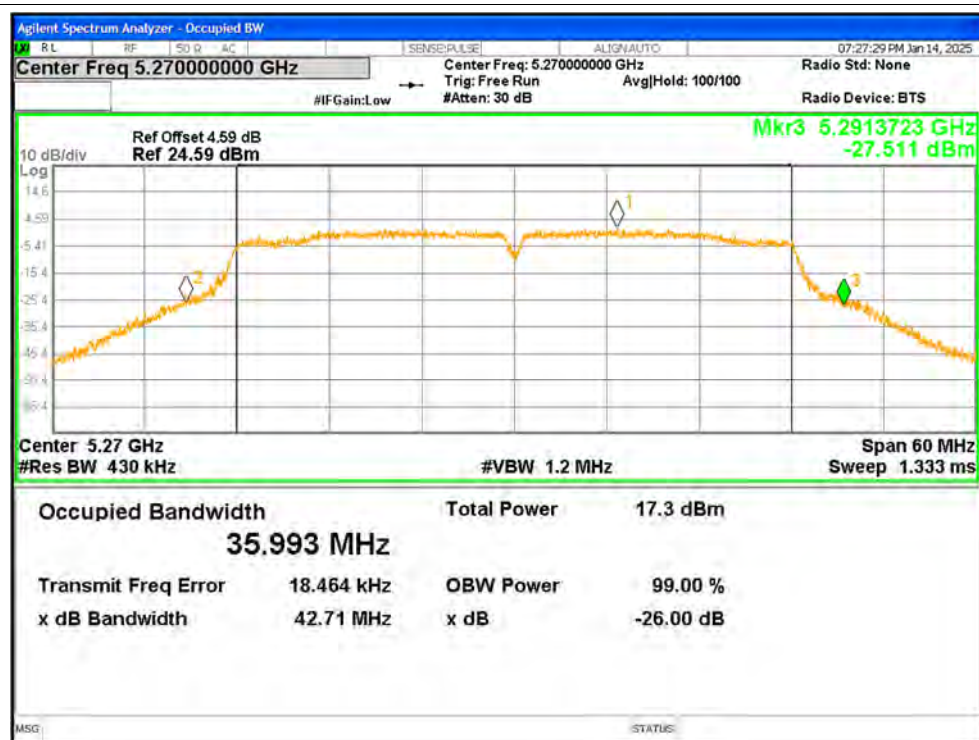-26dB Bandwidth NVNT ac40 5270MHz Ant1**-26dB Bandwidth NVNT ac40 5310MHz Ant1**


-26dB Bandwidth NVNT ac40 5270MHz Ant2**-26dB Bandwidth NVNT ac40 5310MHz Ant2**

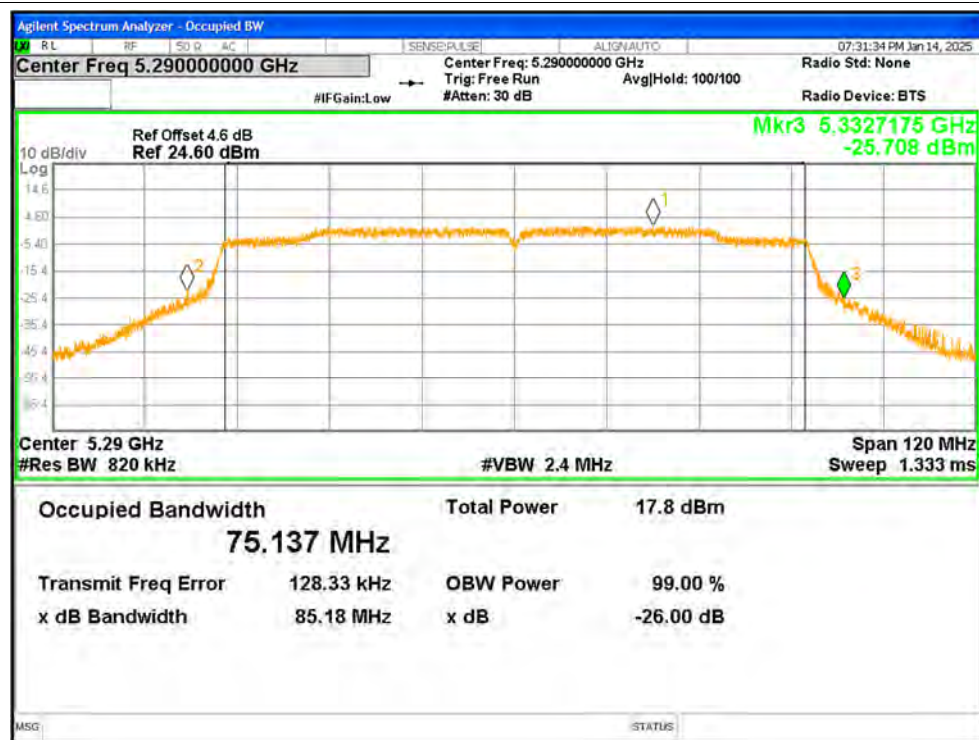
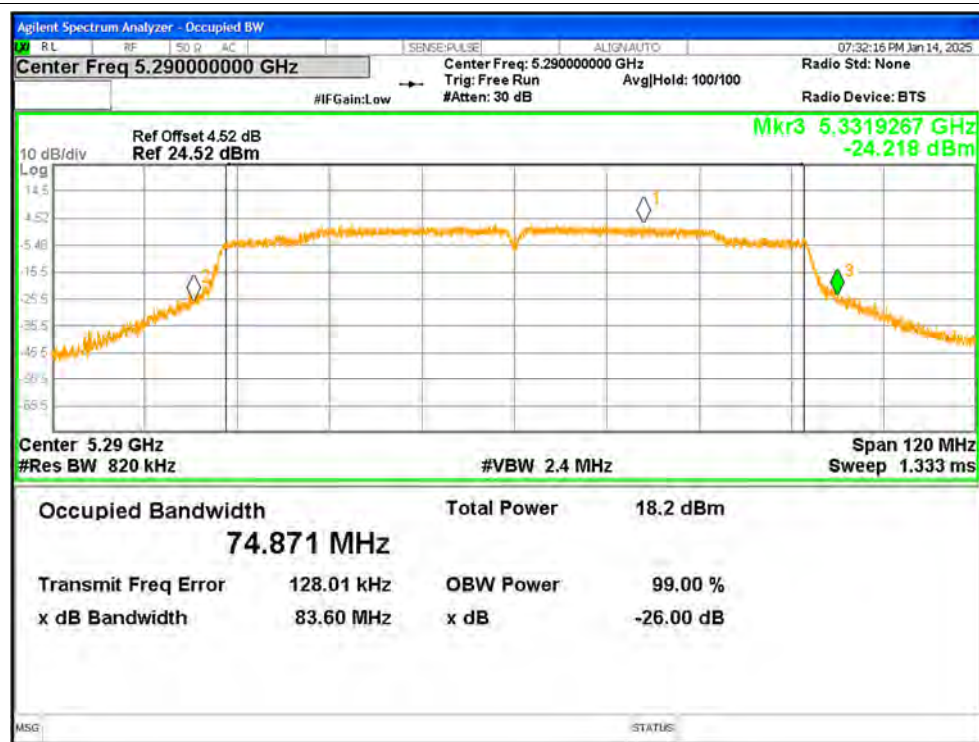
-26dB Bandwidth NVNT ac80 5290MHz Ant1**-26dB Bandwidth NVNT ac80 5290MHz Ant2**



-26dB Bandwidth NVNT ax20 5260MHz Ant1

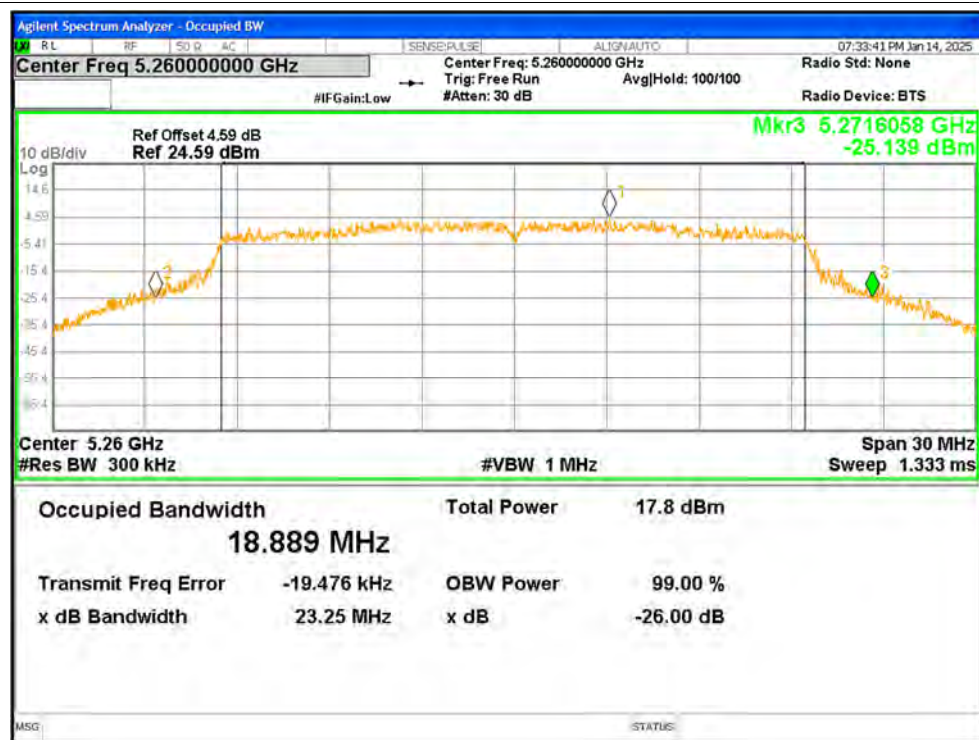



-26dB Bandwidth NVNT ax20 5300MHz Ant1


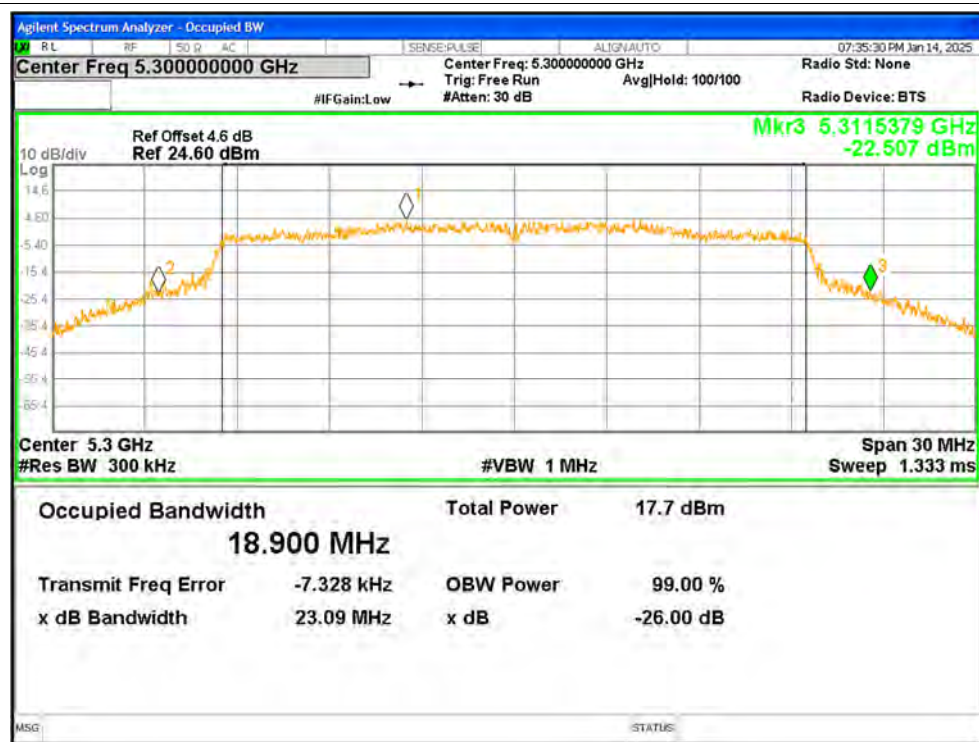


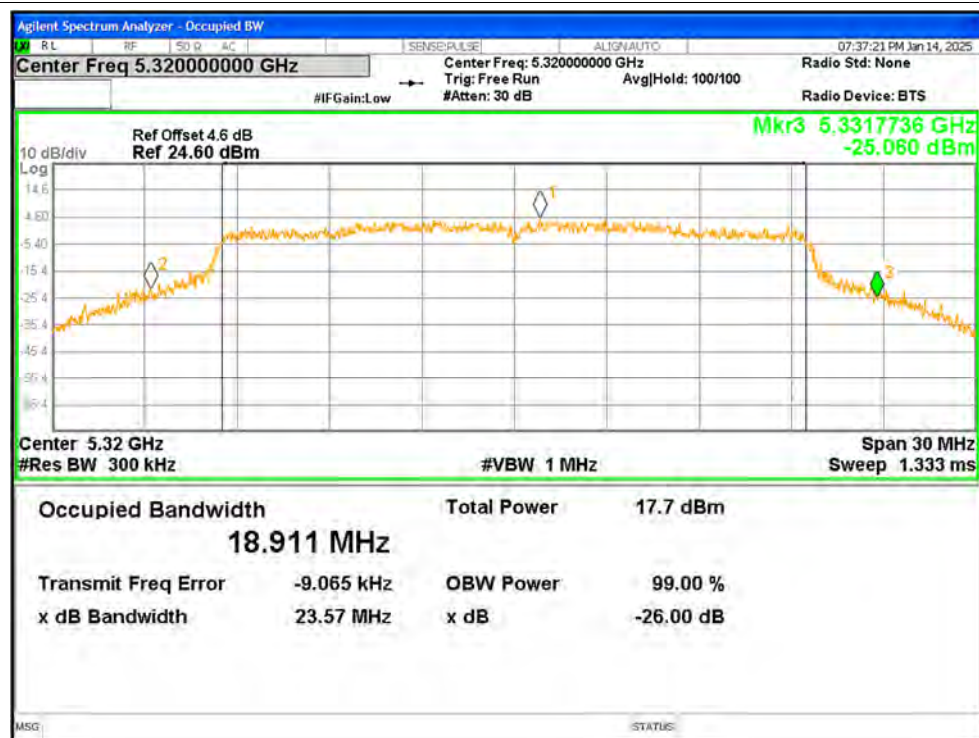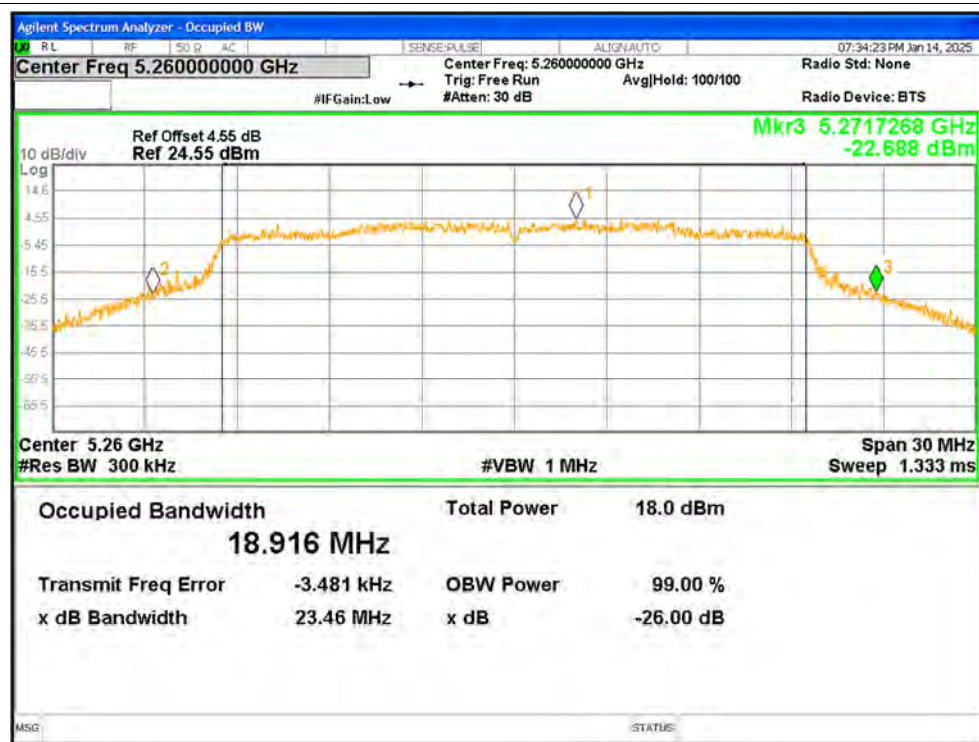-26dB Bandwidth NVNT ax20 5320MHz Ant1**-26dB Bandwidth NVNT ax20 5260MHz Ant2**

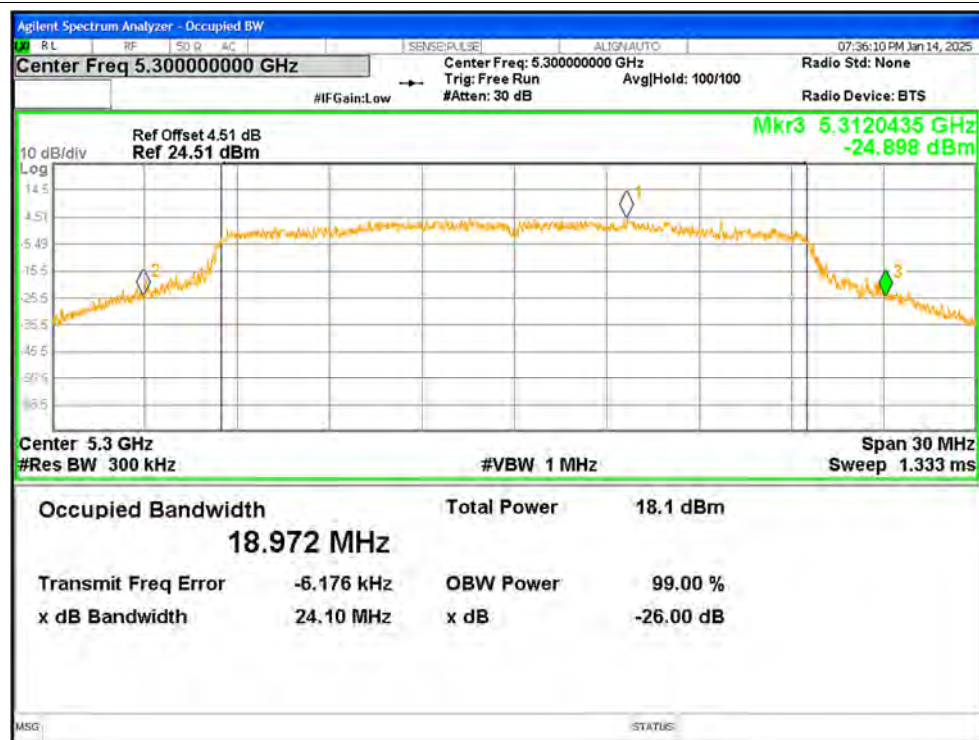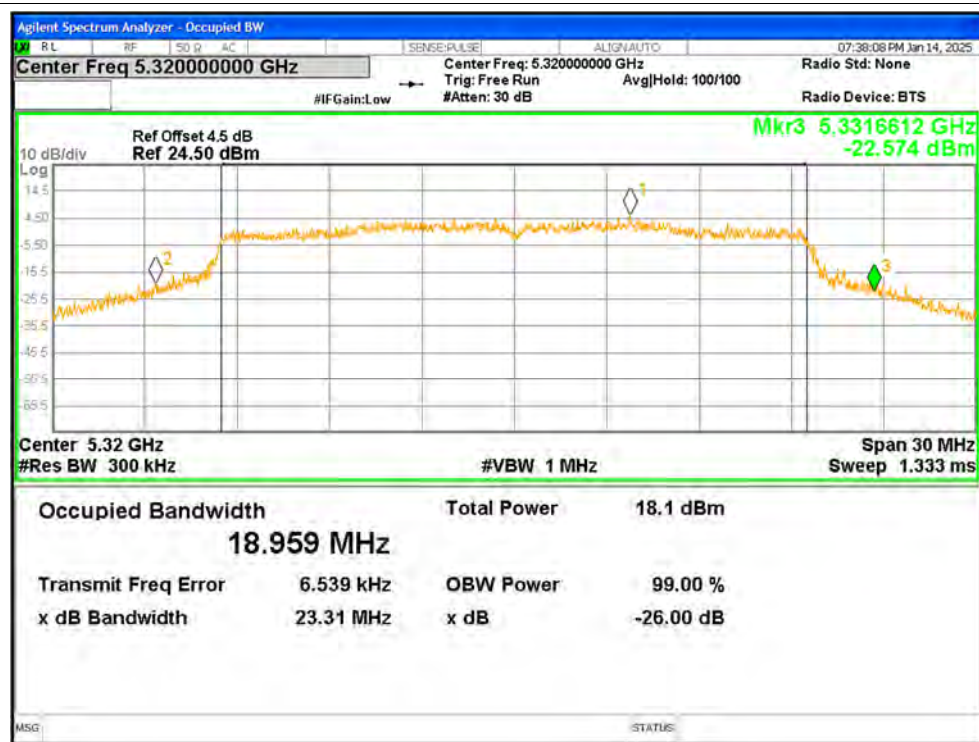-26dB Bandwidth NVNT ax20 5300MHz Ant2**-26dB Bandwidth NVNT ax20 5320MHz Ant2**

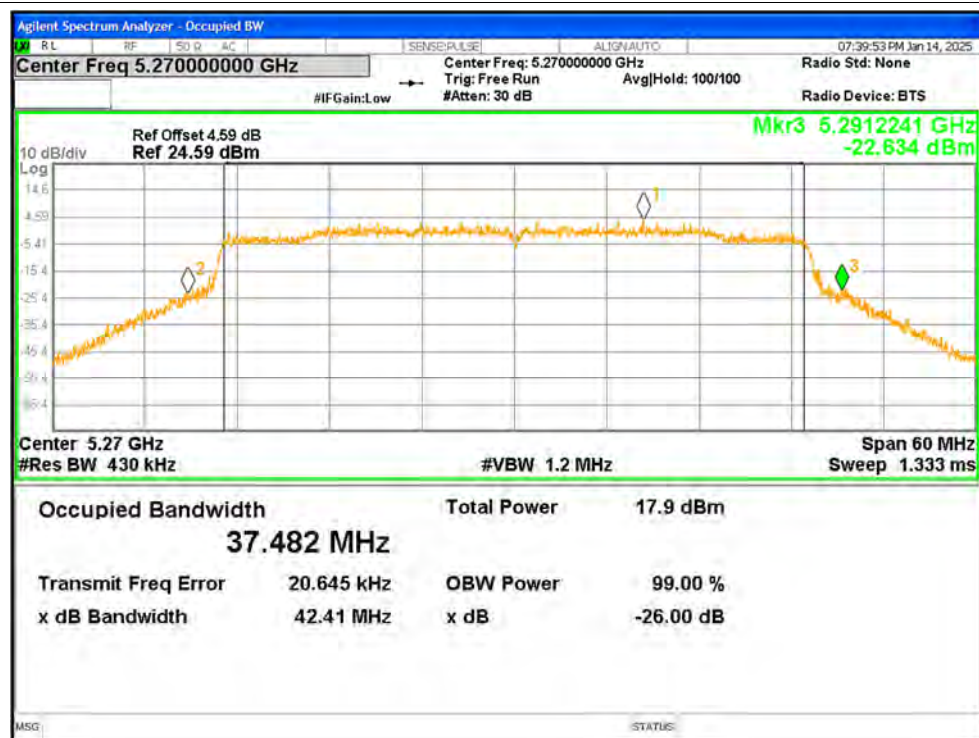-26dB Bandwidth NVNT ax40 5270MHz Ant1**-26dB Bandwidth NVNT ax40 5310MHz Ant1**

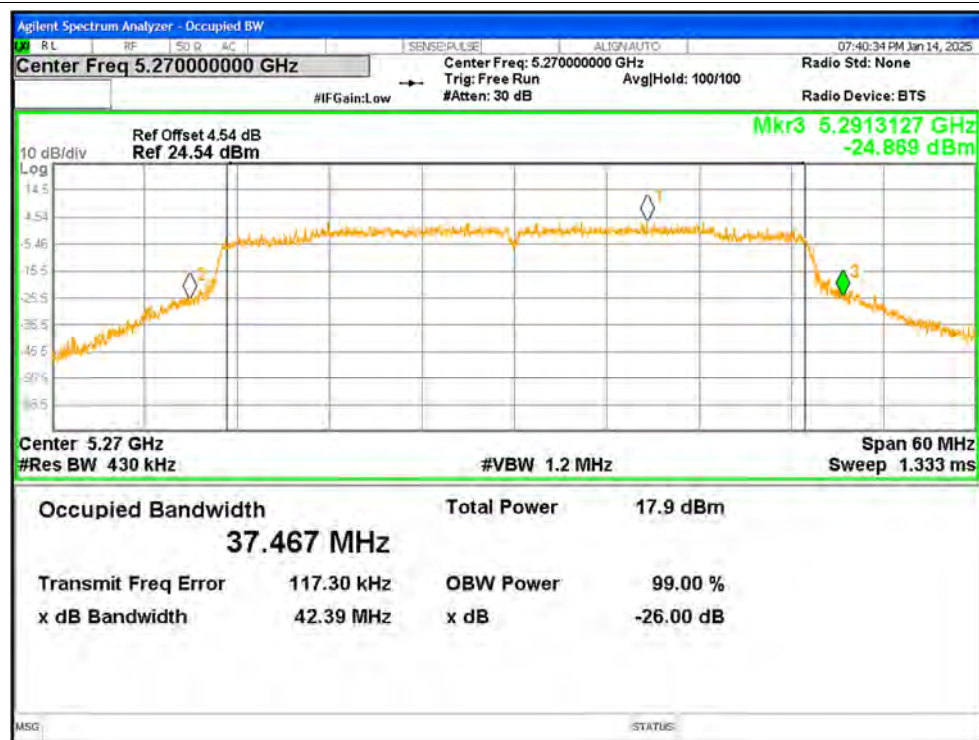-26dB Bandwidth NVNT ax40 5270MHz Ant2**-26dB Bandwidth NVNT ax40 5310MHz Ant2**

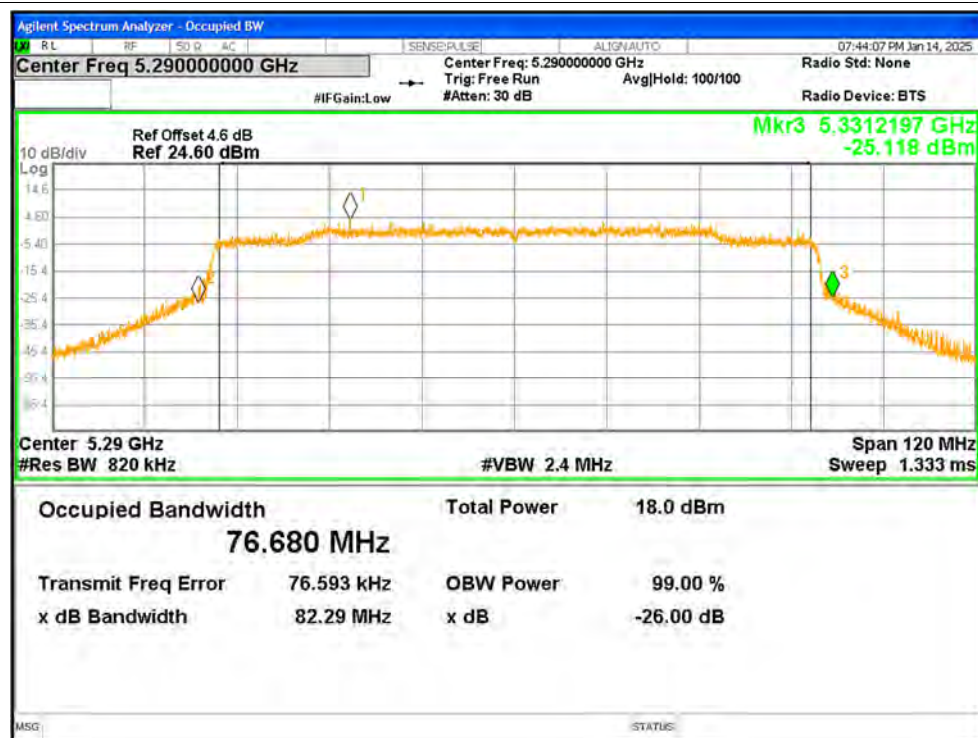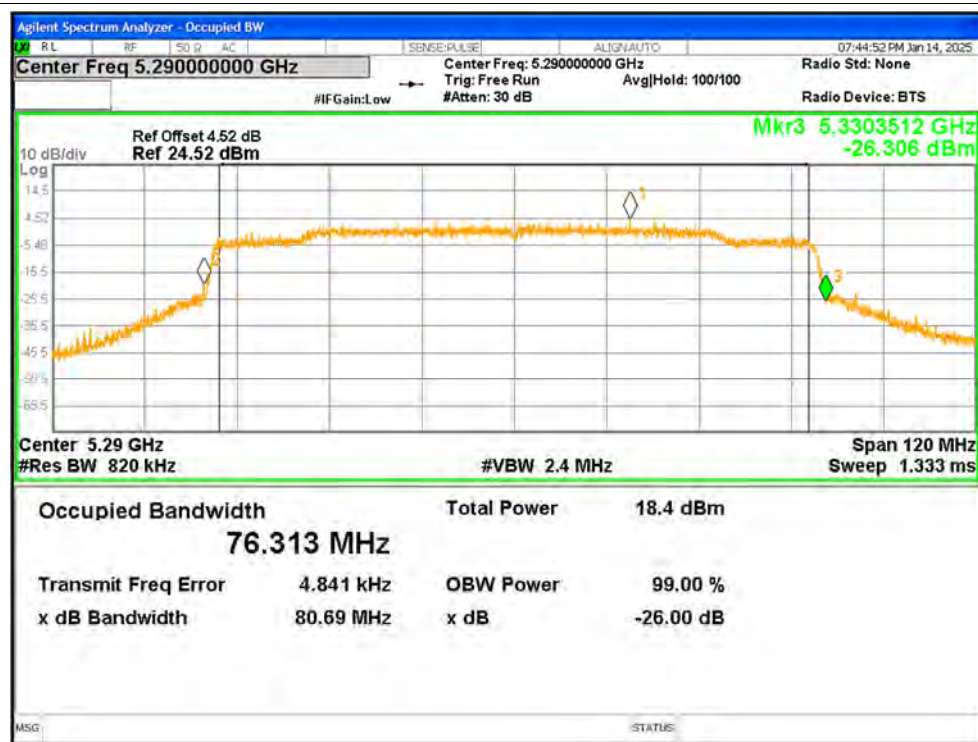
-26dB Bandwidth NVNT ax80 5290MHz Ant1**-26dB Bandwidth NVNT ax80 5290MHz Ant2**

4. Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5260	Ant1	16.5013
NVNT	a	5300	Ant1	16.4775
NVNT	a	5320	Ant1	16.5808
NVNT	a	5260	Ant2	16.5091
NVNT	a	5300	Ant2	16.5699
NVNT	a	5320	Ant2	16.6867
NVNT	n20	5260	Ant1	17.6547
NVNT	n20	5300	Ant1	17.6416
NVNT	n20	5320	Ant1	17.6515
NVNT	n20	5260	Ant2	17.6652
NVNT	n20	5300	Ant2	17.677
NVNT	n20	5320	Ant2	17.7599
NVNT	n40	5270	Ant1	35.9883
NVNT	n40	5310	Ant1	36.0106
NVNT	n40	5270	Ant2	35.9829
NVNT	n40	5310	Ant2	36.0934
NVNT	ac20	5260	Ant1	17.6522
NVNT	ac20	5300	Ant1	17.6227
NVNT	ac20	5320	Ant1	17.651
NVNT	ac20	5260	Ant2	17.635
NVNT	ac20	5300	Ant2	17.6868
NVNT	ac20	5320	Ant2	17.7851
NVNT	ac40	5270	Ant1	36.0018
NVNT	ac40	5310	Ant1	35.9784
NVNT	ac40	5270	Ant2	36.0141
NVNT	ac40	5310	Ant2	36.0642
NVNT	ac80	5290	Ant1	75.0757
NVNT	ac80	5290	Ant2	74.8901
NVNT	ax20	5260	Ant1	18.8667
NVNT	ax20	5300	Ant1	18.8604
NVNT	ax20	5320	Ant1	18.8586
NVNT	ax20	5260	Ant2	18.8468
NVNT	ax20	5300	Ant2	18.8384
NVNT	ax20	5320	Ant2	18.8983
NVNT	ax40	5270	Ant1	37.442
NVNT	ax40	5310	Ant1	37.4821
NVNT	ax40	5270	Ant2	37.4802
NVNT	ax40	5310	Ant2	37.4885
NVNT	ax80	5290	Ant1	76.5509
NVNT	ax80	5290	Ant2	76.3072

Test Graphs


OBW NVNT a 5260MHz Ant1

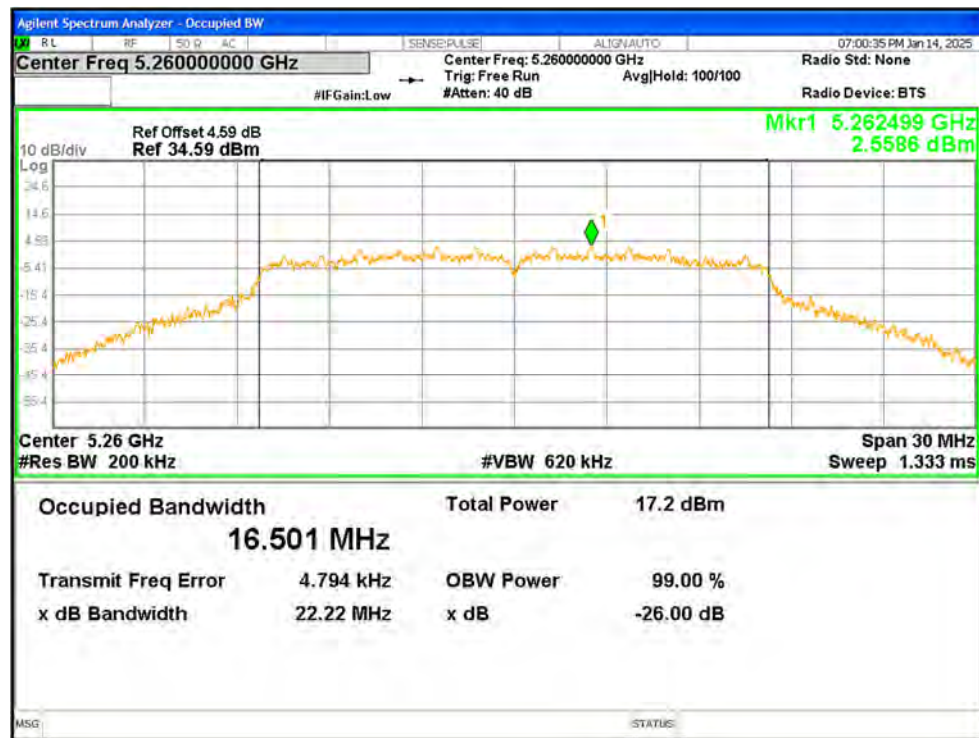


OBW NVNT a 5300MHz Ant1

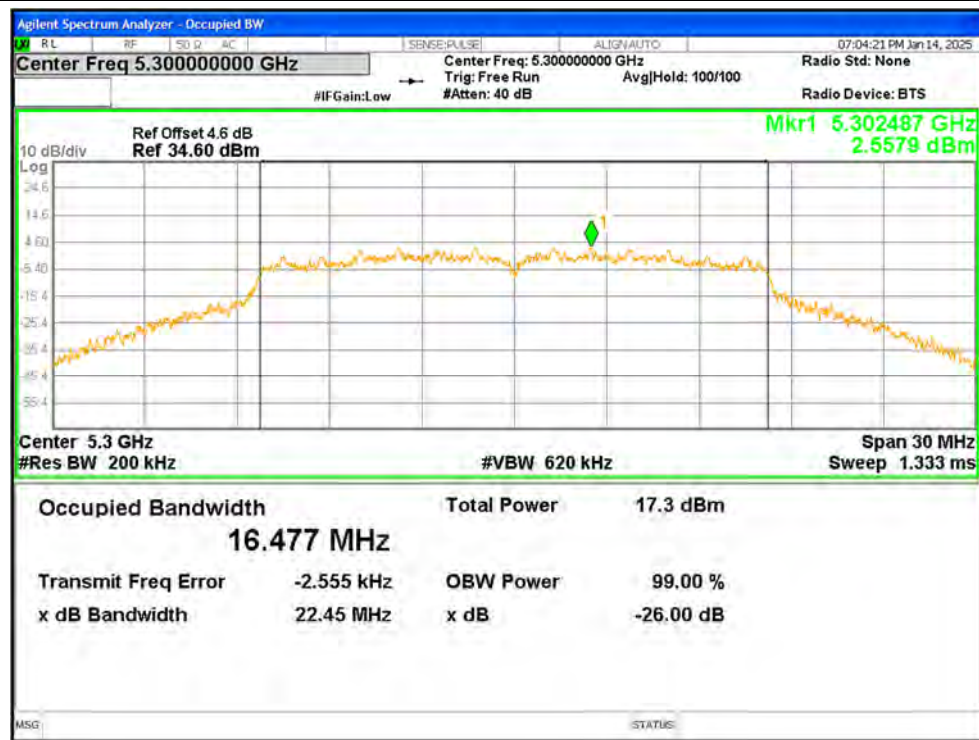


OBW NVNT a 5320MHz Ant1

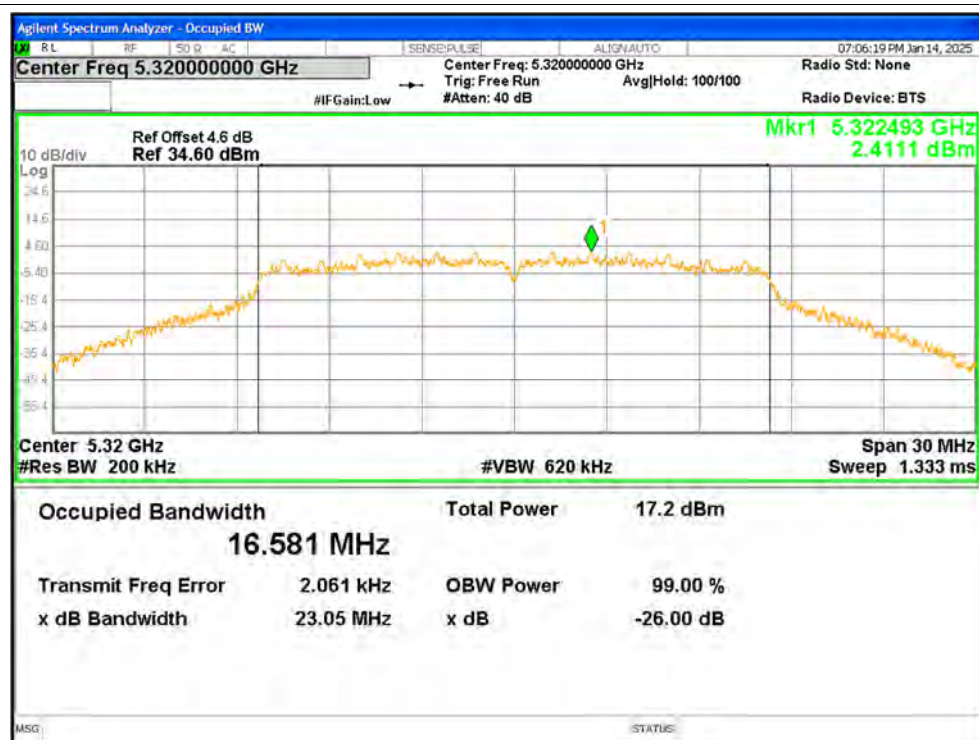


OBW NVNT a 5260MHz Ant2

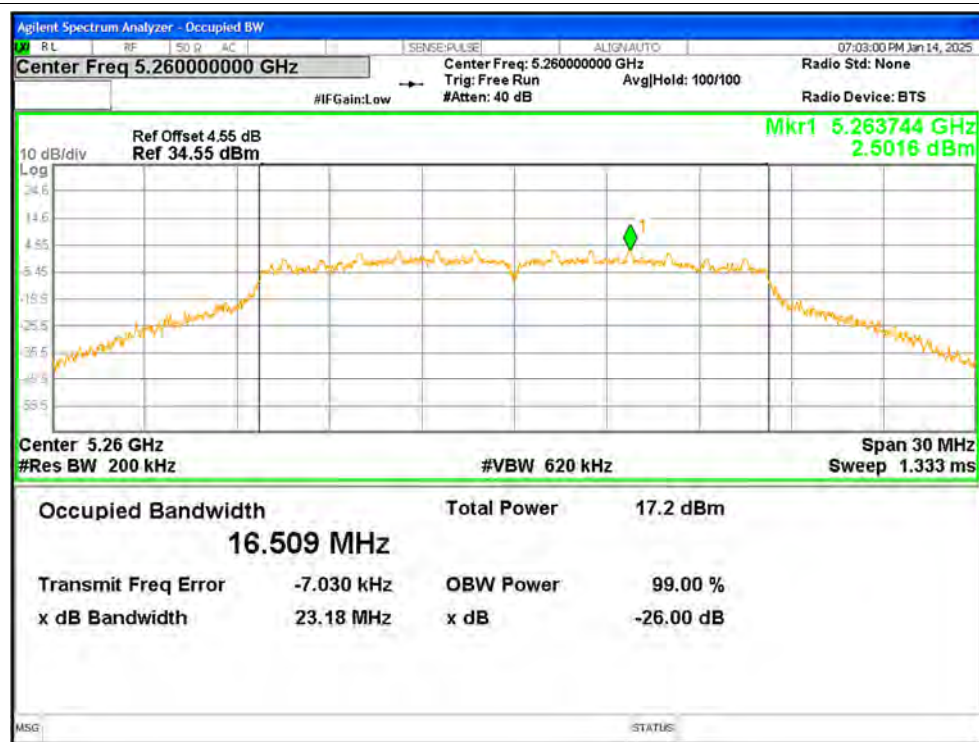


OBW NVNT a 5300MHz Ant2

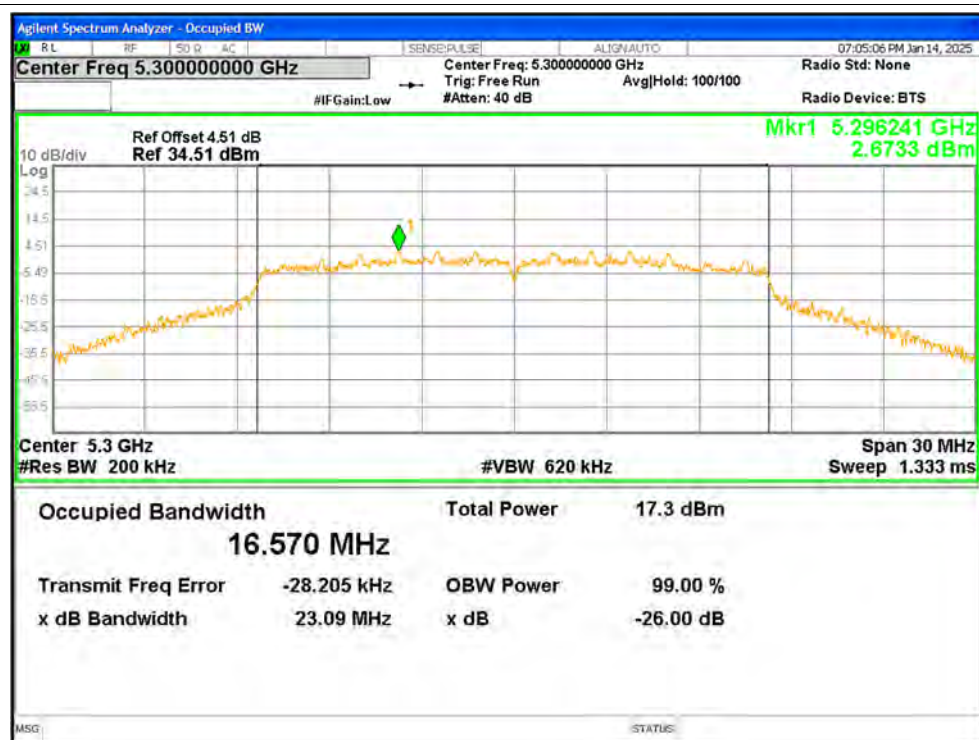


OBW NVNT a 5320MHz Ant2

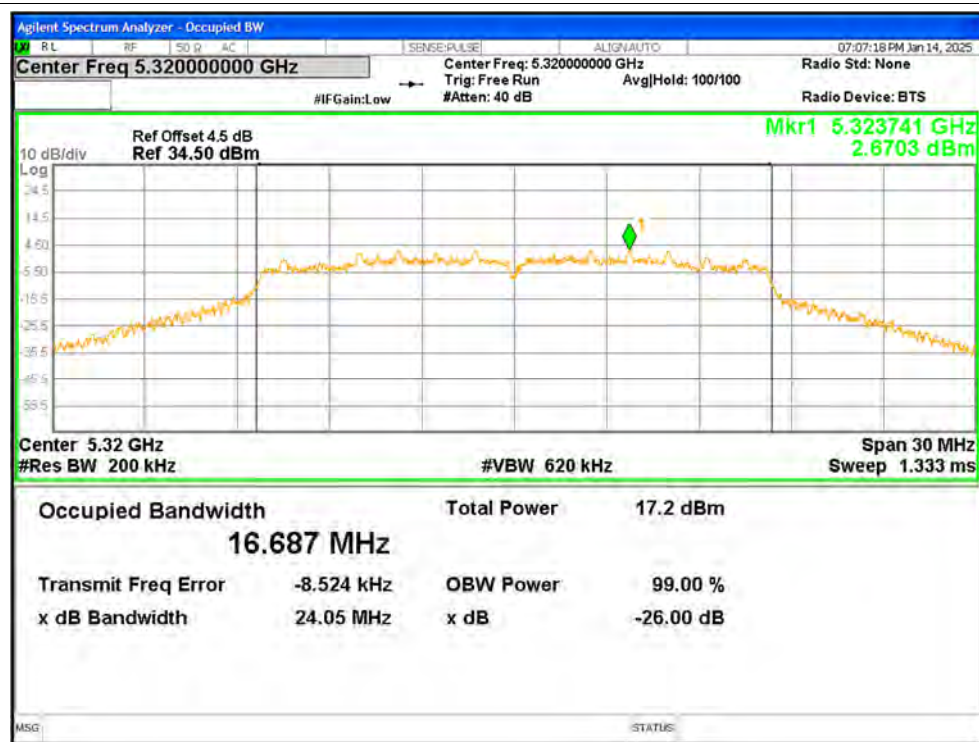


OBW NVNT n20 5260MHz Ant1

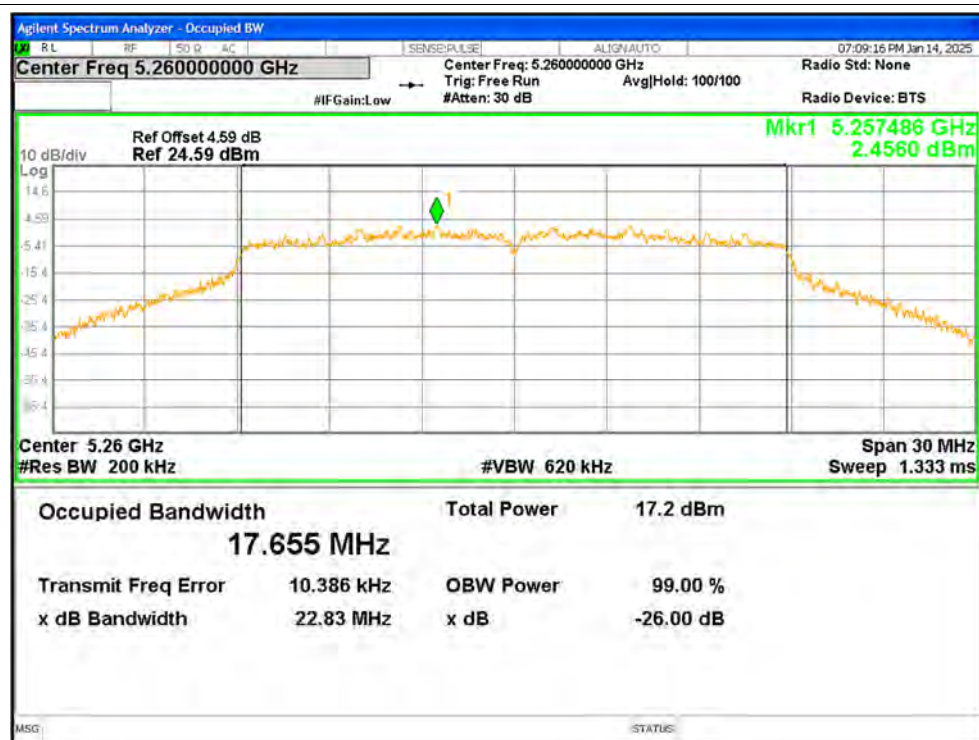


OBW NVNT n20 5300MHz Ant1

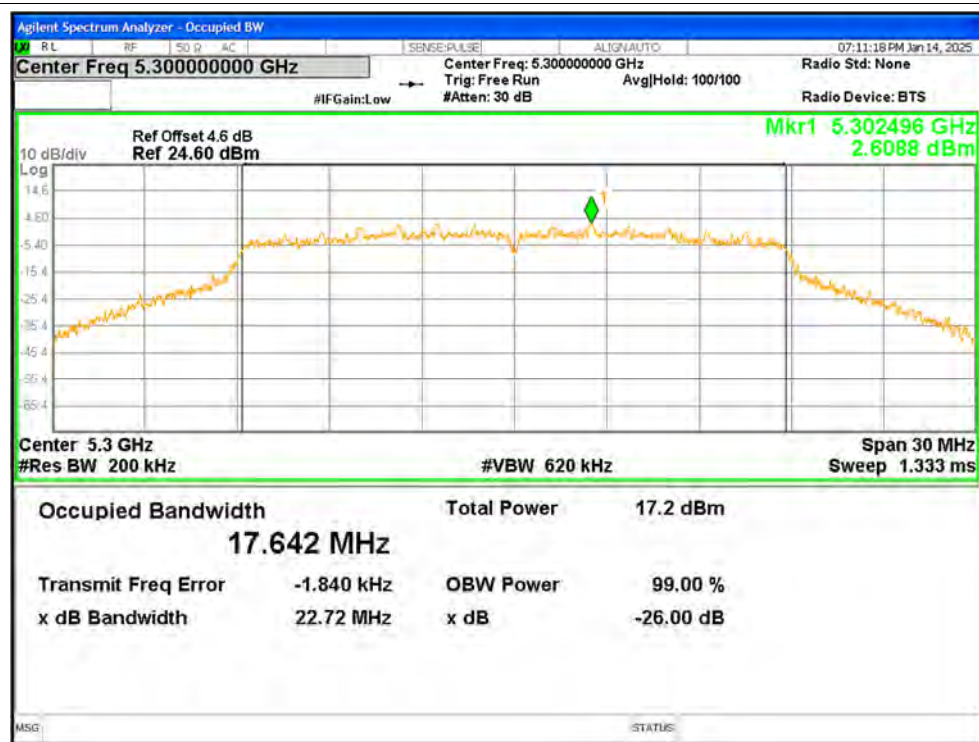


OBW NVNT n20 5320MHz Ant1

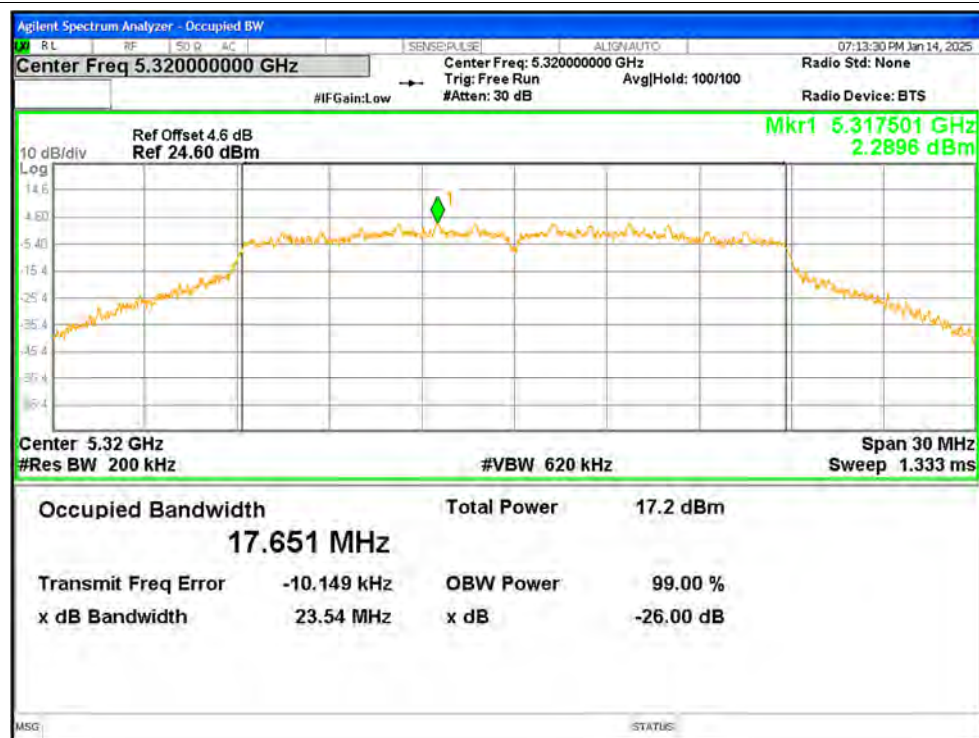


OBW NVNT n20 5260MHz Ant2

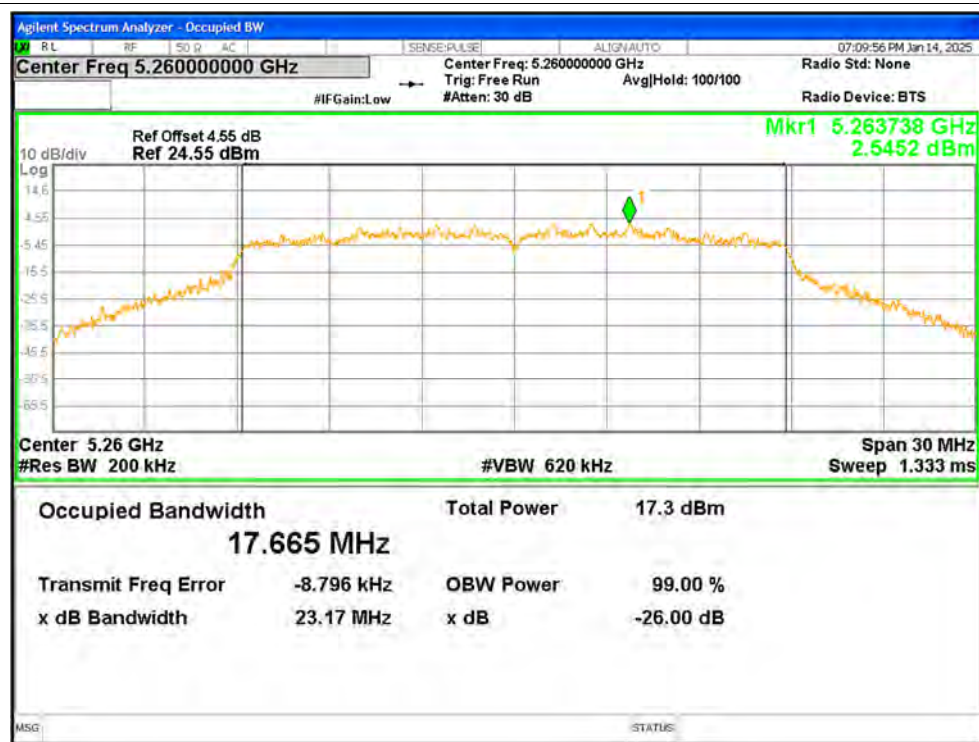


OBW NVNT n20 5300MHz Ant2

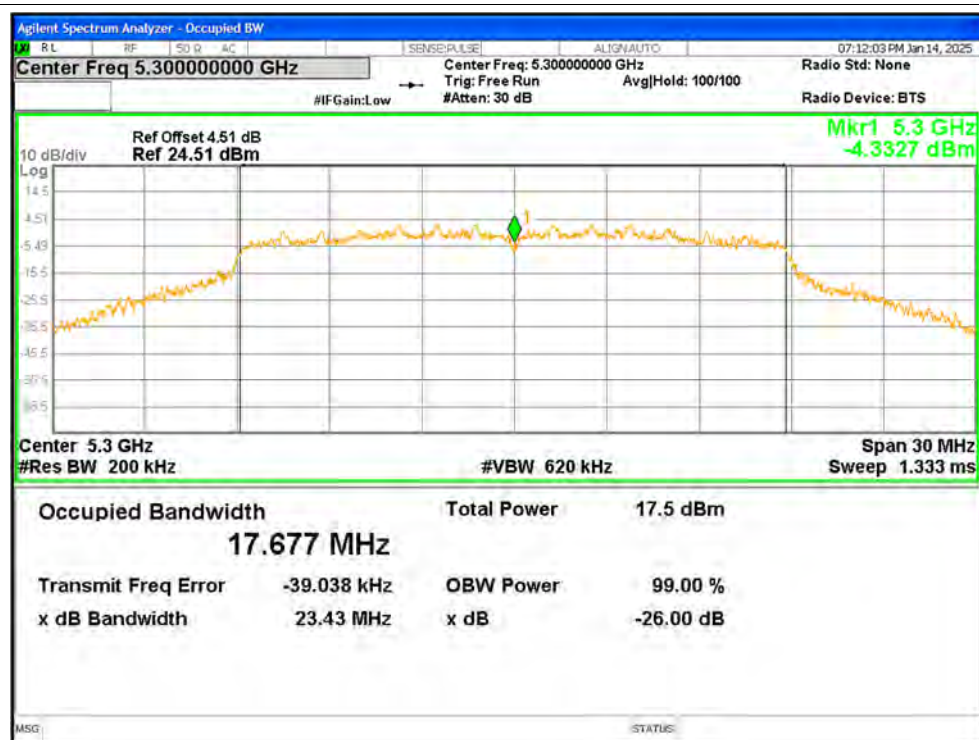


OBW NVNT n20 5320MHz Ant2

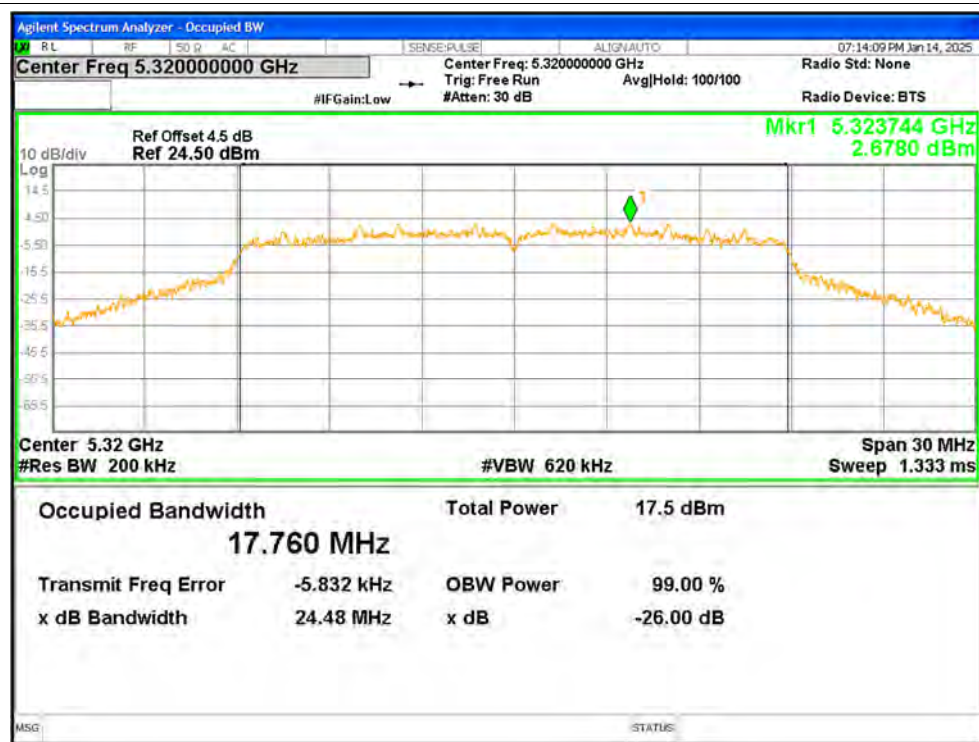


OBW NVNT n40 5270MHz Ant1

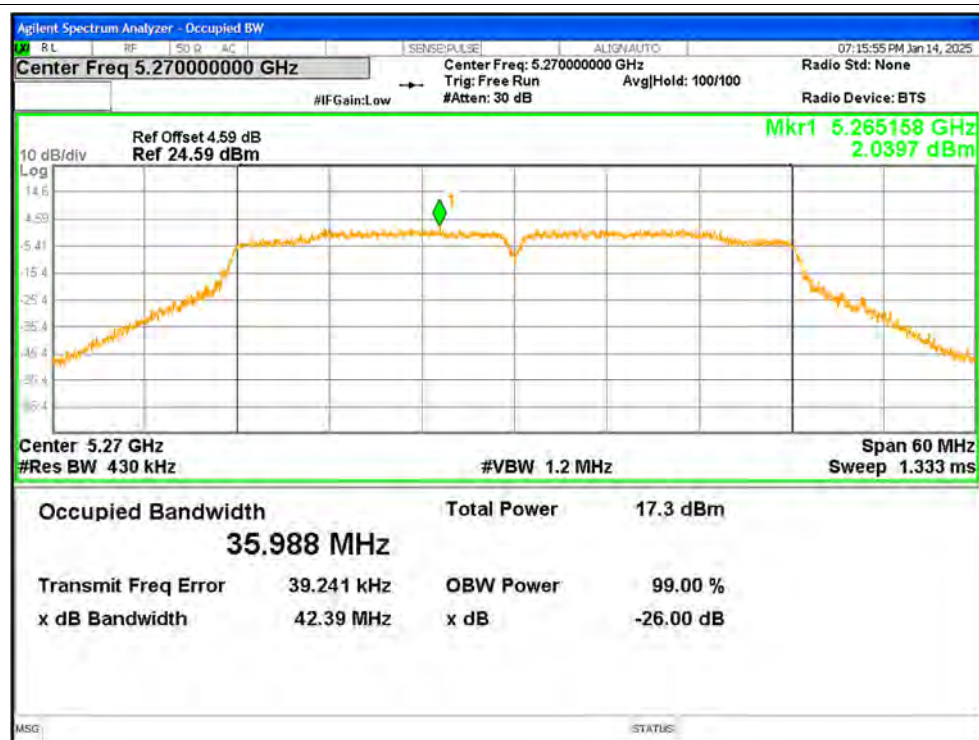


OBW NVNT n40 5310MHz Ant1

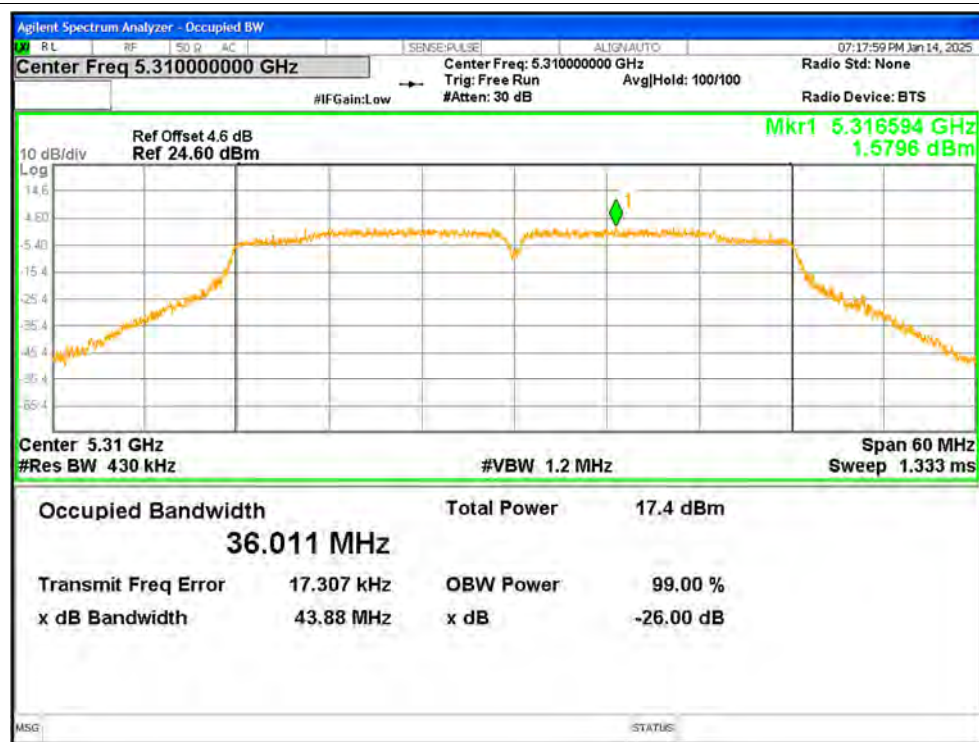


OBW NVNT n40 5270MHz Ant2

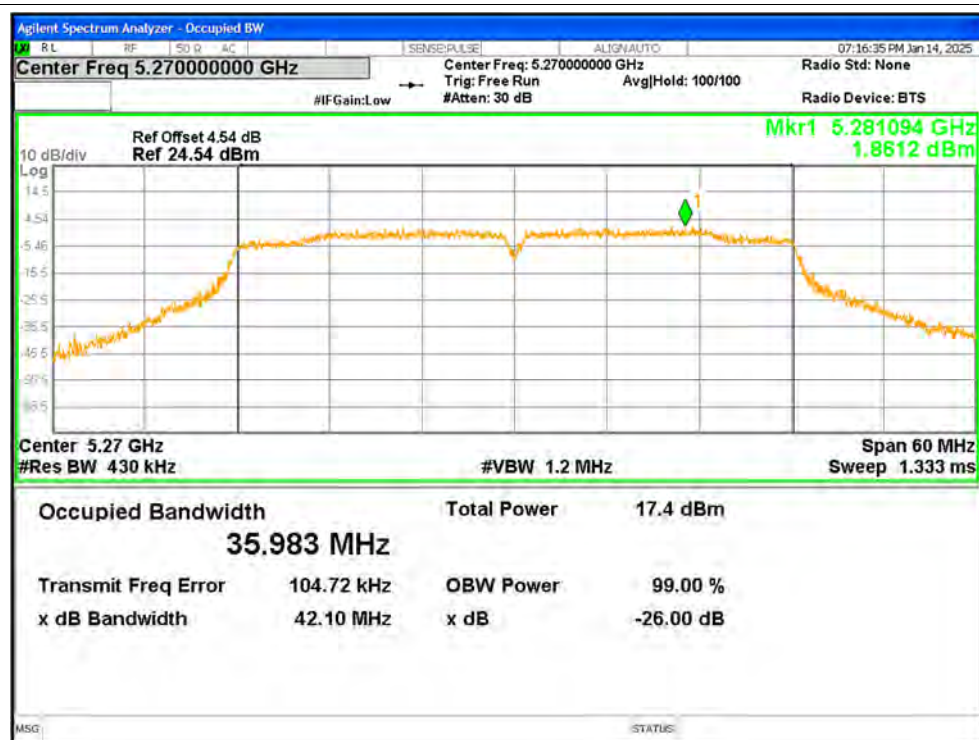


OBW NVNT n40 5310MHz Ant2

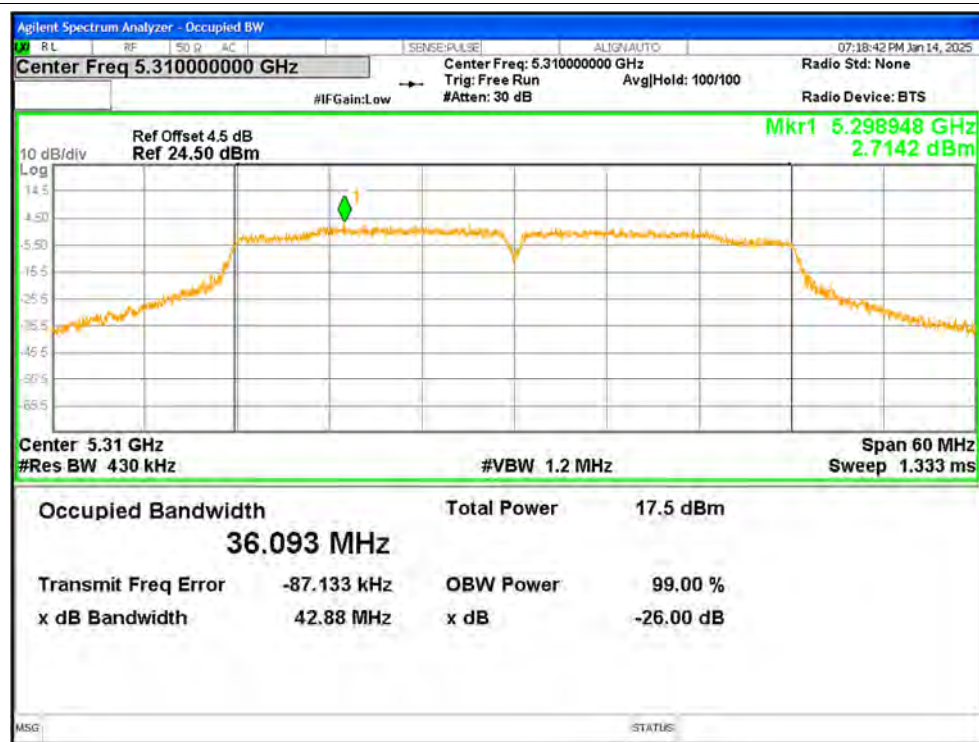


OBW NVNT ac20 5260MHz Ant1

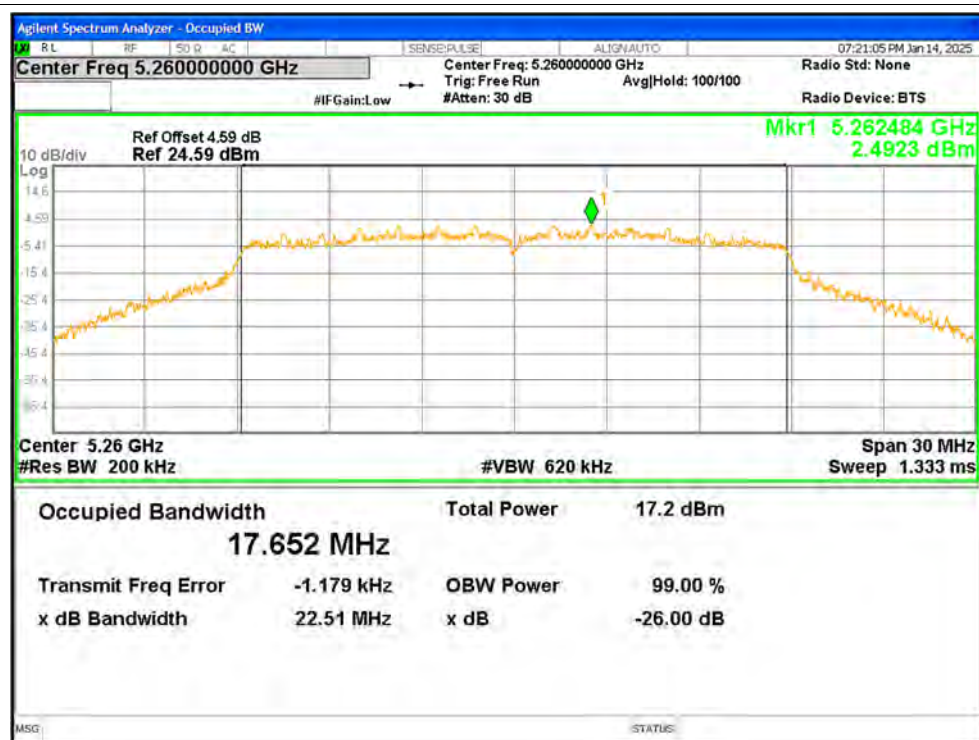


OBW NVNT ac20 5300MHz Ant1

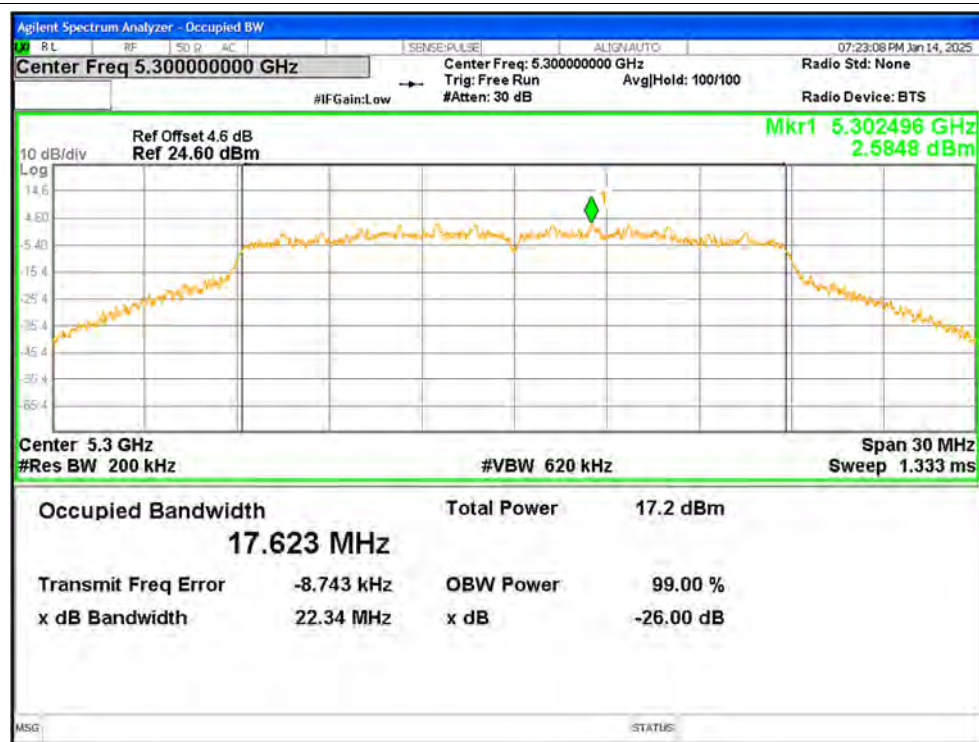


OBW NVNT ac20 5320MHz Ant1

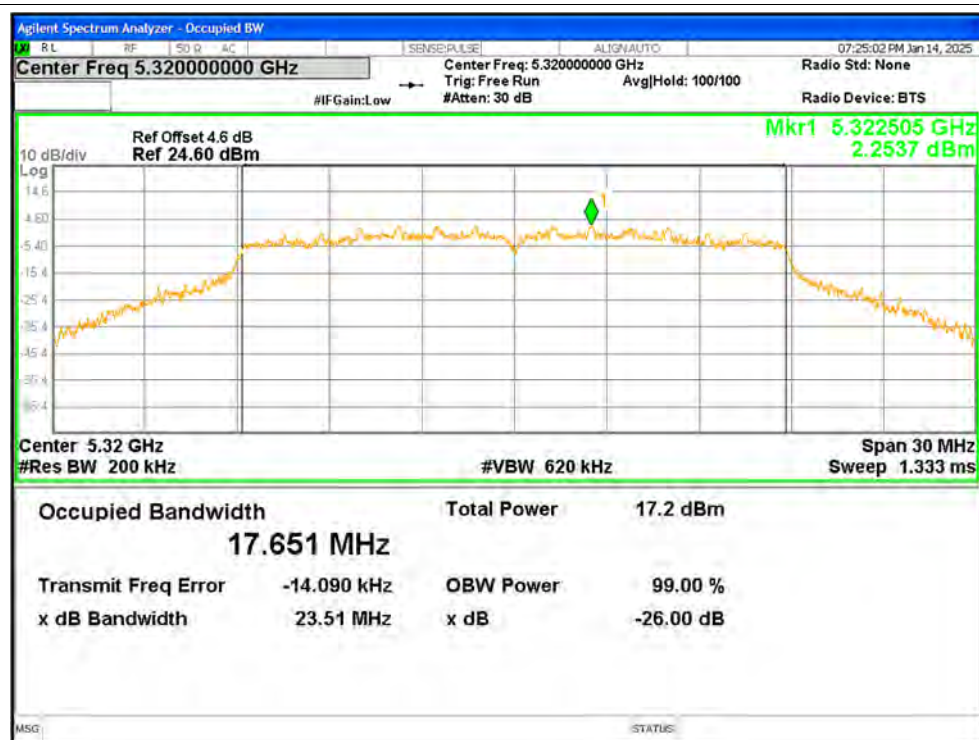


OBW NVNT ac20 5260MHz Ant2

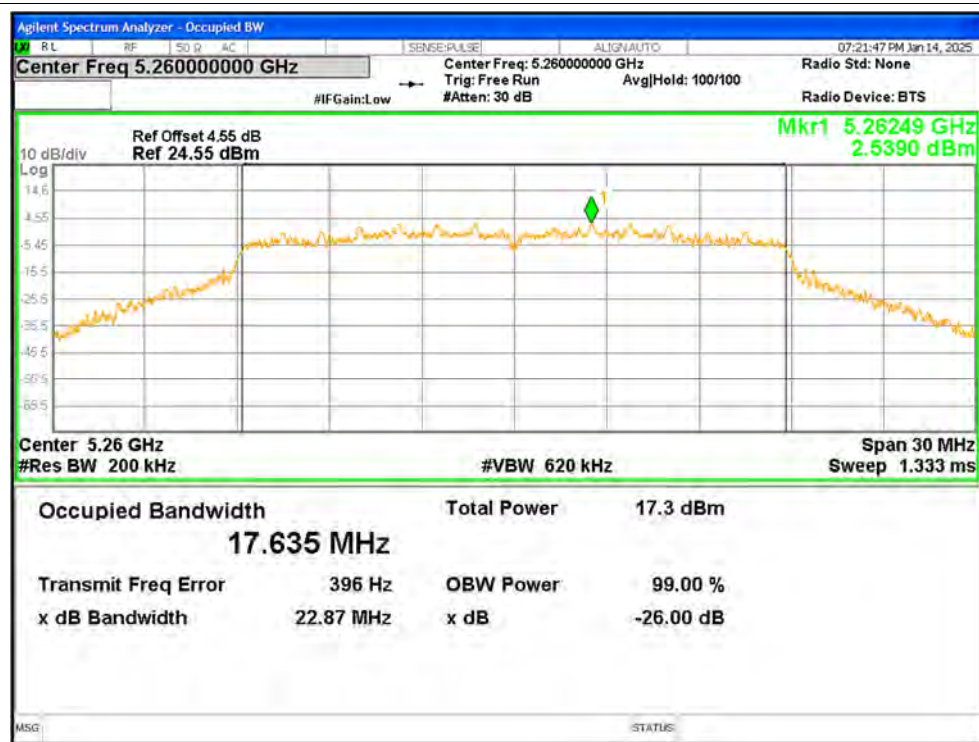


OBW NVNT ac20 5300MHz Ant2

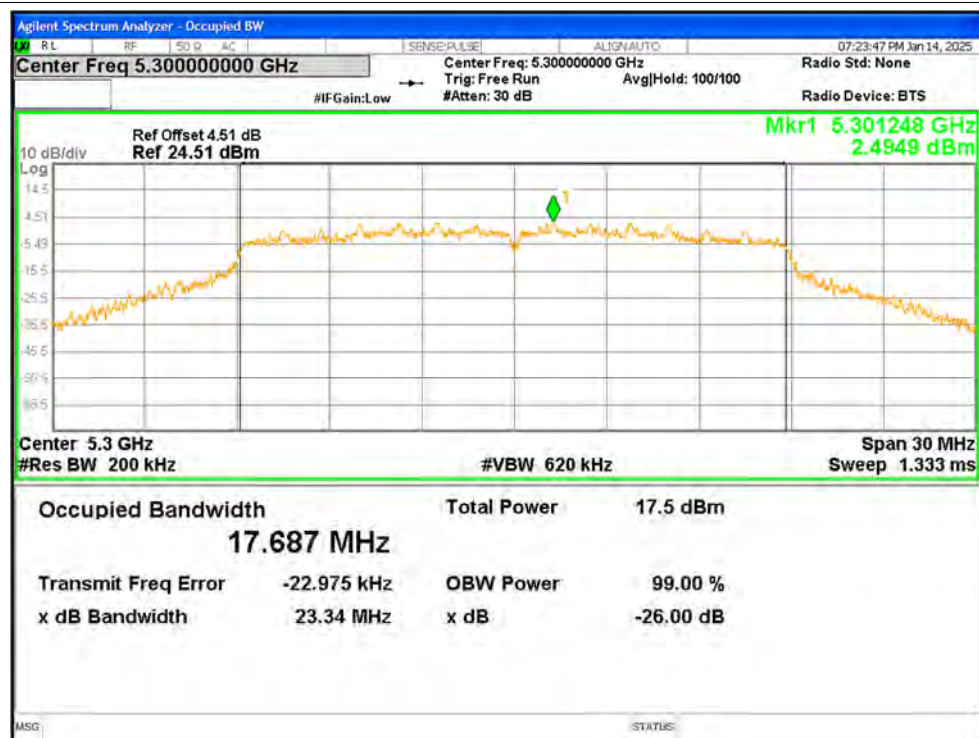


OBW NVNT ac20 5320MHz Ant2

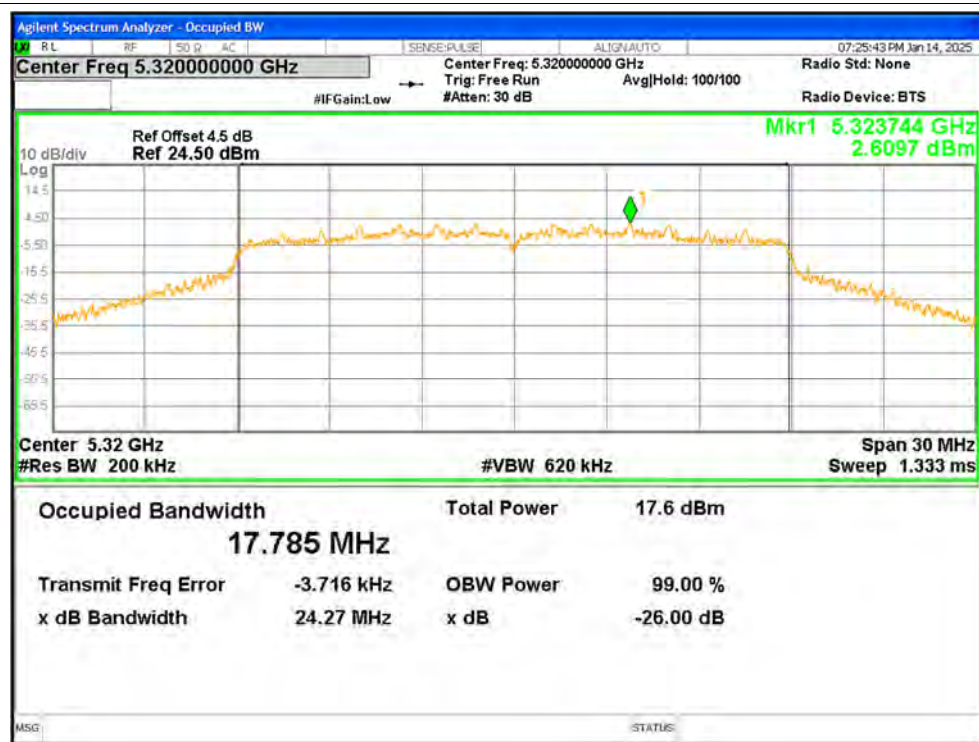


OBW NVNT ac40 5270MHz Ant1

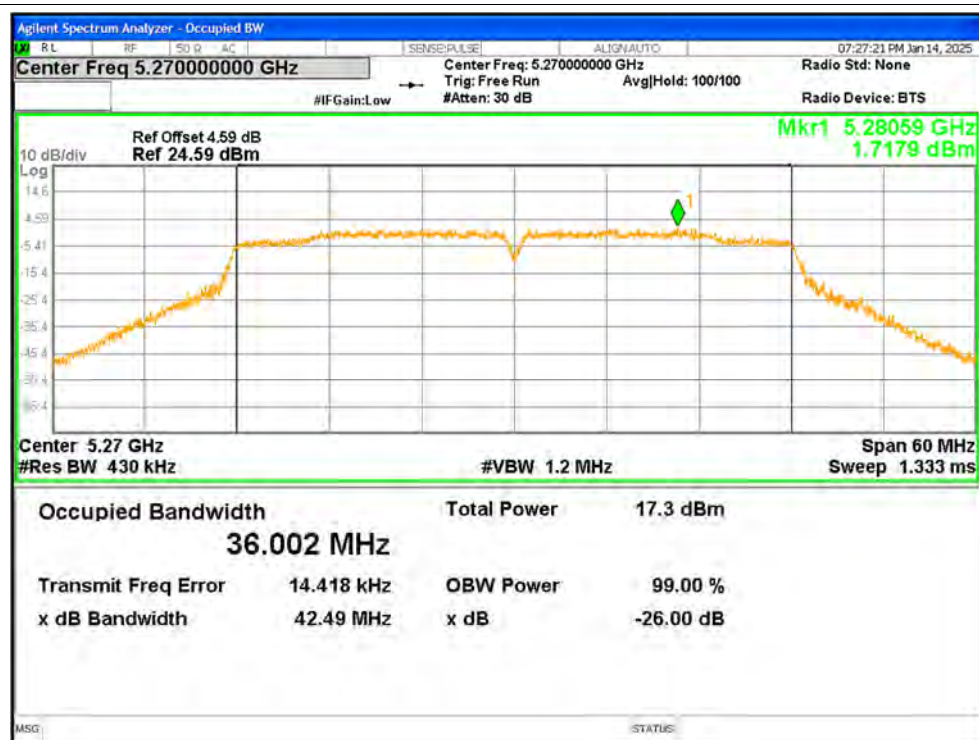


OBW NVNT ac40 5310MHz Ant1

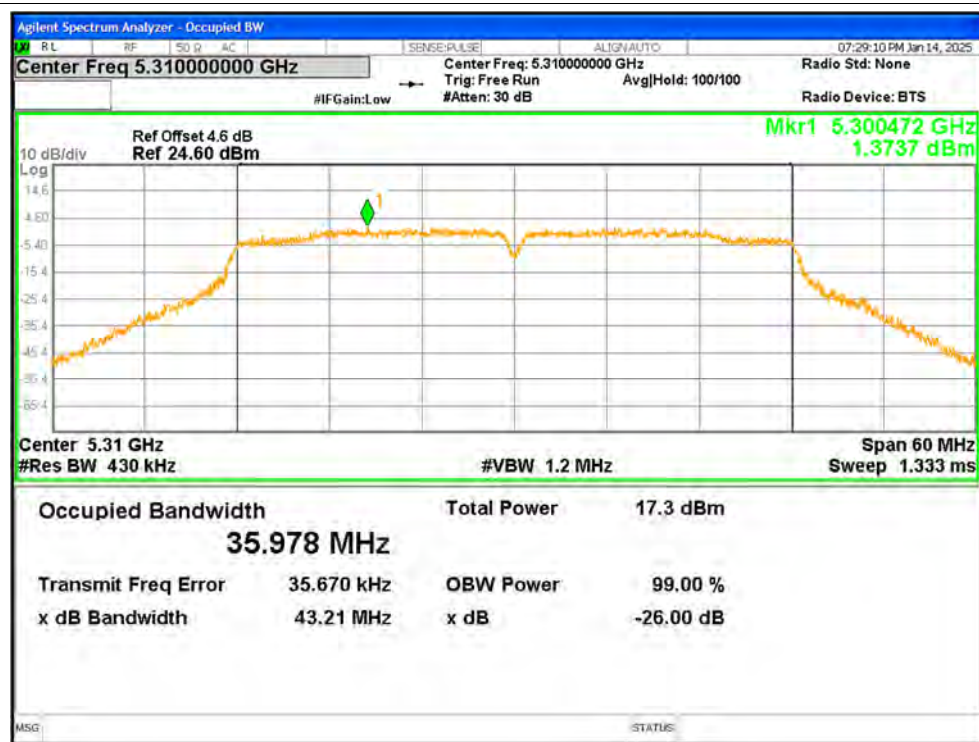


OBW NVNT ac40 5270MHz Ant2

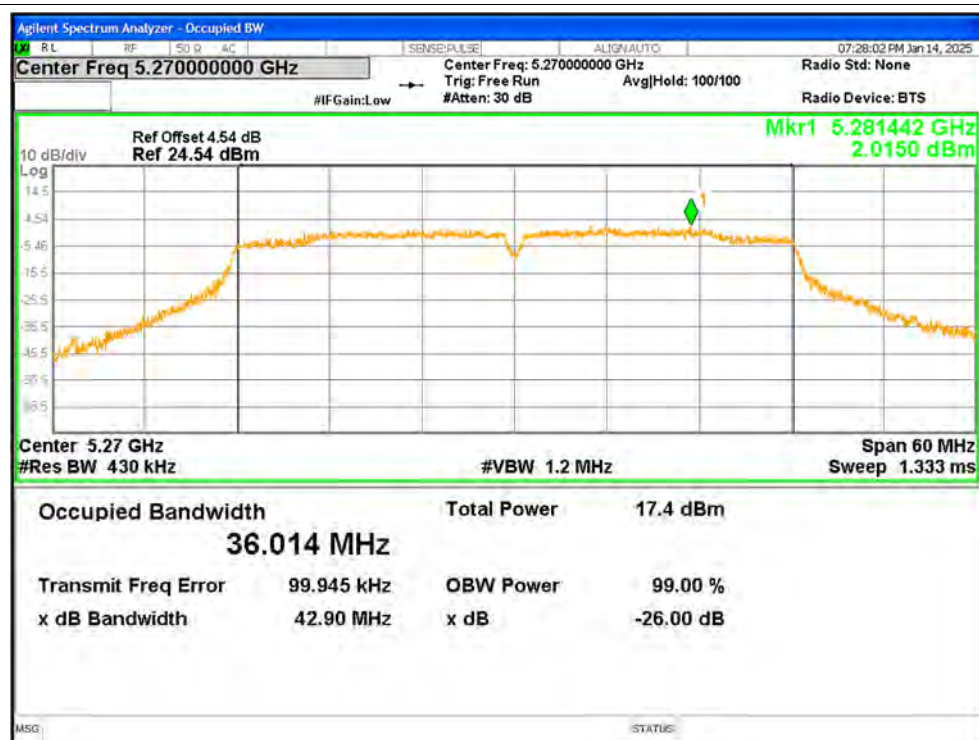


OBW NVNT ac40 5310MHz Ant2

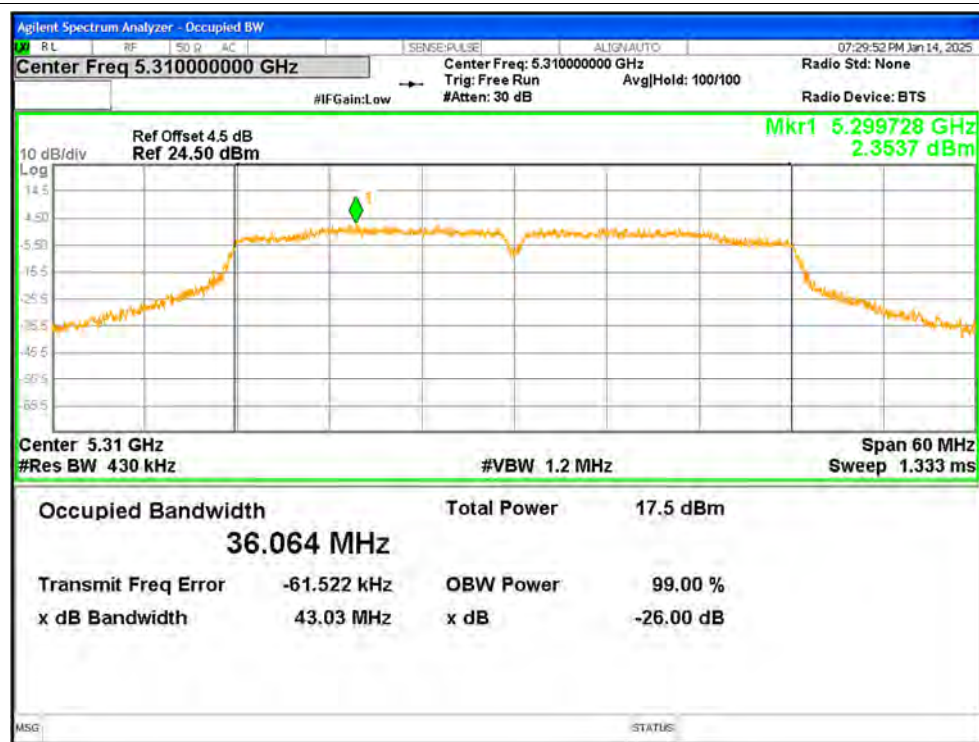


OBW NVNT ac80 5290MHz Ant1

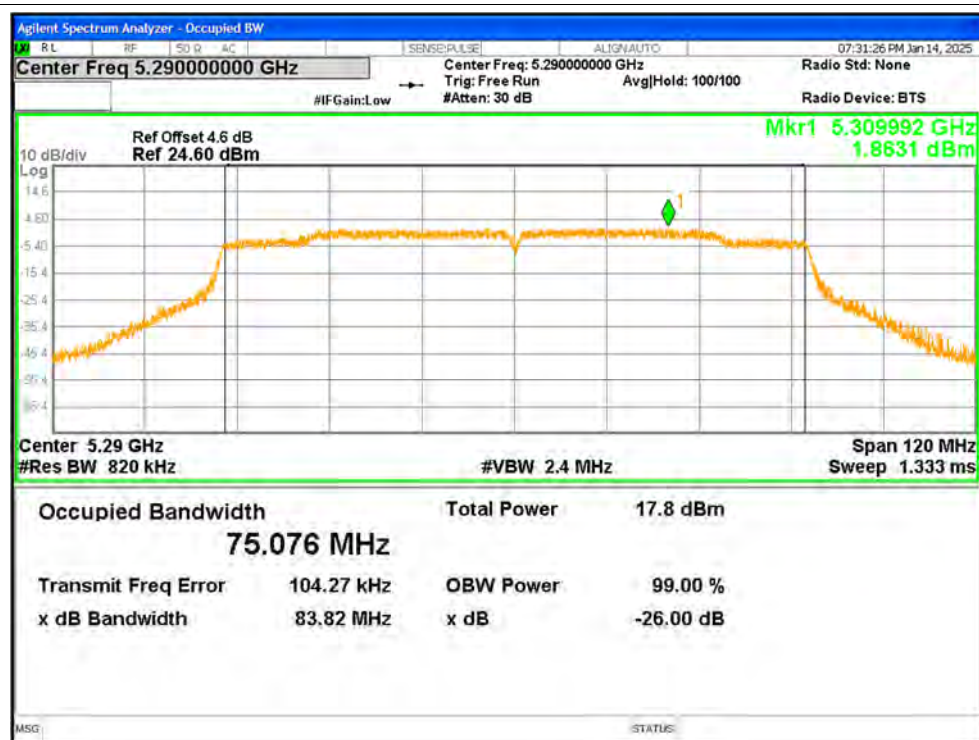


OBW NVNT ac80 5290MHz Ant2

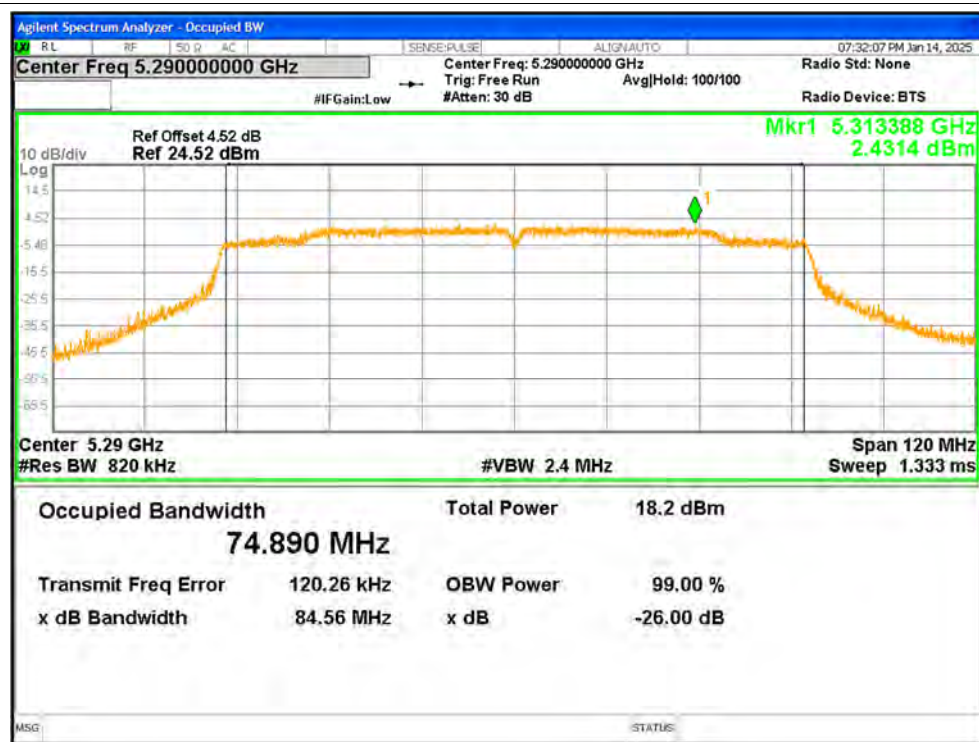


OBW NVNT ax20 5260MHz Ant1

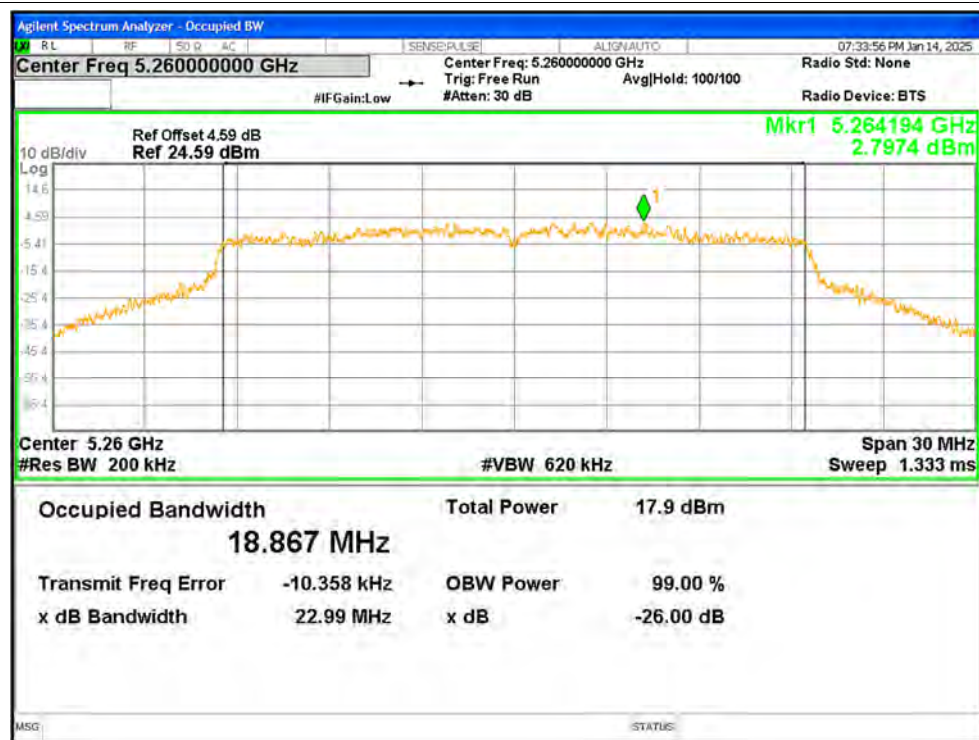


OBW NVNT ax20 5300MHz Ant1

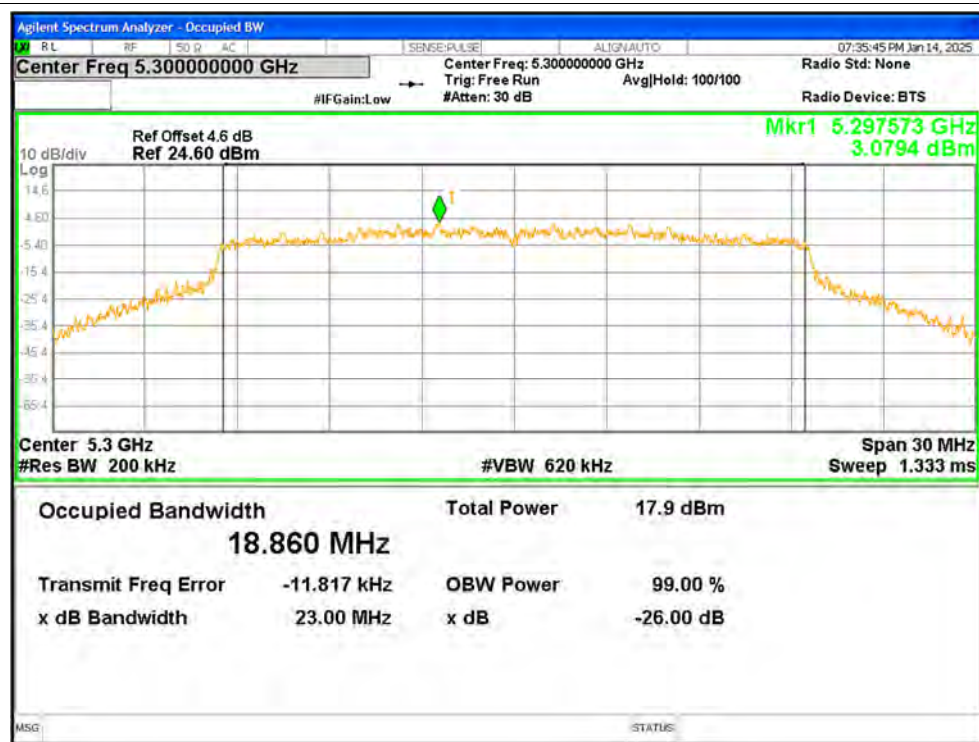


OBW NVNT ax20 5320MHz Ant1

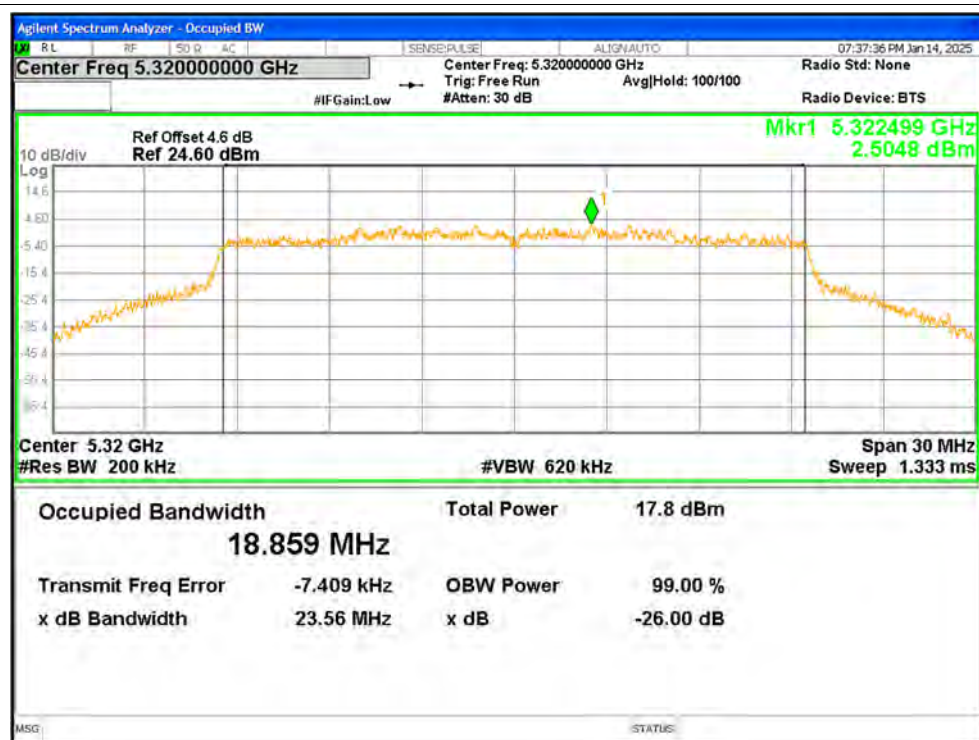


OBW NVNT ax20 5260MHz Ant2

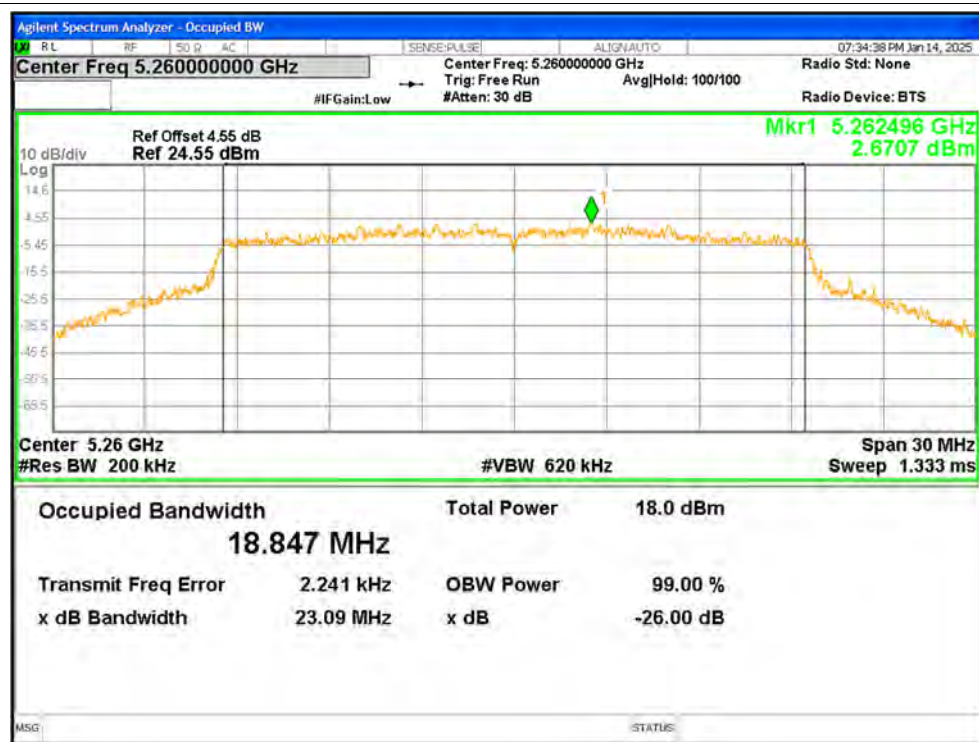


OBW NVNT ax20 5300MHz Ant2

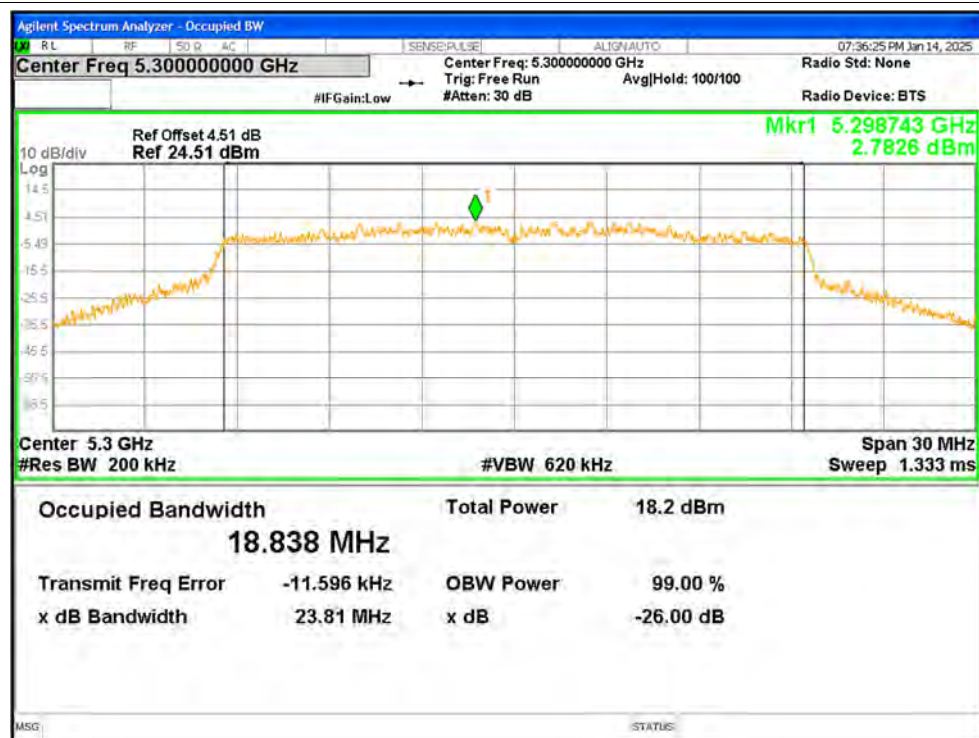


OBW NVNT ax20 5320MHz Ant2

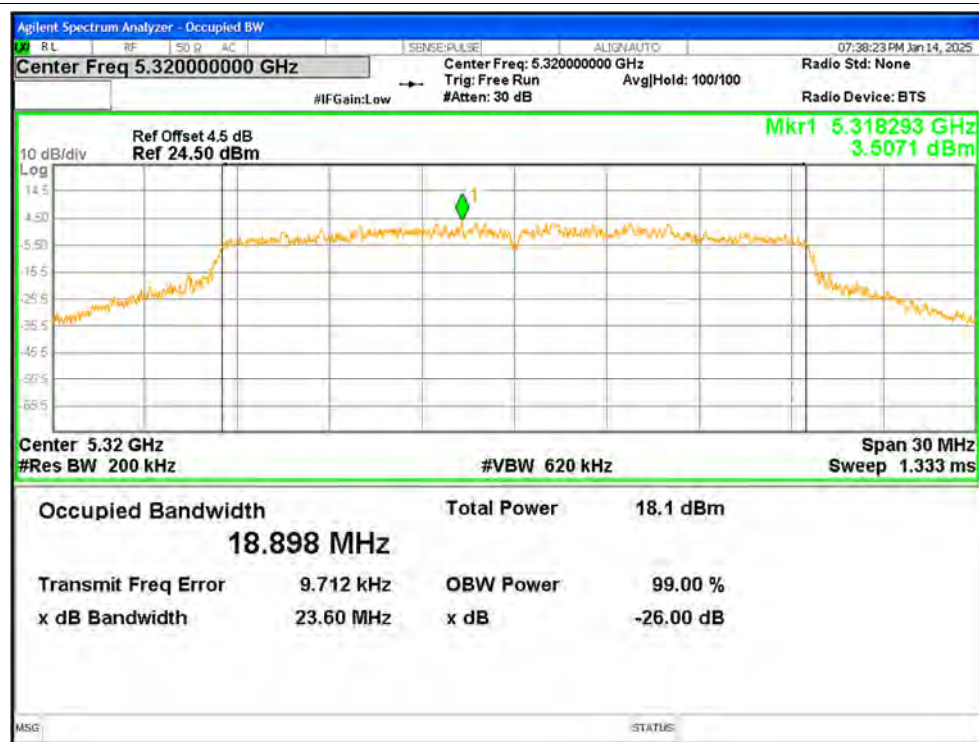


OBW NVNT ax40 5270MHz Ant1

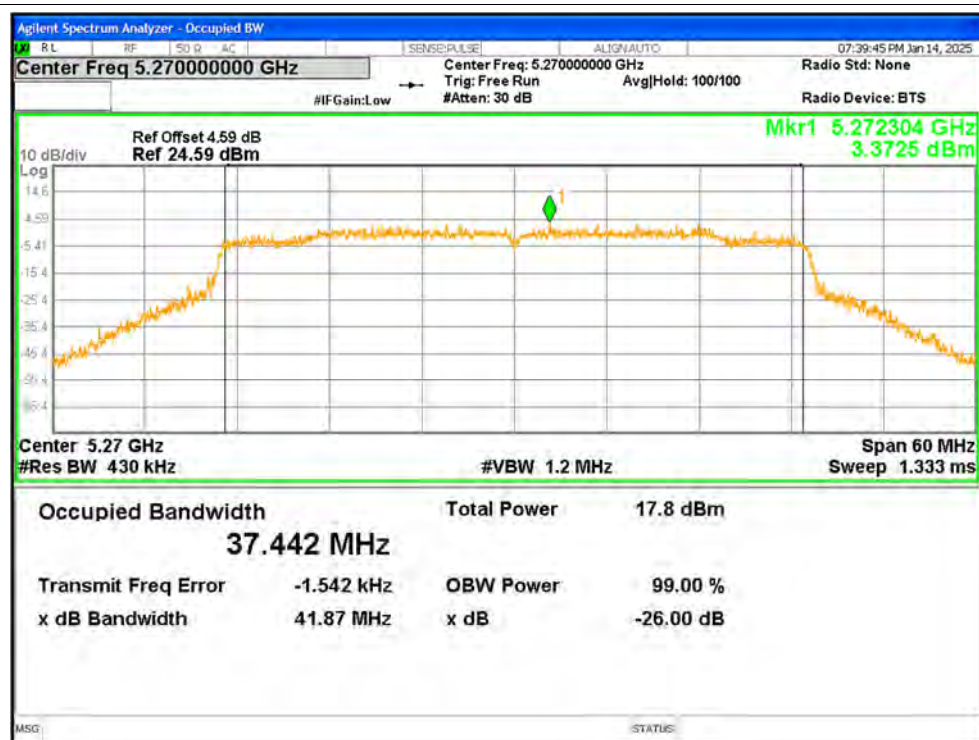


OBW NVNT ax40 5310MHz Ant1

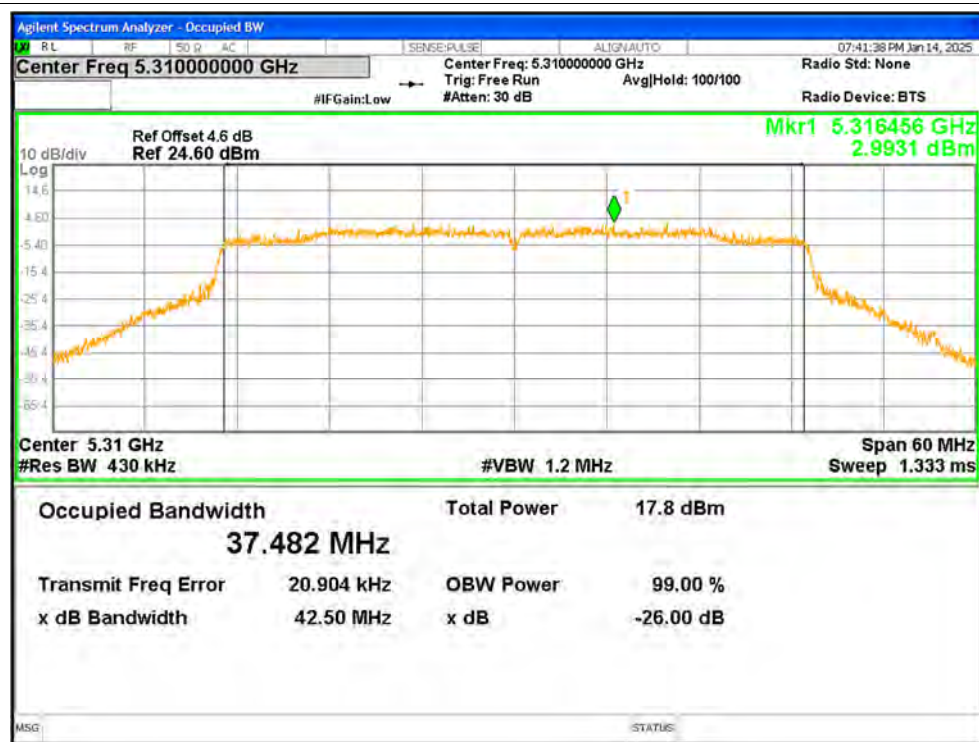


OBW NVNT ax40 5270MHz Ant2

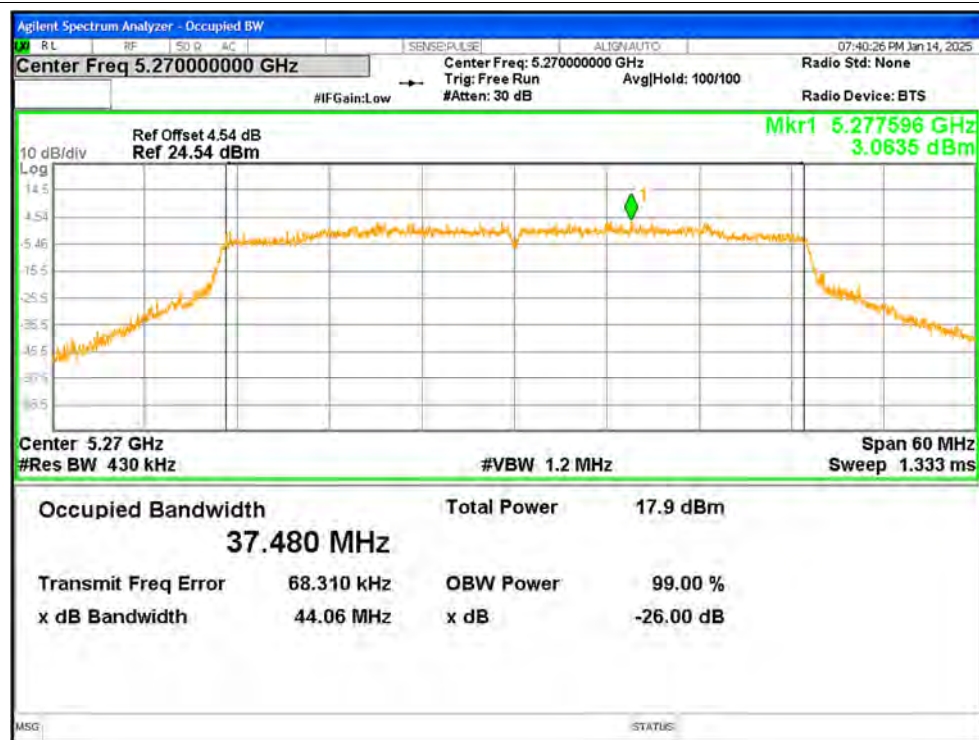


OBW NVNT ax40 5310MHz Ant2

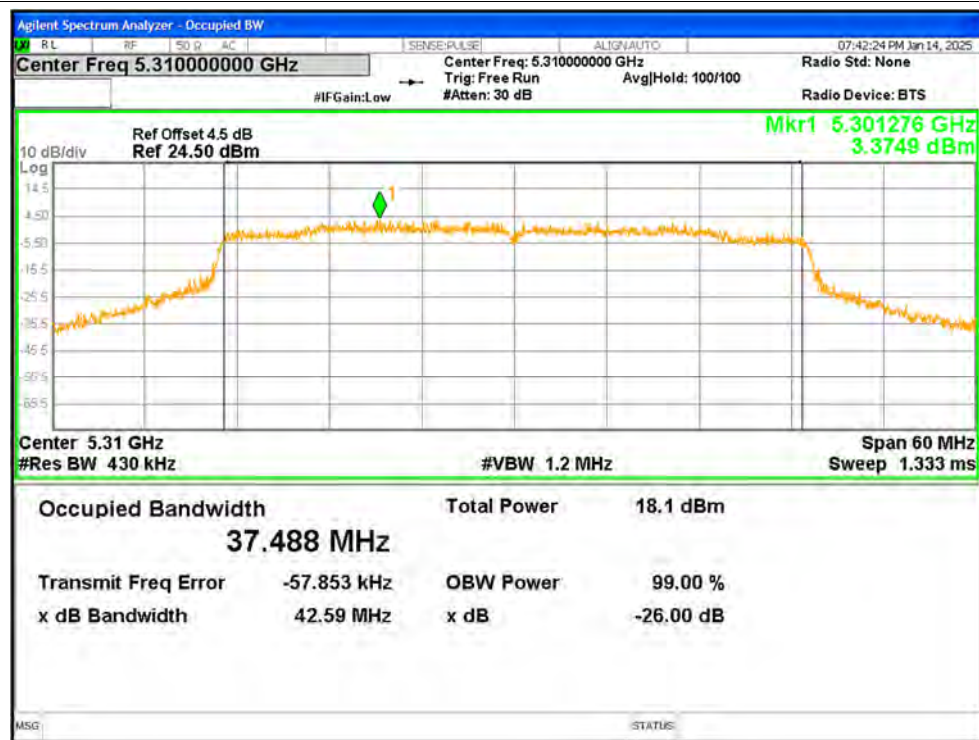

OBW NVNT ax80 5290MHz Ant1

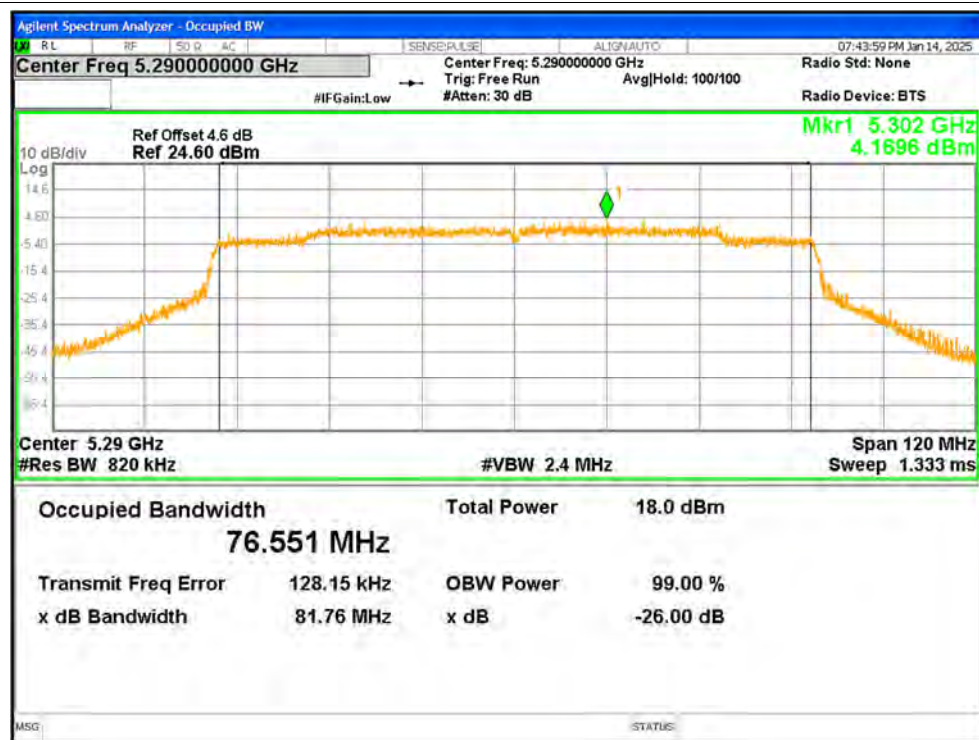

OBW NVNT ax80 5290MHz Ant2

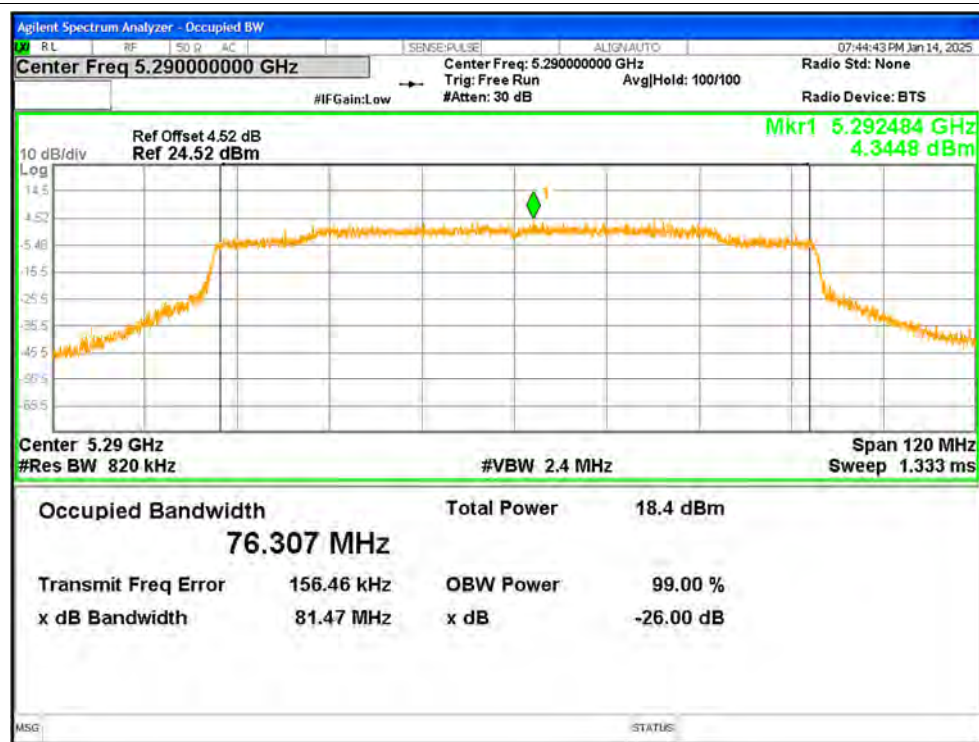


5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5260	Ant1	0.898	0.94	1.838	<=11	Pass
NVNT	a	5300	Ant1	0.961	0.96	1.921	<=11	Pass
NVNT	a	5320	Ant1	0.777	0.97	1.747	<=11	Pass
NVNT	a	5260	Ant2	0.646	0.96	1.606	<=11	Pass
NVNT	a	5300	Ant2	0.687	0.96	1.647	<=11	Pass
NVNT	a	5320	Ant2	1.039	0.96	1.999	<=11	Pass
NVNT	n20	5260	Ant1	0.625	0.55	1.175	<=11	Pass
NVNT	n20	5300	Ant1	0.647	0.55	1.197	<=11	Pass
NVNT	n20	5320	Ant1	0.682	0.56	1.242	<=11	Pass
NVNT	n20	5260	Ant2	1.229	0.55	1.779	<=11	Pass
NVNT	n20	5300	Ant2	1.261	0.55	1.811	<=11	Pass
NVNT	n20	5320	Ant2	1.149	0.55	1.699	<=11	Pass
NVNT	n40	5270	Ant1	-2.275	0.57	-1.705	<=11	Pass
NVNT	n40	5310	Ant1	-2.018	0.59	-1.428	<=11	Pass
NVNT	n40	5270	Ant2	-2.08	0.57	-1.51	<=11	Pass
NVNT	n40	5310	Ant2	-1.509	0.59	-0.919	<=11	Pass
NVNT	ac20	5260	Ant1	0.474	0.59	1.064	<=11	Pass
NVNT	ac20	5300	Ant1	0.815	0.59	1.405	<=11	Pass
NVNT	ac20	5320	Ant1	0.559	0.61	1.169	<=11	Pass
NVNT	ac20	5260	Ant2	0.828	0.61	1.438	<=11	Pass
NVNT	ac20	5300	Ant2	0.922	0.61	1.532	<=11	Pass
NVNT	ac20	5320	Ant2	1.136	0.61	1.746	<=11	Pass
NVNT	ac40	5270	Ant1	-2.192	0.65	-1.542	<=11	Pass
NVNT	ac40	5310	Ant1	-2.21	0.66	-1.55	<=11	Pass
NVNT	ac40	5270	Ant2	-1.867	0.65	-1.217	<=11	Pass
NVNT	ac40	5310	Ant2	-1.87	0.67	-1.2	<=11	Pass
NVNT	ac80	5290	Ant1	-5.047	0.69	-4.357	<=11	Pass
NVNT	ac80	5290	Ant2	-4.725	0.7	-4.025	<=11	Pass
NVNT	ax20	5260	Ant1	0.902	0.41	1.312	<=11	Pass
NVNT	ax20	5300	Ant1	0.975	0.41	1.385	<=11	Pass
NVNT	ax20	5320	Ant1	1.197	0.41	1.607	<=11	Pass
NVNT	ax20	5260	Ant2	1.076	0.41	1.486	<=11	Pass
NVNT	ax20	5300	Ant2	1.162	0.41	1.572	<=11	Pass
NVNT	ax20	5320	Ant2	1.055	0.4	1.455	<=11	Pass
NVNT	ax40	5270	Ant1	-2.606	0.72	-1.886	<=11	Pass
NVNT	ax40	5310	Ant1	-2.636	0.75	-1.886	<=11	Pass
NVNT	ax40	5270	Ant2	-2.471	0.72	-1.751	<=11	Pass
NVNT	ax40	5310	Ant2	-2.027	0.75	-1.277	<=11	Pass
NVNT	ax80	5290	Ant1	-5.436	0.78	-4.656	<=11	Pass


NVNT	ax80	5290	Ant2	-5.225	0.79	-4.435	<=11	Pass
------	------	------	------	--------	------	--------	------	------

Test Graphs


PSD NVNT a 5260MHz Ant1

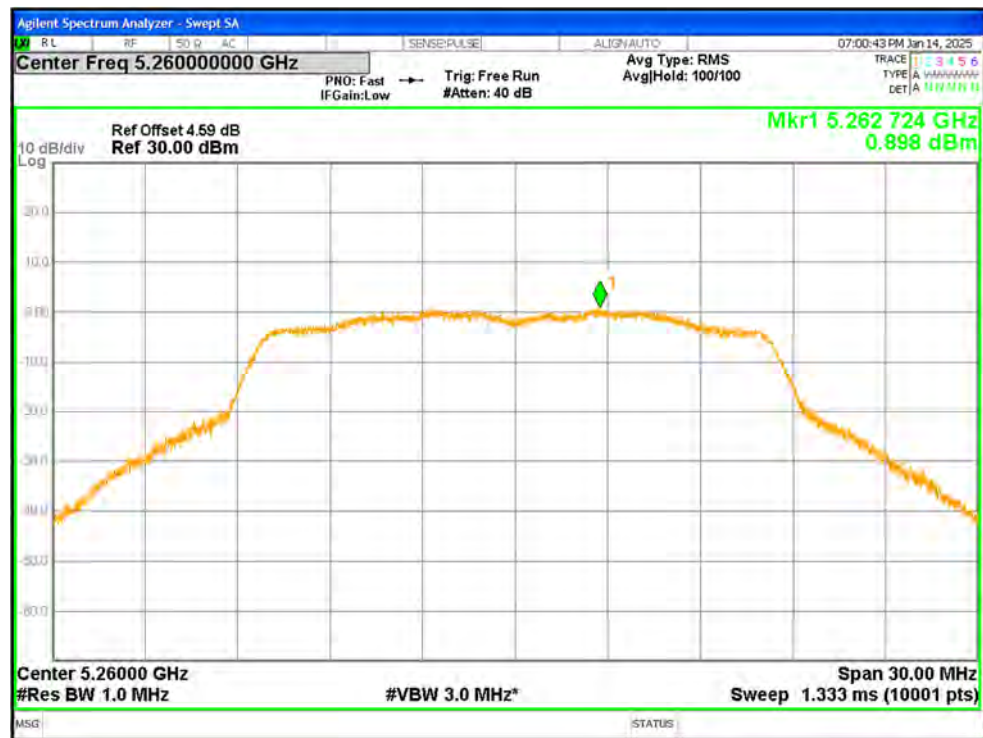


PSD NVNT a 5300MHz Ant1

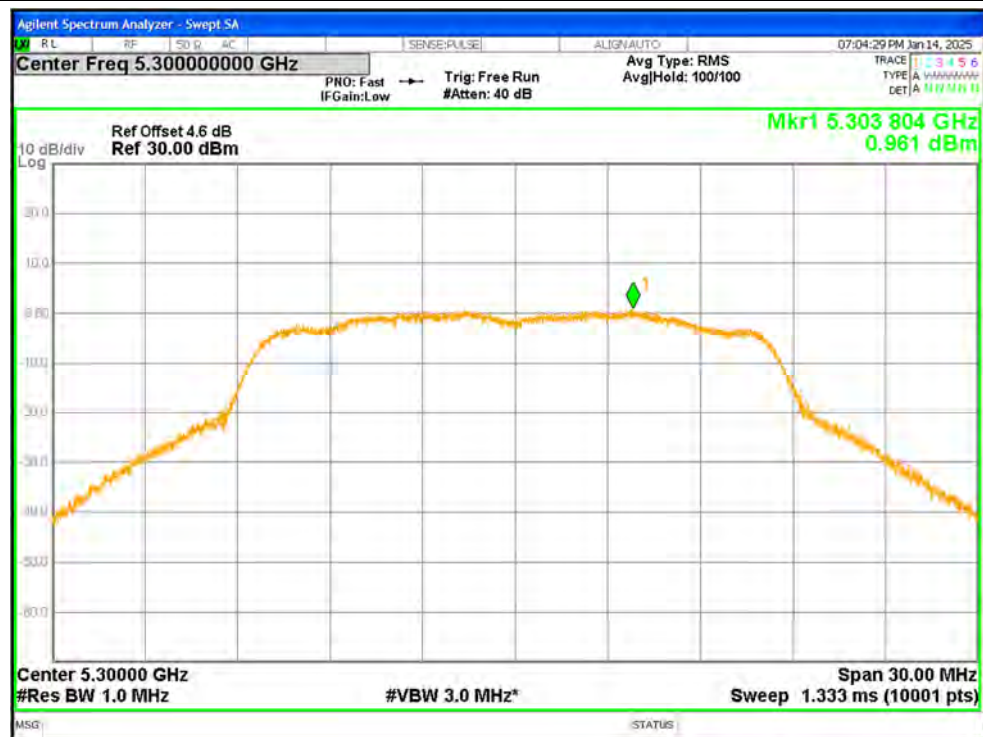


PSD NVNT a 5320MHz Ant1

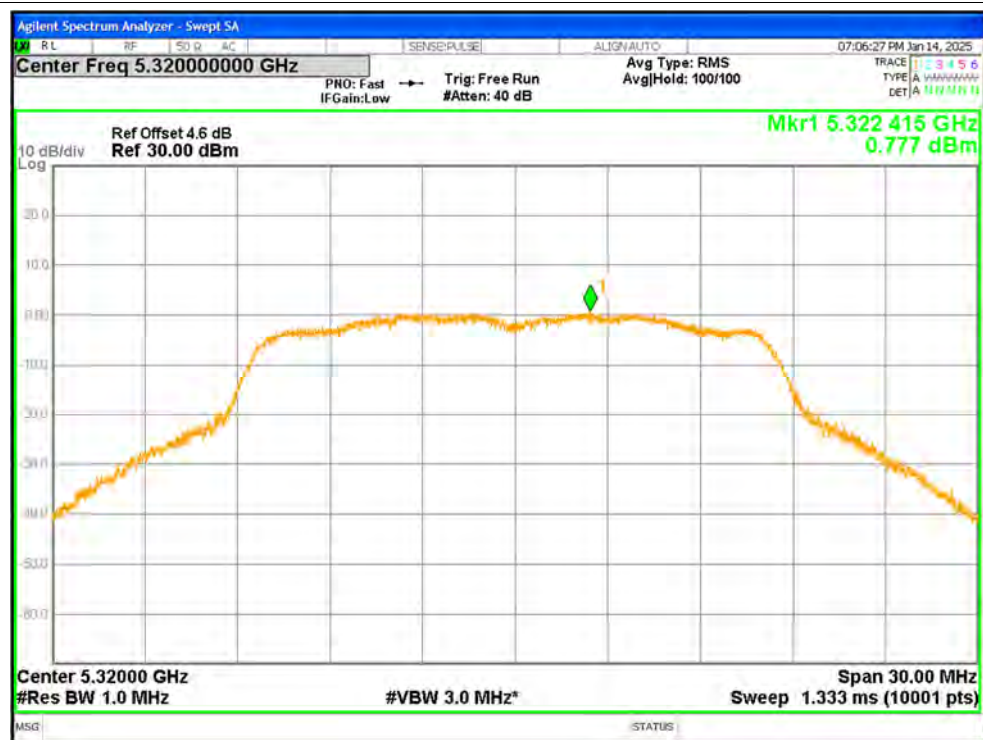


PSD NVNT a 5260MHz Ant2

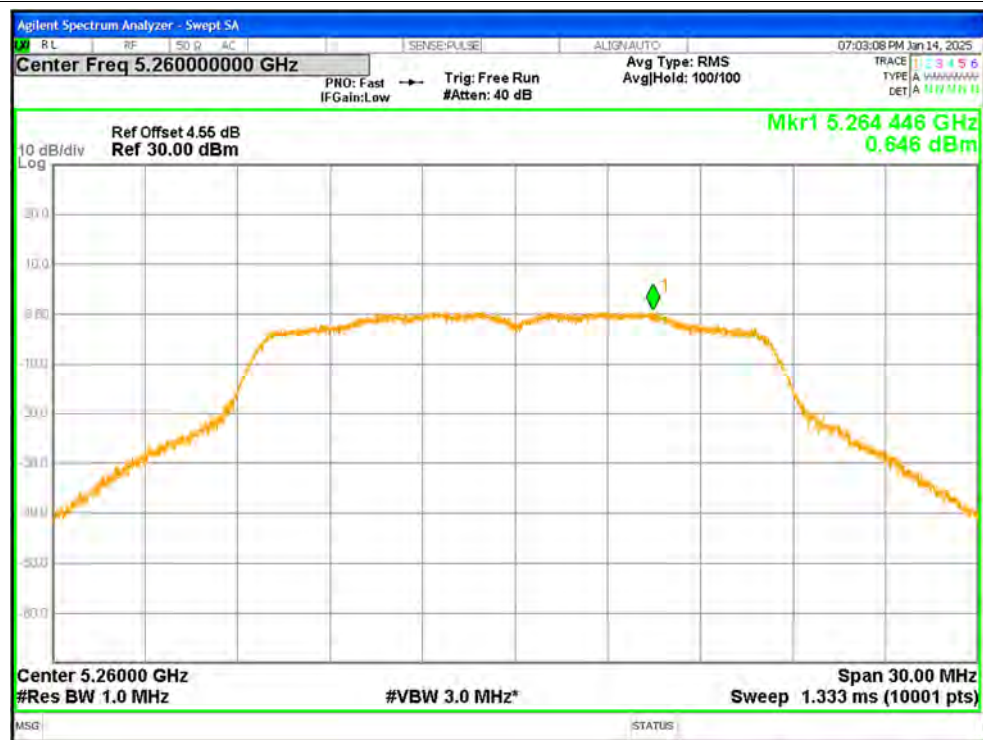


PSD NVNT a 5300MHz Ant2

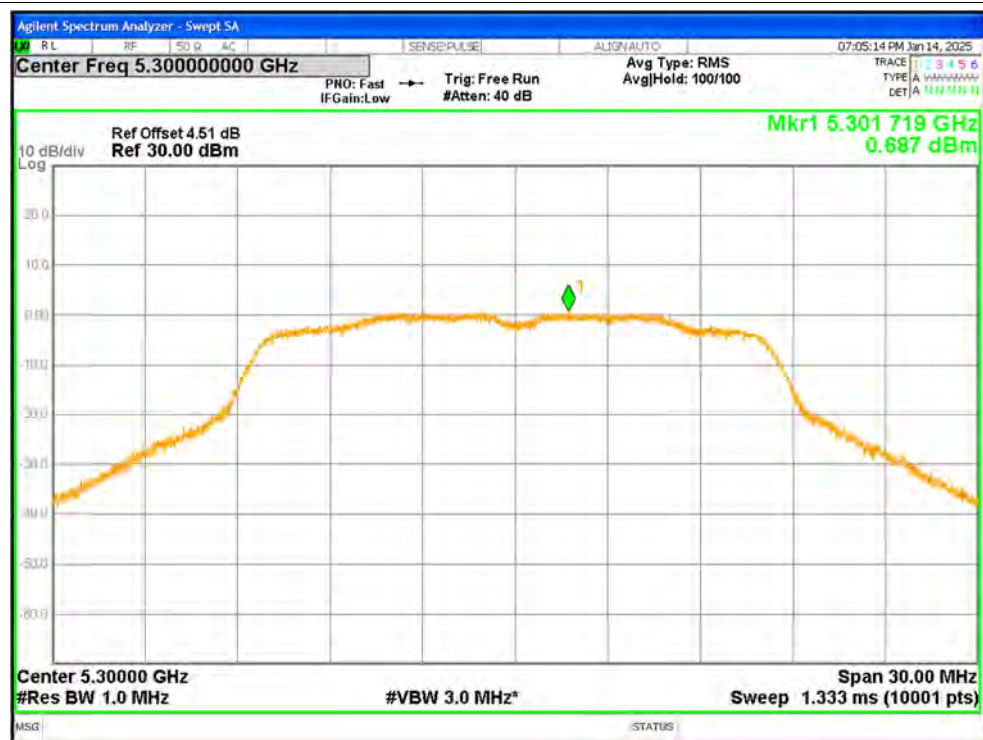


PSD NVNT a 5320MHz Ant2

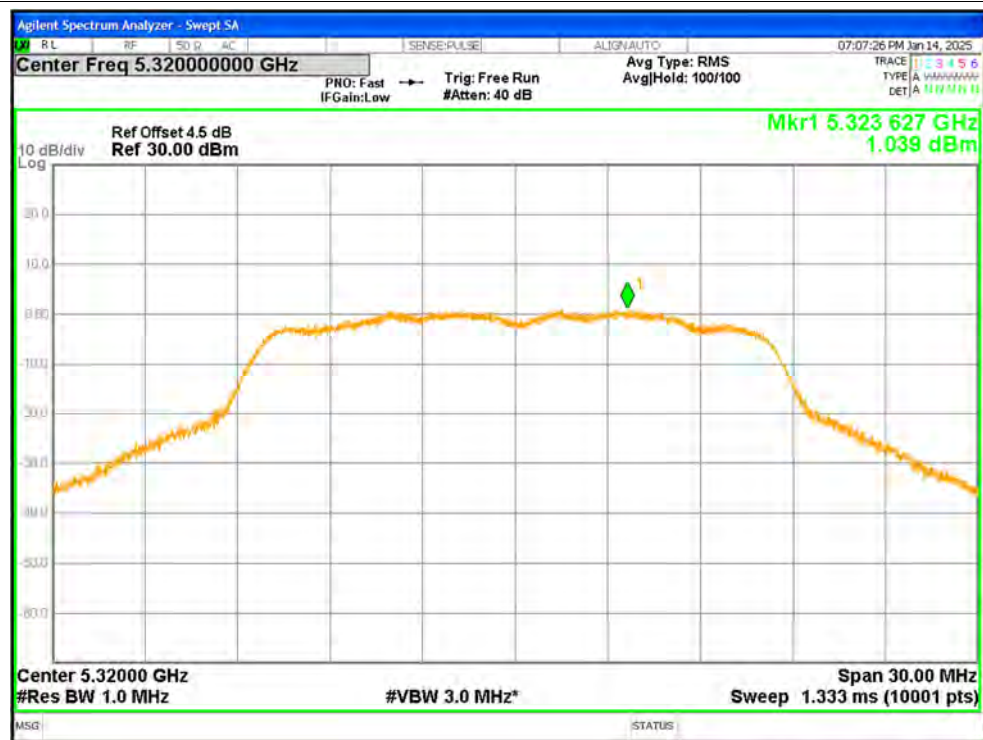


PSD NVNT n20 5260MHz Ant1

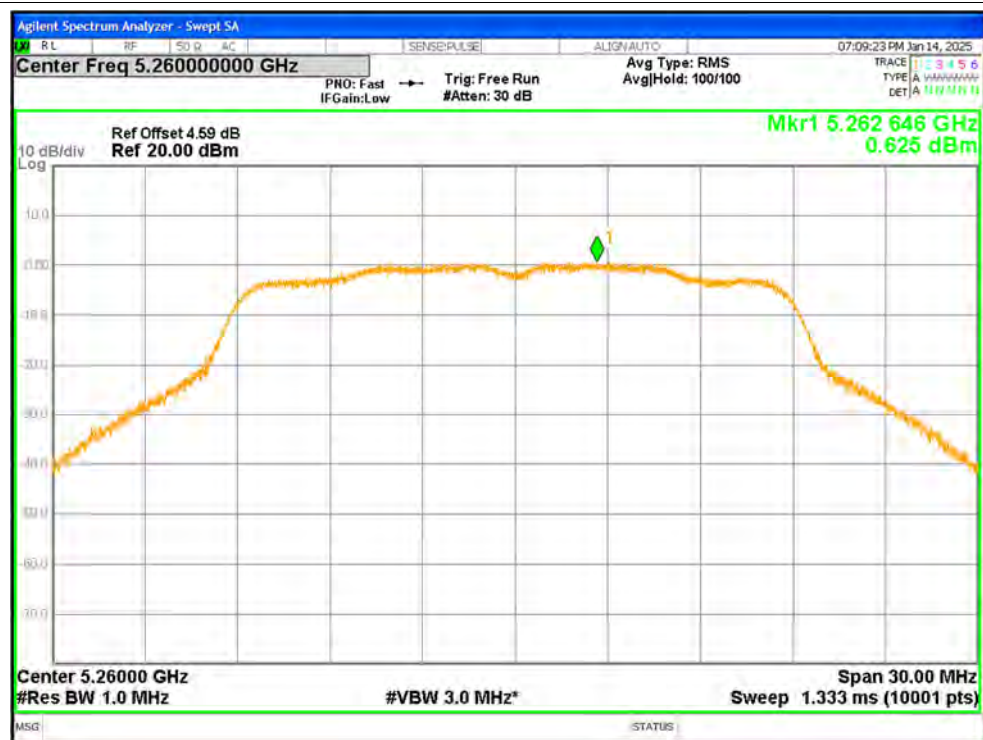

PSD NVNT n20 5300MHz Ant1

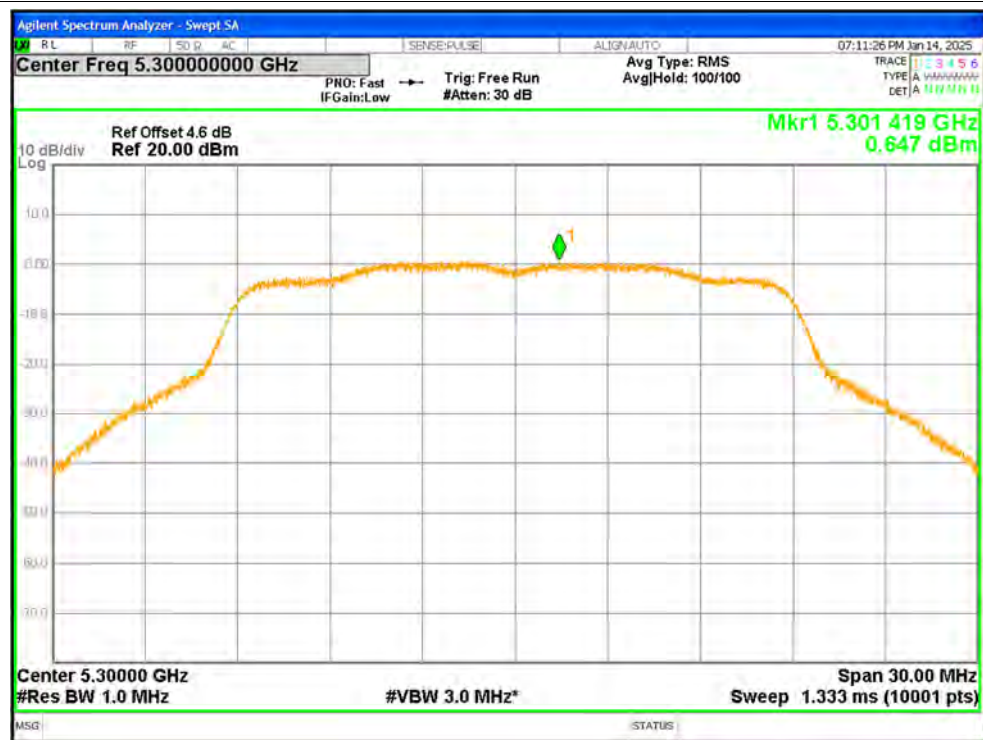


PSD NVNT n20 5320MHz Ant1

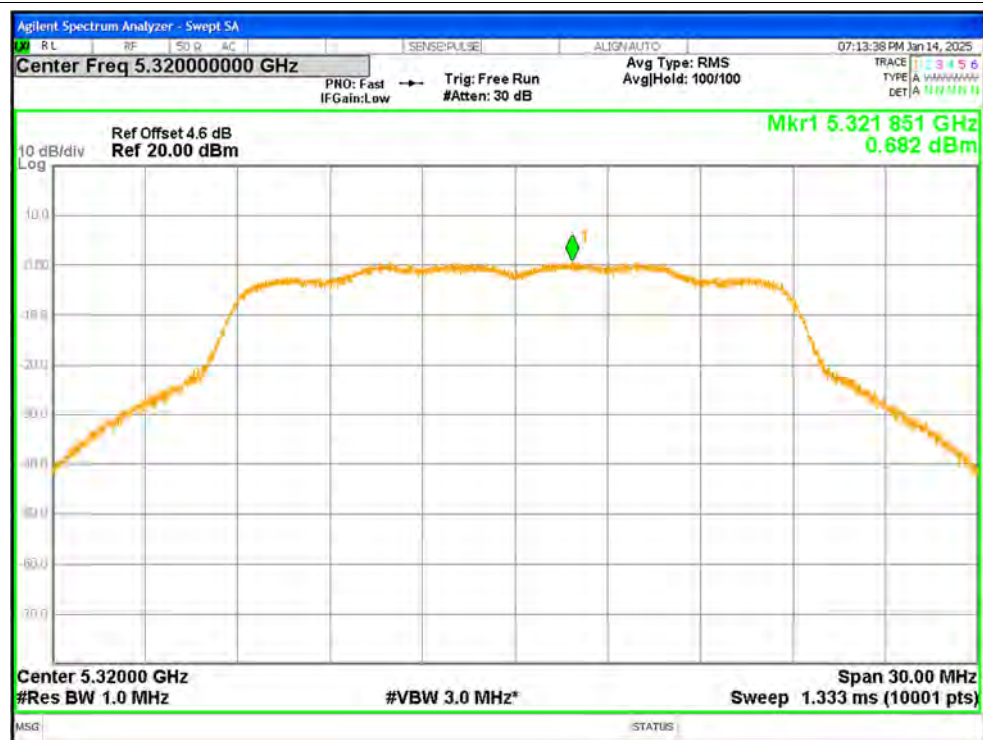


PSD NVNT n20 5260MHz Ant2



PSD NVNT n20 5300MHz Ant2

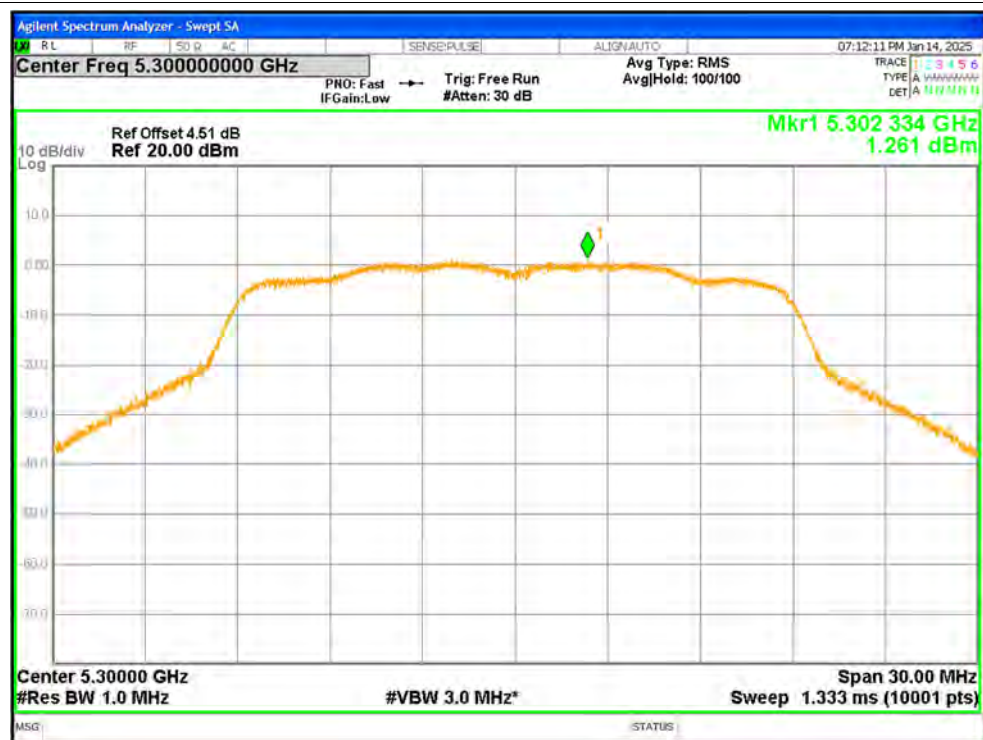

PSD NVNT n20 5320MHz Ant2

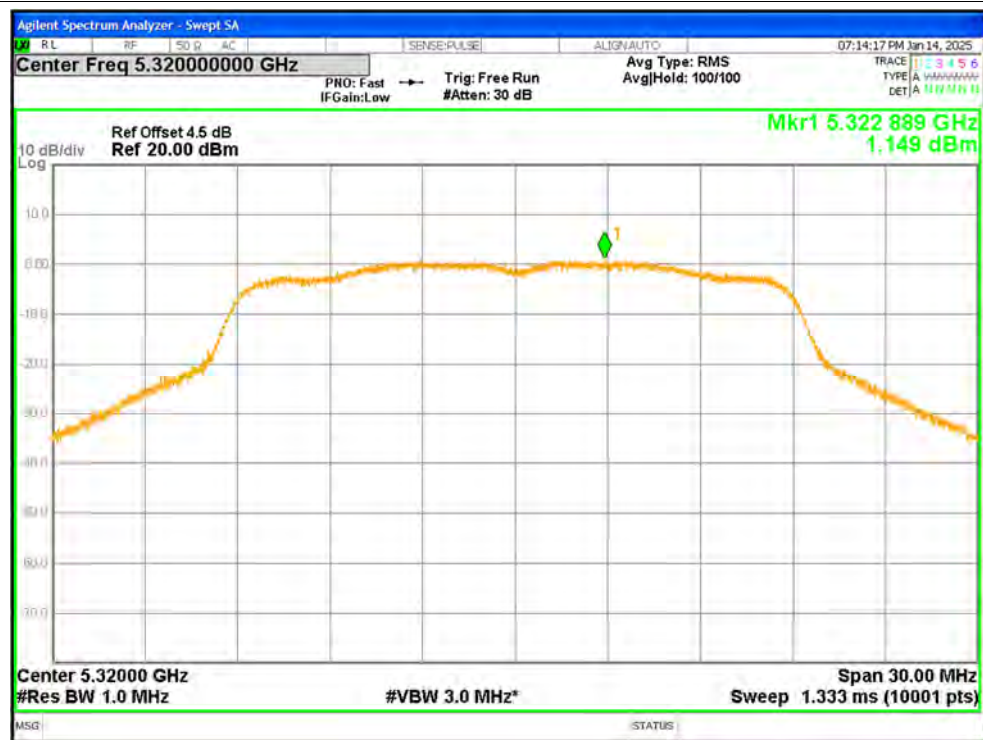

PSD NVNT n40 5270MHz Ant1



PSD NVNT n40 5310MHz Ant1




PSD NVNT n40 5270MHz Ant2




PSD NVNT n40 5310MHz Ant2




PSD NVNT ac20 5260MHz Ant1

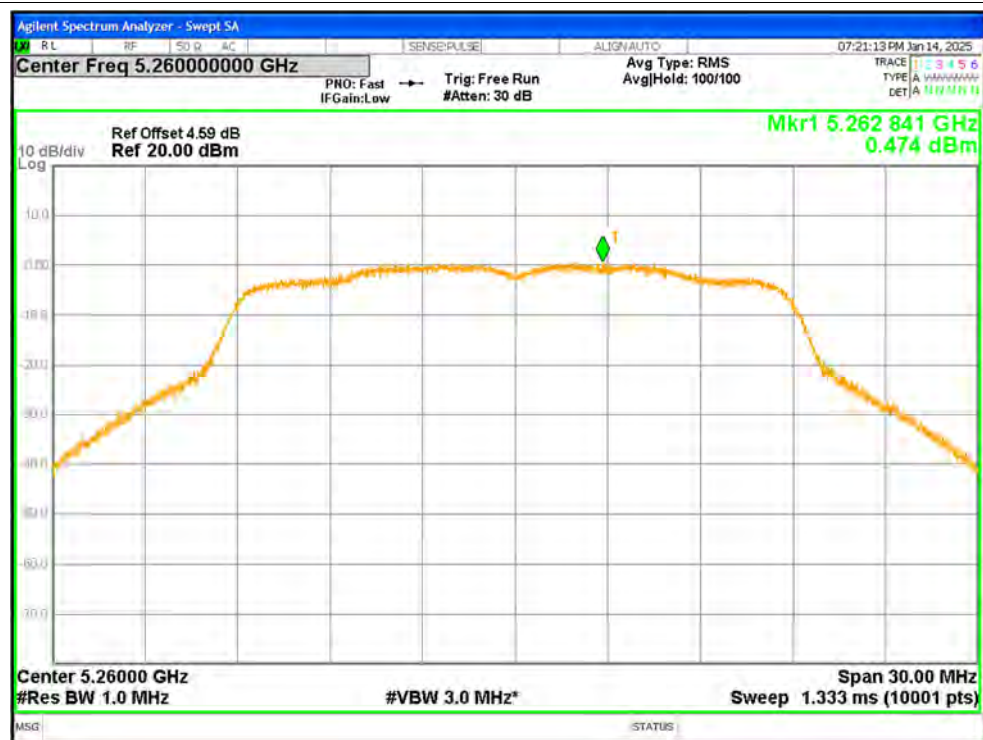

PSD NVNT ac20 5300MHz Ant1

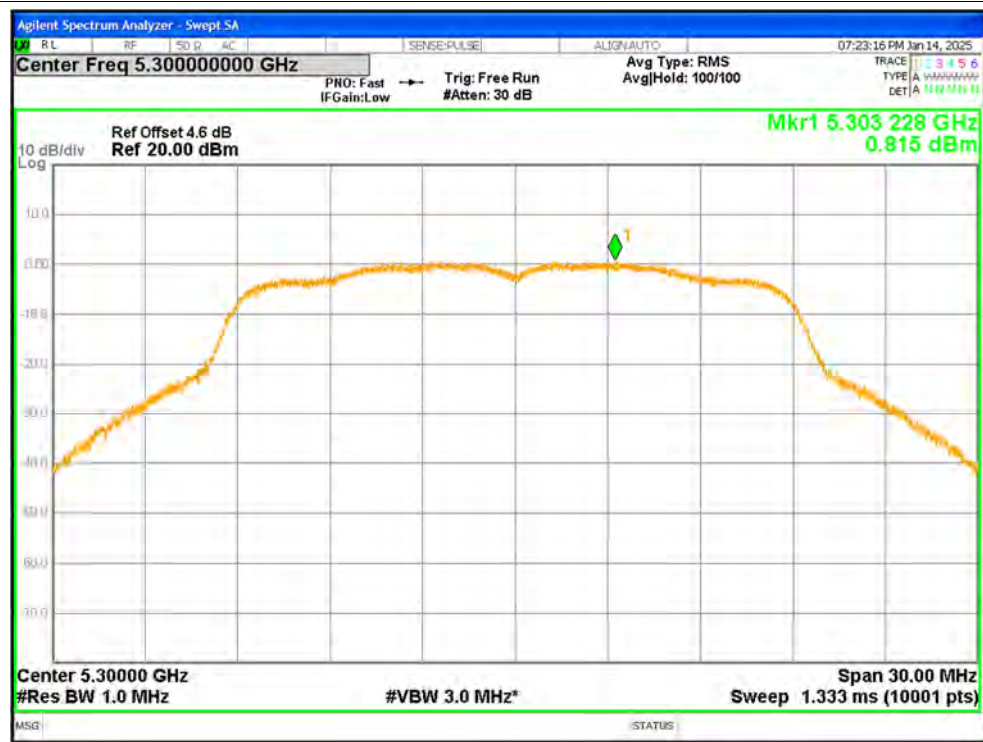


PSD NVNT ac20 5320MHz Ant1

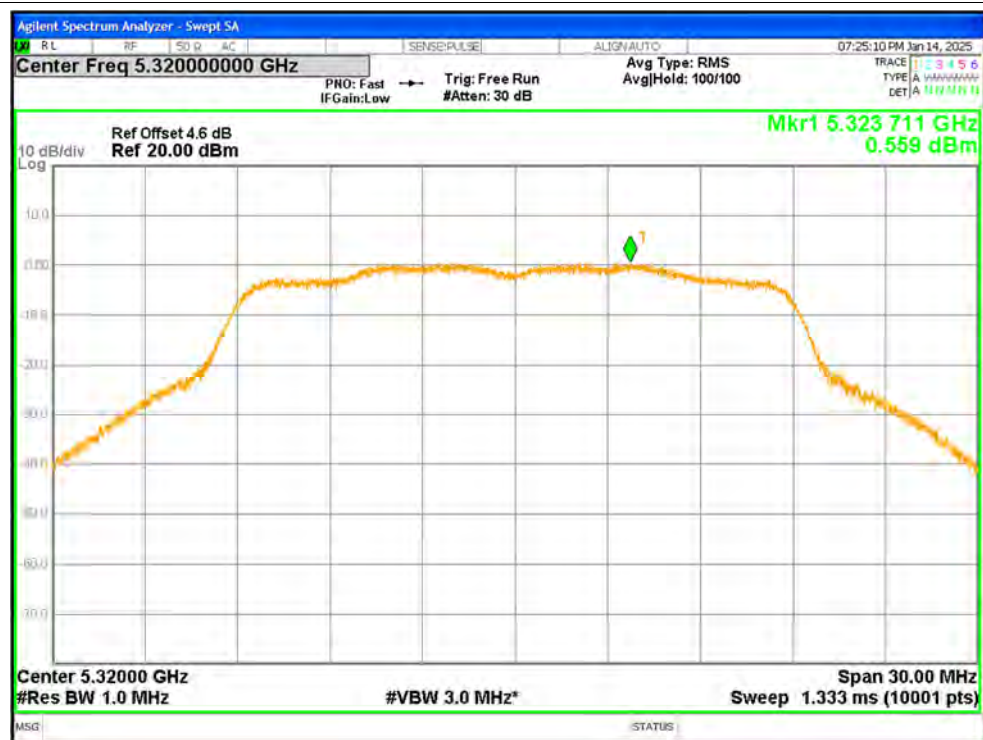

PSD NVNT ac20 5260MHz Ant2



PSD NVNT ac20 5300MHz Ant2

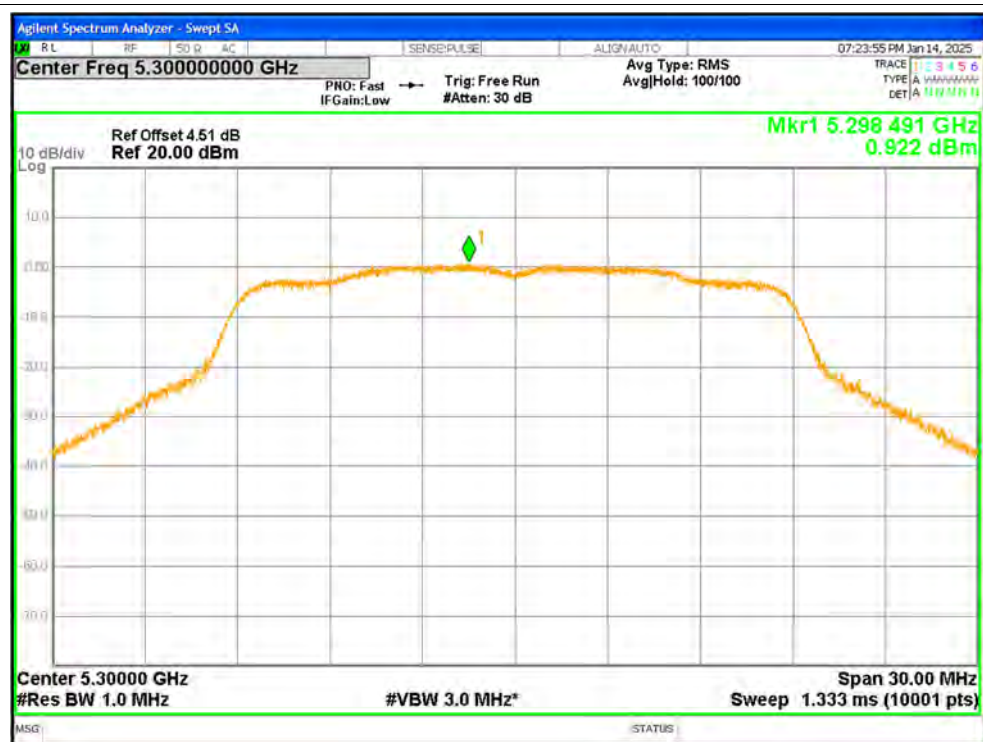


PSD NVNT ac20 5320MHz Ant2



PSD NVNT ac40 5270MHz Ant1



PSD NVNT ac40 5310MHz Ant1

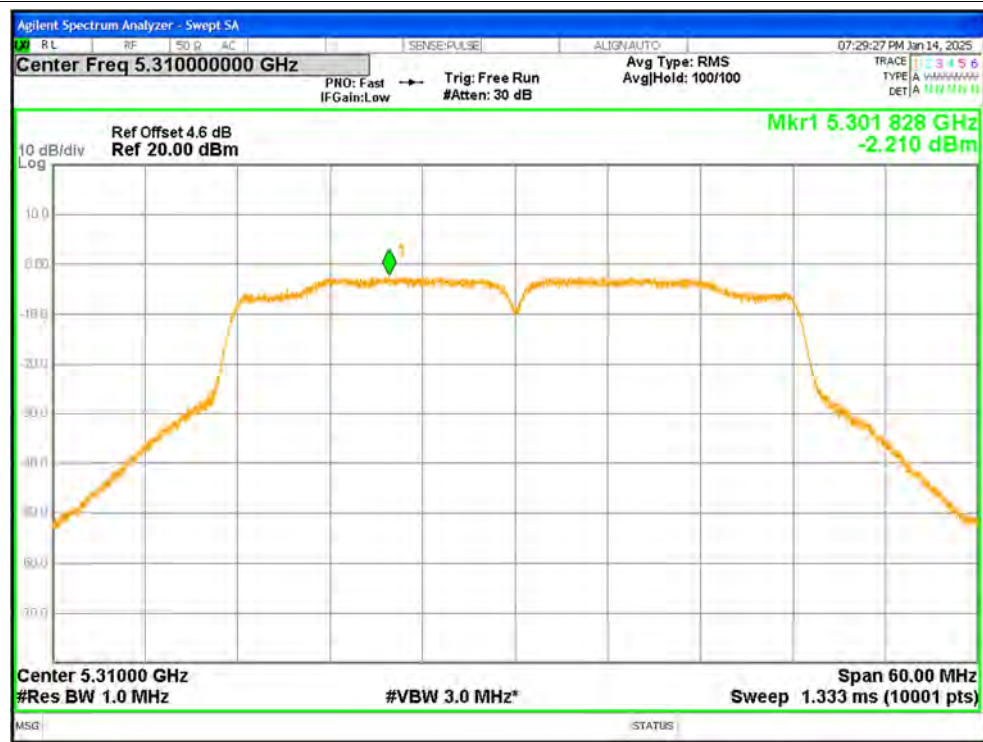


PSD NVNT ac40 5270MHz Ant2



PSD NVNT ac40 5310MHz Ant2



PSD NVNT ac80 5290MHz Ant1

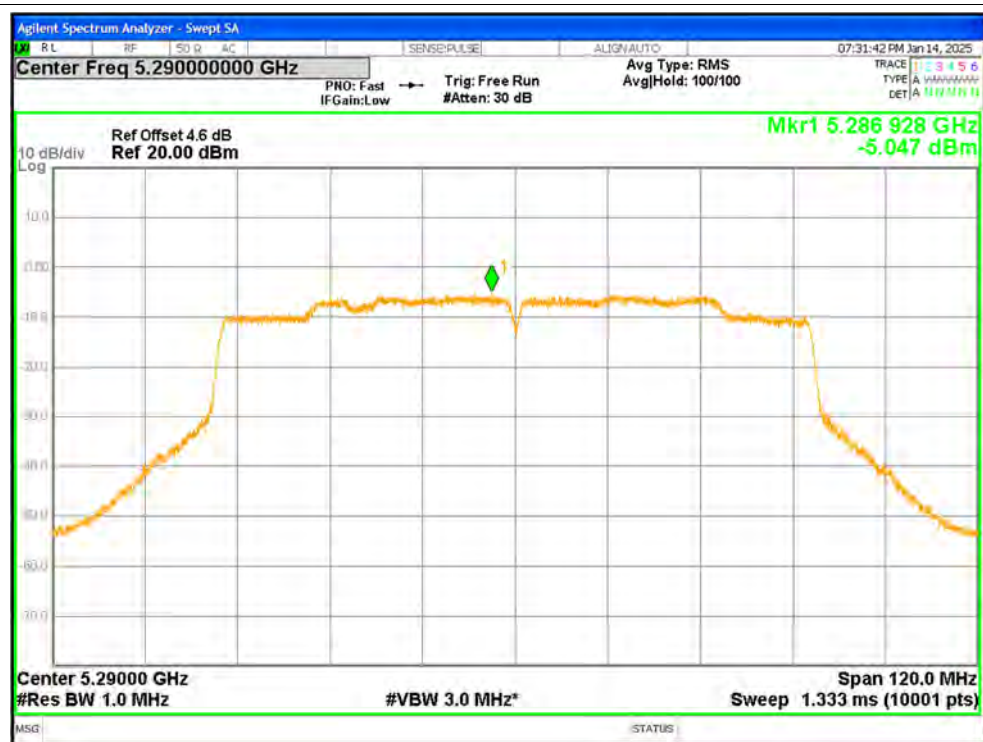


PSD NVNT ac80 5290MHz Ant2




PSD NVNT ax20 5260MHz Ant1




PSD NVNT ax20 5300MHz Ant1

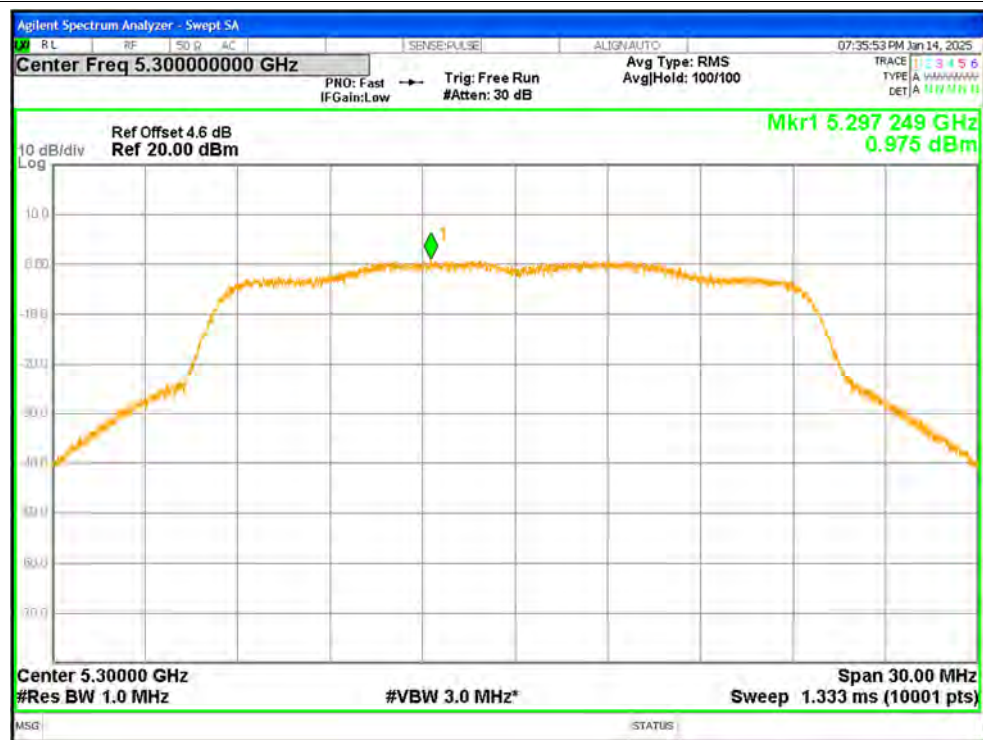


PSD NVNT ax20 5320MHz Ant1

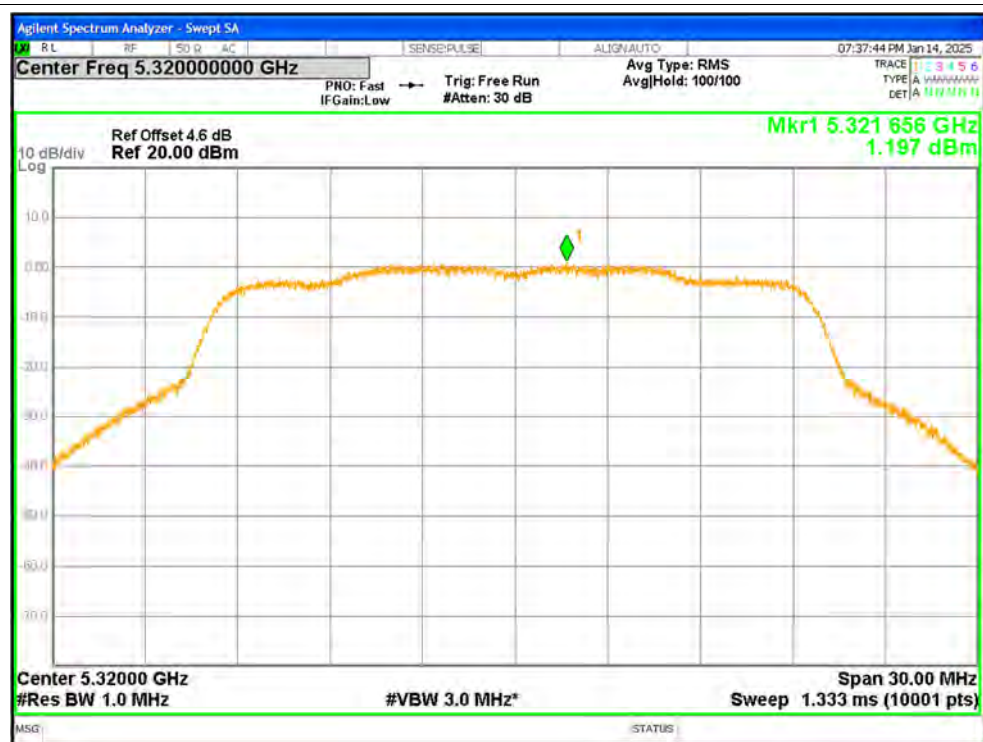


PSD NVNT ax20 5260MHz Ant2

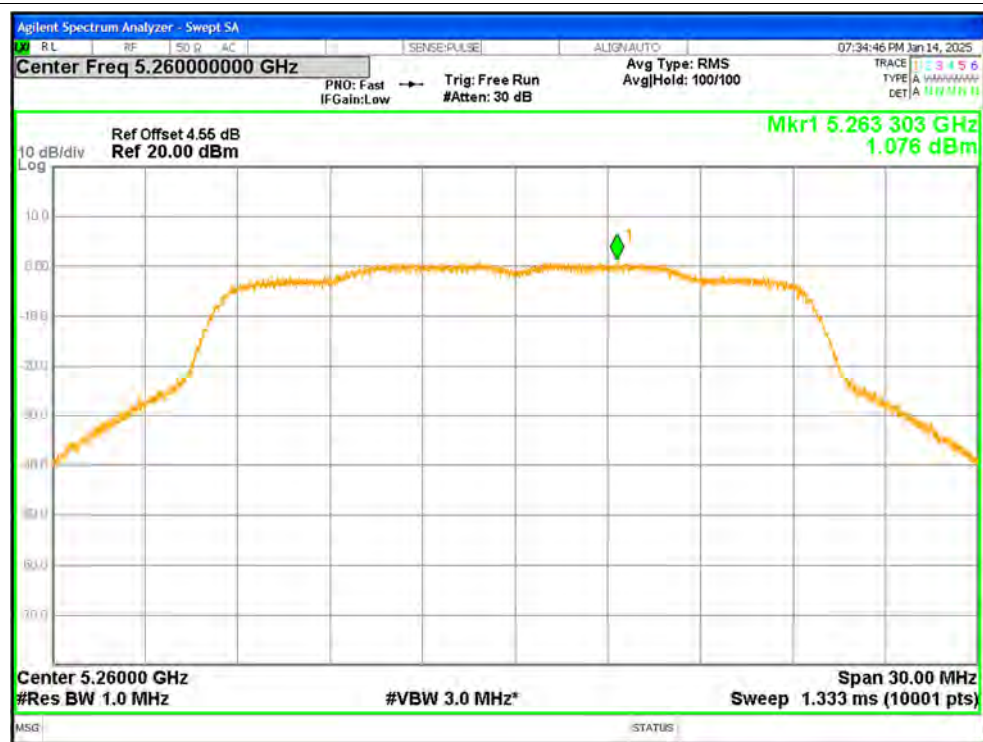

PSD NVNT ax20 5300MHz Ant2

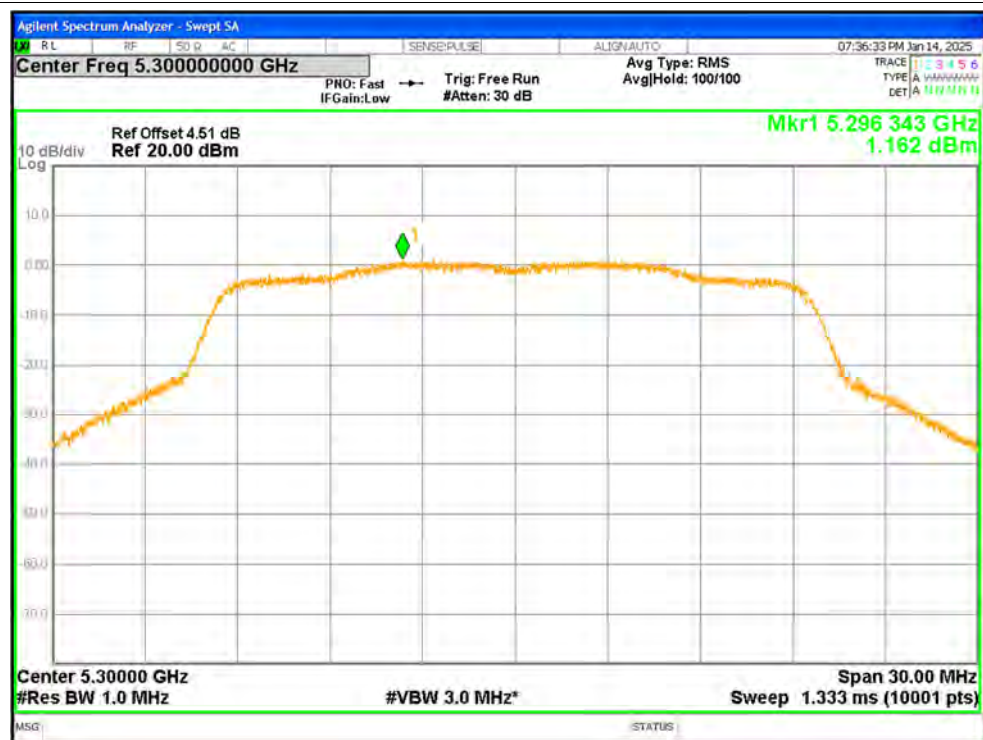


PSD NVNT ax20 5320MHz Ant2

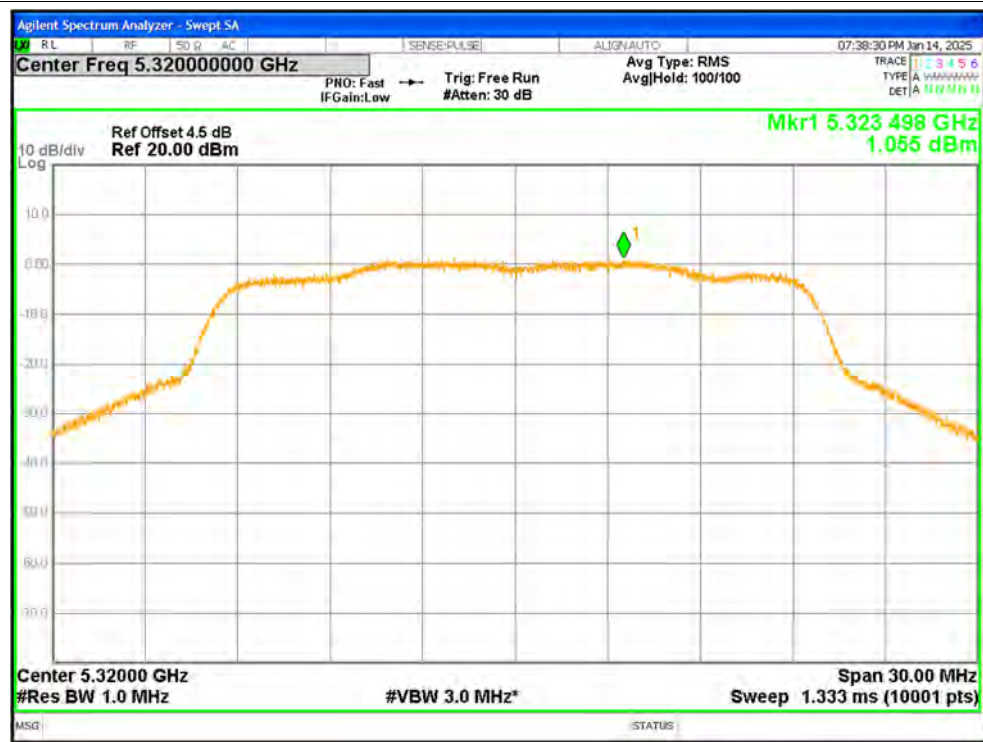

PSD NVNT ax40 5270MHz Ant1



PSD NVNT ax40 5310MHz Ant1

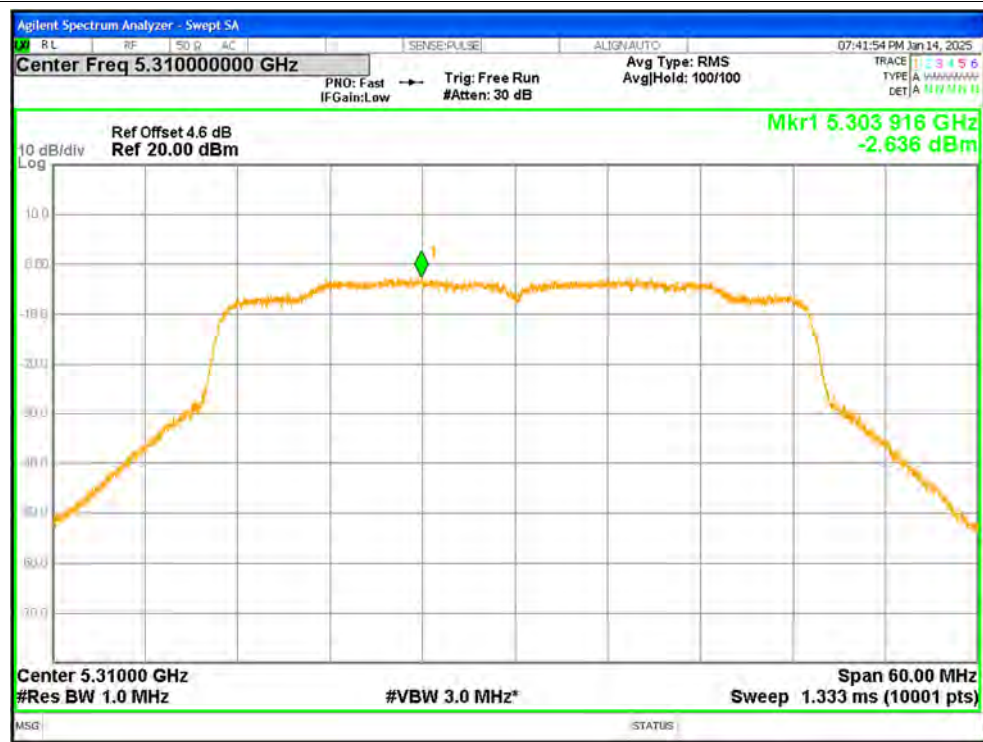

PSD NVNT ax40 5270MHz Ant2



PSD NVNT ax40 5310MHz Ant2



PSD NVNT ax80 5290MHz Ant1



PSD NVNT ax80 5290MHz Ant2

