

R8

无线领夹式麦克风


使用手册



产品介绍


感谢您选择我们的产品。
本产品是一款智能无线领夹式话筒，可提供专业水平的现场录音输出。即插即用，无需应用程序。多用途：可用于网络直播、视频录影带拍摄、节目采访、采访录制、视频教学、会议演讲、蓝牙KTV伴奏等场合。

无线话筒由发射机和接收机两部分组成（如下图所示）

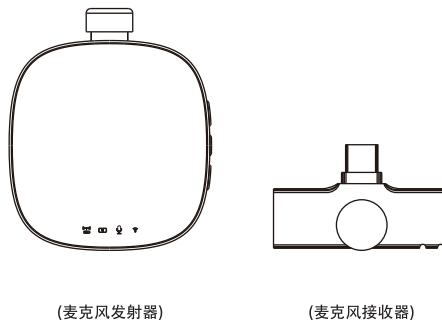

功能介绍

接收器功能介绍



①手机接口
②接收端复位键
③接收端指示灯
④接收端充电口


外接电源可给手机充电，实现边充电边直播
连接指示灯：

红灯慢闪：与发射器未连接成功

红灯长亮：与发射器配对成功

注：接收器插入手机端后接收器不亮灯，表示手机未正常给接收器供电，安卓机请检查OTG功能是否开启

发射器功能介绍

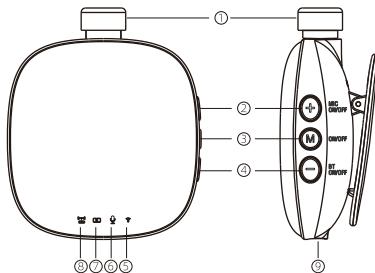

①收音咪头：此部分需对准嘴部，作为人声收音使用，防风毛套安装位置
②麦克风音量加/静音模式：短按一次，麦克风音量加一级，提示灯⑥闪一下提醒
长按为开启静音模式/关闭静音模式，提示灯⑥开启/关闭
③开关机/模式切换：长按此键开机/关机，灯⑤绿灯慢闪。关机灯⑤灯灭。短按为模式切换（开机默认为原声模式，短按一次为KTV混响模式，灯⑦绿灯亮，依次循环）
④麦克风音量减：短按一次。麦克风音量减一级，提示灯⑥闪一下提醒
⑦配对/连接指示灯：连接成功后，灯⑤⑥绿灯同时亮起
⑧充电灯：充电时红色灯长亮，充满后熄灭
低电提示灯：电池电量低于30%时，灯⑧红灯10s闪烁一次
⑨充电/耳机孔：充电插口/外接监听耳机插口

使用方法

发射器功能介绍

①连接手机录音/录视频/直播的操作方式
第一步：首先把接收器插入录制手机，接收器红灯慢闪（安卓手机需打开OTG功能）
第二步：长按发射器中间按键③三秒，等待配对，直到发射器灯⑤灯⑥常亮，同时接收器连接灯也常亮，及进入到原声录制状态，打开手机里的相机等APP即可进行录音录视频。

蓝牙伴奏/KTV混响/模式：短按一次发射器开机键切换到蓝牙伴奏模式，灯⑧蓝灯亮，可以用另一台伴奏手机搜索蓝牙名R8连接，伴奏手机播放伴奏音乐（开机默认为原声模式，双击为KTV混响模式，灯⑦绿灯亮，依次循环）

静音模式：长按麦克风音量+②键，进入静音模式，灯⑥灭，再次长按麦克风音量+②键，退出静音模式，灯⑥绿灯亮
音量大小调节：短按一次②，麦克风音量加一级，提示灯⑥闪一下提醒
短按④一次。麦克风音量减一级，提示灯⑥闪一下提醒

注：有配送监听耳机，监听耳机插入接收器充电口⑨，用于实时监听录制效果
本产品默认6级深度降噪功能，无需降噪操作

产品参数

指向类型：全指向性
频率范围：2.4G
频响范围：30HZ-18KHZ
传输距离：15米
信噪比：>90db
电池容量：400mA/3.7v
充电接口：Type-c充电接口
额定输入：DC=400mA
标准充电时间：约1小时
工作时长：8-10小时
工作温度：-10°C~45°C
储存温度：-20°C~60°C

包装清单

包装清单内容
①发射器
②接收器
③用户说明书
④充电线*1监听耳机线*1
⑤包装盒

合格证	检验员	PASS QC 01 合格	本产品经检验已合格	产品编号：_____
		保修卡		

R8


Wireless Lavalier Microphone

Instruction Manual



MADE IN CHINA

Transmitter Function Introduction

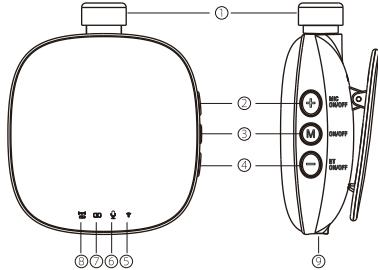

① Radio microphone head: this part needs to be aligned with the mouth to be used as human voice radio, and the installation position of wind proof wool cover.

② Microphone volume increase / mute mode: short press once, the microphone volume increases by one level, and the prompt light ⑥ flashes for a reminder.

Long press to turn on / off the mute mode, and the prompt light ⑥ turns on / off

③ Switch on / off / mode switching: long press this key to start / shut down, and the green light ⑤ flashes slowly. The shutdown lamp ⑤ is off. Short press is the mode switching (the default mode is the original sound mode when starting up, short press once is the KTV reverberation mode, the light ⑦ green light is on, and cycle in turn)

④ Microphone volume decreases: Briefly press once. The microphone volume decreases by one level, and the prompt light ⑥ flashes to remind.


⑤ Pairing / connection indicator light: after successful connection, the green lights of the light ⑤ and light ⑥ light up at the same time.

⑥ Charging lamp: when charging, the red lamp is on for a long time and goes out after full

Product Description

This product is a smart wireless lavalier microphone, which can provide professional-level recording live output. Plug and play, no APP required. Multiple uses: It can be used in web live broadcast, video Vlog shooting, program interviews, interview recording, video teaching, conference speeches, Bluetooth KTV accompaniment and other occasions.

The wireless microphone consists of two parts, the transmitter and the receiver (as shown in the figure below)

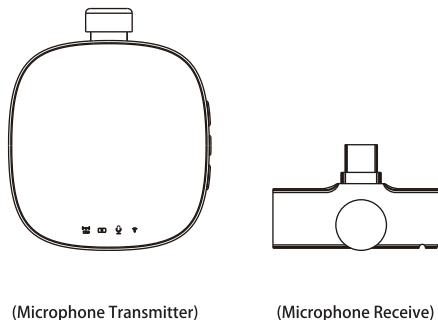

Application method

① Operation mode of connecting mobile phone recording / video recording / live broadcasting
Step 1: first insert the receiver into the recording mobile phone, and the red light of the receiver flashes slowly (Android mobile phone needs to turn on the OTG function)
Step 2: long press the key ③ in the middle of the transmitter for three seconds and wait for pairing until the transmitter light ⑤ and ⑥ are always on, and the receiver connection light is also always on, and enter the original sound recording state. Open the camera and other app in the mobile phone to record video.

Bluetooth accompaniment/KTV reverb mode: Short press the transmitter power button once to switch to Bluetooth accompaniment Playing mode, light ⑧ blue light is on, you can use another accompanying phone to search for Bluetooth name R8. Next, the accompaniment phone plays the accompaniment music (default to original sound mode when turned on, double-click to KTV) Reverb mode, light ⑦ green light on, cycle in sequence)


Volume adjustment: briefly press ② once, increase the microphone volume by one level, and the prompt light ⑥ flashes for a reminder. Briefly press ④ once. The microphone volume decreases by one level, and the prompt light ⑥ flashes to remind.

Note: there are monitoring earphones, which are inserted into the charging port ⑨ of the receiver to monitor the recording effect in real time.

This product defaults to level 6 deep noise reduction function, and no noise reduction operation is required.

Function introduction

Receiver function introduction



① Lightning port to connect phone

② Reset key of receiver

③ Receiver indicator

④ Type-C port of receiver

The external power supply can charge the mobile phone and realize live broadcasting while charging.
Connection indicator:

Slow flashing red light: the transmitter is not connected successfully
Long red light: successfully paired with the transmitter
Note: when the receiver is plugged into the mobile phone terminal, the receiver does not turn on, which means that the mobile phone does not normally supply power to the receiver. Please check whether the OTG function is turned on.


5. Product Parameters

Pointing type: full directivity
Frequency range: 2.4G
Frequency response range: 30HZ-18KHZ
Transmission distance: 15m
Signal to noise ratio: ≥ 90 db
Battery capacity: 400mA / 3.7V
Charging interface: Type-c charging interface
Rated input: DC = 400mA
Standard charging time: about 1 hour
Working hours: 8-10 hours
Operating temperature: -10 °C ~ 45 °C
Storage temperature: -20 °C ~ 60 °C

Packing List

Contents of packing list

① Launcher
② Receiver
③ User manual
④ Charging cable * 1 Monitoring earphone cable * 1
⑤ Packing box

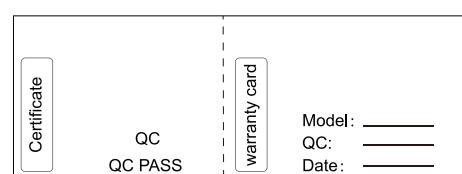

Model: _____
QC: _____
Date: _____

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction