EXHIBIT C - EUT INTERNAL PHOTOGRAPHS

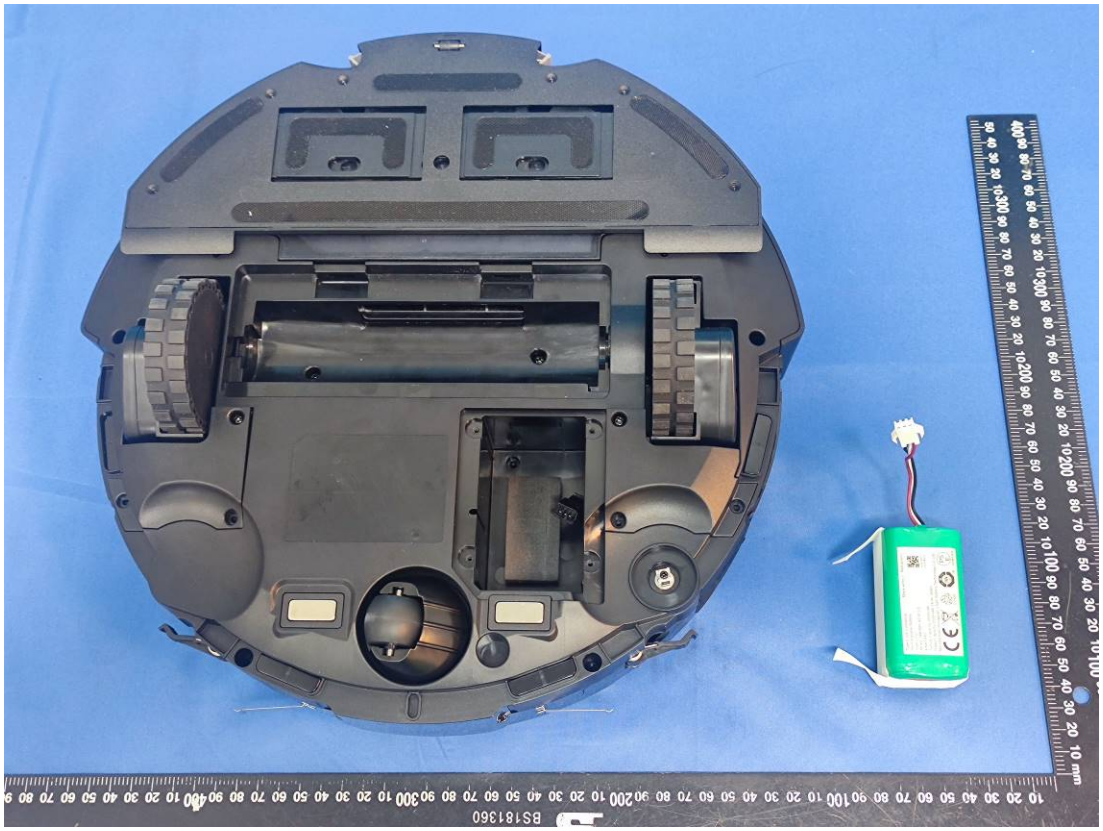

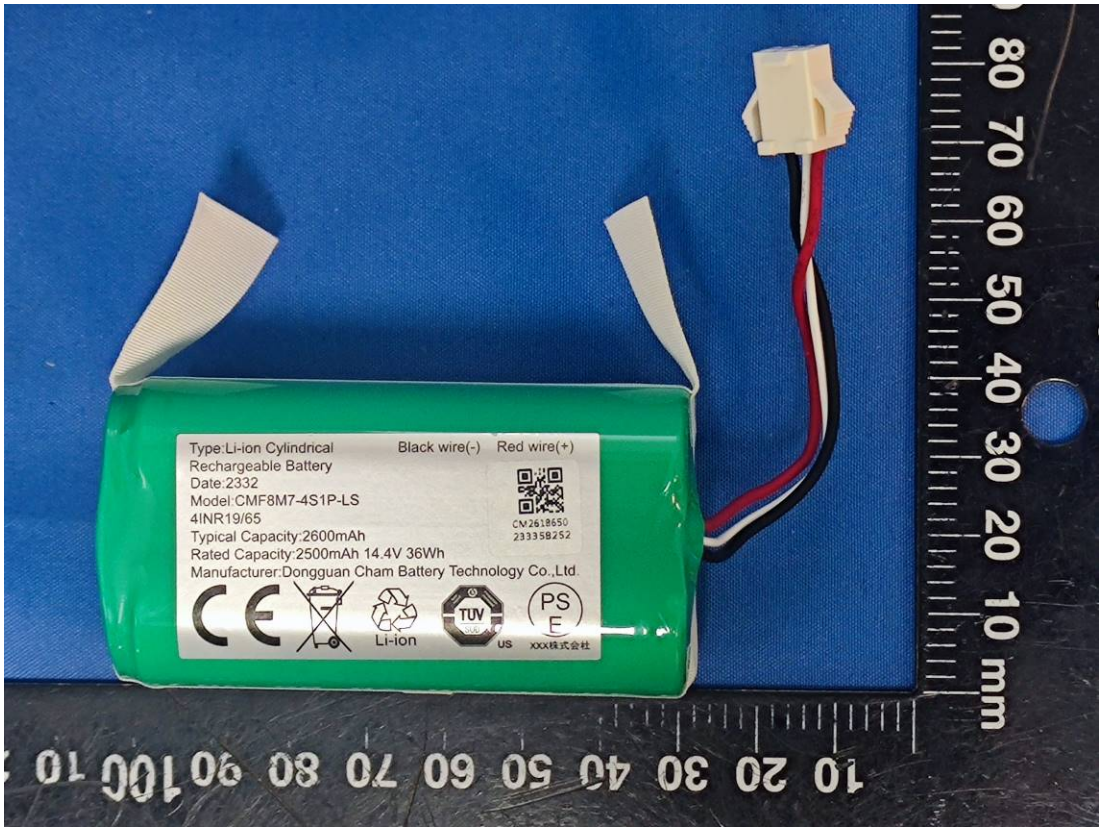
Type:Li-ion Cylindrical
Rechargeable Battery
Date:2332
Model:CMF8M7-4S1P-LS
4INR19/65
Typical Capacity:2600mAh
Rated Capacity:2500mAh 14.4V 36Wh
Manufacturer:Dongguan Cham Battery Technology Co.,Ltd.
Black wire(-)
Red wire(+)
CM2618650
233358252
Li-ion
TÜV
US
PS
E
XXX株式会社

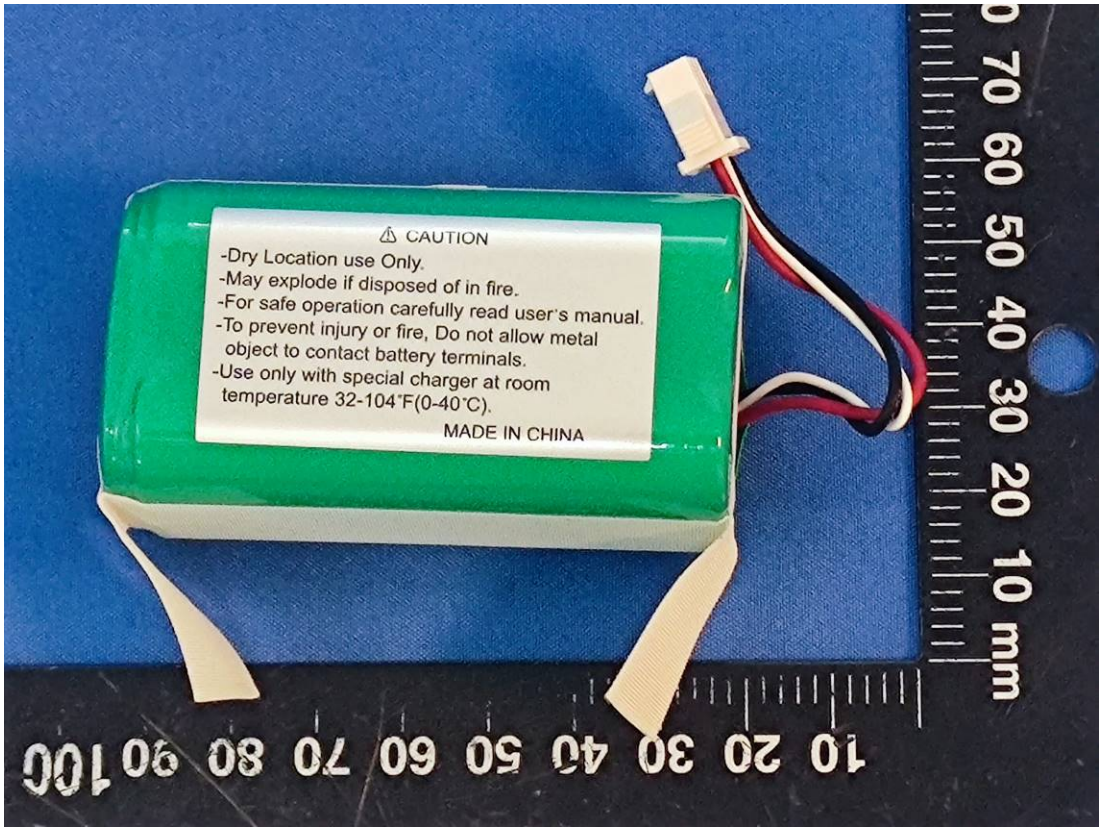
CAUTION
-Dry Location use Only.
-May explode if disposed of in fire.
-For safe operation carefully read user's manual.
-To prevent injury or fire, Do not allow metal object to contact battery terminals.
-Use only with special charger at room temperature 32-104°F(0-40°C).
MADE IN CHINA

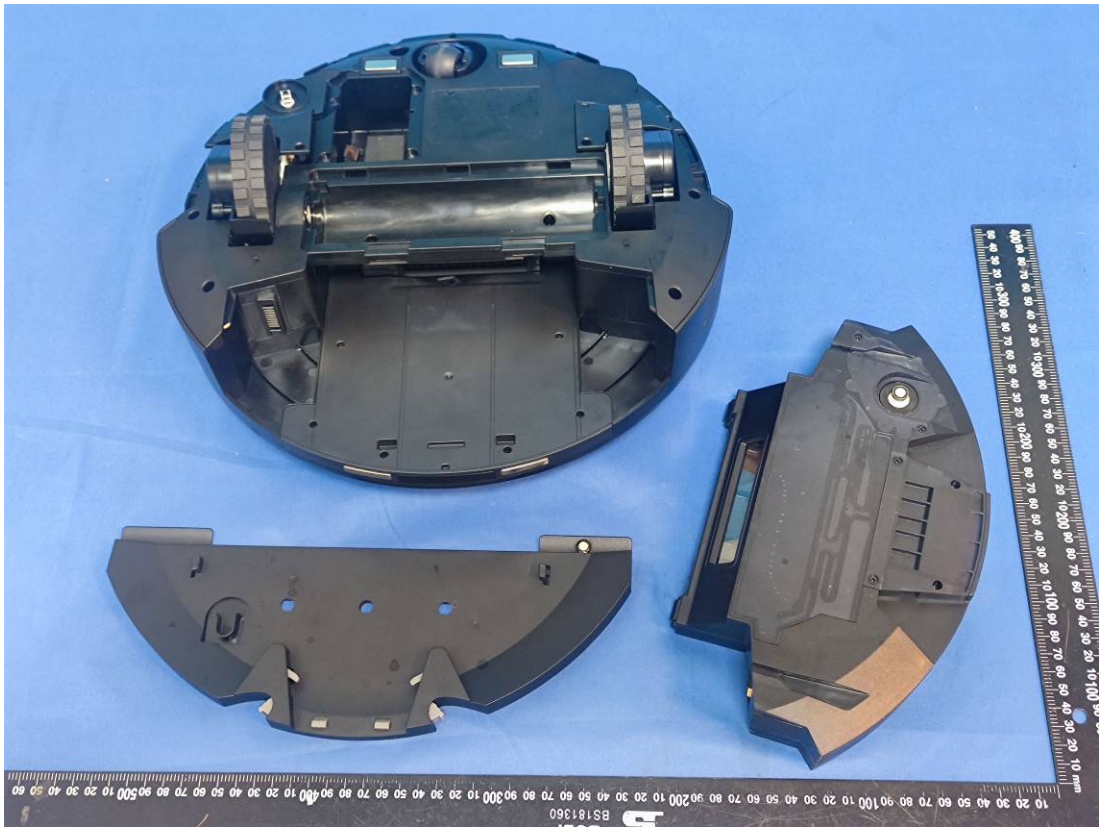

BOSI
BS181360

BS181360

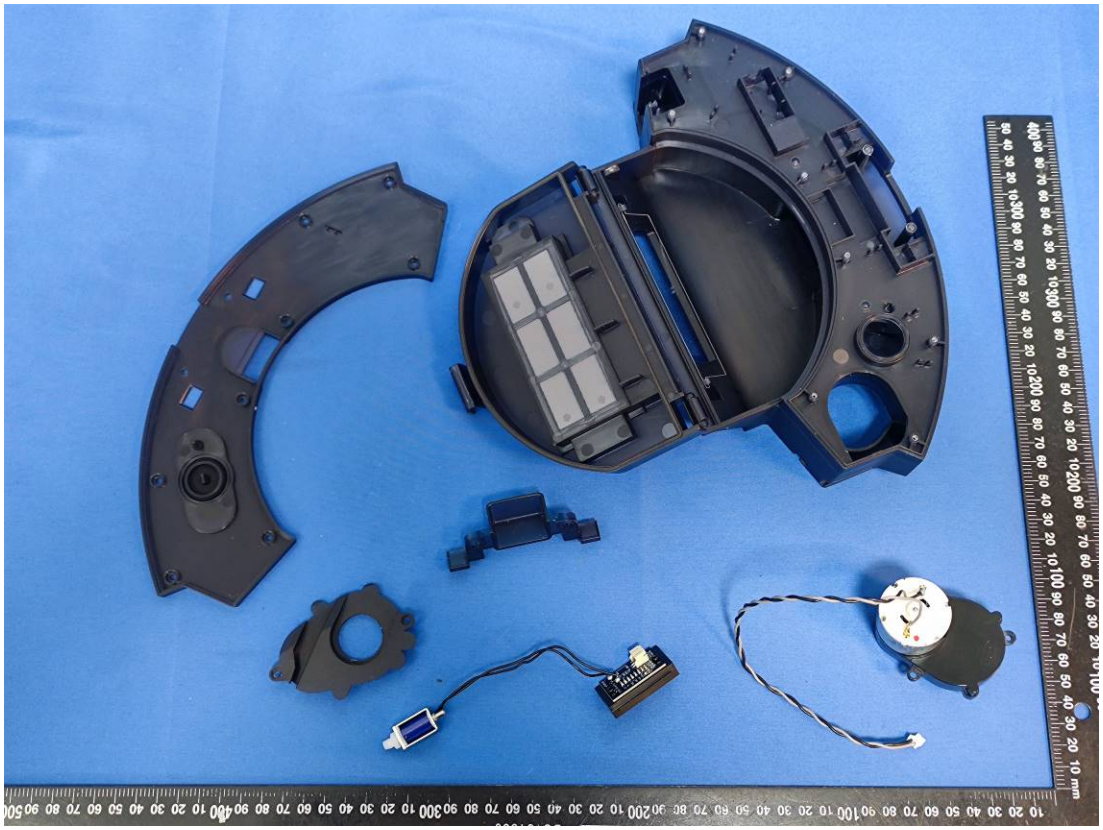

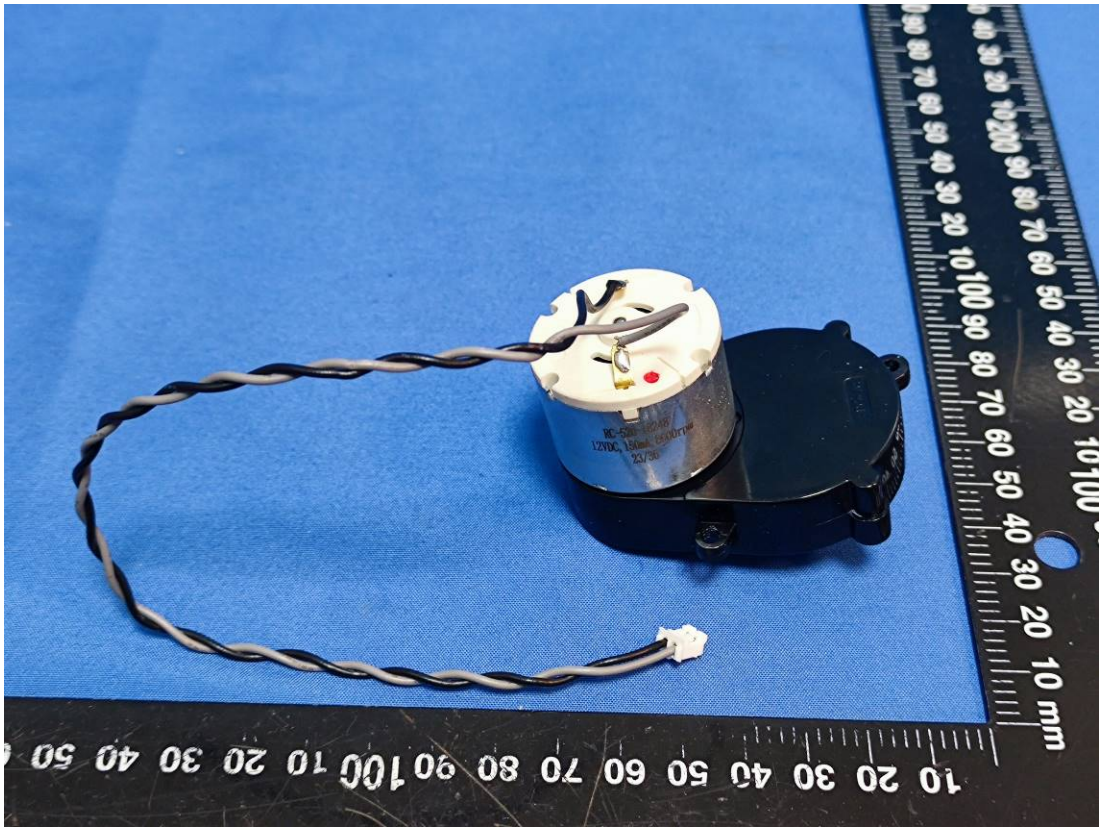

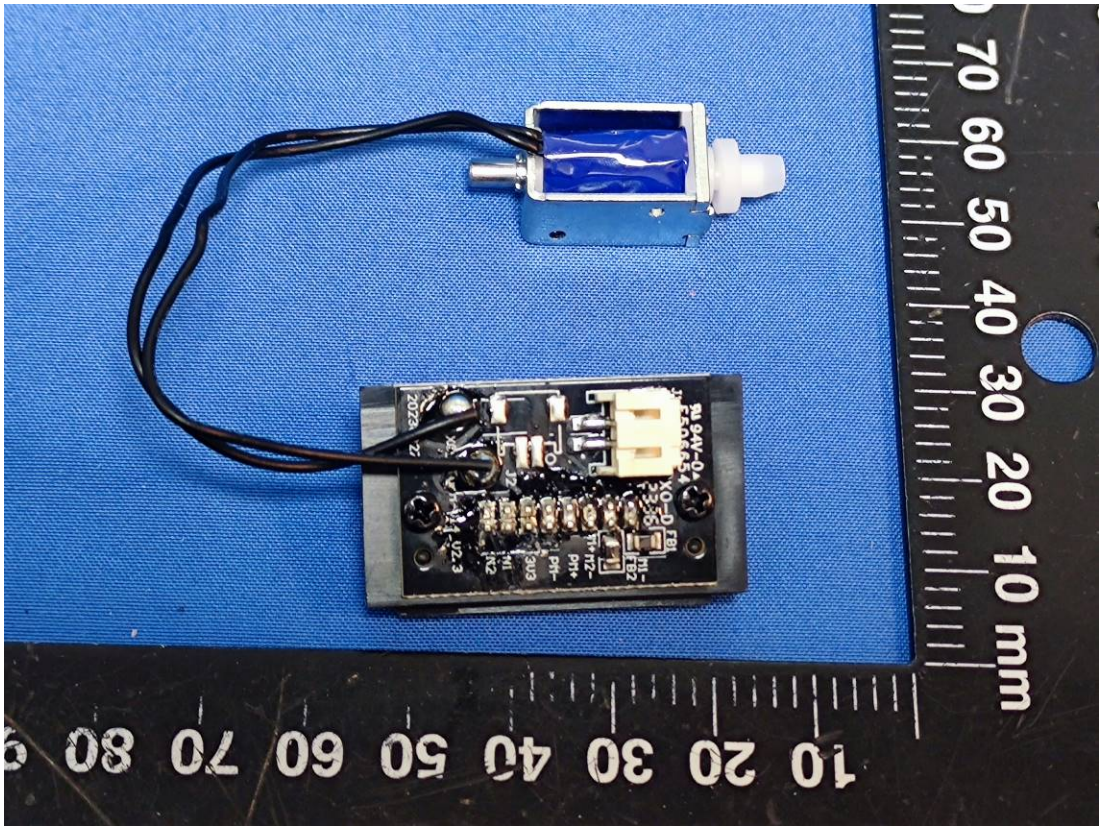

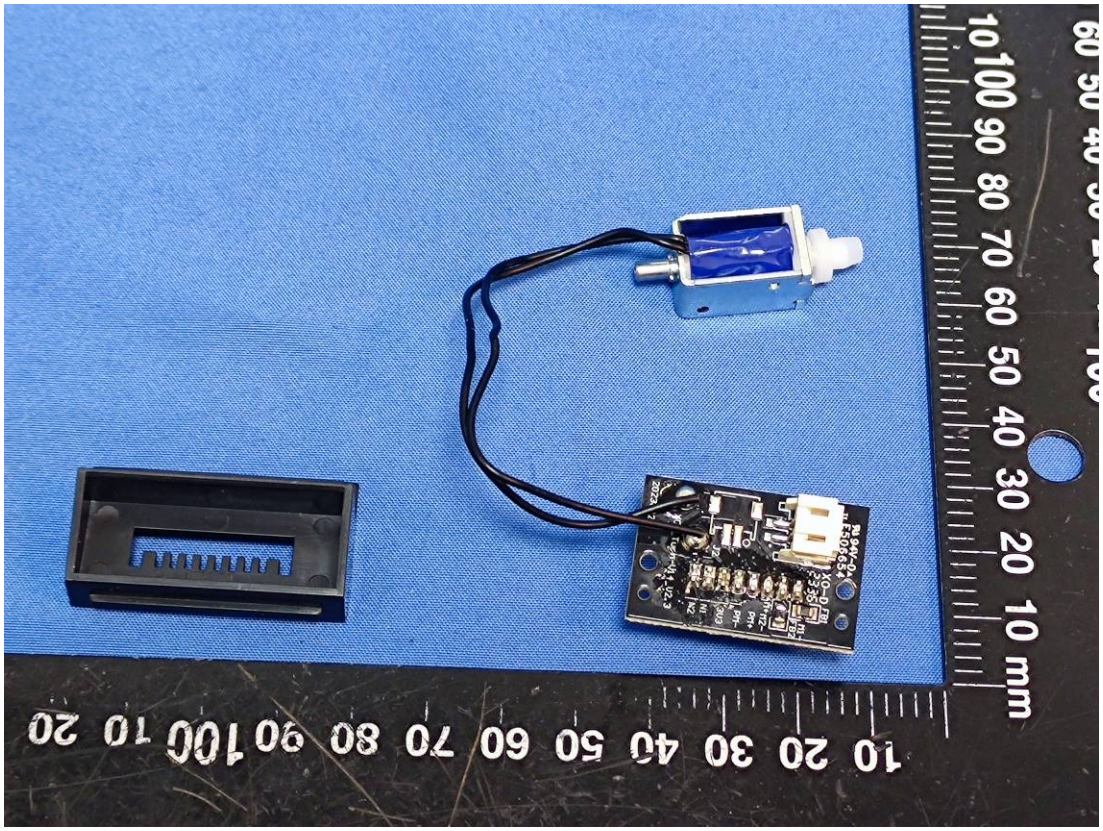

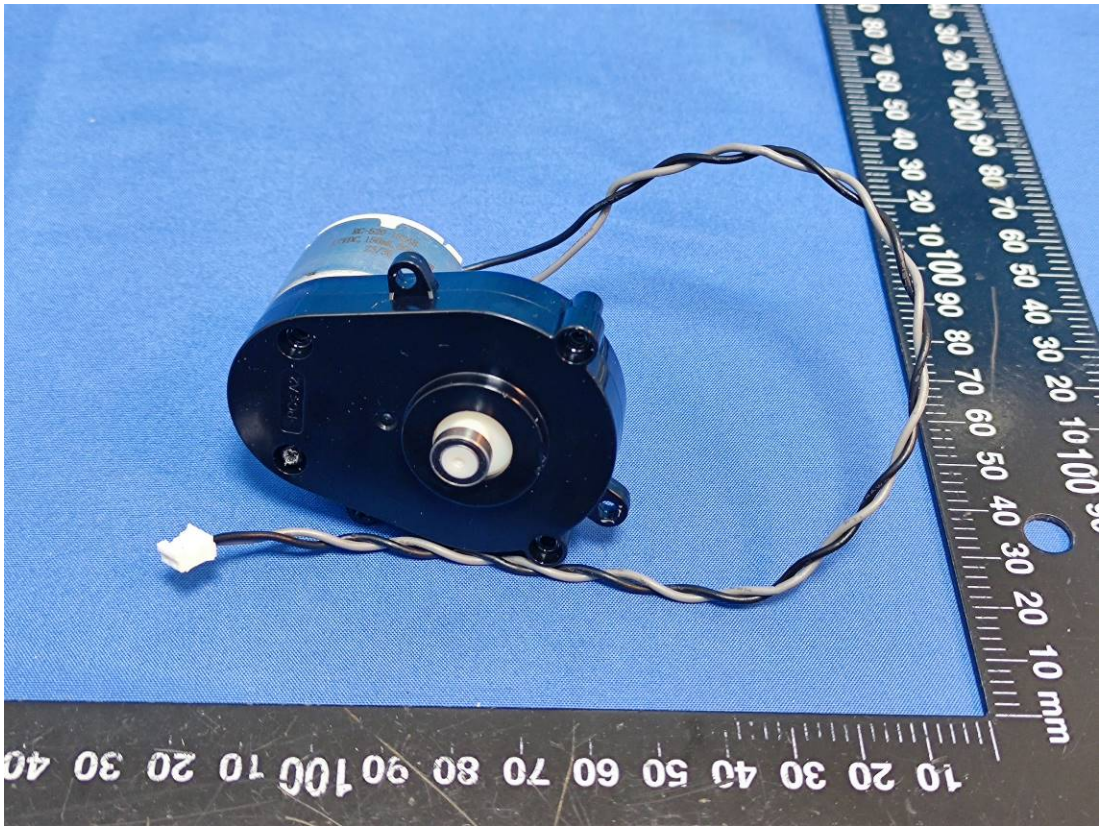

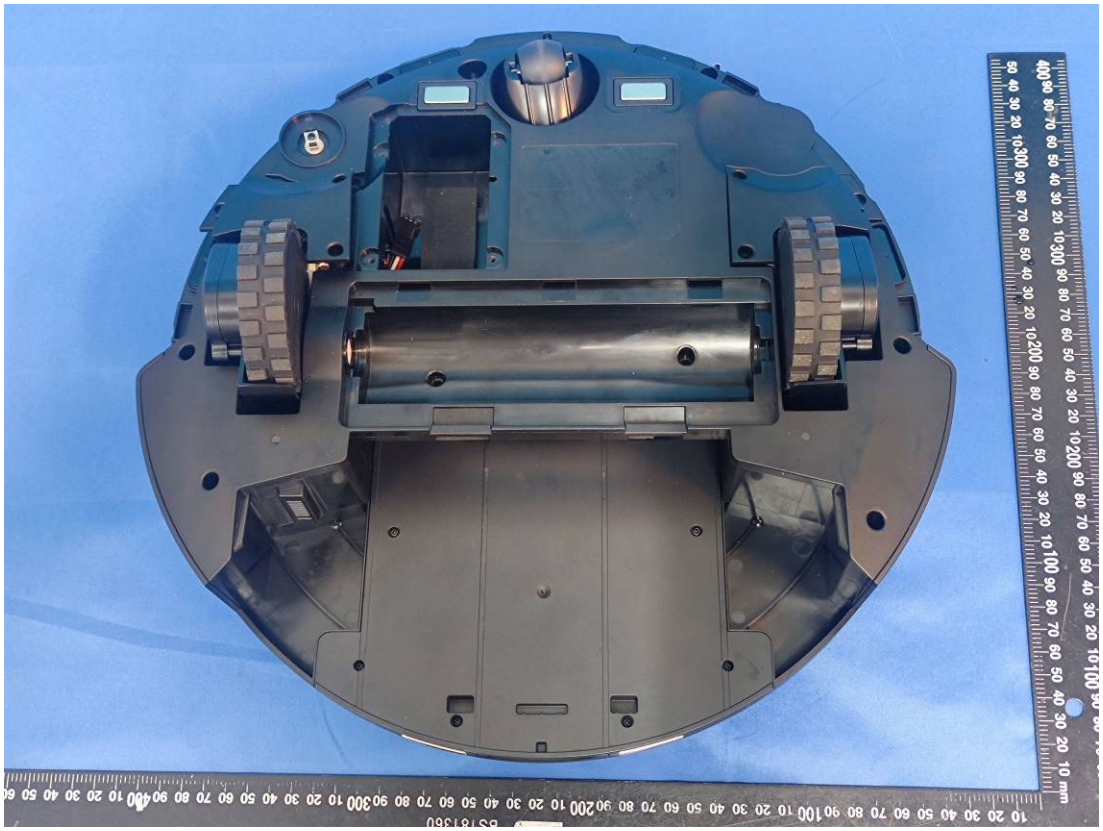

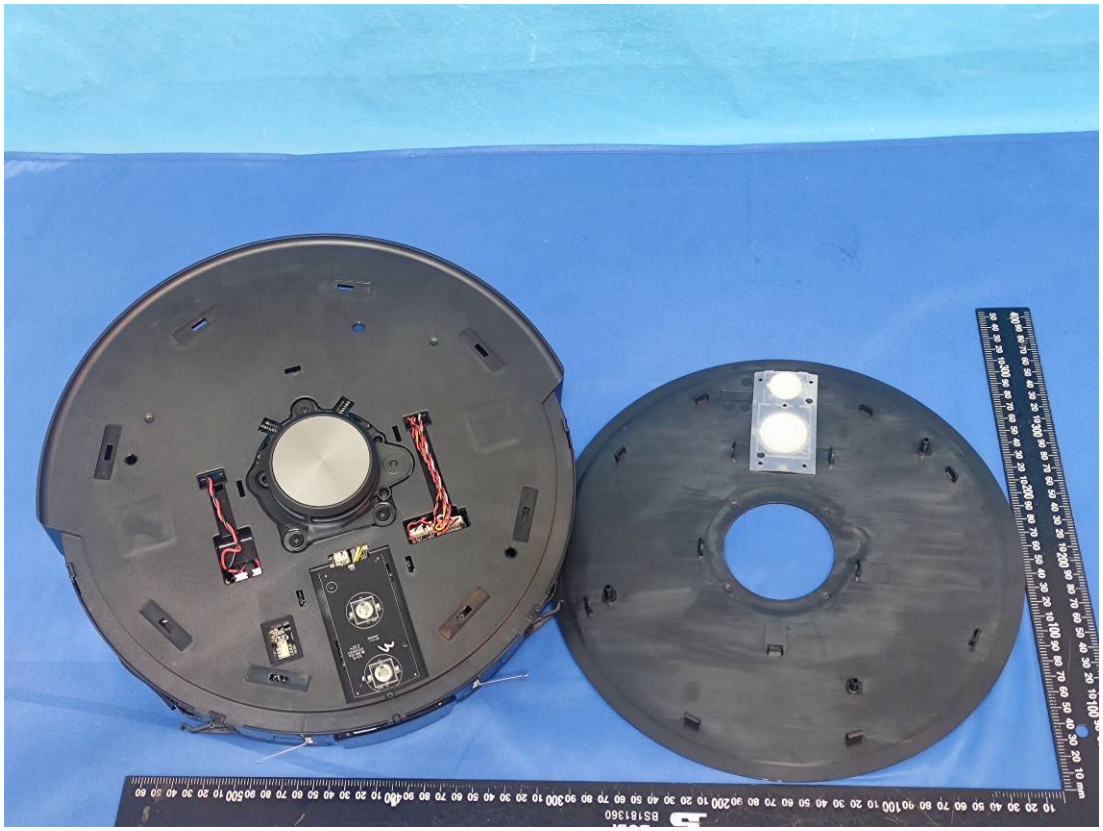

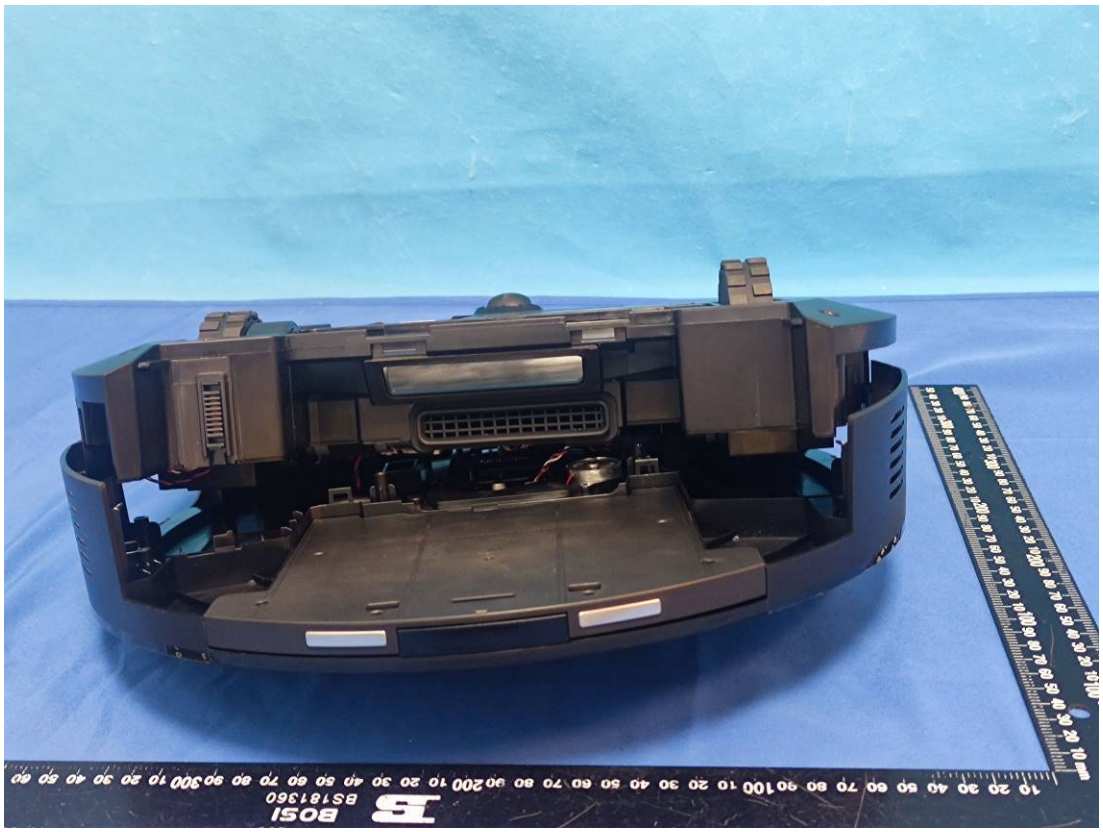

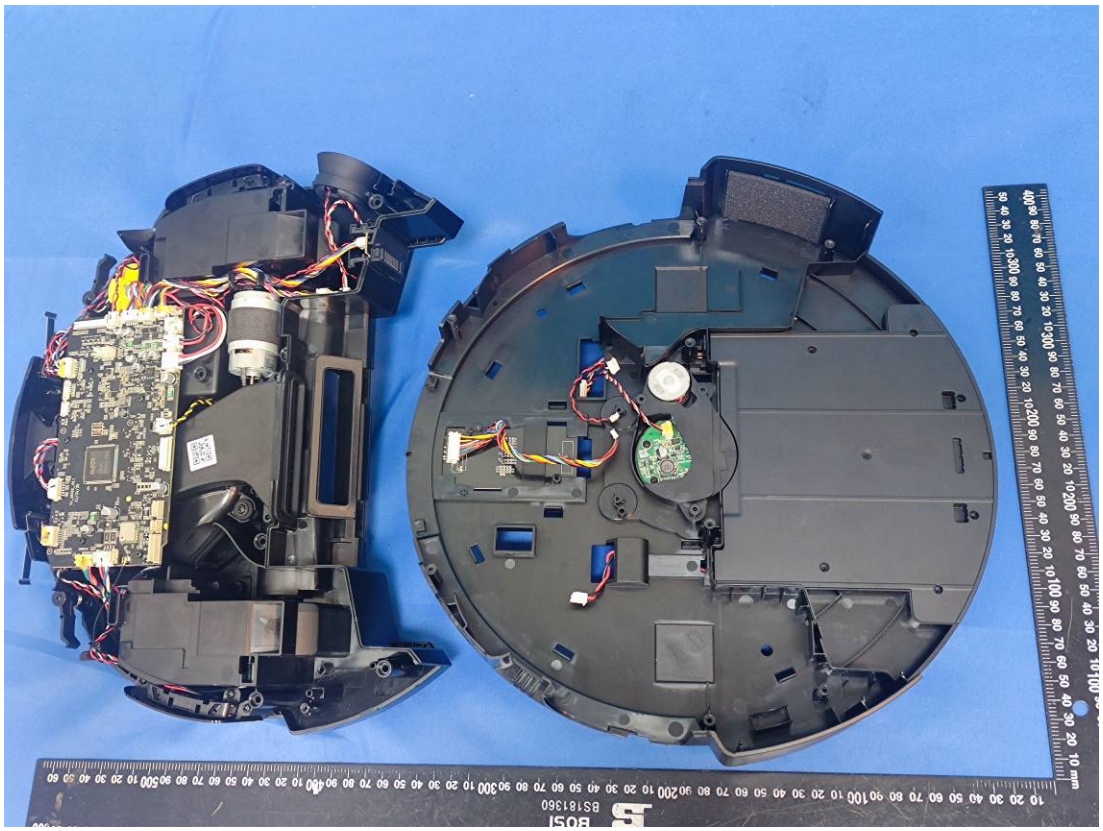

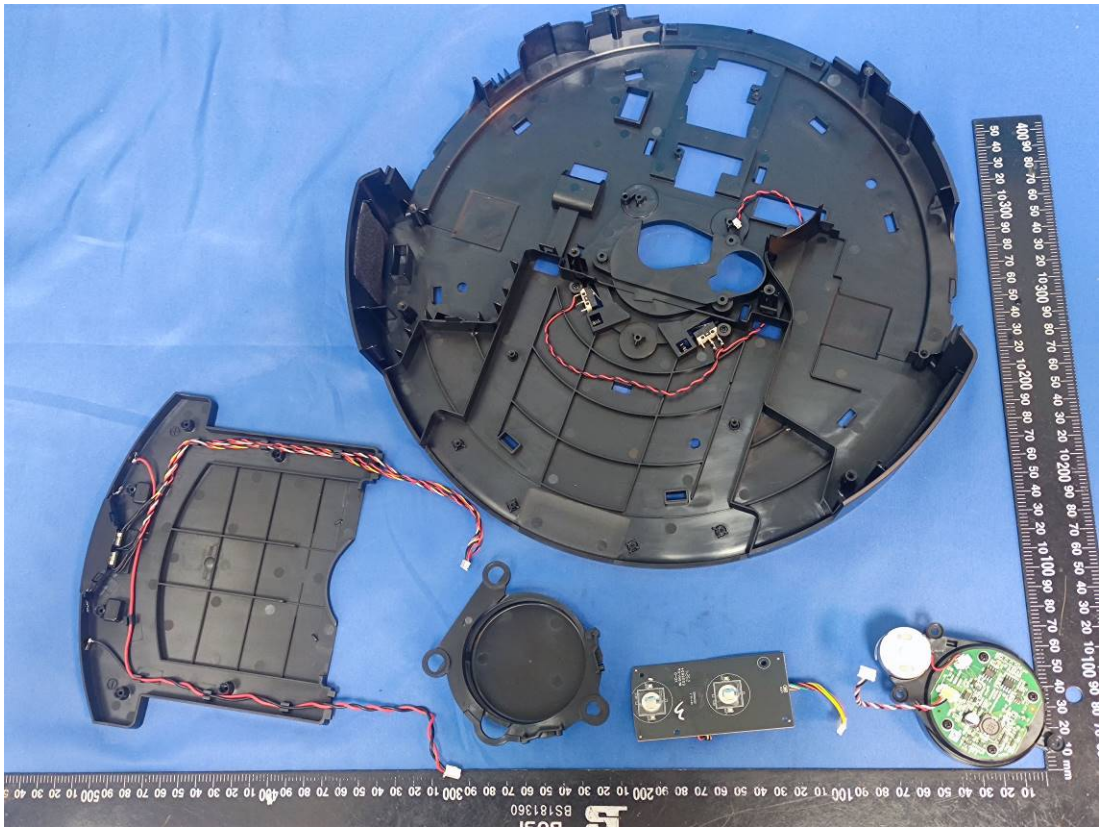

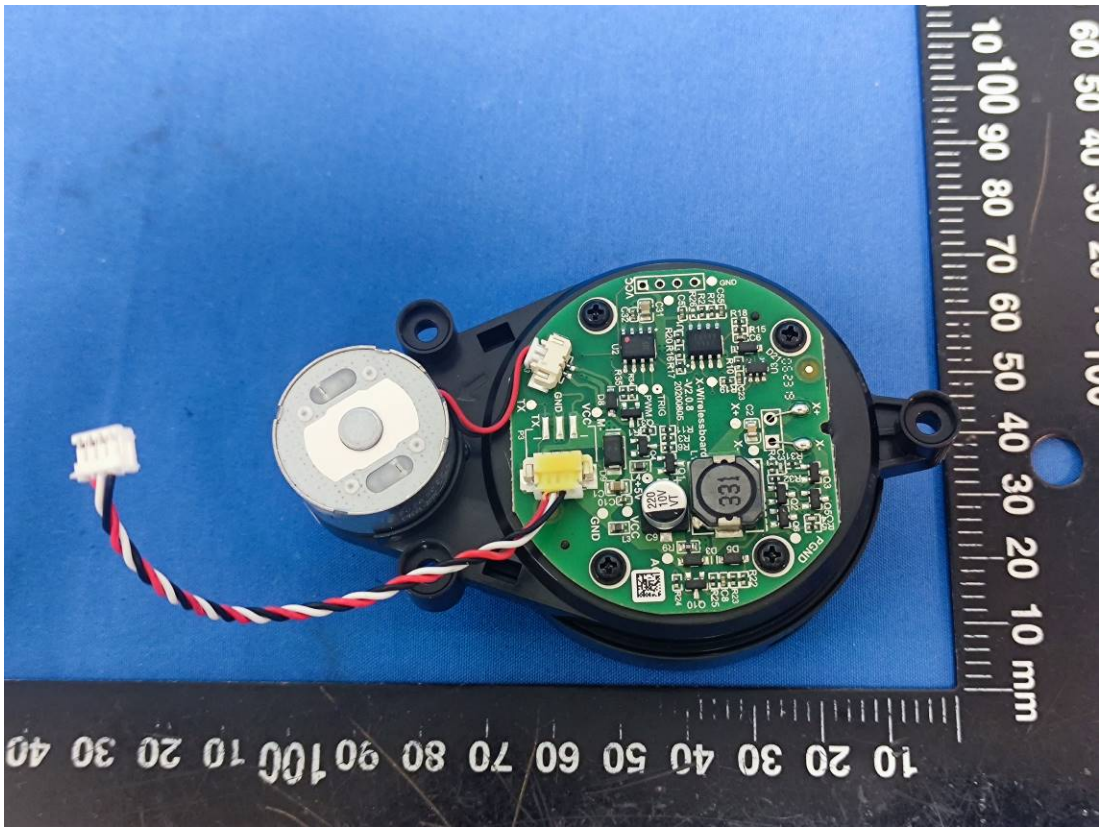

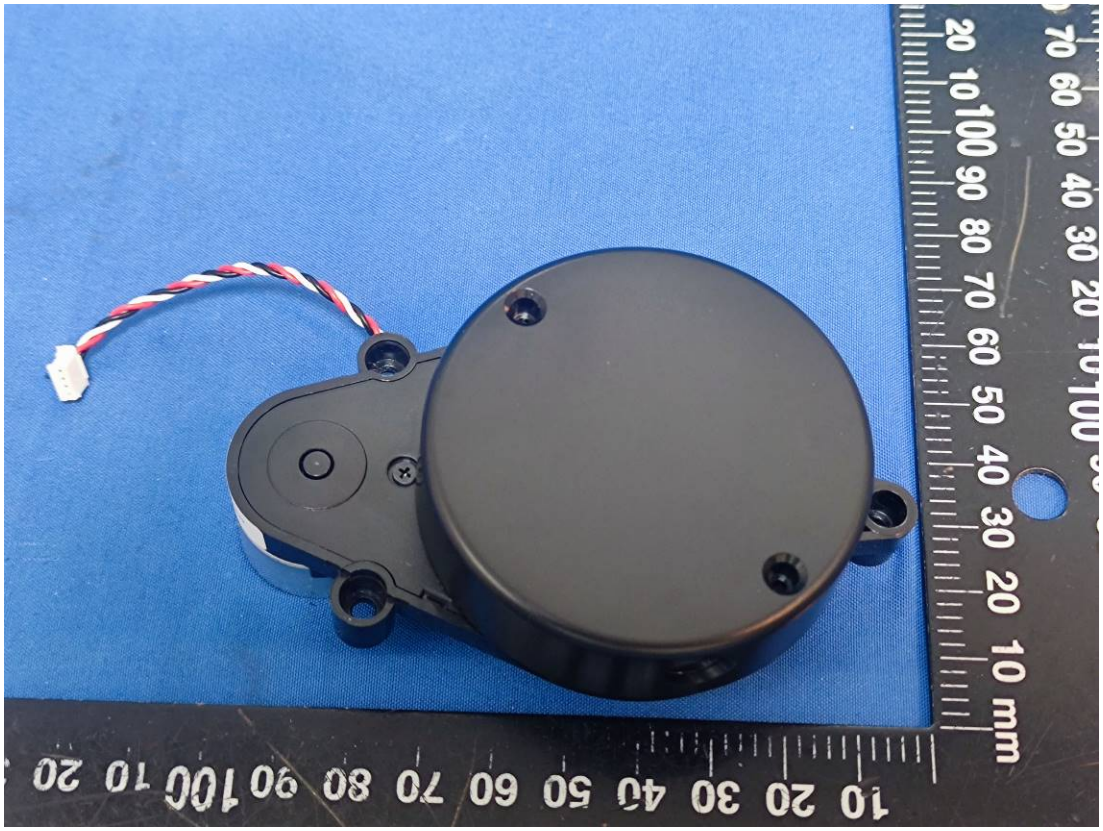

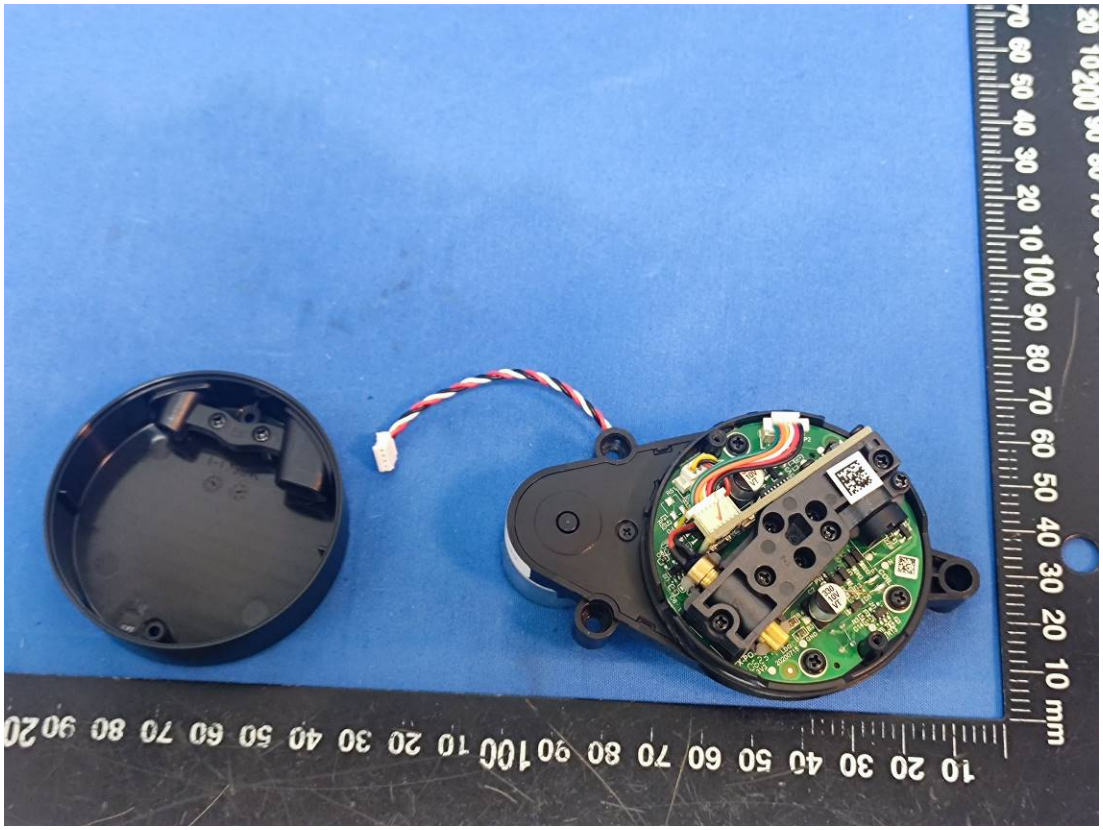

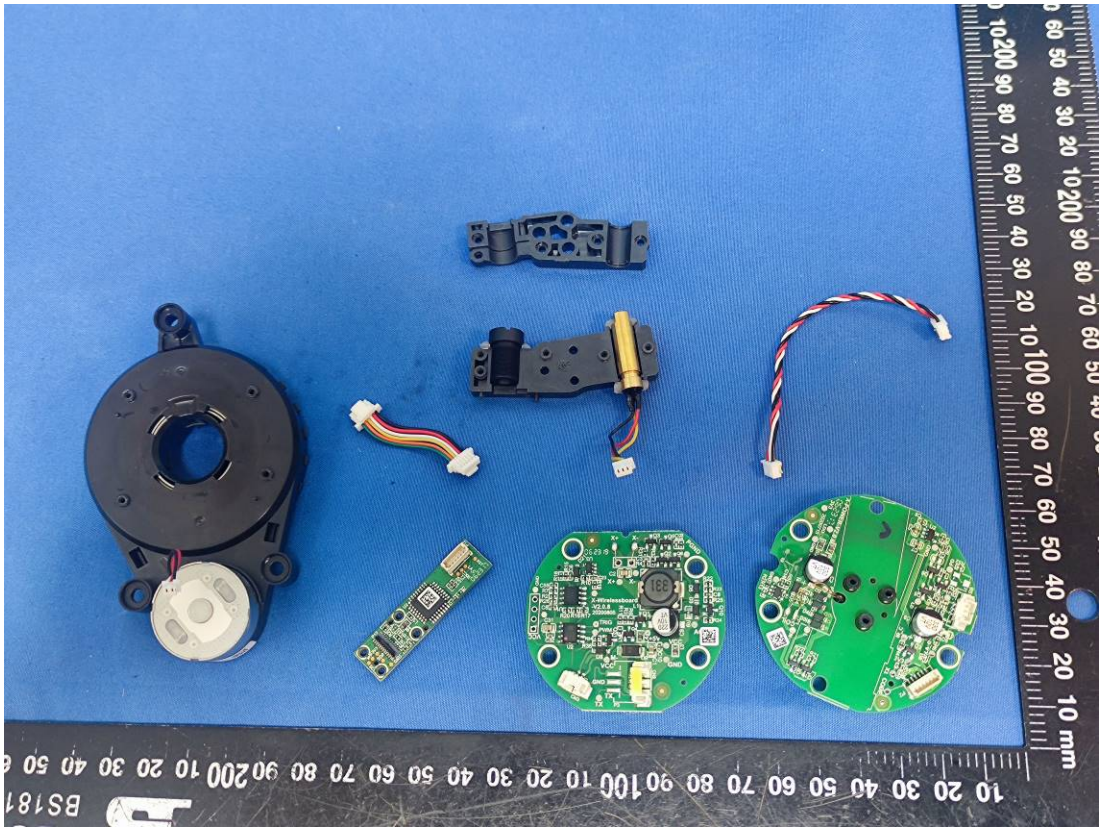

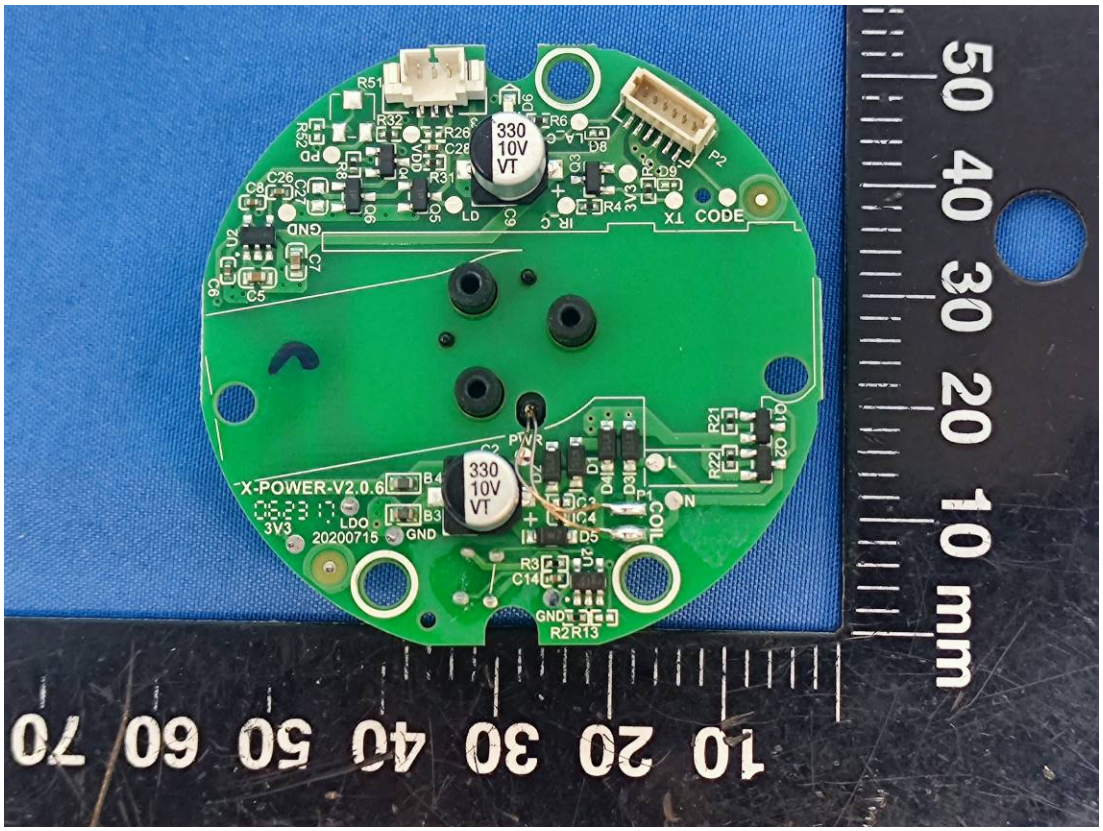
330
10V
VT
X-POWER-V2.0.6
LDO
20200715
3V3
GND
PWR
CODE
TX
COIL
L
N
10 20 30 40 50 60 70
10 mm

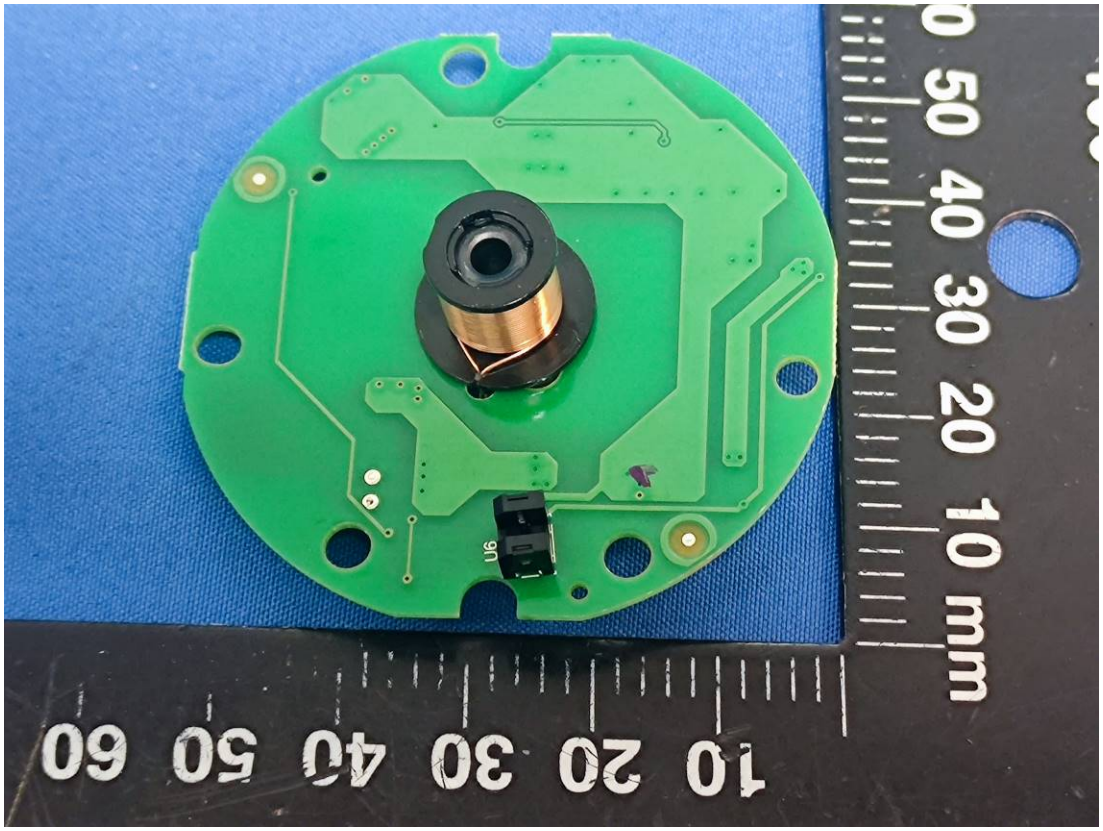
10 20 30 40 50 60
10 mm

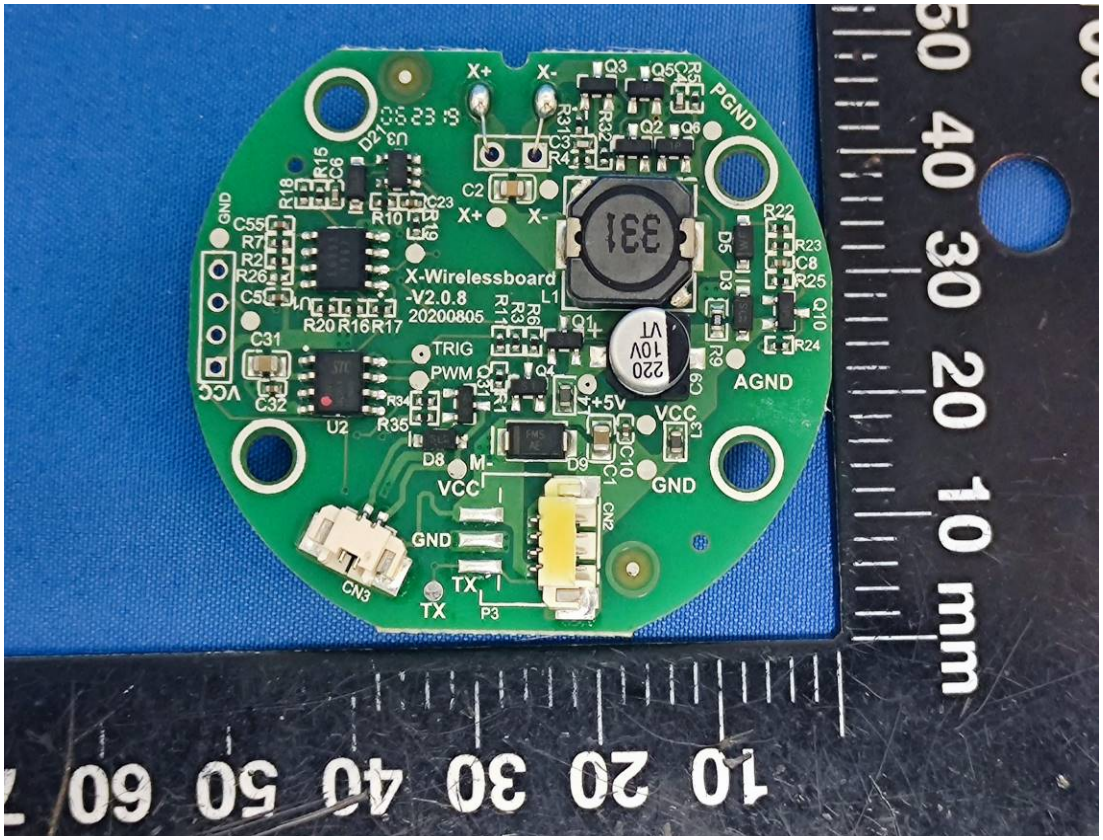
X+
X-
PGND
X-Wirelessboard
-V2.0.8
20200805
TRIG
PWM
+5V
VCC
AGND
GND
M-
TX
P3
CN2
CN3
VCC
GND
10 20 30 40 50 60 mm

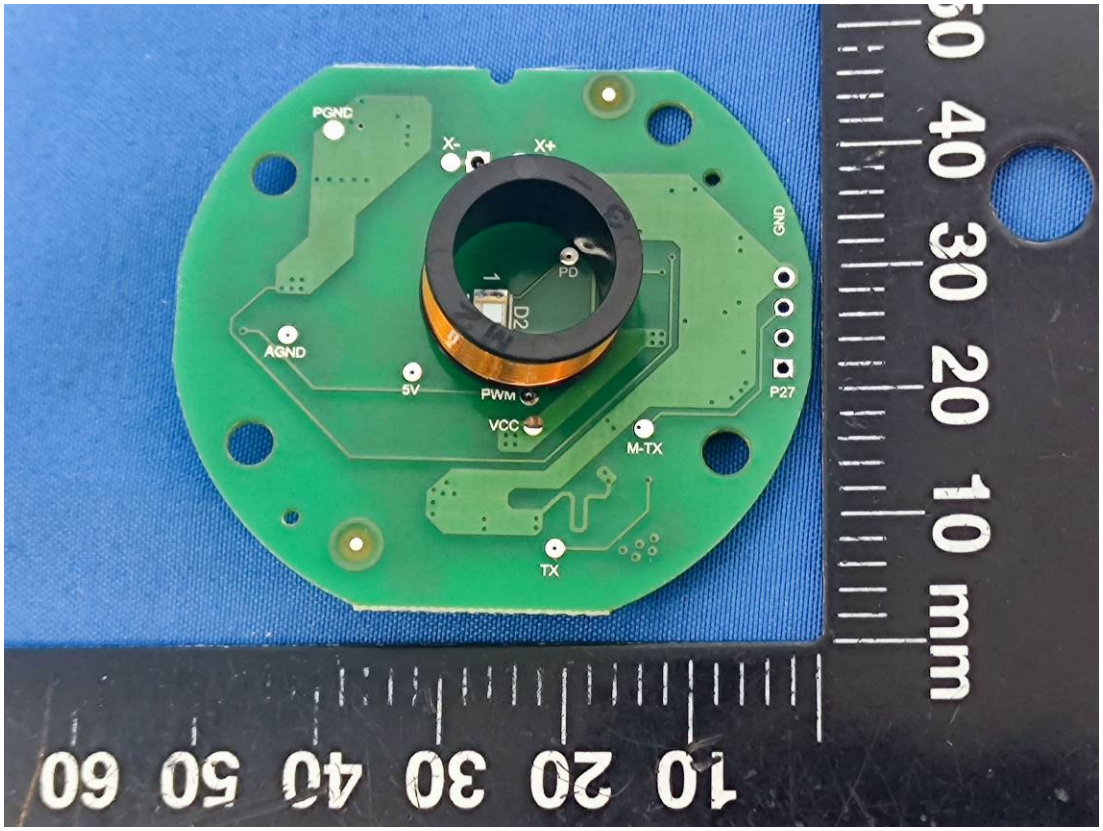
PGND
X-
X+
PD
D2
GND
AGND
5V
PWM
VCC
M-TX
TX
P27
10 20 30 40 50 60 mm

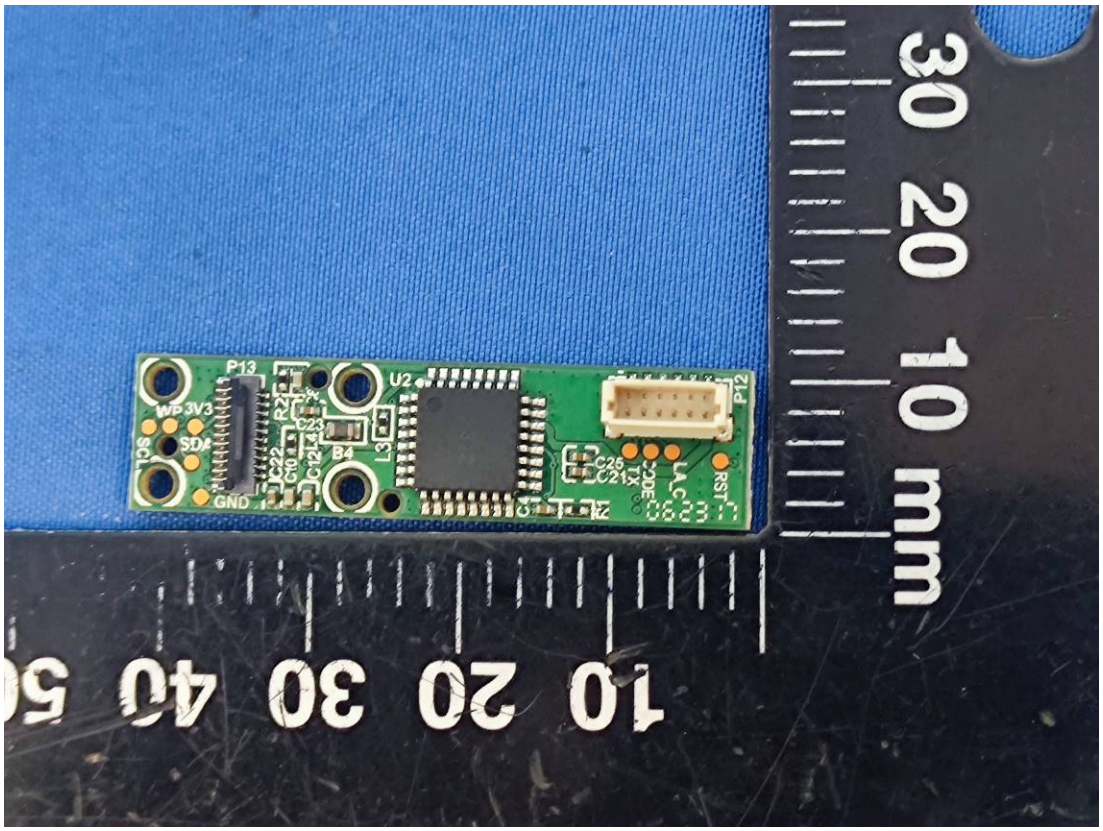
P13
U2
P12
WP
3V3
SDA
SCL
GND
B4
C25
C21
TX
CODE
LAC
RST
30 20 10 mm
10 20 30 40 50

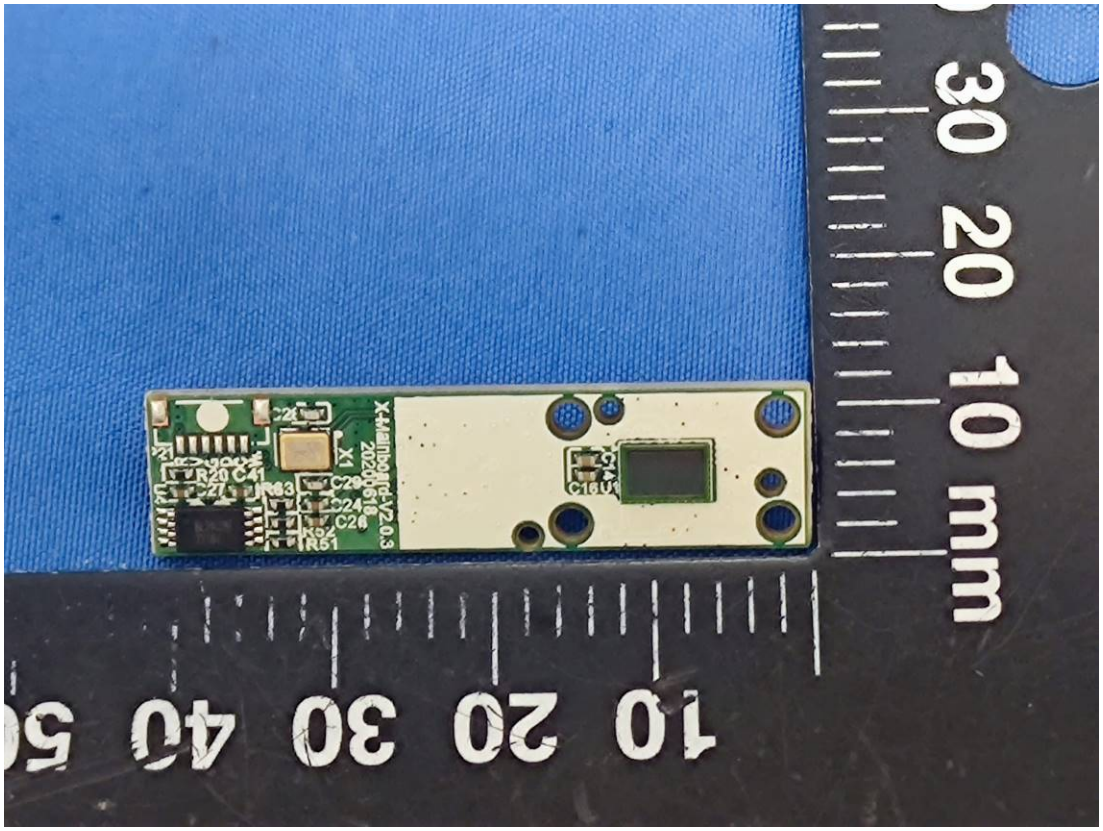
X1
R20
C41
R51
C16
30 20 10 mm
10 20 30 40 50

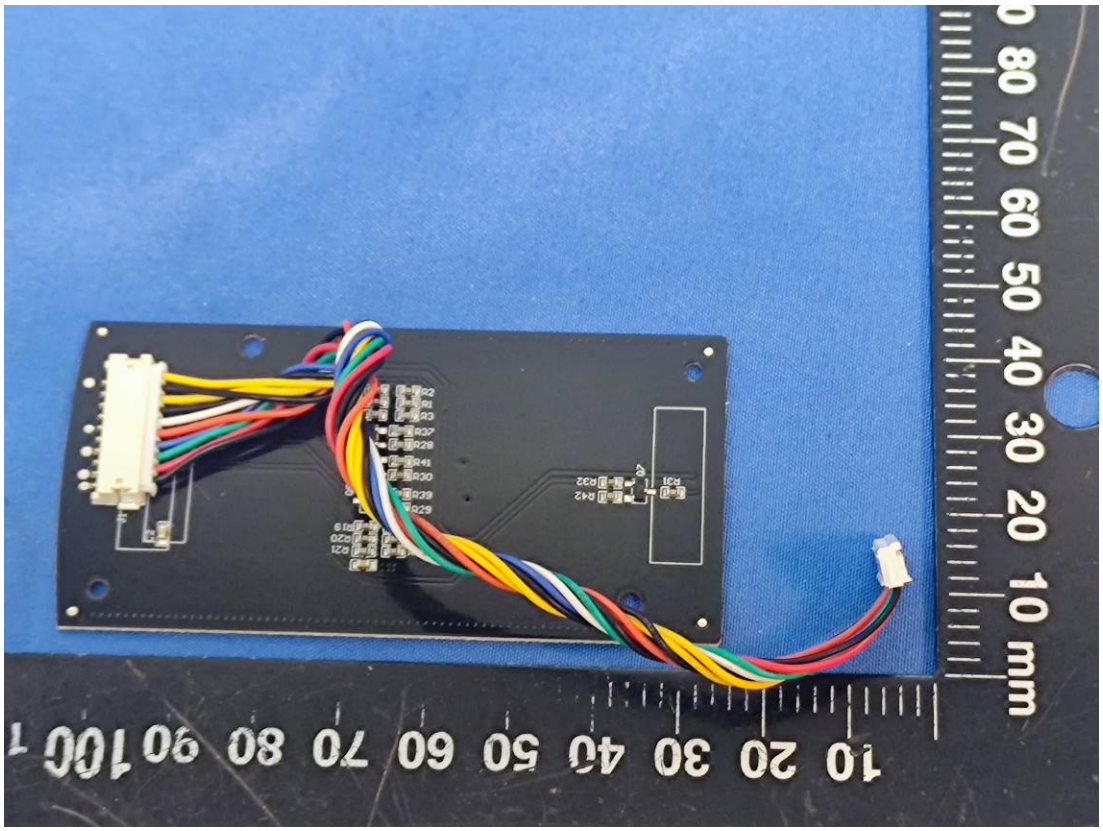
0 80 70 60 50 40 30 20 10 mm
10 20 30 40 50 60 70 80 90 100

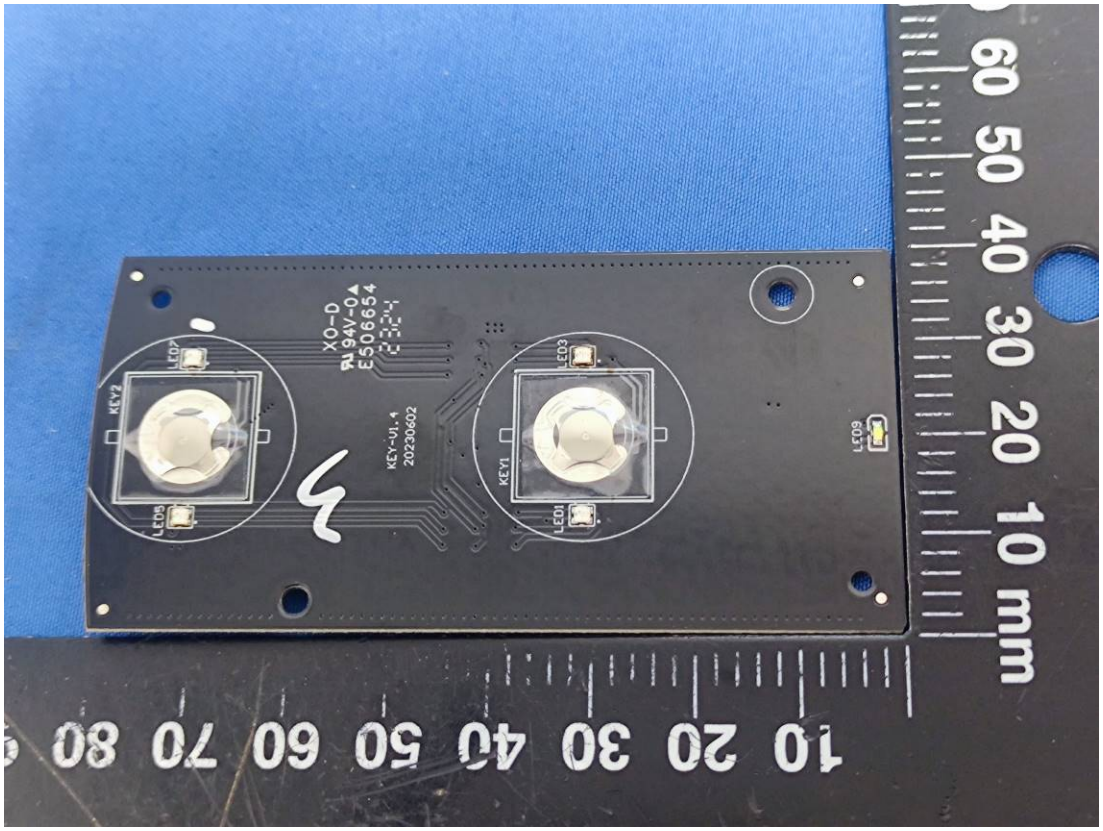
60 50 40 30 20 10 mm
10 20 30 40 50 60 70 80
KEY2
KEY1
LED7
LED5
LED3
LED1
LED9
KEY-V1.4
20230602
XO-D
94V-0
E506654

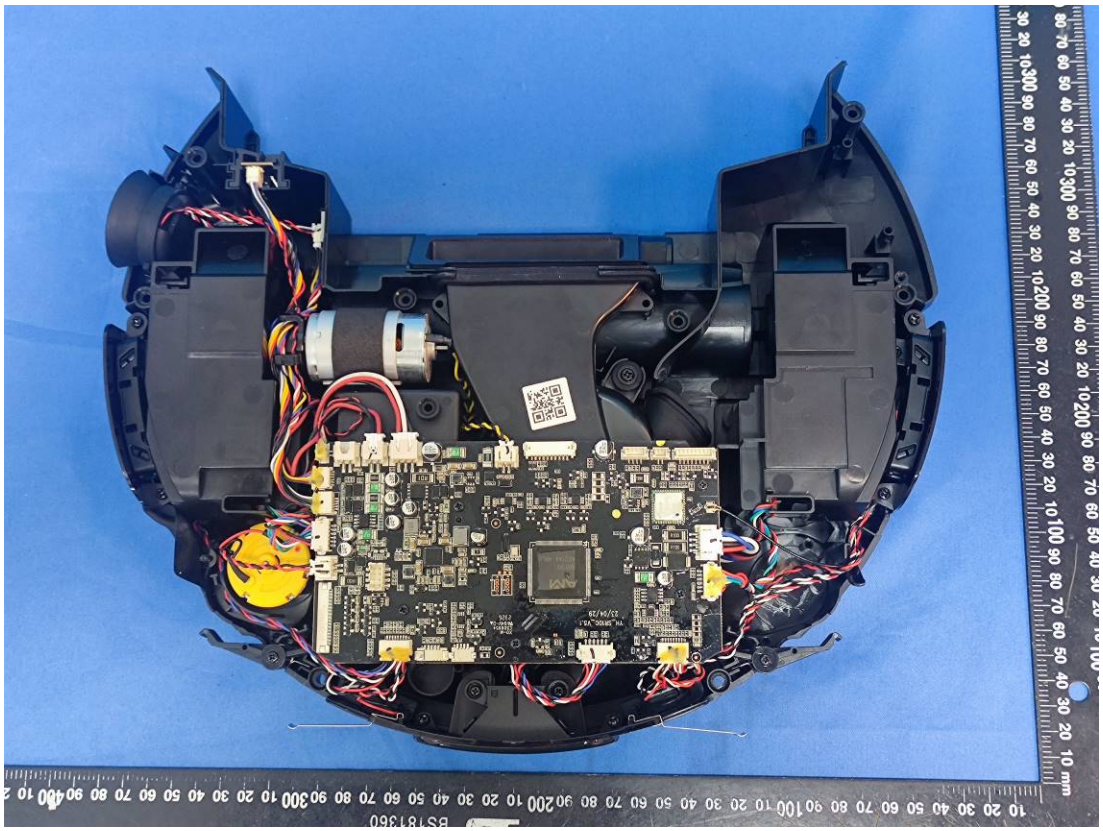

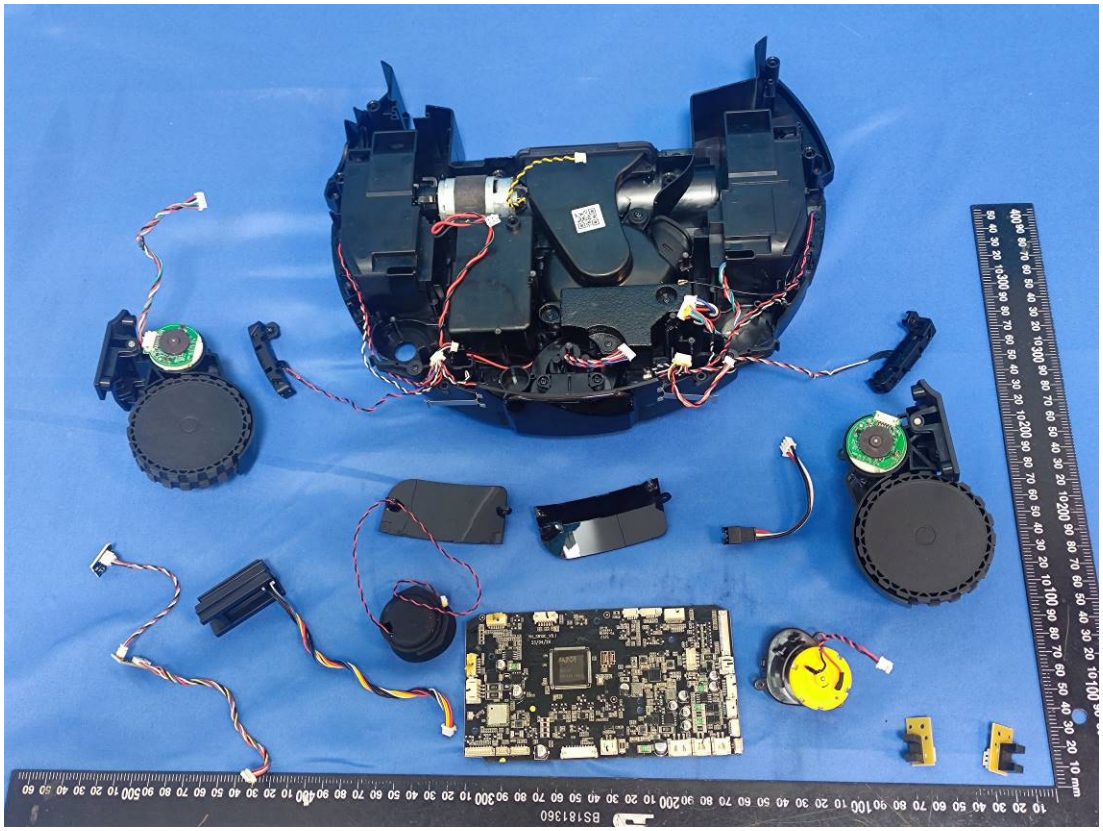

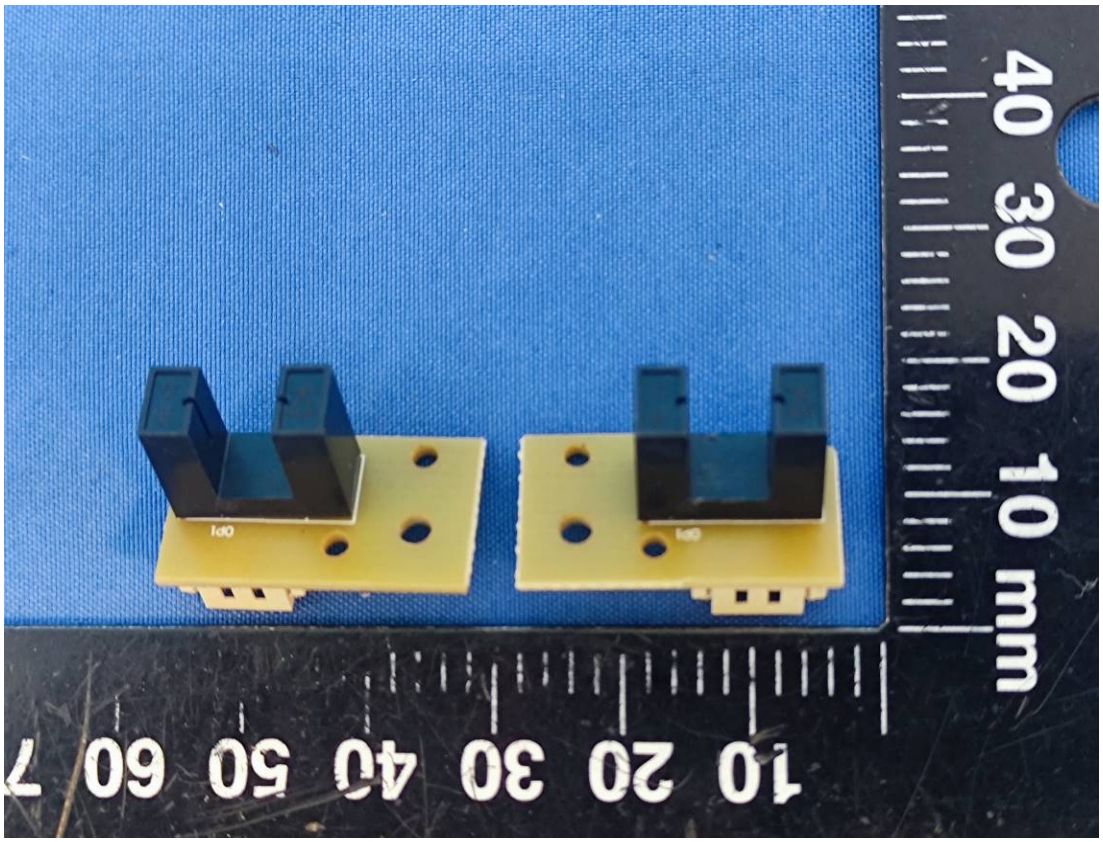
10 20 30 40 50 60 7
10 20 30 40 mm

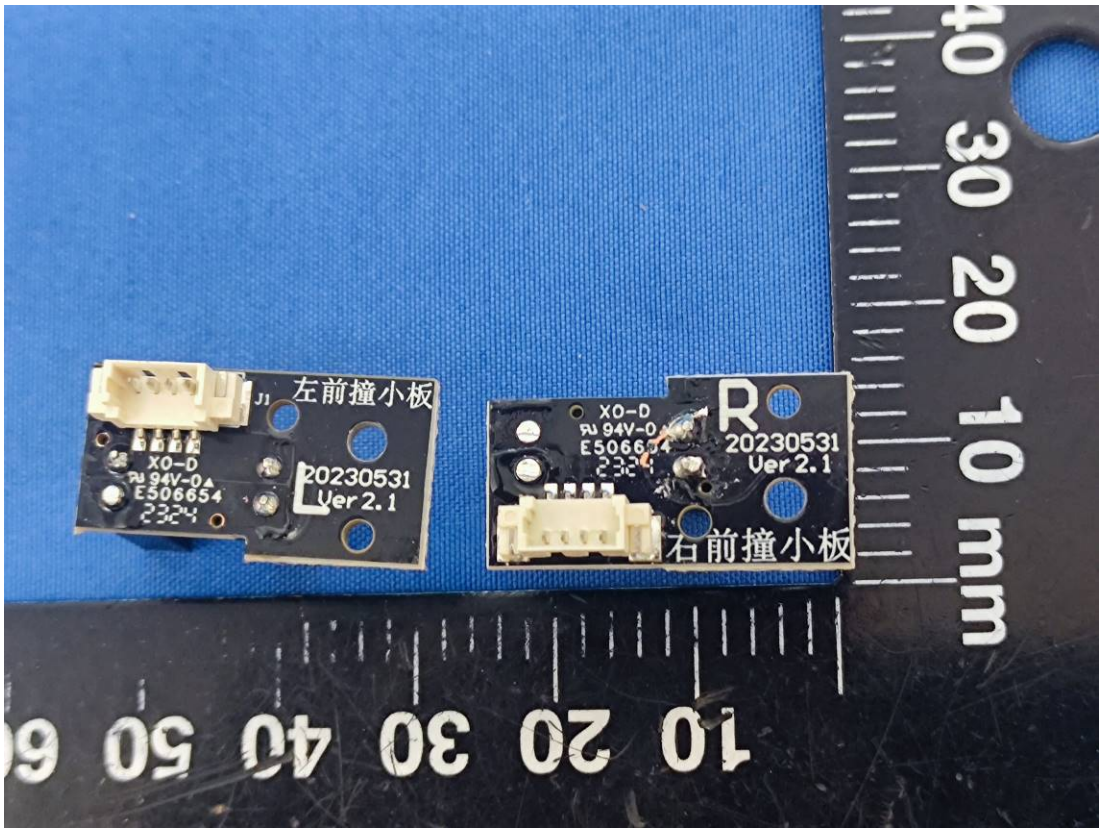
左前撞小板
20230531
Ver 2.1
XO-D
94V-0
E506654
2324
R
20230531
Ver 2.1
右前撞小板
10 20 30 40 50 6
10 20 30 40 mm

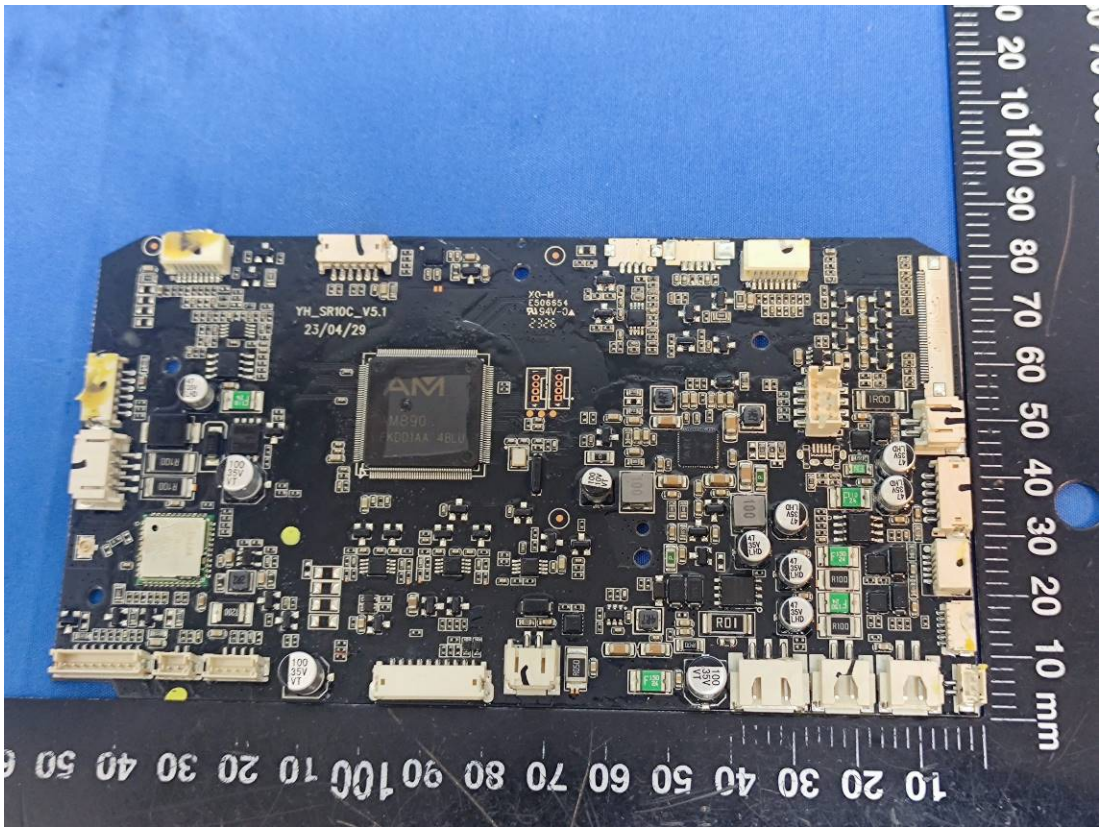
YH_SR10C_V5.1
23/04/29
M890
R01
R100
10 20 30 40 50 60 70 80 90 100 10 20 30 40 50
0 20 10 100 90 80 70 60 50 40 30 20 10 mm

Fn-Link
6223A-SRD
C04043
2316W4
R100
T200
R2
Q18
Q1
R2

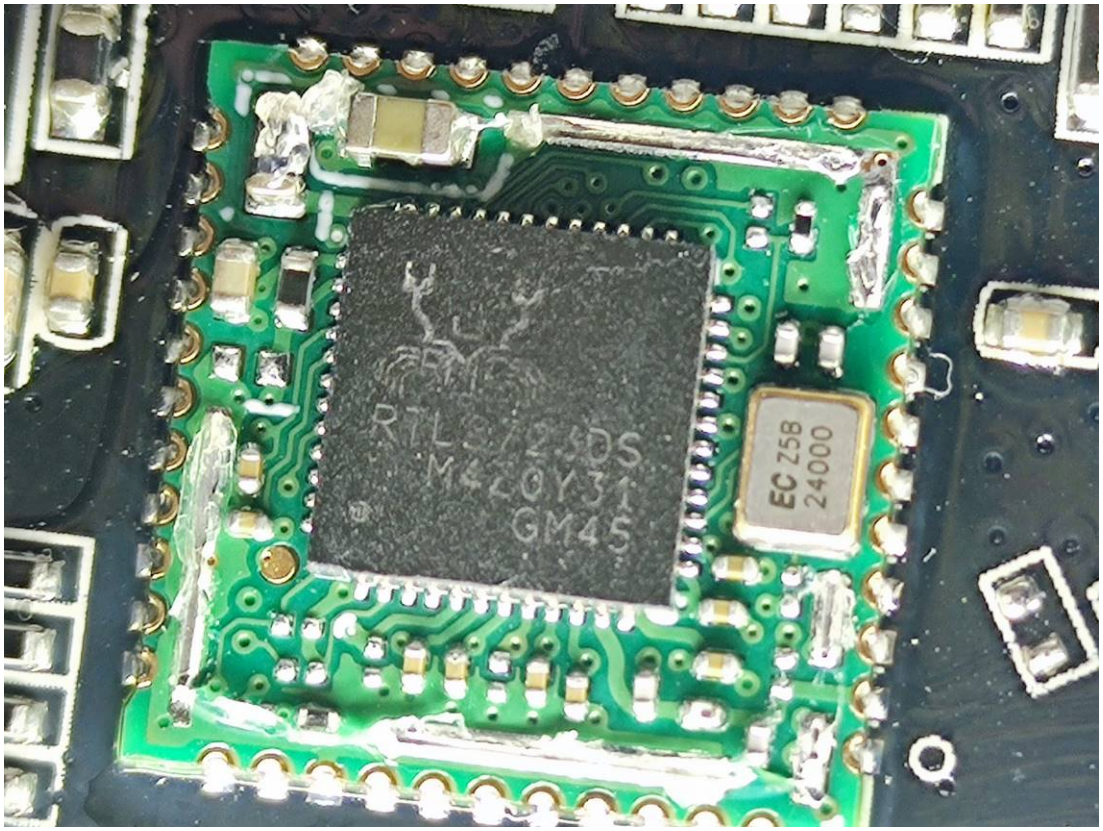
EC Z5B
24000
GM45

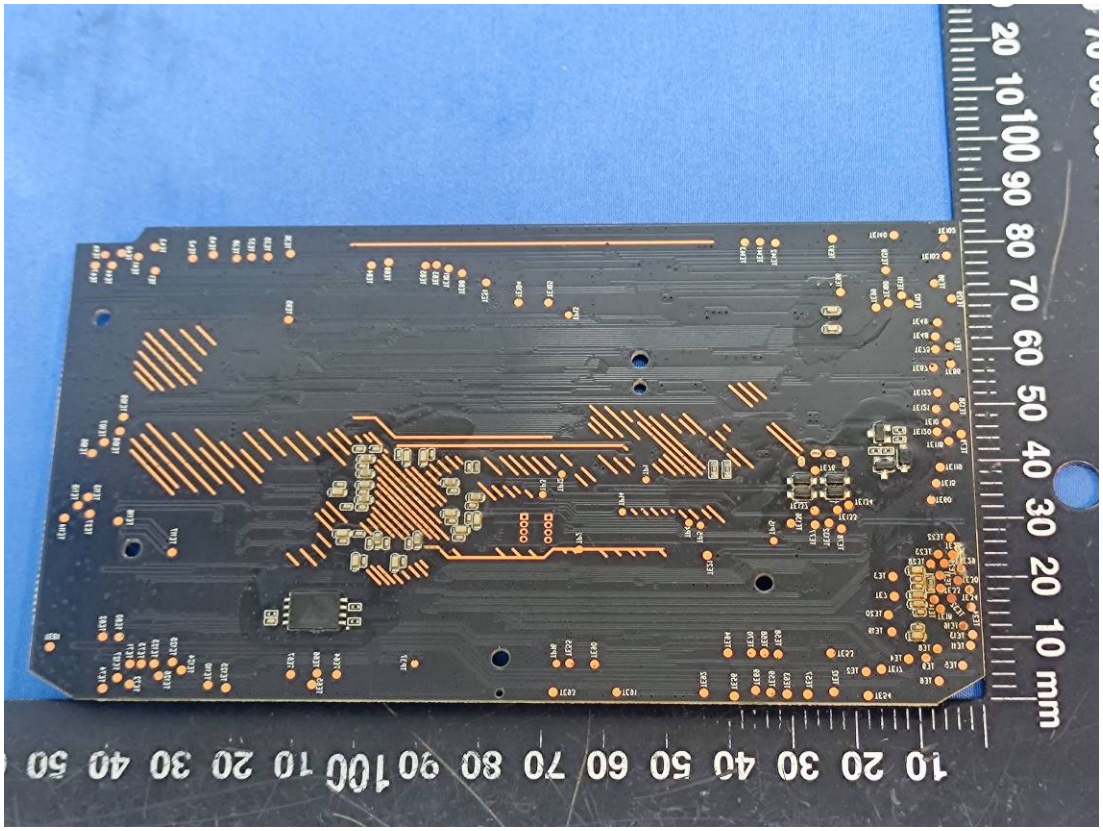
10 20 30 40 50 60 70 80 90 100 10 20 30 40 50
20 10 100 90 80 70 60 50 40 30 20 10 mm