

印刷说明

材质：双铜版纸

对折尺寸：95x150mm


装订方式：骑马钉

注意：此页不做印刷

Le~~v~~iewlity

Le~~v~~iewlity


User Manual

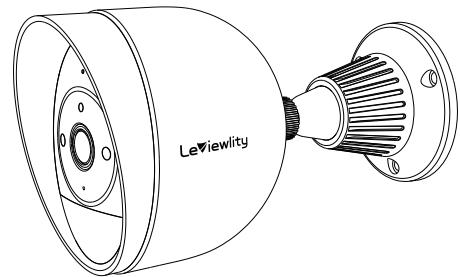



**WIRELESS
CAMERA**

CM-01

1. Package Contents

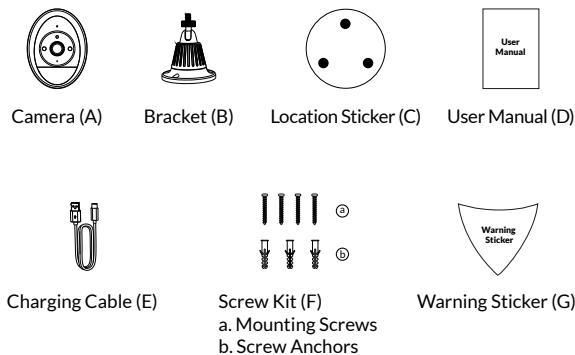

2. Introduction

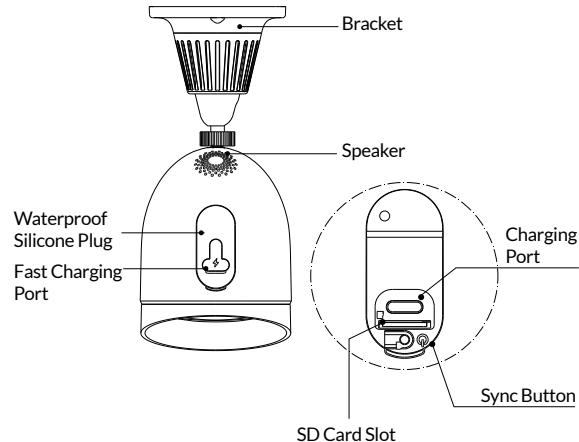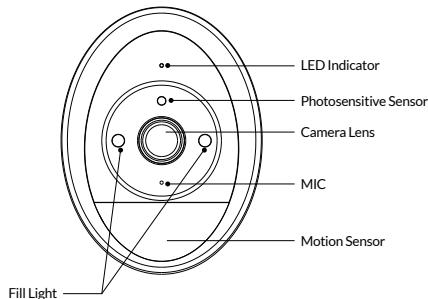

3. Controls & Indicators

Sync Button Instruction:

Press and hold the Sync button for 3s, the camera will turn on and enter pairing mode.

Press and hold the Sync button for 8s, the camera will return to the factory default settings.

LED Indicator Instruction:

| Device Status | LED Indicator Status |
|-----------------|--|
| Enter Pairing | Blue light flashes slowly. |
| Finish Pairing | Blue light stays on. |
| Failed Pairing | Red light flashes fast for 5s and off, then the blue light flashes slowly. |
| Charging | Red light flashes slowly. |
| Finish Charging | Red light stays on (without pairing). |
| | Blue light stays on (pairing finished). |

4. Specification


| | |
|---------------------------|-------------------------------|
| Model No.: CM-01 | Product Type: Wireless Camera |
| Resolution: 2K | Field of View: 140° |
| Battery Capacity: 9000mAh | Waterproof: IP66 |
| Local Storage: 16-128G | Charging Input: 5V/2A |
| Dimension: 100*99*74.5mm | Color: White |

5. Charge The Camera


The camera has a built-in battery, please use the provided charging cable (E) to charge the camera before use.

| Device Status | LED Indicator Status |
|-----------------|--|
| Charging | Red light flashes slowly. |
| Finish Charging | Red light stays on (without pairing). Blue light stays on (pairing finished). |

Method a: Open the waterproof silicone plug on the bottom of the camera and plug the charging cable (E) into the charging port to charge.

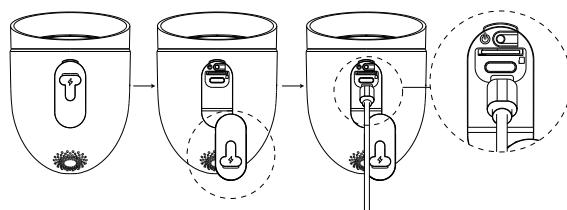

Method b: Open the silicone plug of the fast charging port on the bottom of the camera and plug the charging cable (E) into the charging port to charge.

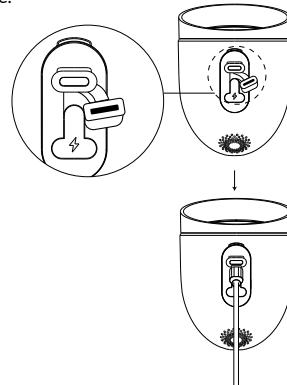

6. Add The Camera

a. Download the **Prodigytec** app from App Store (IOS device) or Google Play (Android device).




b. Register your account via email. After registration is completed, enter "Home", and select "Add device"-"Camera"-"Wireless Camera (CM-01)".


c. Follow the on-screen instructions to add the camera. After adding the camera, you can watch the real-time video in the preview window. For detailed operation steps and instructions, please refer to the e-User Manual in the app.

7. Mount The Camera

a. Find a mounting location: the camera can be mounted on the wall or ceiling. Find a location you want to monitor and the recommended mounting height is 6.6ft-8.2ft (2m-2.5m). To get the best monitoring field of view, we recommend adjusting the angle of the camera downward by 10°-15° when mounting on the wall, and adjusting the angle of the camera upward by 75°-80° when mounting on the ceiling.

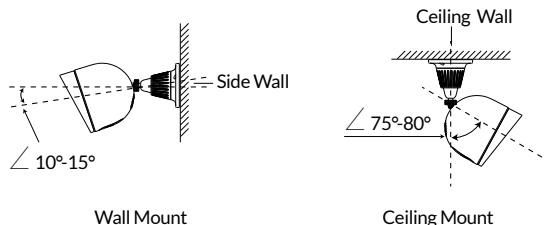


b. Mount the bracket (B): stick the location sticker (C) on the mounting location. Drill screw holes with a 15/64inch drill bit according to the location sticker. Then insert the screw anchors (F-b) into the holes. The screw anchors are required for walls that are made of hard materials. Align the bracket holes with the screw anchors, and tighten the mounting screws (F-a) to position the bracket. Make sure that the bracket is stable and does not wobble after mounting.

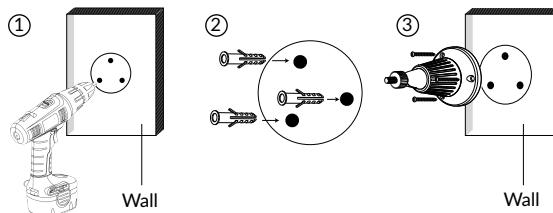

c. Fix the camera (A): Insert the screw of the bracket into the nut hole of the camera, and rotate the camera clockwise to fix the camera on the bracket. Open the Prodigytec app and adjust the monitoring angle by watching the real-time video to achieve the best monitoring effect.

Note: The camera can also be mounted on the ceiling by following the above 3 steps.

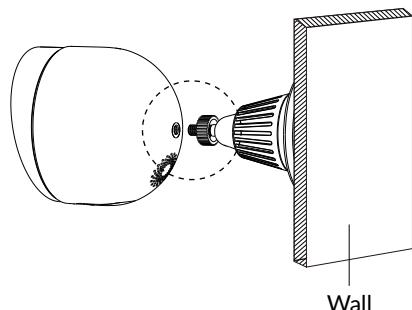

Q & A

Q1: How the camera enters the pairing status?

A: There is a SYNC button  on the back of the camera. Press and hold the Sync button for 3s, the camera will enter pairing status. At this time, the blue light will flash slowly, and you can pair the network. You can check whether the camera is in pairing status by checking the status of the LED indicator.

Q2: What are the WiFi requirements for the camera?

A: The camera is only compatible with 2.4GHz WiFi. It cannot be compatible with 5.8GHz WiFi. Please select the correct WiFi, and make sure to enter the correct WiFi password during use.

Q3: What is the appropriate distance between the camera and the router?

A: The connection distance of the camera can reach up to 120m in open area. In the actual environment, the actual connection distance varies due to the blockage of walls, metal objects and electronic devices. Please mount the camera near to the router if the WiFi signal is weak and the real-time video is unstable.

Q4: Why do the network pairing fail?

A: First, make sure the camera is in the pairing status. Second, make sure the WiFi name and password are correct. Last, make sure the camera scans the QR code by confirming it with a "beep" sound. If the camera successfully scans the QR code, there will be 1 "beep" sound.

If you follow the above steps, but the camera still cannot pairing successfully, please try to reset the camera and retry pairing.

The reset operation: Press and hold the Sync button  for 8s, at this time, there will be 3 "beep" sounds, and the blue light starts to flash slowly. Then the camera completes the reset.

Q5: How to charge the camera?

A: Use the supplied charging cable (E) to charge the camera. The charging voltage is 5V/2A. A full charge takes about 6h.

Q6: How long can the camera work when it is fully charged?

A: The camera has a built-in 9000mAh high-capacity battery, which can normally be used for 1 year once fully charged. However, due to different using environments, the triggering times of the camera vary greatly, so the working time depends on the actual situation. The more frequently the camera is triggered, the shorter the working time.

Q7: How does Synergy work?

A: Synergy is the process of mounting multiple cameras in an area at the same time to achieve an accurate and real-time monitoring of that area. The Synergy function requires at least two cameras, and there must be an overlap in the viewpoints of the cameras to achieve the best Synergy effect.

Q8: Does the camera support extended storage?

A: The camera has a micro SD card slot and supports 16-128GB SD card (the SD card needs to be purchased by the user). In addition, the camera supports cloud storage. After subscribing the cloud storage function, the user can get unlimited storage capacity space for more secure storage.

Notice

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: (1) Reorient or relocate the receiving antenna. (2) Increase the separation between the equipment and receiver. (3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. (4) Consult the dealer or an experienced radio/TV technician for help.

FCC Radio Frequency Exposure Statement

The device has been evaluated to meet general RF exposure requirements. The device can be used in fixed/mobile exposure condition. The min separation distance is 20 cm.

IC Statement

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

IC RF Statement: When using the product, maintain a distance of 20cm from the body to ensure compliance with RF exposure requirements.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

(1) l'appareil ne doit pas produire de brouillage, et
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.
Pour être conforme aux lignes directrices d'exposition RF RSS-102, cet équipement doit être installé et exploité à une distance minimale de 20cm entre le radiateur et votre corps: n'utilisez que l'antenne fournie.

Warranty

12-month warranty for the camera.

60-day money-back guarantee for quality issues.

Note: Damages caused by the disregard of this user manual are not subject to warranty.

Contact Us

At **Leviewlity**, we truly value your experience. If you have any questions about our product, please contact us through our store or app. Our dedicated team will respond promptly to provide you with the support you need. Thank you for choosing **Leviewlity**, and we look forward to serving you.