

# TEST REPORT

Applicant Name : Xiamen iprt Technology Co., Ltd  
Address : Fifth Floor, No.101, Huli Industrial Park, Meixi Road, Tong'an District, Xiamen City, China  
Report Number : XMTN3211231-68547E-00A-M3  
FCC ID: 2A2HA-JD-468BT

**Test Standard (s)**  
FCC PART 15.247


**Sample Description**

Product Type: Thermal Label Printer  
Model No.: BY-244  
Date Received: 2021-12-31(XMTN3211231-68547E-RF-S1)  
2024-01-28(XMTN3211231-68547E-RF-S2)  
Date of Test: 2022-04-03 to 2022-04-07 for CE&RE Test  
2024-12-16 for RF conducted test  
Report Date: 2024-12-18

Test Result:	Pass*
--------------	-------

\* In the configuration tested, the EUT complied with the standards above.

**Prepared and Checked By:**



---

Roger Ling  
EMC Engineer

**Approved By:**



---

Bob.Liao  
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk \*\*. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

---

**Shenzhen Accurate Technology Co., Ltd.**

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Fax: +86 755-26503396

Web: www.atc-lab.com

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	5
MEASUREMENT UNCERTAINTY.....	6
TEST FACILITY .....	6
<b>SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
DESCRIPTION OF TEST CONFIGURATION .....	7
EUT EXERCISE SOFTWARE .....	7
SPECIAL ACCESSORIES.....	7
EQUIPMENT MODIFICATIONS .....	7
SUPPORT EQUIPMENT LIST AND DETAILS .....	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP .....	8
<b>SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>11</b>
<b>FCC §15.247 (i) &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b>	<b>12</b>
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
ANTENNA CONNECTOR CONSTRUCTION .....	13
<b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
EUT SETUP .....	14
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	15
FACTOR & MARGIN CALCULATION .....	15
TEST DATA .....	15
<b>FCC §15.205, §15.209 &amp; §15.247(d) – RADIATED EMISSIONS.....</b>	<b>18</b>
APPLICABLE STANDARD .....	18
EUT SETUP.....	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	19
TEST PROCEDURE .....	19
FACTOR & MARGIN CALCULATION .....	19
TEST DATA .....	19
<b>FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....</b>	<b>25</b>
APPLICABLE STANDARD .....	25
TEST PROCEDURE .....	25
TEST DATA .....	25
<b>FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH &amp; 99% OCCUPIED BANDWIDTH .....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
TEST PROCEDURE .....	26
TEST DATA .....	27
<b>FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....</b>	<b>28</b>
APPLICABLE STANDARD .....	28

TEST PROCEDURE .....	28
TEST DATA .....	28
<b>FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....</b>	<b>29</b>
APPLICABLE STANDARD .....	29
TEST PROCEDURE .....	29
TEST DATA .....	29
<b>FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....</b>	<b>30</b>
APPLICABLE STANDARD .....	30
TEST PROCEDURE .....	30
TEST DATA .....	30
<b>FCC §15.247(d) - BAND EDGES TESTING .....</b>	<b>31</b>
APPLICABLE STANDARD .....	31
TEST PROCEDURE .....	31
TEST DATA .....	31
<b>APPENDIX .....</b>	<b>32</b>
APPENDIX A: 20DB EMISSION BANDWIDTH.....	32
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	38
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	44
APPENDIX D: CARRIER FREQUENCY SEPARATION .....	50
APPENDIX E: TIME OF OCCUPANCY .....	53
APPENDIX F: NUMBER OF HOPPING CHANNELS .....	63
APPENDIX G: BAND EDGE MEASUREMENTS .....	66

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	XMTN3211231-68547E-00A	Original Report	2022-04-13
Rev.01	XMTN3211231-68547E-00A-M3	Retest and Update RF Conducted Test Data	2024-12-18

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Thermal Label Printer
Tested Model No.	BY-244
Frequency Range	2402~2480MHz
Maximum conducted Peak output power	-1.13dBm
Modulation Technique	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	Internal Antenna: 2dBi(provided by the applicant)
Voltage Range	DC 24V from adapter
Sample number	XMTN3211231-68547E-RF-S1 for AC CE & RE Test XMTN3211231-68547E-RF-S2 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter Information	Model: GM53-240200-F Input: 100-240V~, 50/60Hz, 2A Output: DC 24V, 2A

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	5%	
RF output power, conducted	0.3dB	
Unwanted Emission, conducted	1.2dB	
AC Power Lines Conducted Emissions	2.72dB	
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature	1°C	
Humidity	6%	
Supply voltages	0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 809509, the FCC Designation No.: CN1403.

Accredited by American Association for Laboratory Accreditation (A2LA). The Certificate Number is 4297.01

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode.

### EUT Exercise Software

Software “BT98X FCC Tool V1.2.exe”\* was used during testing and the power level was 0\*.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Notebook	T430	Unknown

### External I/O Cable


Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Cable	1.45	Notebook	EUT
Unshielded Un-Detachable DC Input Cable	1.13	Adapter	EUT

## Block Diagram of Test Setup


For conducted emission:

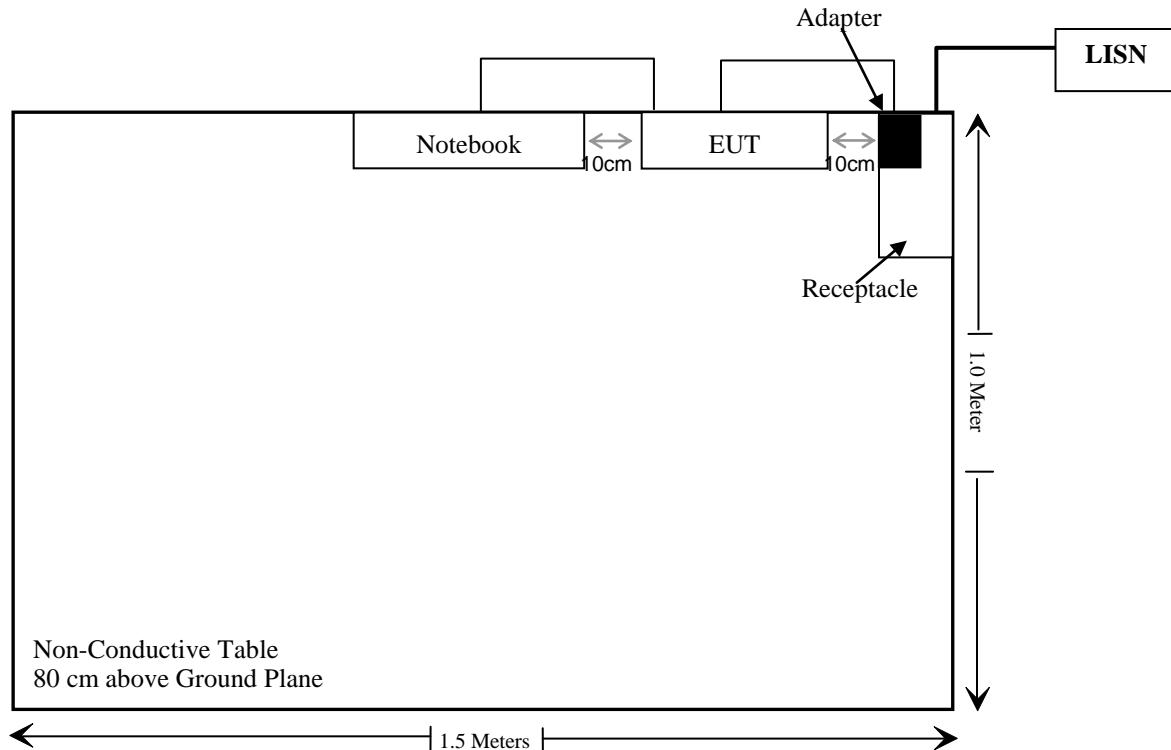

For radiated emission for below 1GHz:

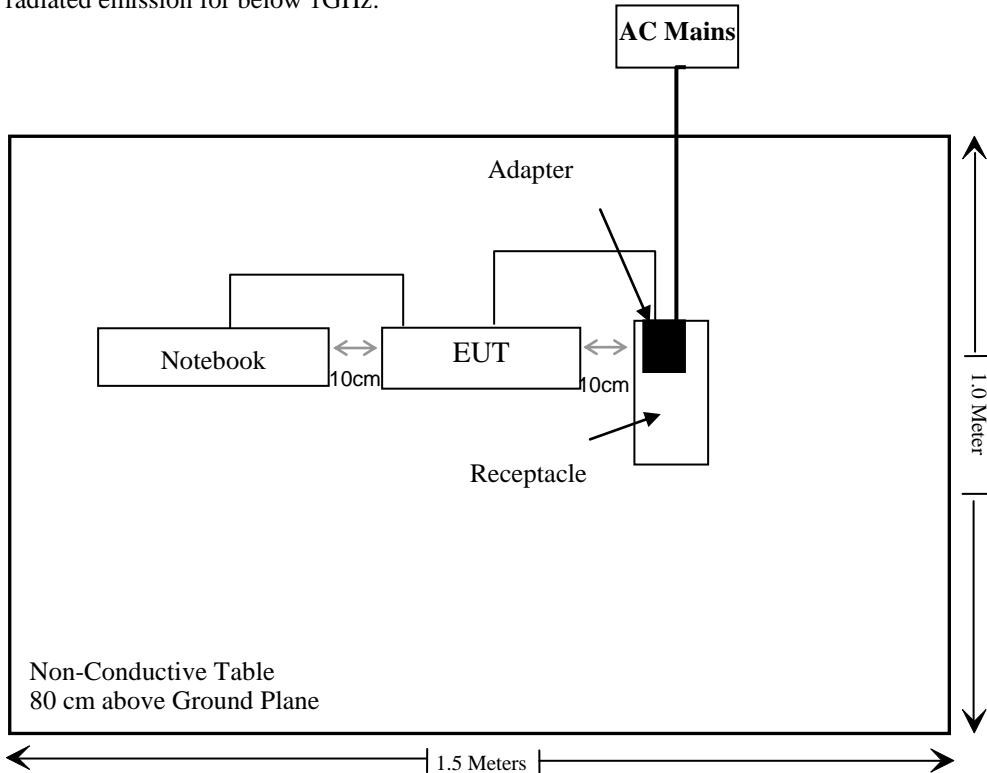

For radiated emission above 1GHz:

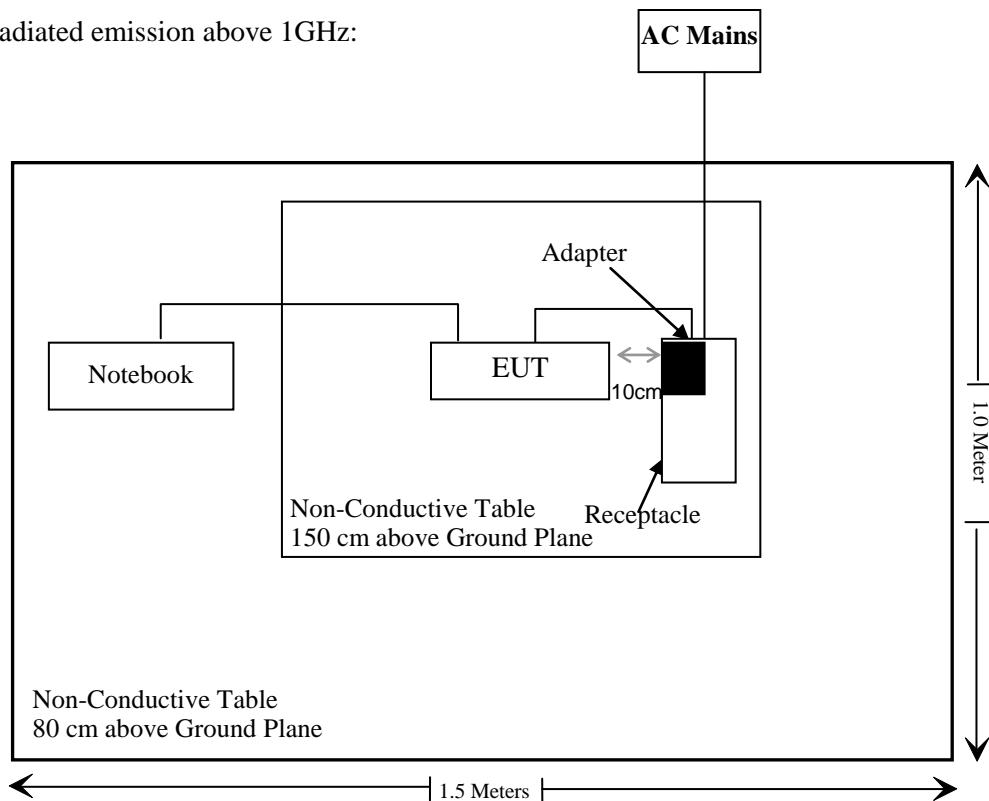

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result	Note
§15.247 (I), §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant	From Original
§15.203	Antenna Requirement	Compliant	From Original
§15.207(a)	AC Line Conducted Emissions	Compliant	From Original
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant	From Original
§15.247(a)(1)	20 dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant*	Retested
§15.247(a)(1)	Channel Separation Test	Compliant*	Retested
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant*	Retested
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant*	Retested
§15.247(b)(1)	Peak Output Power Measurement	Compliant*	Retested
§15.247(d)	Band edges	Compliant*	Retested

Compliant\* – Annotations as below:

Note 1: The test item was retested and updated the data.

Note 2: The test software and power setting level were same as the original testing which on page 7 of the report.

Note 3: The retested RF power is almost the same as the original report.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated Emissions Test					
Rohde & Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-184055 36-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Wainwright	High Pass Filter	WHKX3.6/18 G-10SS	5	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2024/10/08	2025/10/07
Rohde & Schwarz	Open Switch and ControlUnit	OSP120+OSP-B157	101244+100866	2024/10/08	2025/10/07
Agilent	10dB Attenuator	8491B	A5825	2024/10/08	2025/10/07
Unknown	RF Coaxial Cable	No.31	RF-01	2024/10/08	2025/10/07

**\* Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (Minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

### Result

#### Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm<sup>2</sup>)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

Frequency (MHz)	Antenna Gain		Tune up conducted power		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
2402-2480	2	1.58	-1	0.79	20	0.000250	1

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

## FCC §15.203 – ANTENNA REQUIREMENT

### Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Antenna Connector Construction

The EUT has one internal Antenna arrangement, which was permanently attached and the antenna gain is 2dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC §15.207(a)

### EUT Setup

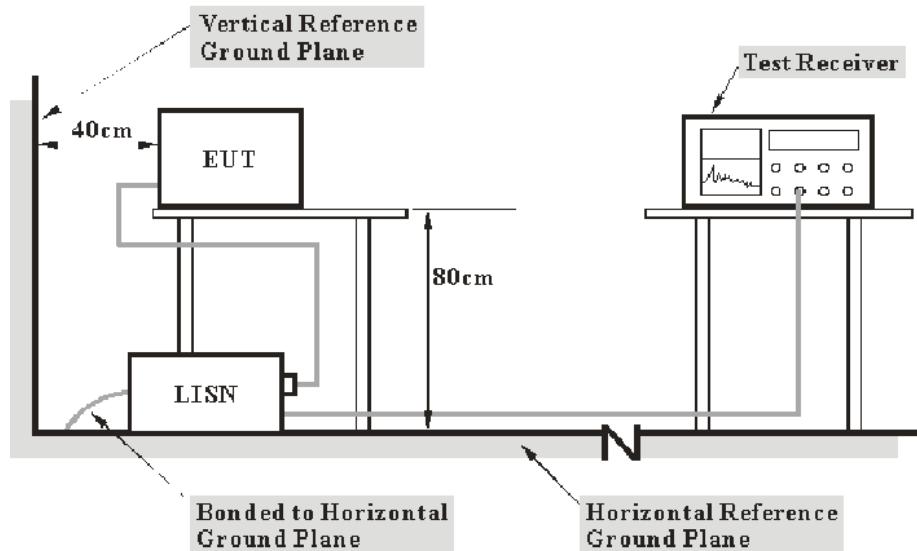

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Margin Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit}$$

$$\text{Level} = \text{Read Level} + \text{Factor}$$


## Test Data

### Environmental Conditions

Temperature:	24 °C
Relative Humidity:	51 %
ATM Pressure:	101.0 kPa

*The testing was performed by Caro Hu on 2022-04-07.*

*EUT operation mode: BT Transmitting(working and monitoring with CMW500)*

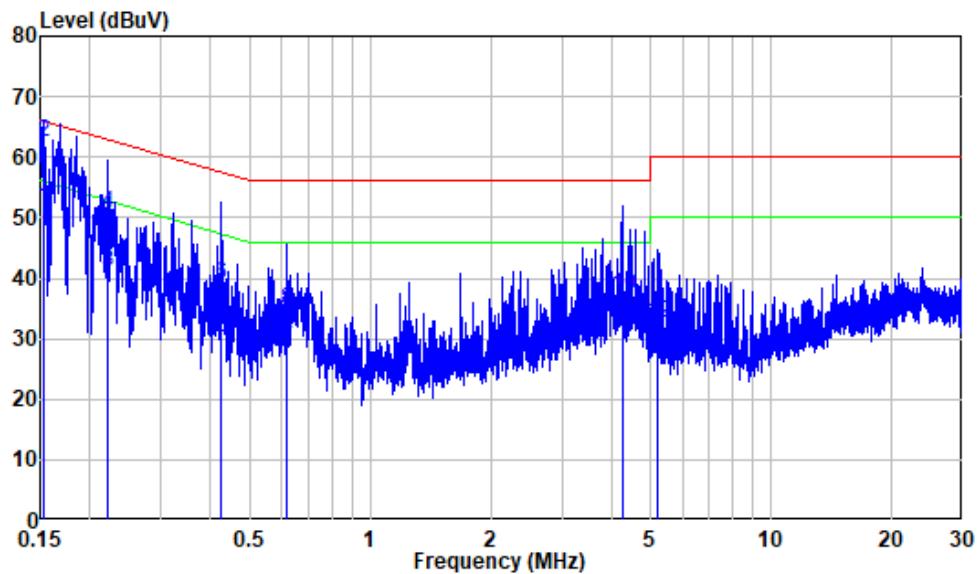**AC 120V/60Hz, Line**

Site : Shielding Room


Condition: Line

Test Mode: Transmitting

Model : BY-244

Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.153	9.89	41.88	51.77	55.85	-4.08	Average
2	0.153	9.89	52.64	62.53	65.85	-3.32	QP
3	0.221	9.80	31.21	41.01	52.78	-11.77	Average
4	0.221	9.80	40.96	50.76	62.78	-12.02	QP
5	0.423	9.80	20.25	30.05	47.40	-17.35	Average
6	0.423	9.80	29.12	38.92	57.40	-18.48	QP
7	0.620	9.81	18.64	28.45	46.00	-17.55	Average
8	0.620	9.81	24.96	34.77	56.00	-21.23	QP
9	4.252	9.95	22.51	32.46	46.00	-13.54	Average
10	4.252	9.95	27.16	37.11	56.00	-18.89	QP
11	5.180	10.00	16.94	26.94	50.00	-23.06	Average
12	5.180	10.00	22.50	32.50	60.00	-27.50	QP

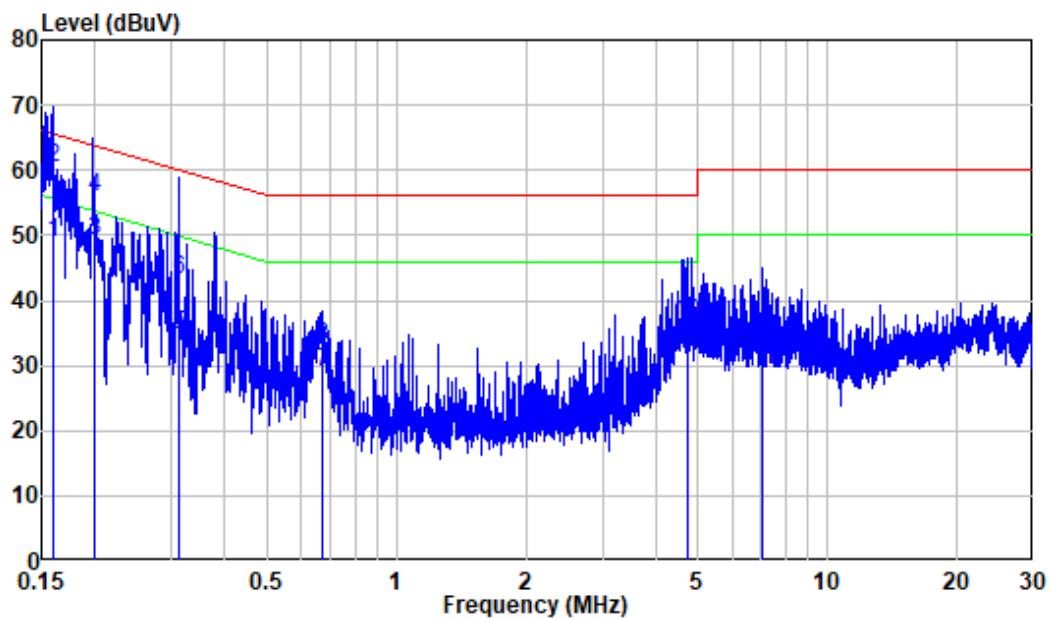**AC 120V/60Hz, Neutral**

Site : Shielding Room

Condition: Neutral

Test Mode: Transmitting



Model : BY-244

Power : AC 120V 60Hz

	Freq	Factor	Read Level	Limit Level	Limit Line	Over Limit	Remark
		MHz	dB	dBuV	dBuV	dBuV	dB
1	0.159	9.80	39.23	49.03	55.51	-6.48	Average
2	0.159	9.80	50.52	60.32	65.51	-5.19	QP
3	0.200	9.80	39.39	49.19	53.61	-4.42	Average
4	0.200	9.80	46.05	55.85	63.61	-7.76	QP
5	0.312	9.80	24.83	34.63	49.92	-15.29	Average
6	0.312	9.80	33.51	43.31	59.92	-16.61	QP
7	0.671	9.81	19.10	28.91	46.00	-17.09	Average
8	0.671	9.81	23.19	33.00	56.00	-23.00	QP
9	4.709	9.88	22.63	32.51	46.00	-13.49	Average
10	4.709	9.88	26.73	36.61	56.00	-19.39	QP
11	7.086	9.97	19.20	29.17	50.00	-20.83	Average
12	7.086	9.97	23.16	33.13	60.00	-26.87	QP

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS****Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

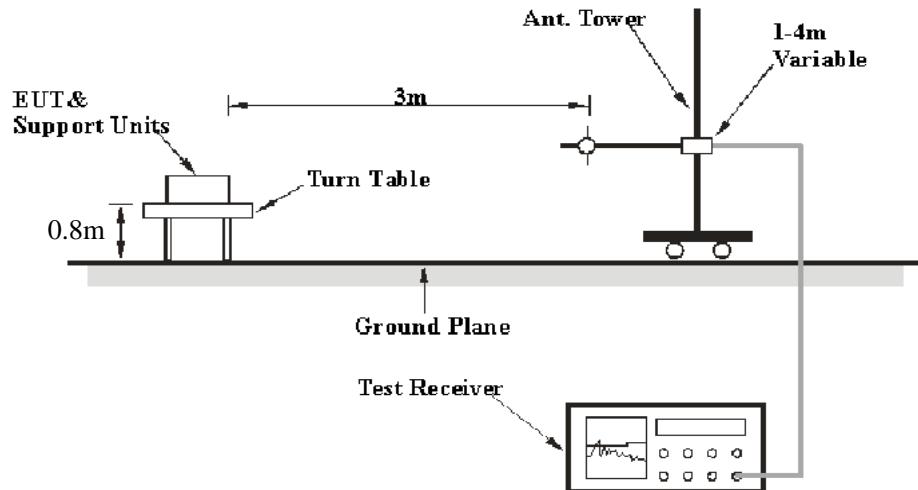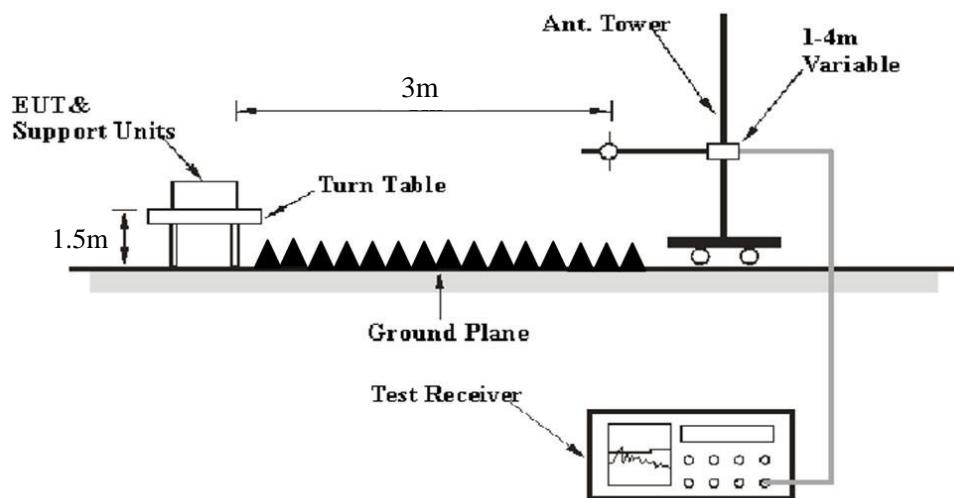**EUT Setup****Below 1 GHz:****Above 1GHz:**

The radiated emission performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 limits.

## EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Level} / \text{Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

## Test Data


### Environmental Conditions

Temperature:	23 °C
Relative Humidity:	58%
ATM Pressure:	101.0 kPa

The testing was performed by Nick Fang on 2022-04-03.

EUT operation mode: BT Transmitting(working and monitoring with CMW500)


(Scan with GFSK,  $\pi/4$ -DQPSK, 8DPSK mode at X axis, Y axis, Z axis, the worst case is 8DPSK Mode at X axis)

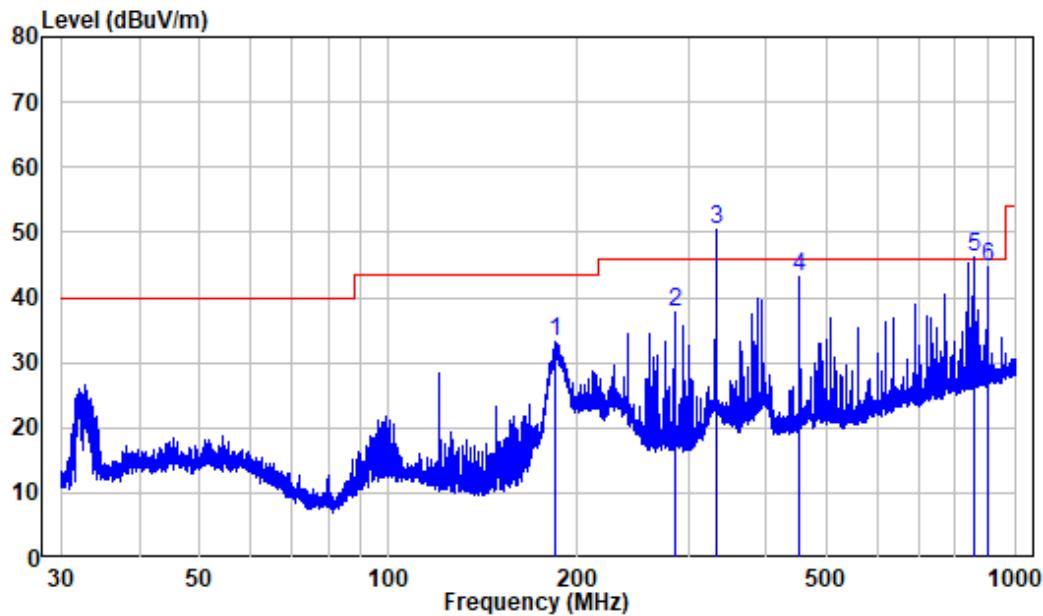**Below 1GHz: 8DPSK Mode, High Channel****Horizontal**

Site : chamber  
Condition: 3m HORIZONTAL  
Job No. : XMTN3211231-68547E-RF  
Test Mode: BT Transmitting

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	184.652	-12.22	45.48	33.26	43.50	-10.24	Peak
2	286.229	-9.42	47.16	37.74	46.00	-8.26	Peak
3	332.373	-7.81	58.22	50.41	46.00	4.41	QP *
4	452.323	-5.57	48.70	43.13	46.00	-2.87	QP
5	858.529	0.28	45.76	46.04	46.00	0.04	QP *
6	900.147	1.36	43.45	44.81	46.00	-1.19	QP

## Vertical

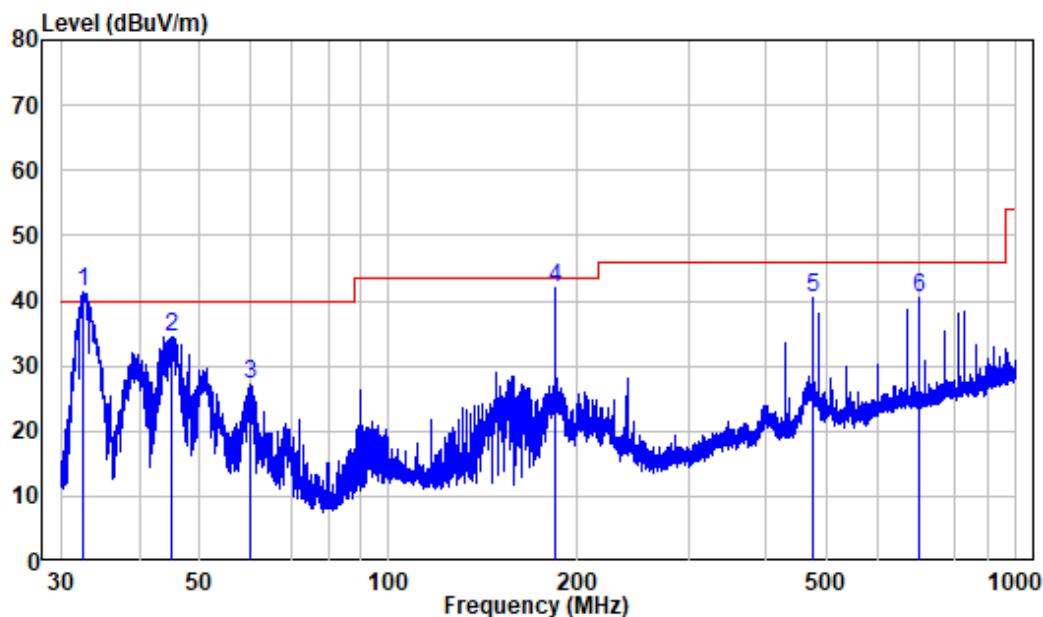

Site : chamber

Condition: 3m VERTICAL

Job No. : XMTN3211231-68547E-RF

Test Mode: BT Transmitting

Freq	Factor	Read		Limit		Over	Remark
		MHz	dB/m	dBuV	dBuV/m	Line	
1	32.534	-12.09	53.43	41.34	40.00	1.34	QP *
2	45.039	-9.94	44.31	34.37	40.00	-5.63	QP
3	60.254	-10.72	37.88	27.16	40.00	-12.84	Peak
4	184.571	-12.23	54.28	42.05	43.50	-1.45	QP
5	475.499	-5.39	45.71	40.32	46.00	-5.68	QP
6	701.761	-1.57	41.90	40.33	46.00	-5.67	QP

Note \*: The data record above represents the worst case for all supported operating modes, there were no spurious emission in the range 30MHz -1GHz over the limit in §15.209 caused by radio, the emission list at above table was investigated and was not caused by the radio, the emission was present when the radio was not transmitting. Those emissions comply with the FCC Part 15, Subpart B-Unintentional radiators §15.109(b) limit set for Class A digital device as the EUT is a Class A equipment according the user manual.

**Above 1GHz (worst case):**

Frequency (MHz)	Receiver		Turntable Angle	Rx Antenna		Factor (dB/m)	Absolute Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
	Reading (dBuV)	PK/AV		Height (m)	Polar (H/V)				
BT 3DH1, Low Channel									
2310	45.75	PK	275	1.1	H	-7.23	38.52	74	-35.48
2310	45.54	PK	109	1.9	V	-7.23	38.31	74	-35.69
2390	46.5	PK	140	1.5	H	-7.21	39.29	74	-34.71
2390	45.33	PK	7	2.1	V	-7.21	38.12	74	-35.88
4804	46.27	PK	140	1.5	H	-3.52	42.75	74	-31.25
4804	45.19	PK	173	1.4	V	-3.52	41.67	74	-32.33
7206	46.6	PK	173	1.4	H	2.71	49.31	74	-24.69
7206	42.55	PK	24	1.0	V	2.71	45.26	74	-28.74
BT 3DH1, Middle Channel									
4882	46.29	PK	322	1.5	H	-3.37	42.92	74	-31.08
4882	45.23	PK	66	1.3	V	-3.37	41.86	74	-32.14
7323	48.02	PK	66	1.3	H	3.31	51.33	74	-22.67
7323	44.57	PK	266	1.7	V	3.31	47.88	74	-26.12
BT 3DH1, High Channel									
2483.5	61.05	PK	272	1.7	H	-7.2	53.85	74	-20.15
2483.5	58.68	PK	342	1.2	V	-7.2	51.48	74	-22.52
2500	47.7	PK	170	1.2	H	-7.18	40.52	74	-33.48
2500	48.36	PK	217	1.5	V	-7.18	41.18	74	-32.82
4960	46.69	PK	118	1.4	H	-3.01	43.68	74	-30.32
4960	46.38	PK	356	2.1	V	-3.01	43.37	74	-30.63
7440	49.84	PK	356	2.1	H	3.52	53.36	74	-20.64
7440	44.22	PK	314	1.7	V	3.52	47.74	74	-26.26

Note:

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Absolute Level (Corrected Amplitude) = Factor + Reading

Margin = Absolute Level - Limit


The other spurious emission which is in the noise floor level was not recorded.

For Above 1GHz, the test result of peak was 20dB below to the limit of peak, which can be compliant to the average limit, so just peak value was recorded.


**1 GHz - 18 GHz:** (Pre-Scan plots)

**High Channel**

**Horizontal**

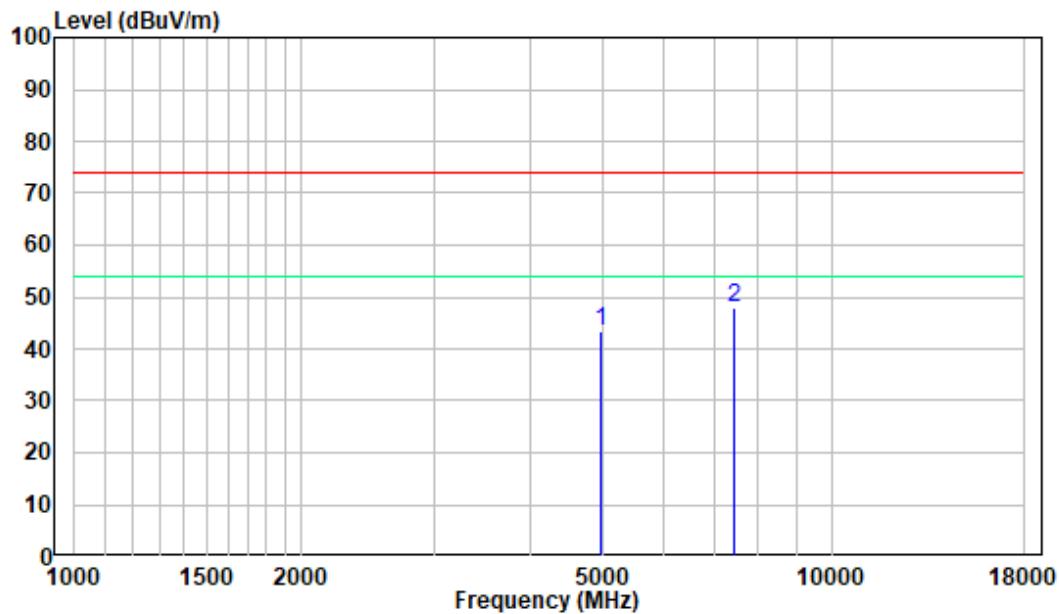


**Vertical**

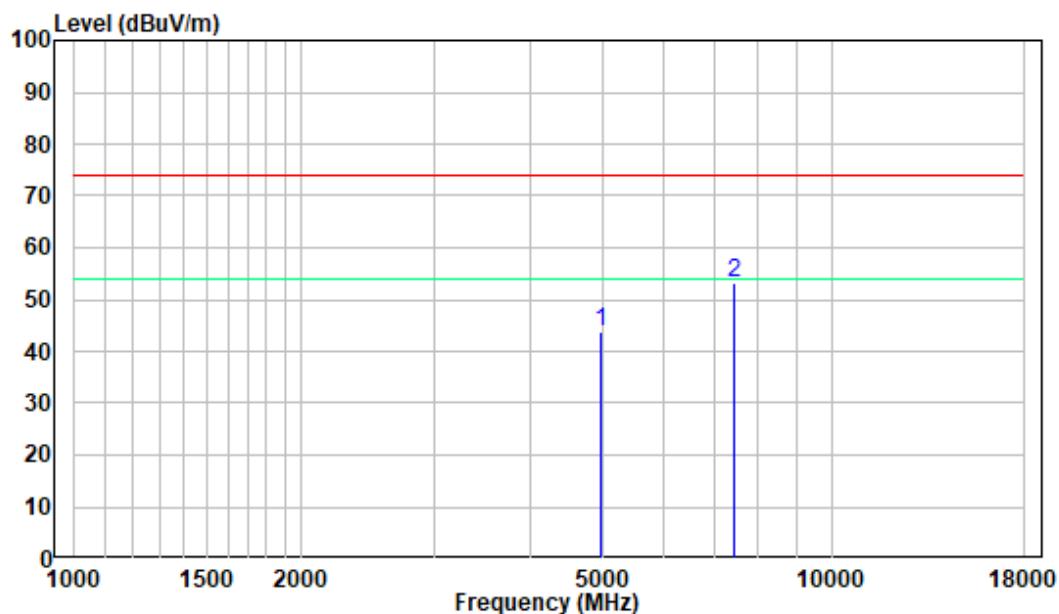


**18-25GHz:** (Pre-Scan plots)

**High Channel**

**Horizontal**

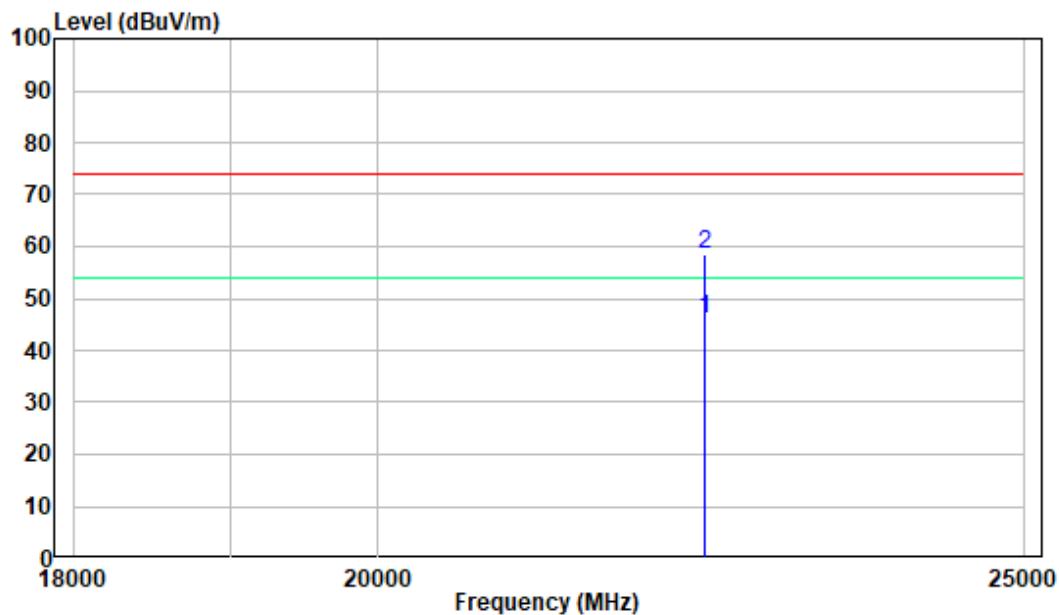

**Vertical**

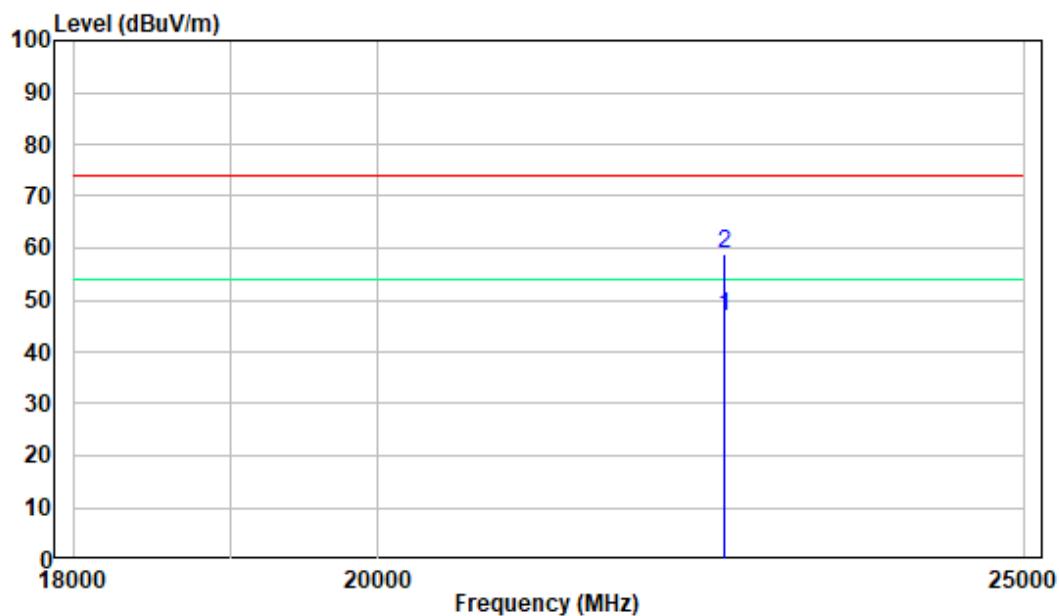


**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST****Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**Test Procedure**

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

**Test Data****Environmental Conditions**

Temperature:	19 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

*The testing was performed by Matt Liang on 2024-12-16.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH & 99% OCCUPIED BANDWIDTH

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


### Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



## Test Data

### Environmental Conditions

Temperature:	19 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

*The testing was performed by Matt Liang on 2024-12-16.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

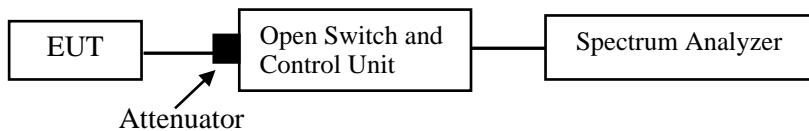

### Test Data

#### Environmental Conditions

Temperature:	19 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

*The testing was performed by Matt Liang on 2024-12-16.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

### Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW  $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

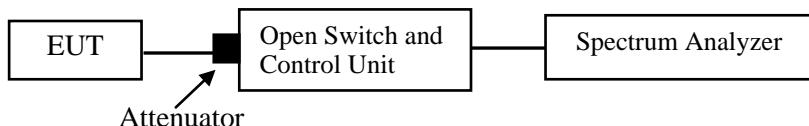

### Test Data

#### Environmental Conditions

Temperature:	19 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

*The testing was performed by Matt Liang on 2024-12-16.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

Temperature:	19 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

*The testing was performed by Matt Liang on 2024-12-16.*

*EUT operation mode: Transmitting*

Test Result: Compliant. Please refer to the Appendix.


## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

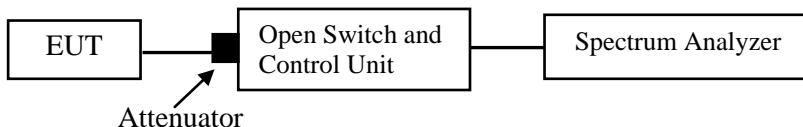

### Test Data

#### Environmental Conditions

Temperature:	19 °C
Relative Humidity:	33 %
ATM Pressure:	100.9 kPa

The testing was performed by Matt Liang on 2024-12-16.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix.


## APPENDIX


### Appendix A: 20dB Emission Bandwidth


#### Test Result


Test Mode	Antenna	Freq(MHz)	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.96	2401.54	2402.51	---	---
		2441	0.97	2440.54	2441.51	---	---
		2480	0.97	2479.54	2480.51	---	---
2DH5	Ant1	2402	1.29	2401.37	2402.66	---	---
		2441	1.30	2440.36	2441.66	---	---
		2480	1.29	2479.37	2480.66	---	---
3DH5	Ant1	2402	1.30	2401.36	2402.66	---	---
		2441	1.30	2440.36	2441.66	---	---
		2480	1.30	2479.36	2480.66	---	---


## Test Graphs

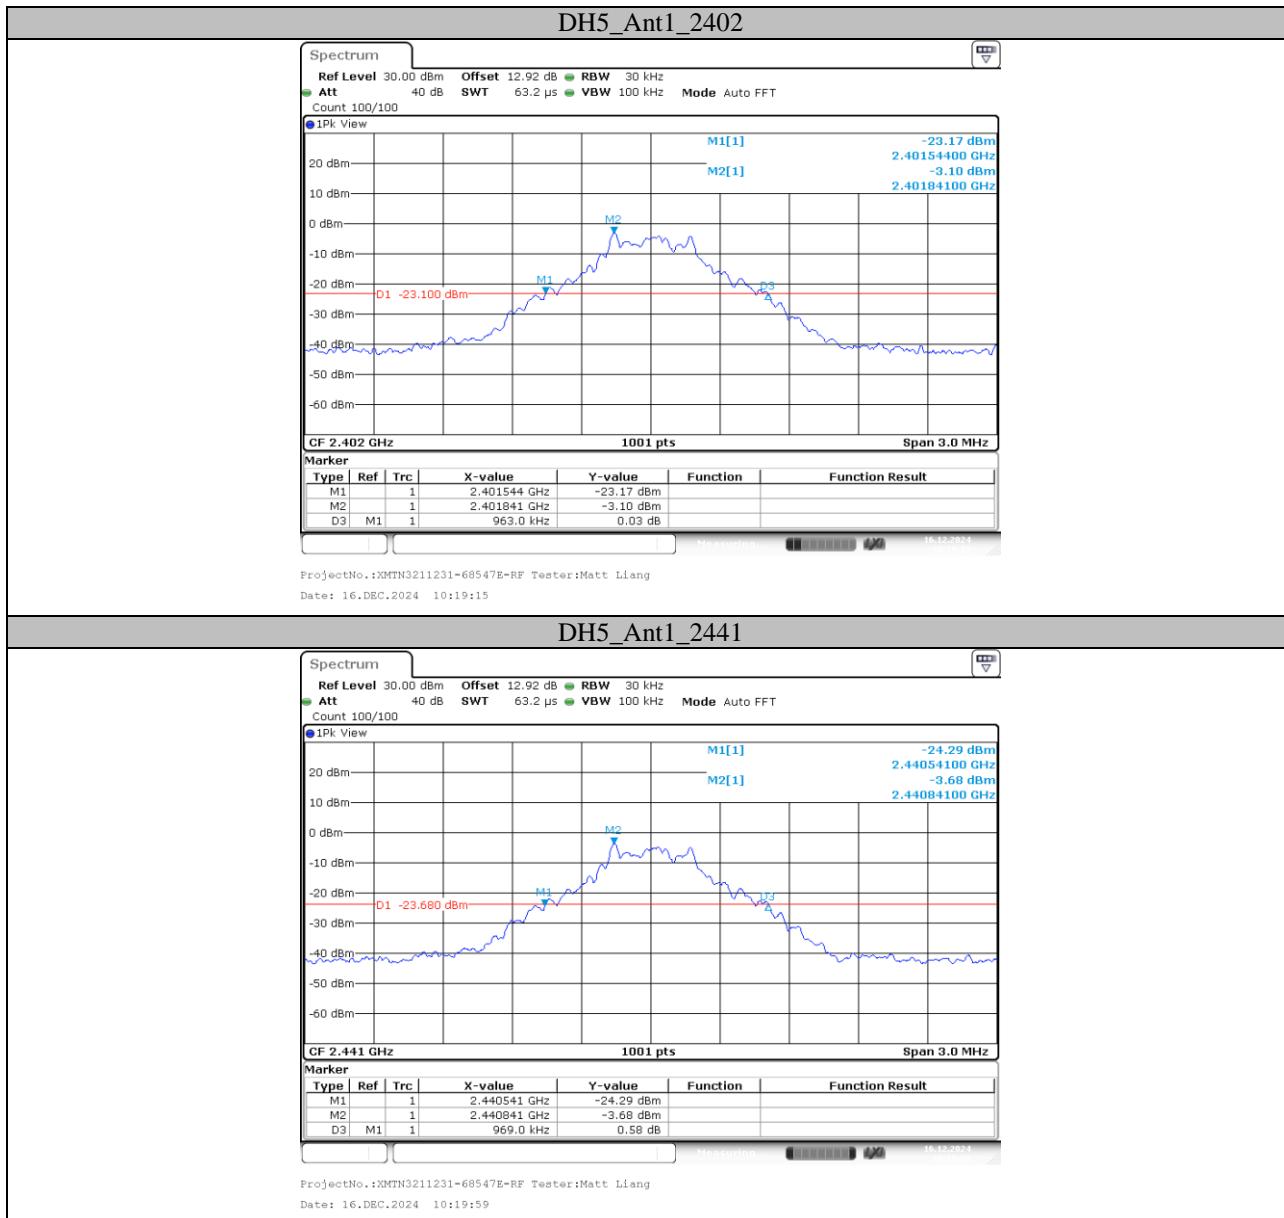

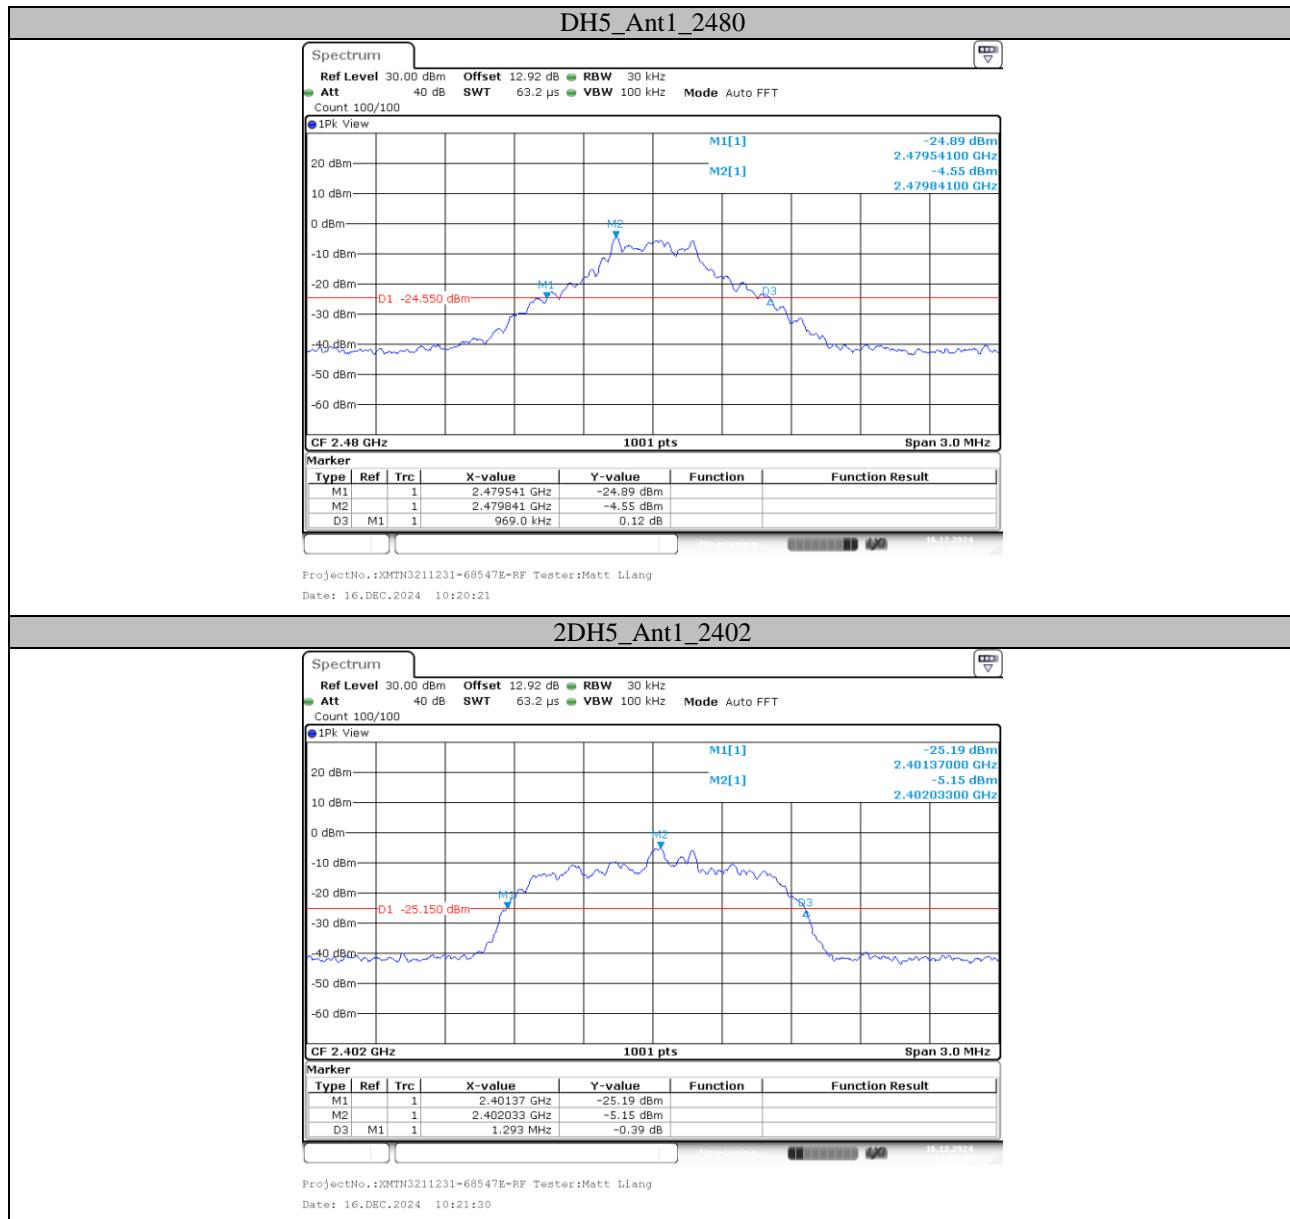

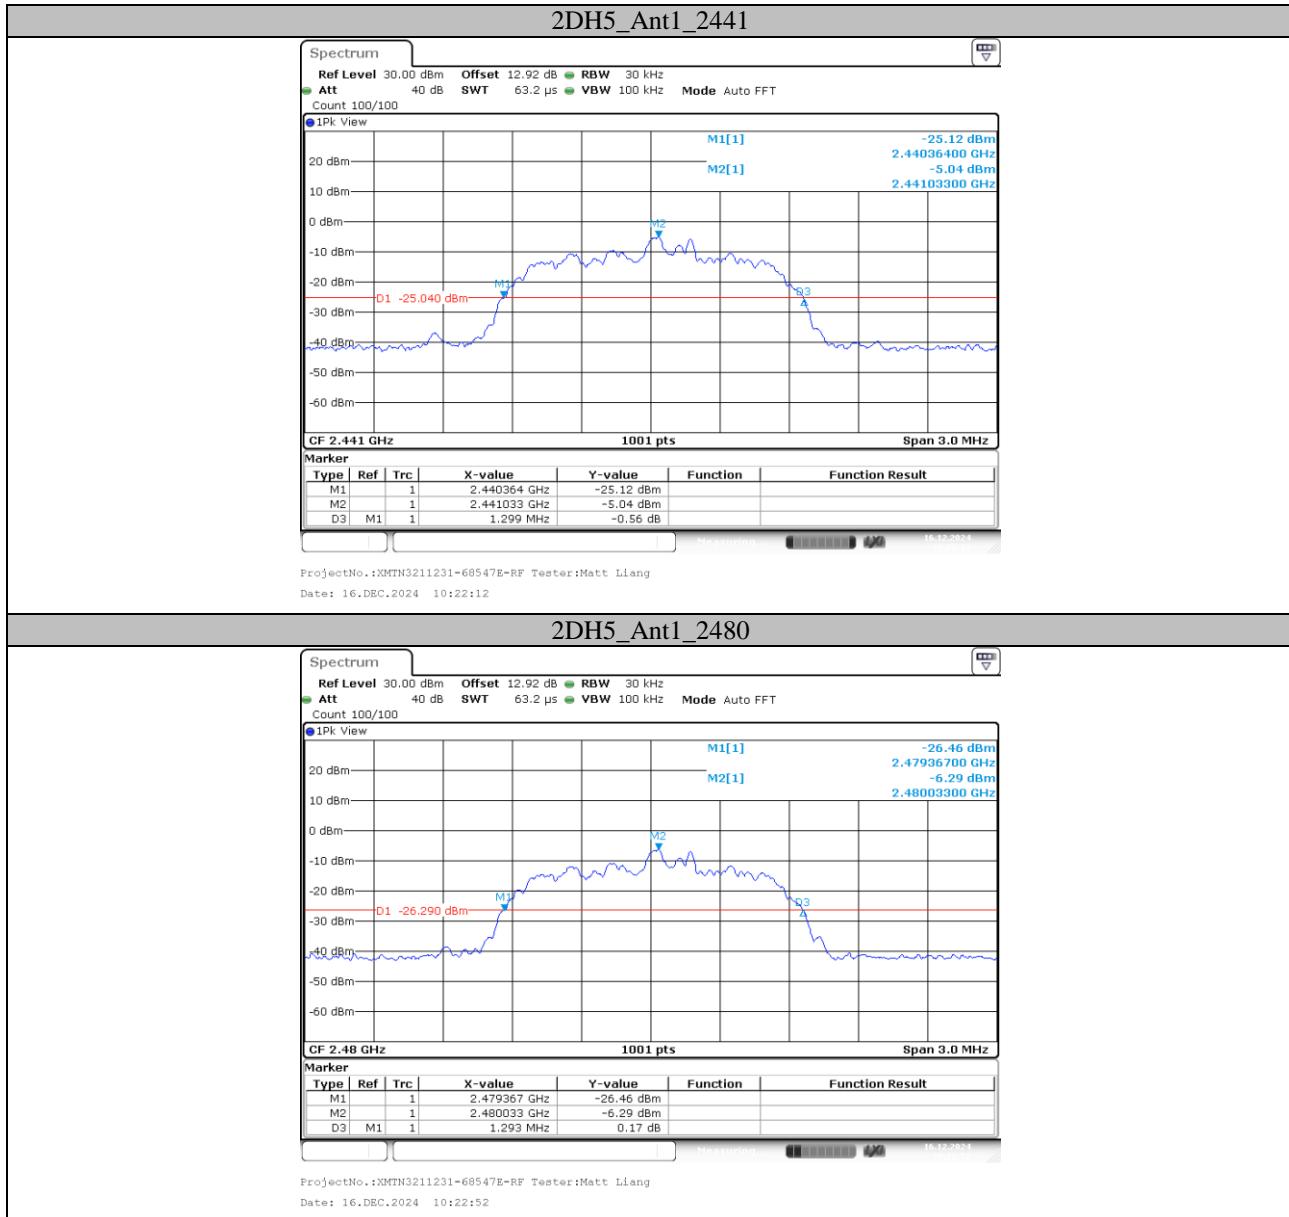

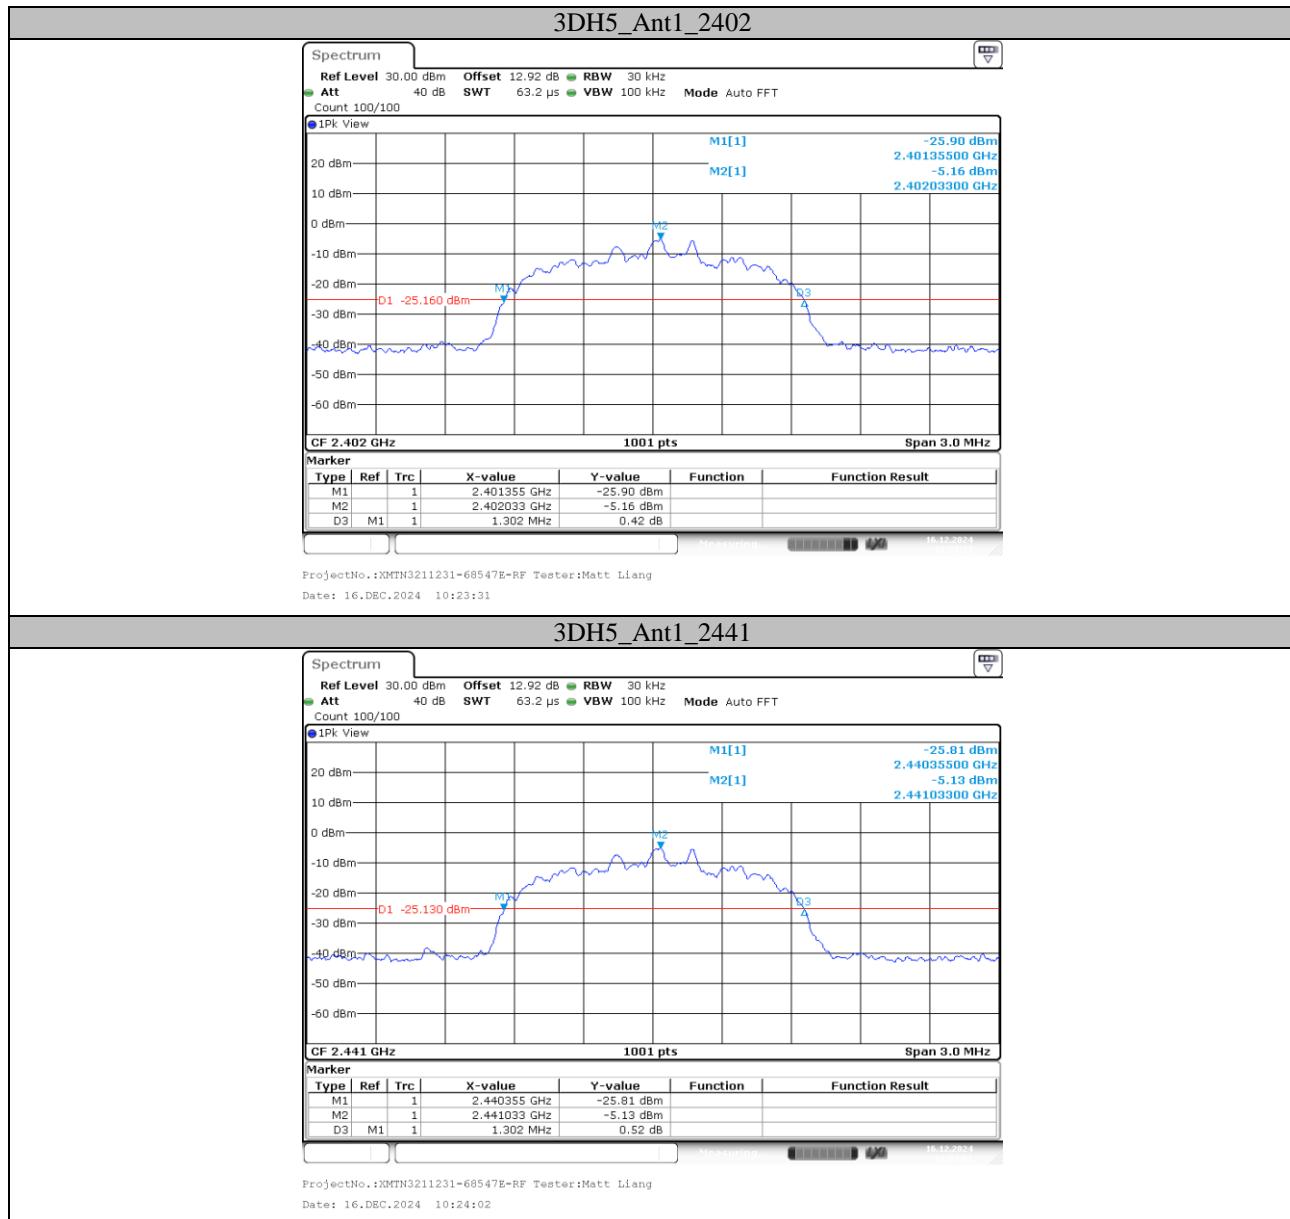

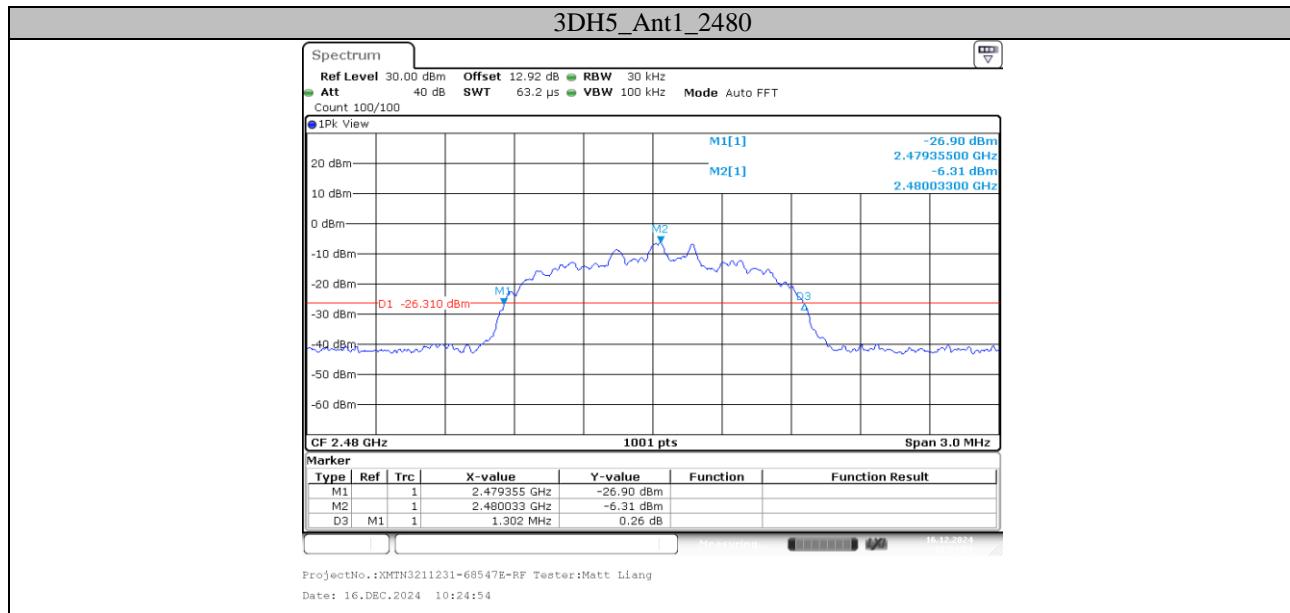



## Appendix B: Occupied Channel Bandwidth


### Test Result


Test Mode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.905	2401.5564	2402.4615	---	---
		2441	0.908	2440.5564	2441.4645	---	---
		2480	0.911	2479.5534	2480.4645	---	---
2DH5	Ant1	2402	1.187	2401.4126	2402.5994	---	---
		2441	1.193	2440.4096	2441.6024	---	---
		2480	1.193	2479.4096	2480.6024	---	---
3DH5	Ant1	2402	1.19	2401.4126	2402.6024	---	---
		2441	1.193	2440.4096	2441.6024	---	---
		2480	1.193	2479.4096	2480.6024	---	---


## Test Graphs

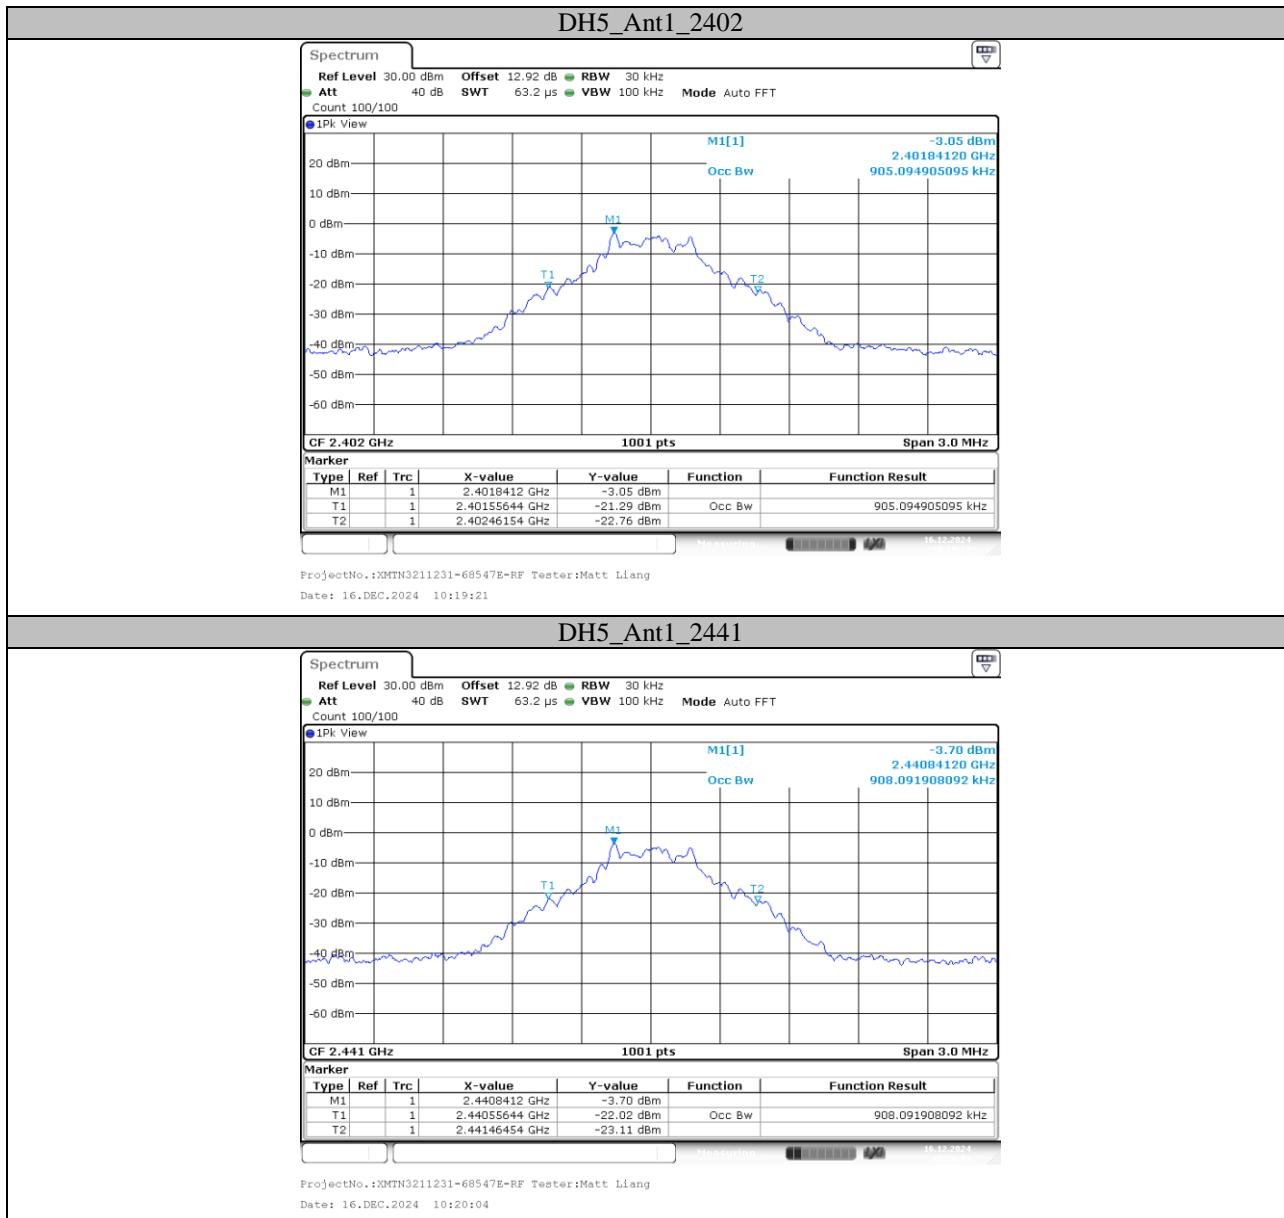

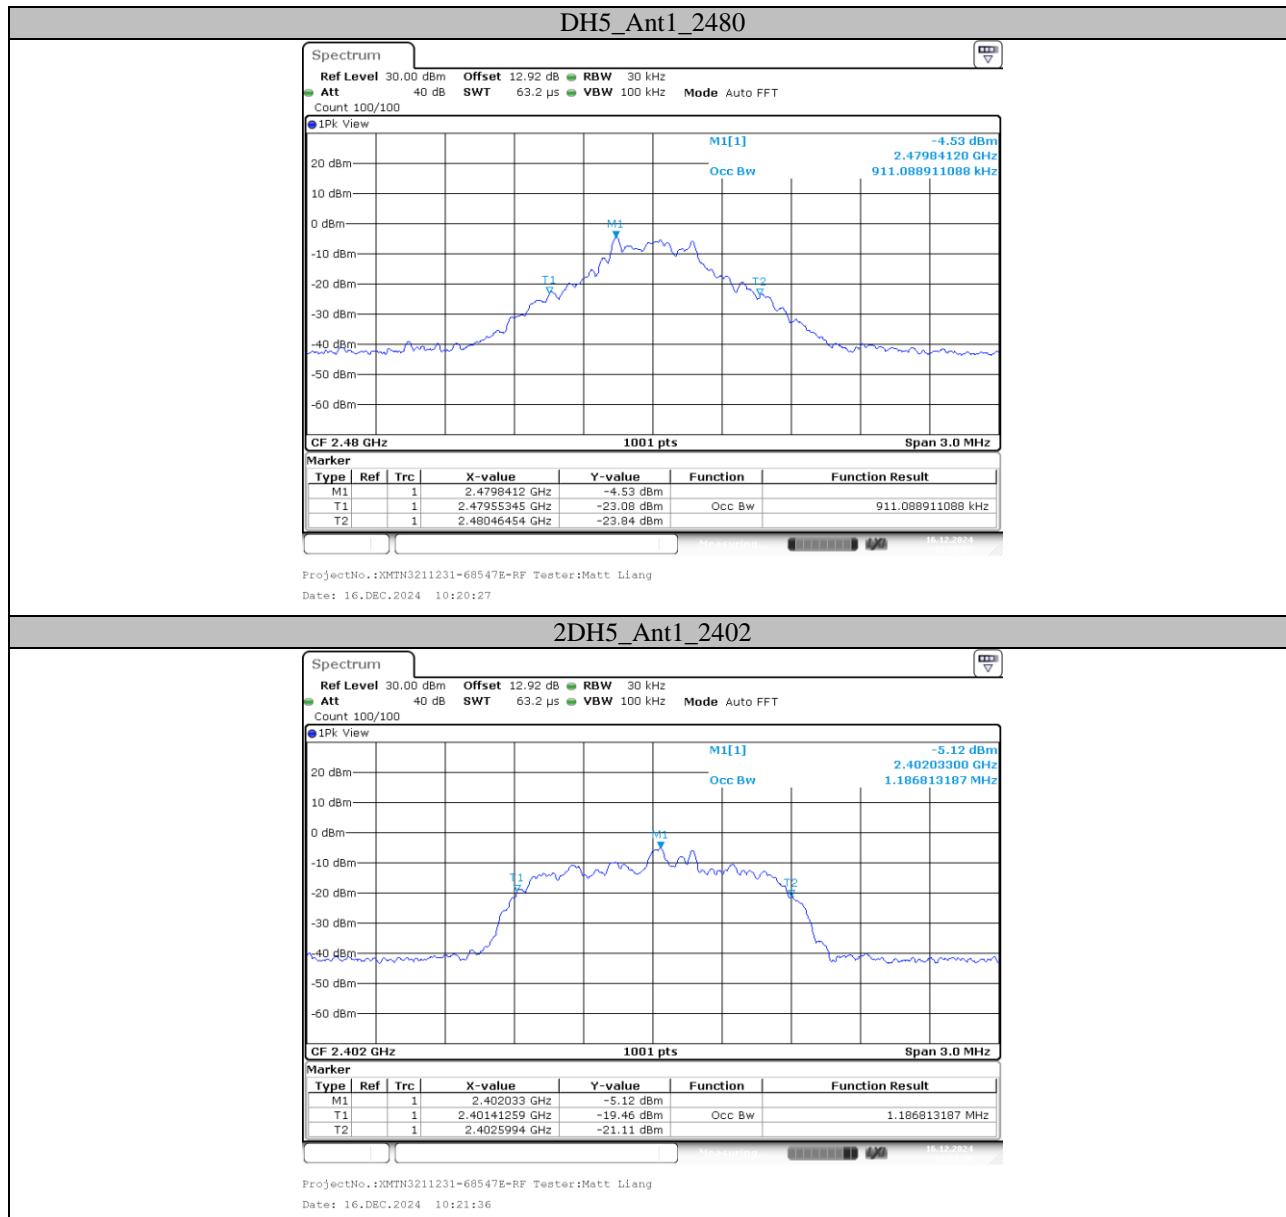

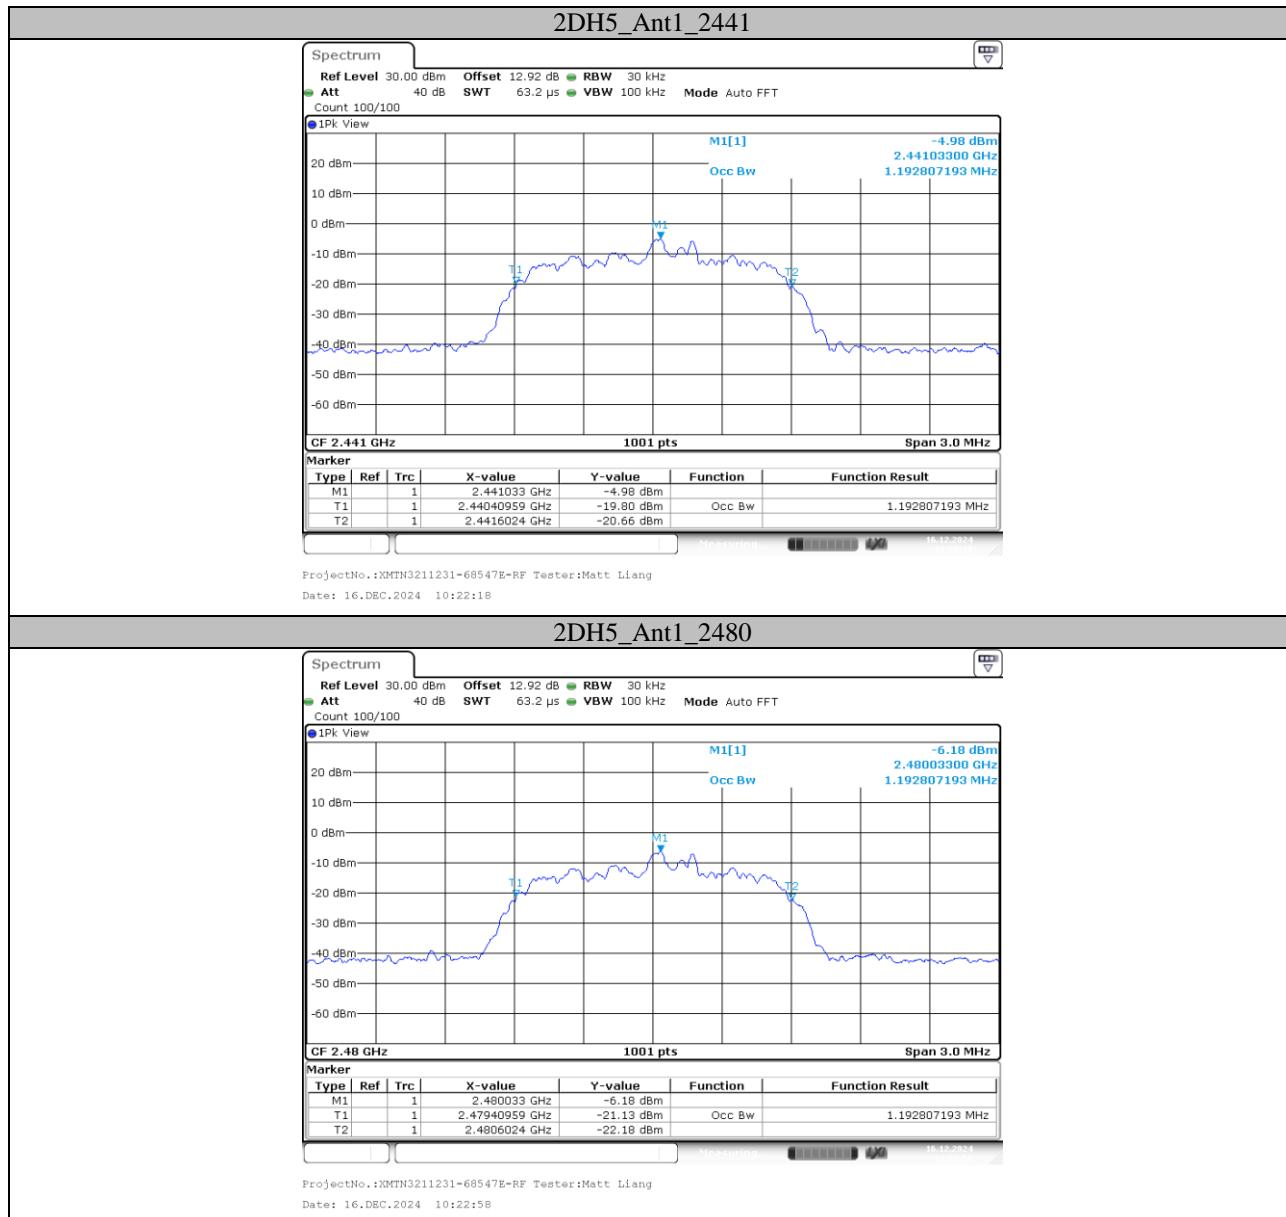

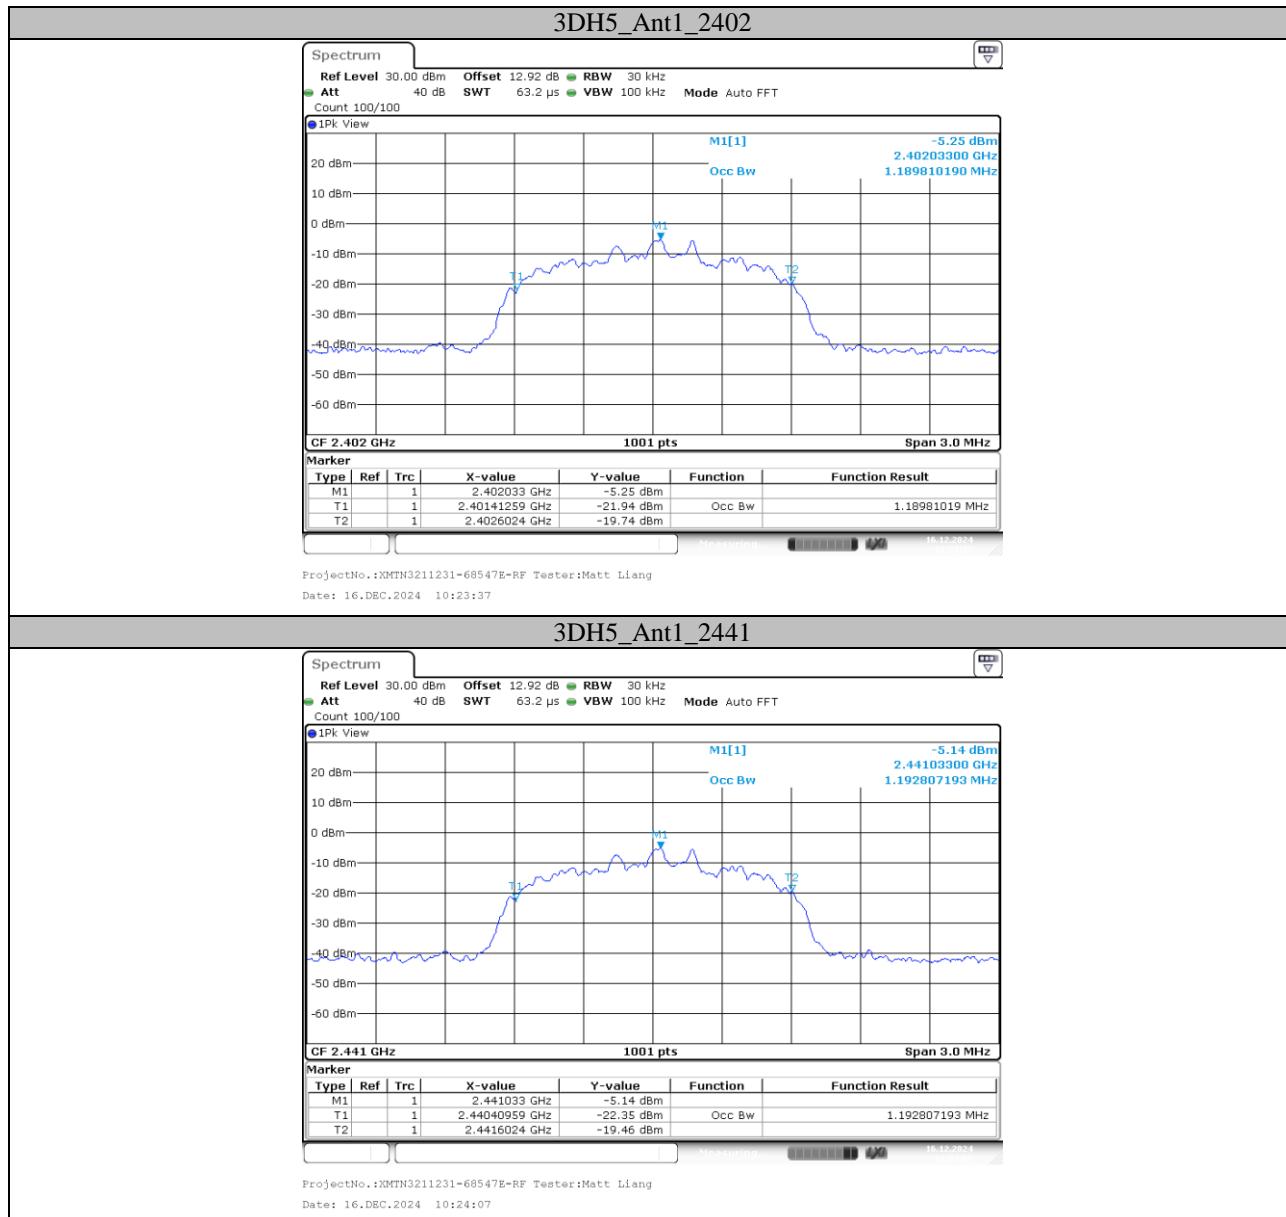

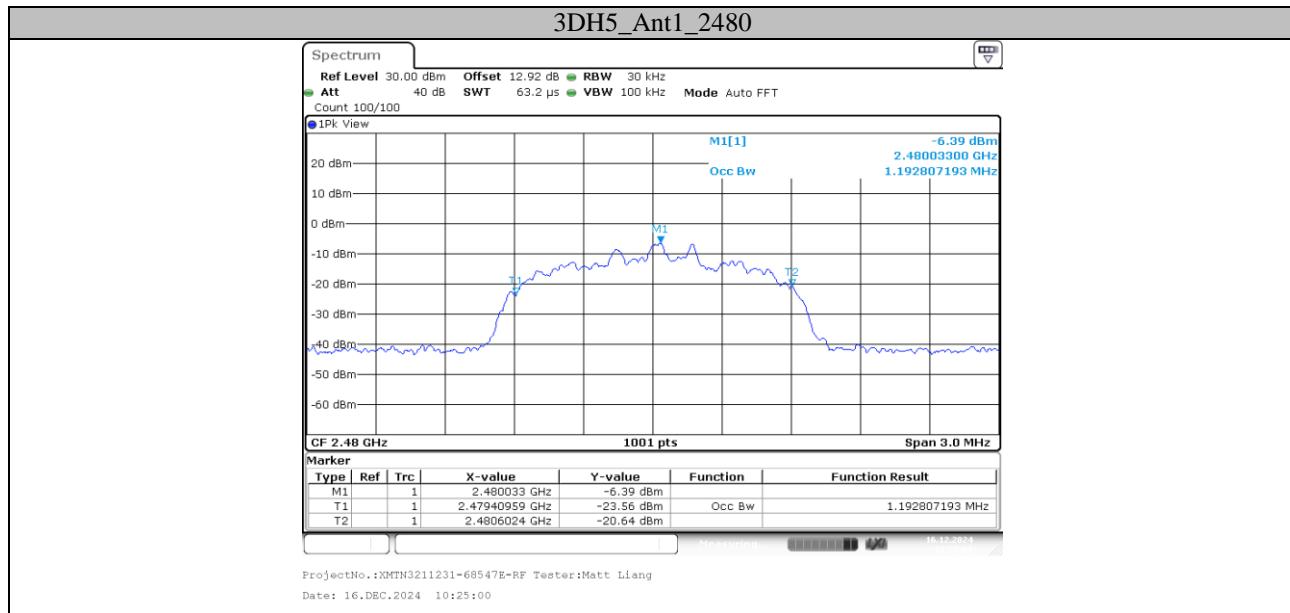



## Appendix C: Maximum Conducted Output Power


### Test Result Peak


Test Mode	Antenna	Freq(MHz)	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	-1.54	≤20.97	PASS
		2441	-1.69	≤20.97	PASS
		2480	-1.64	≤20.97	PASS
2DH5	Ant1	2402	-1.23	≤20.97	PASS
		2441	-1.42	≤20.97	PASS
		2480	-1.47	≤20.97	PASS
3DH5	Ant1	2402	-1.2	≤20.97	PASS
		2441	<b>-1.13</b>	≤20.97	PASS
		2480	-1.5	≤20.97	PASS


## Test Graphs

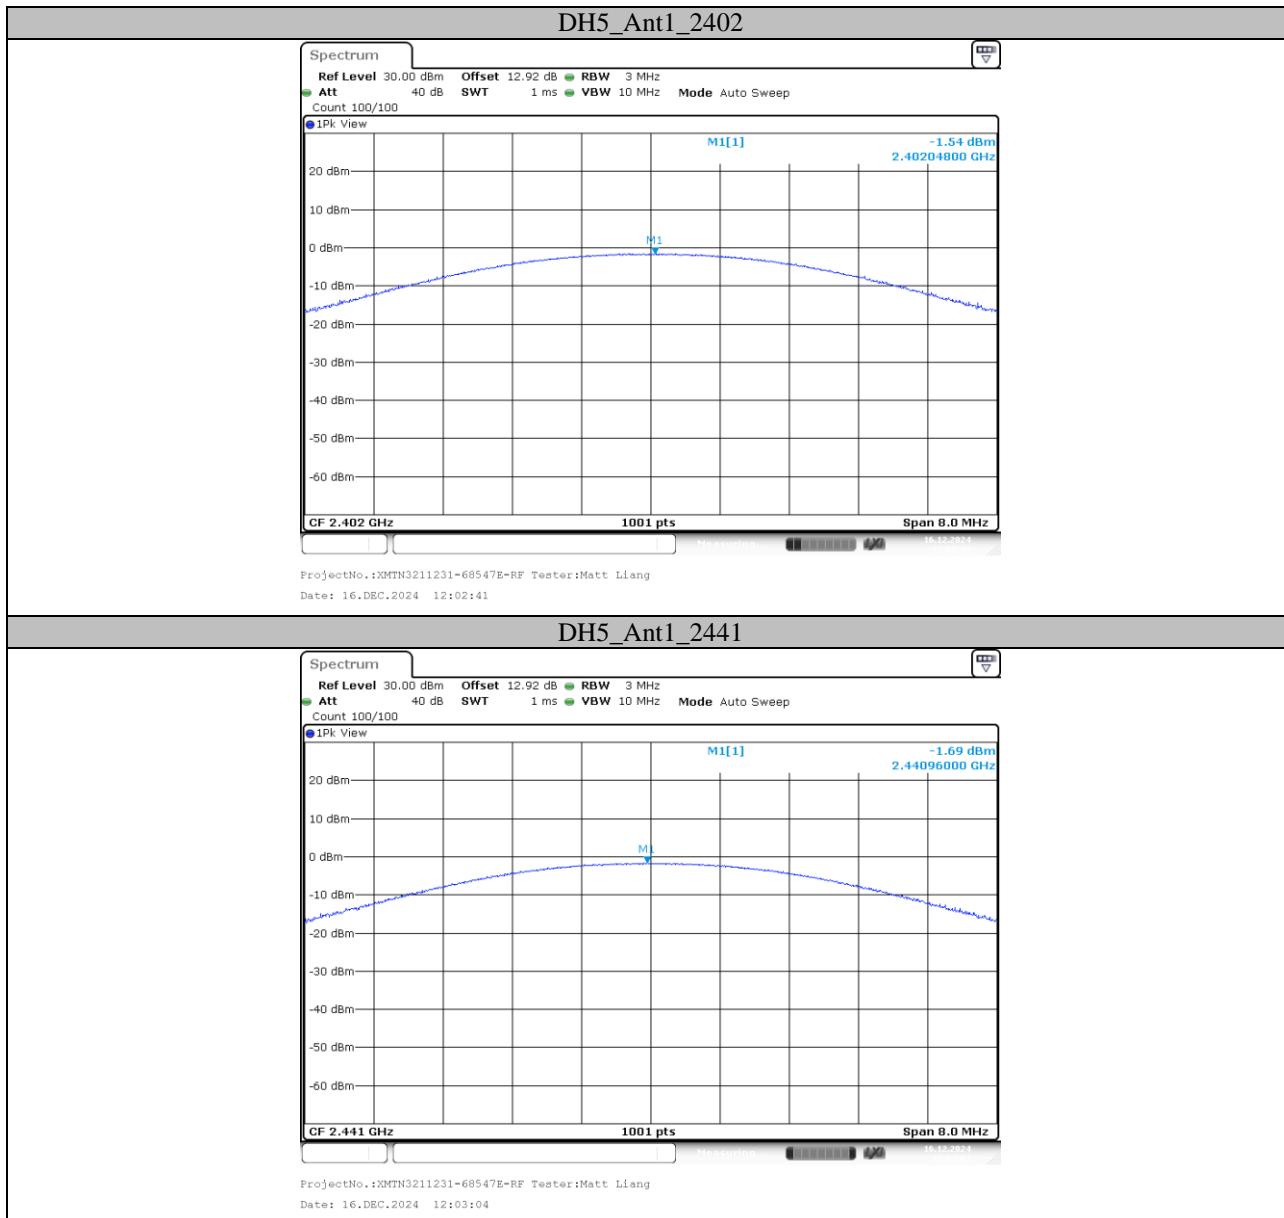

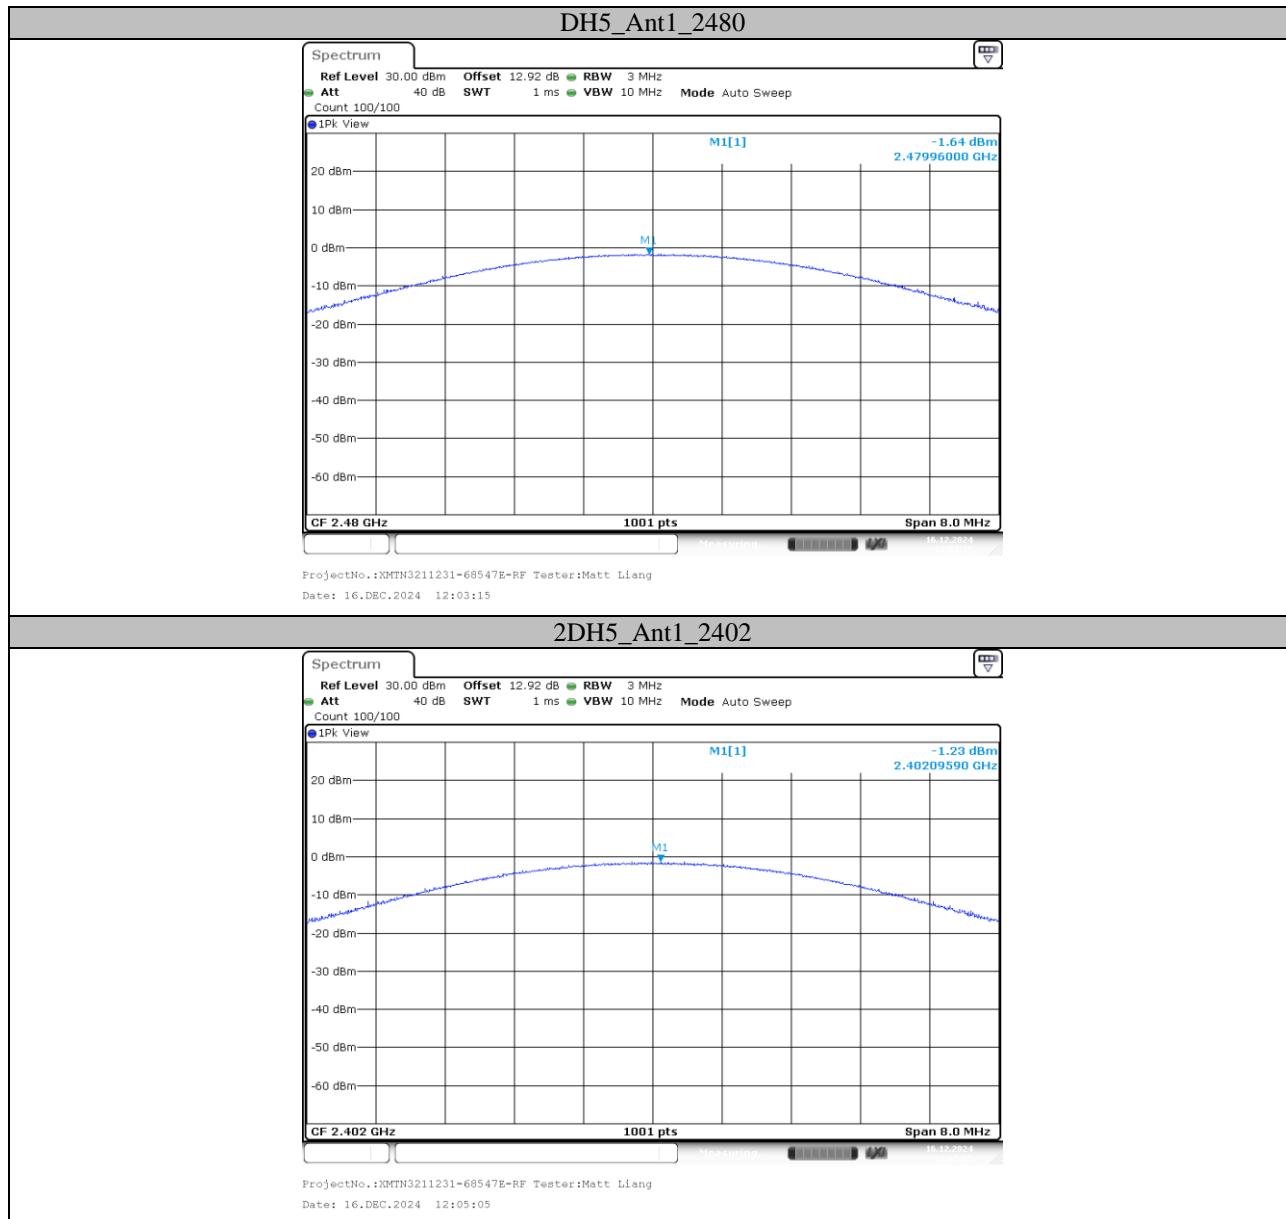

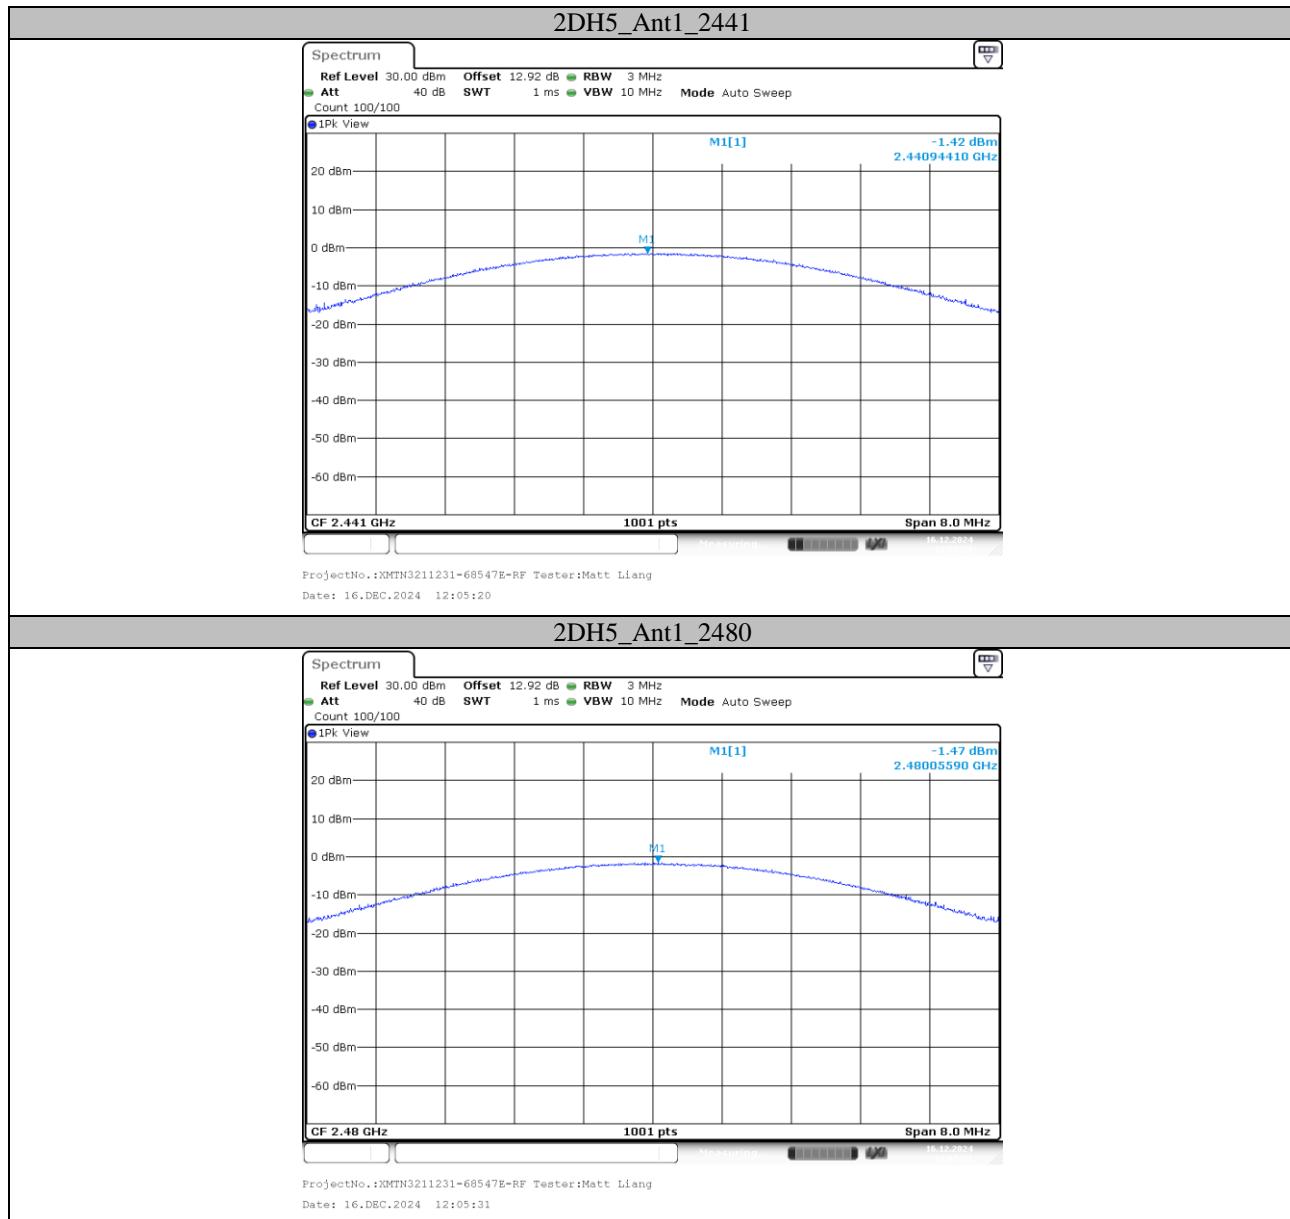

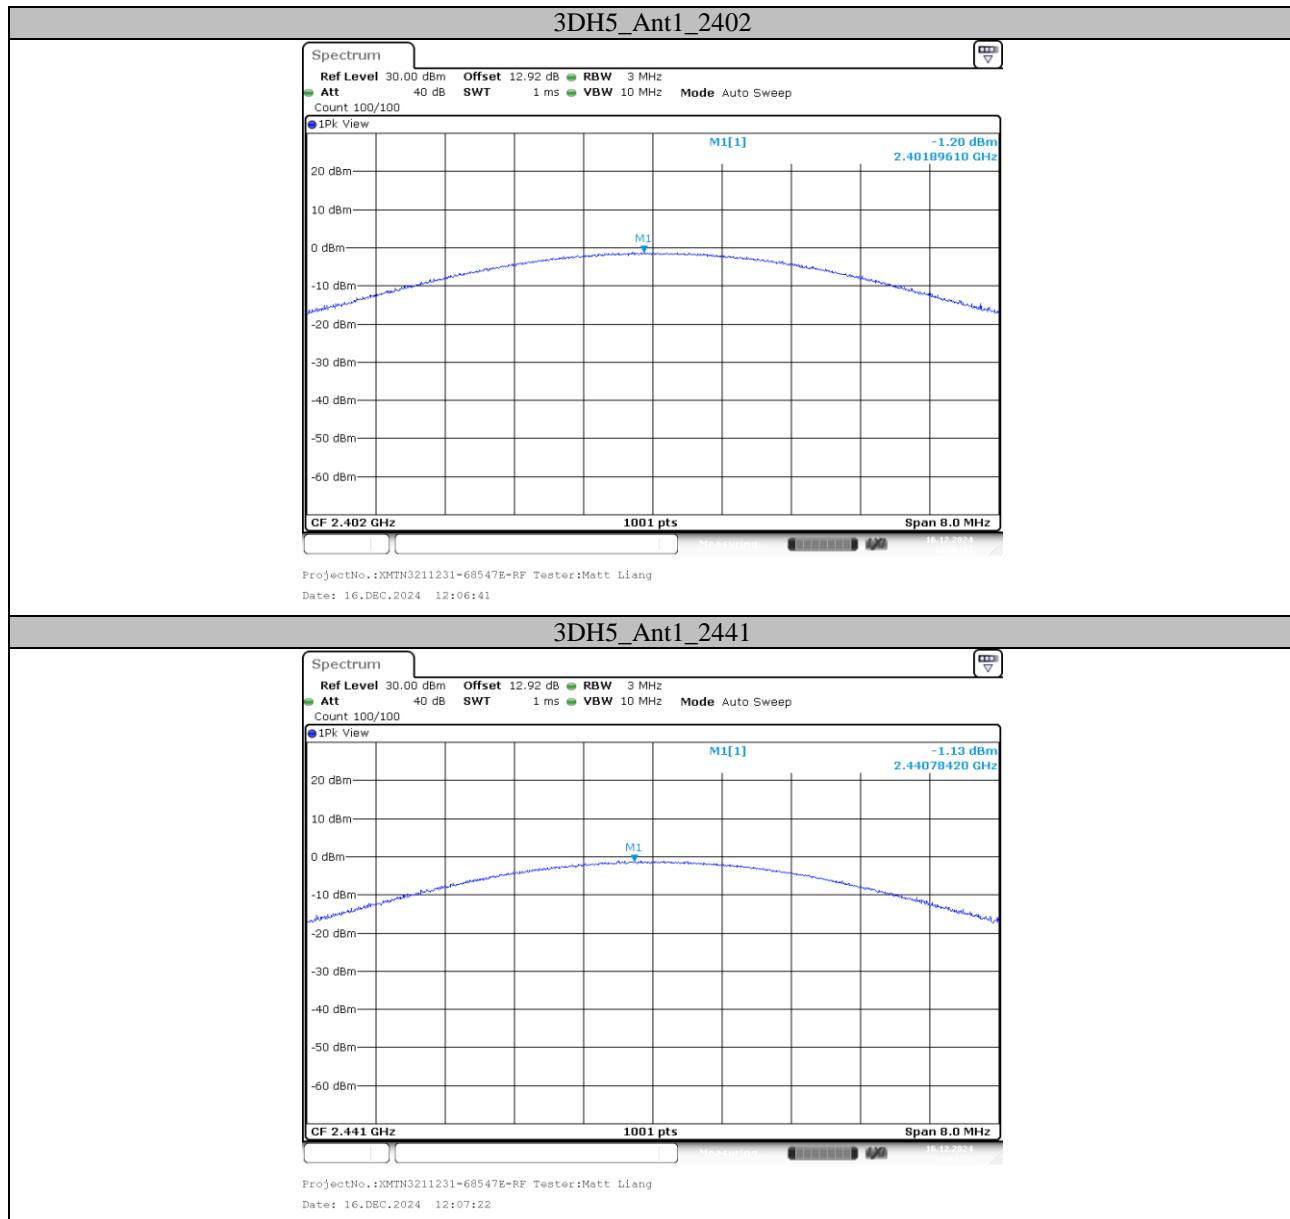

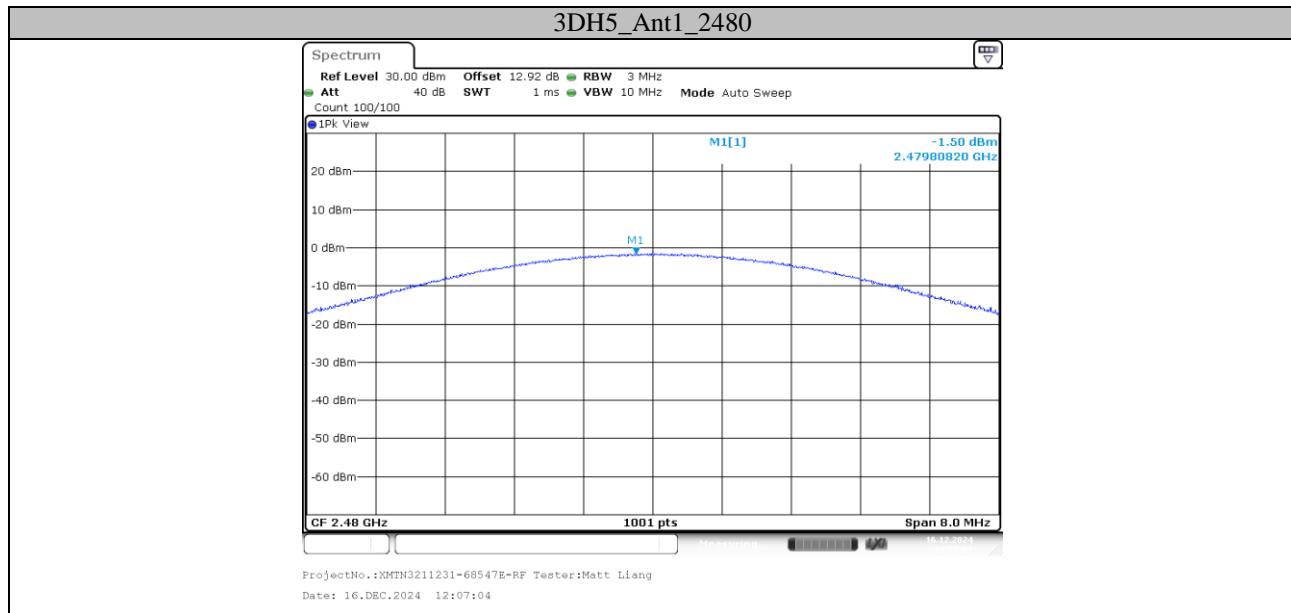


## Appendix D: Carrier Frequency Separation

### Test Result

Test Mode	Antenna	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	$\geq 0.647$	PASS
2DH5	Ant1	Hop	0.991	$\geq 0.867$	PASS
3DH5	Ant1	Hop	1	$\geq 0.867$	PASS

## Test Graphs



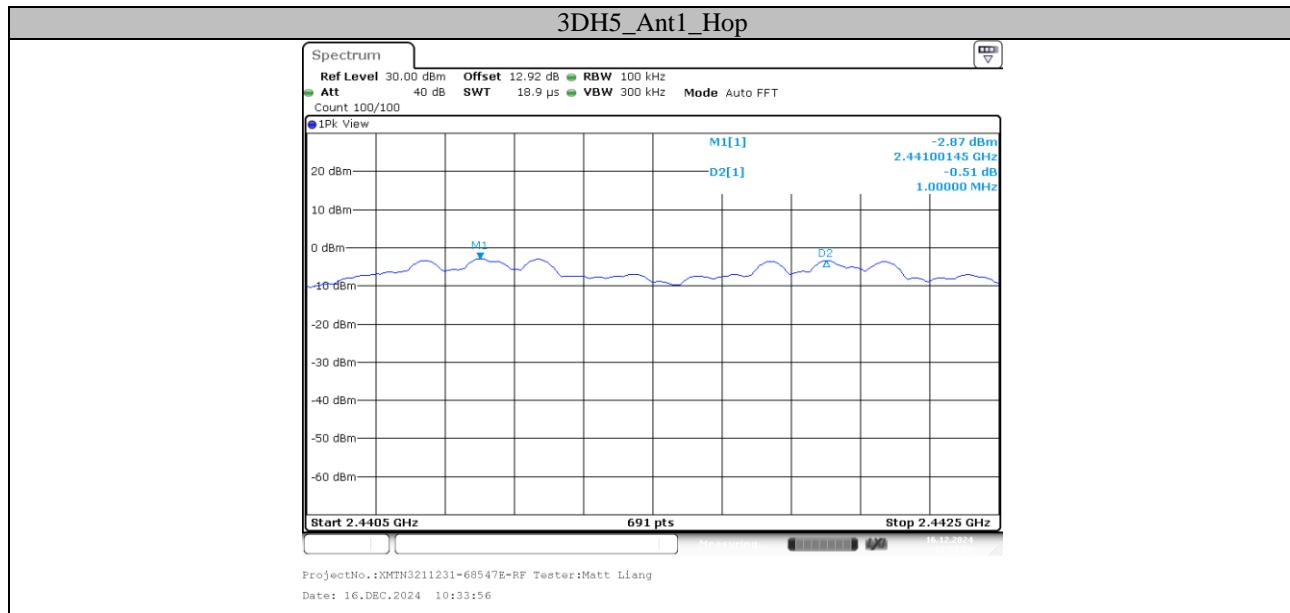



## Appendix E: Time of Occupancy


### Test Result


Test Mode	Antenna	Freq(MHz)	Burst Width [ms]	Total Hops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.401	320	0.128	$\leq 0.4$	PASS
DH3	Ant1	Hop	1.650	150	0.248	$\leq 0.4$	PASS
DH5	Ant1	Hop	2.890	110	0.318	$\leq 0.4$	PASS
2DH1	Ant1	Hop	0.395	320	0.126	$\leq 0.4$	PASS
2DH3	Ant1	Hop	1.639	180	0.295	$\leq 0.4$	PASS
2DH5	Ant1	Hop	2.880	130	0.374	$\leq 0.4$	PASS
3DH1	Ant1	Hop	0.393	320	0.126	$\leq 0.4$	PASS
3DH3	Ant1	Hop	1.635	150	0.245	$\leq 0.4$	PASS
3DH5	Ant1	Hop	2.878	120	0.345	$\leq 0.4$	PASS


## Test Graphs

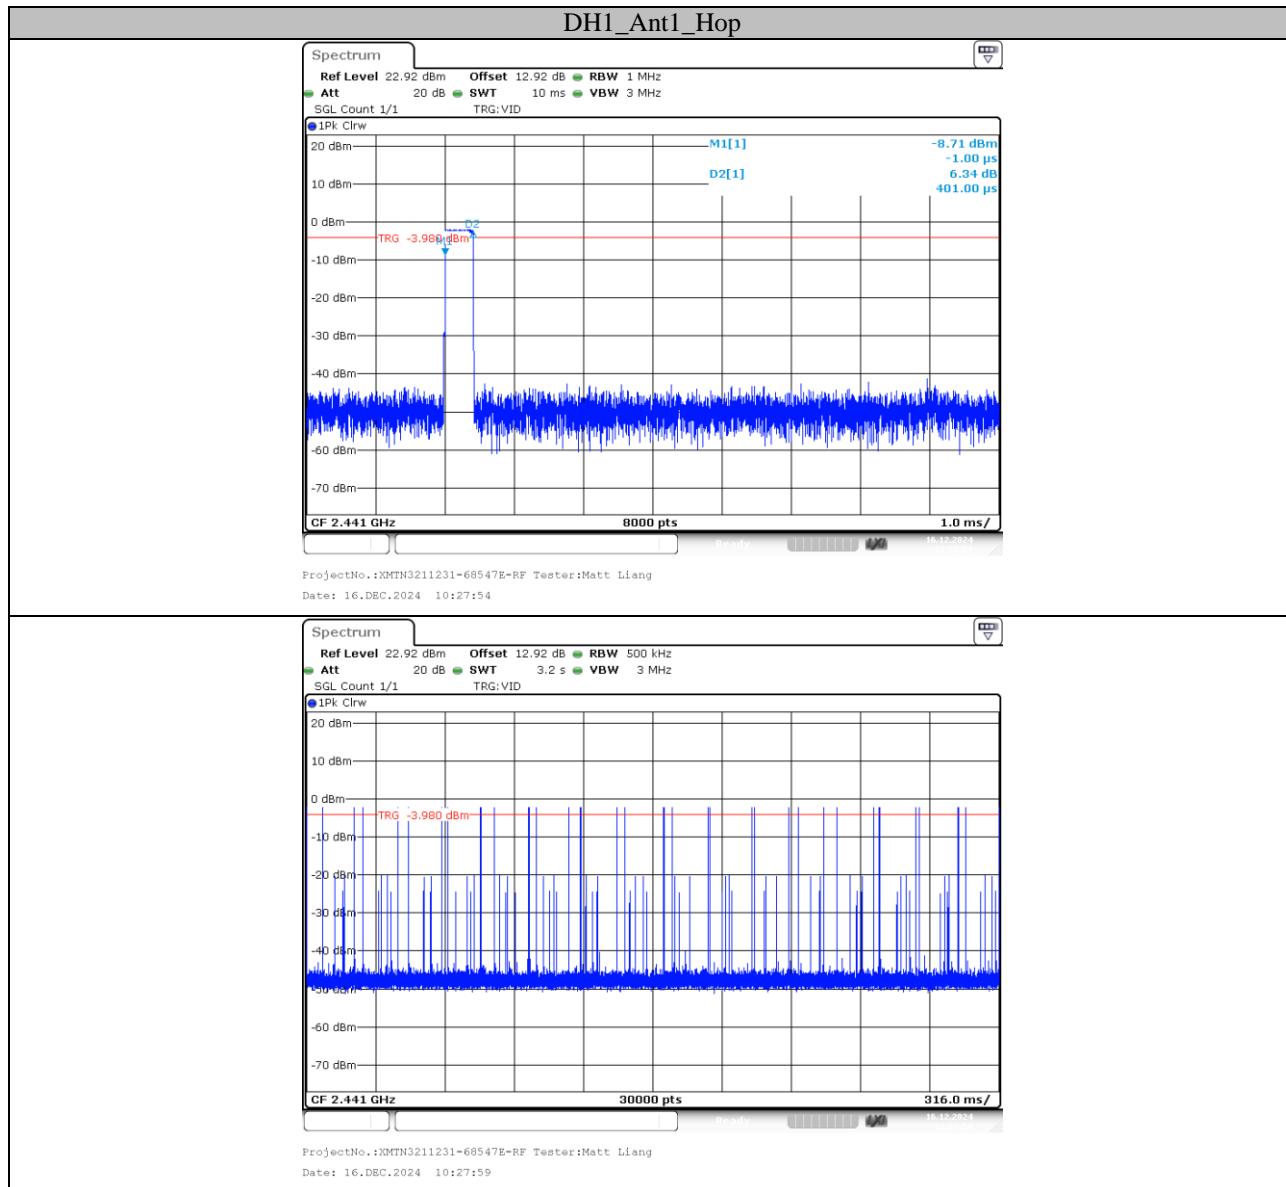


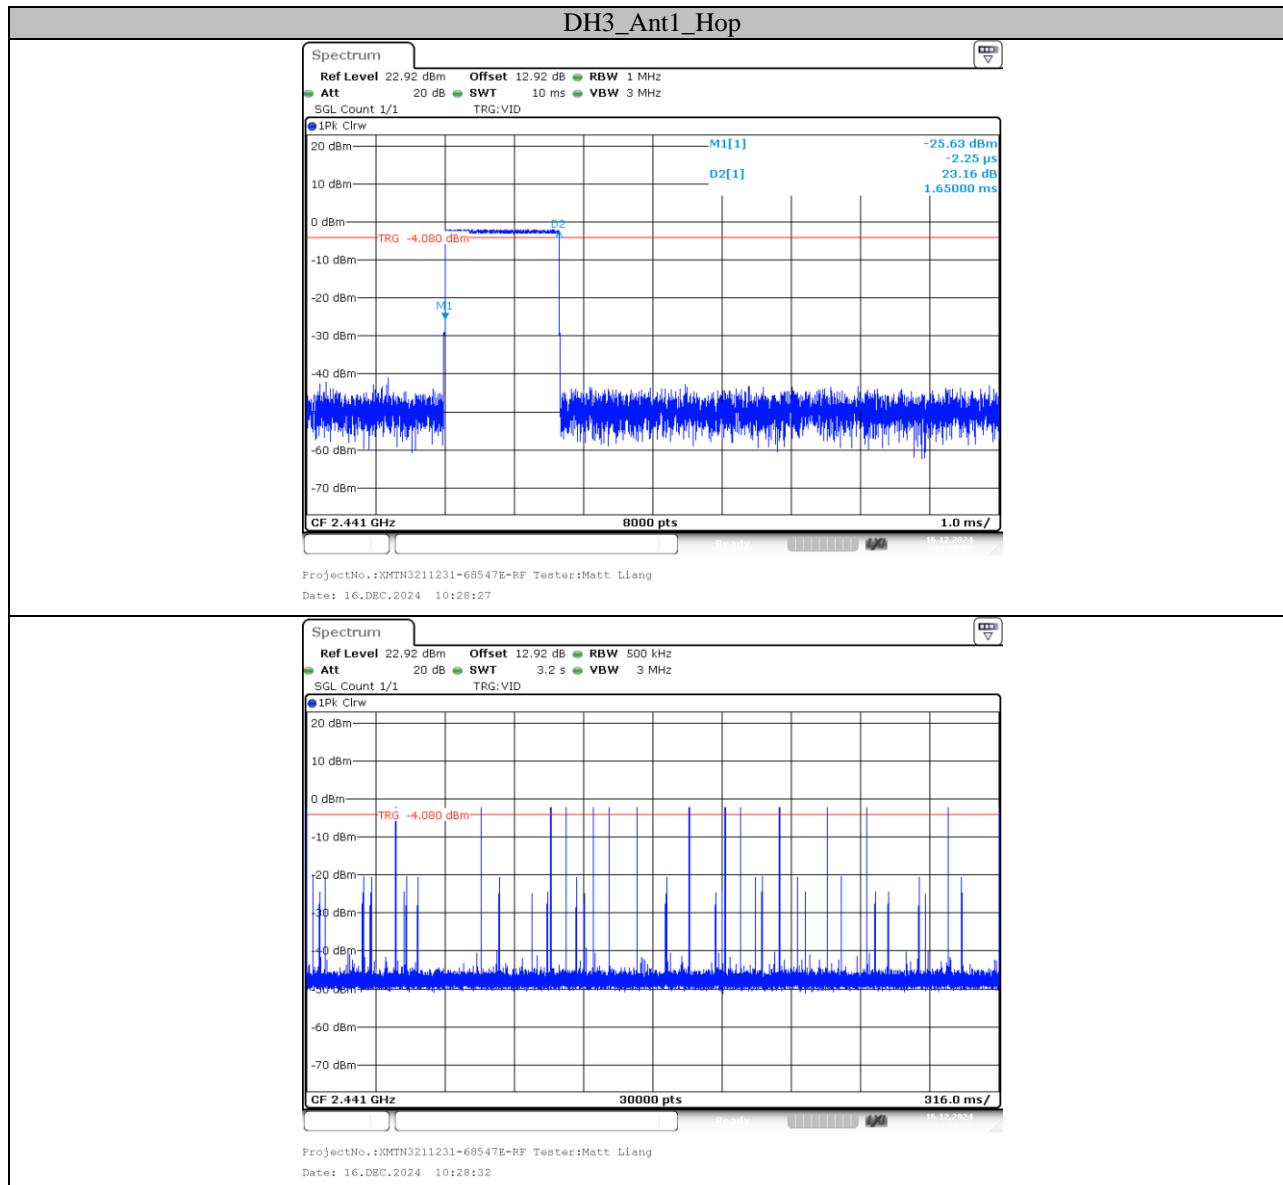


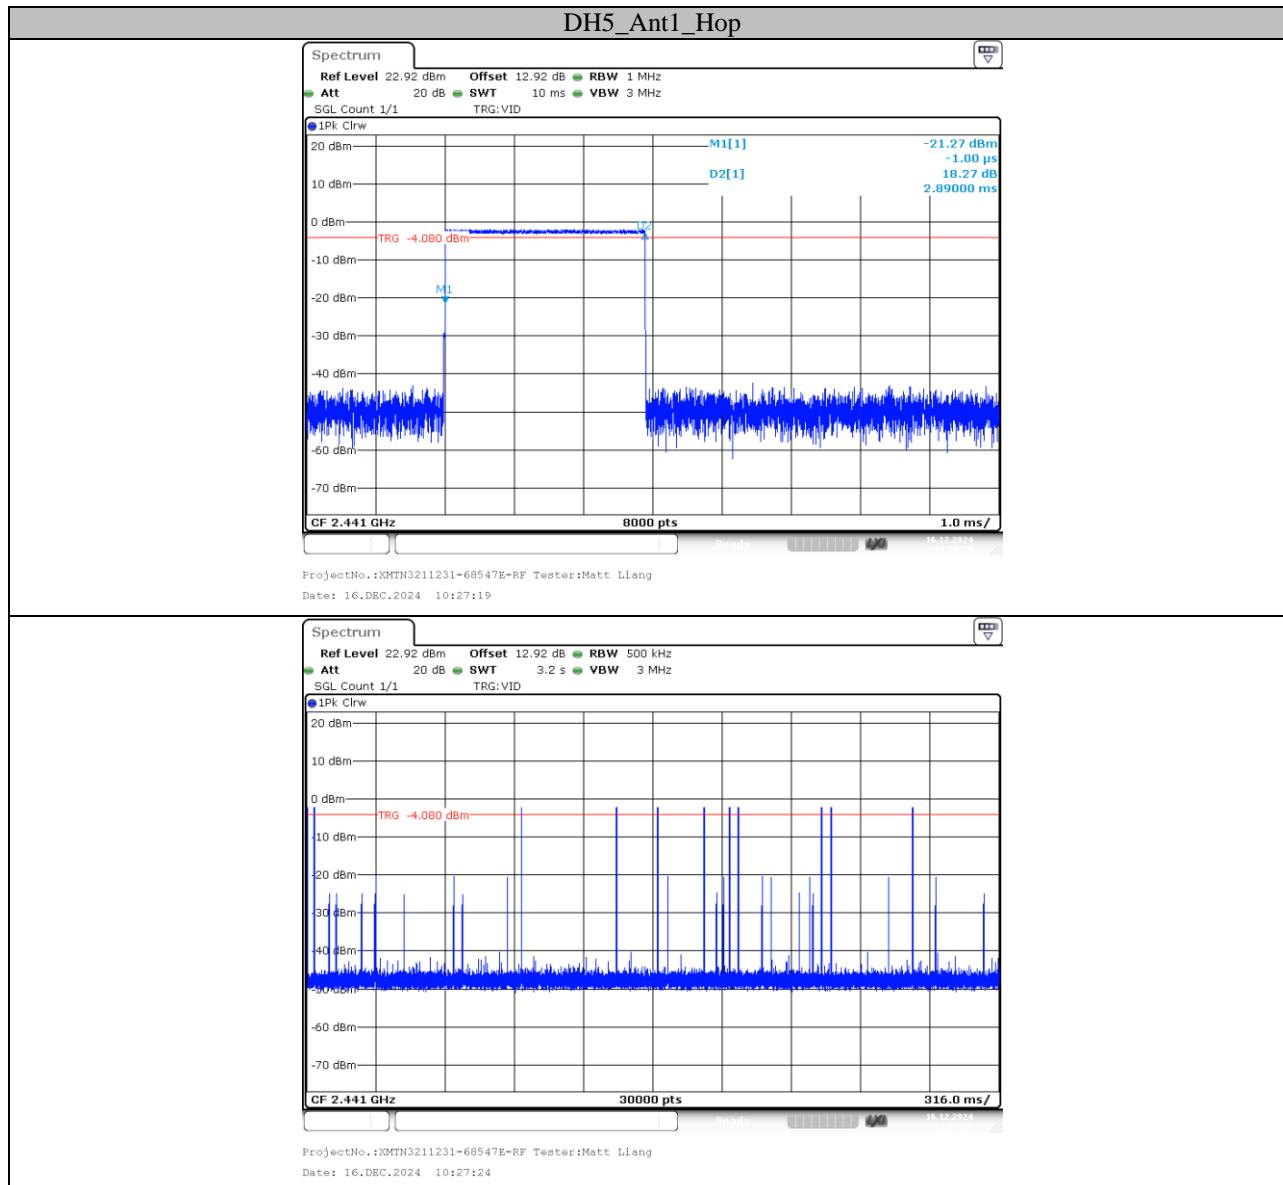


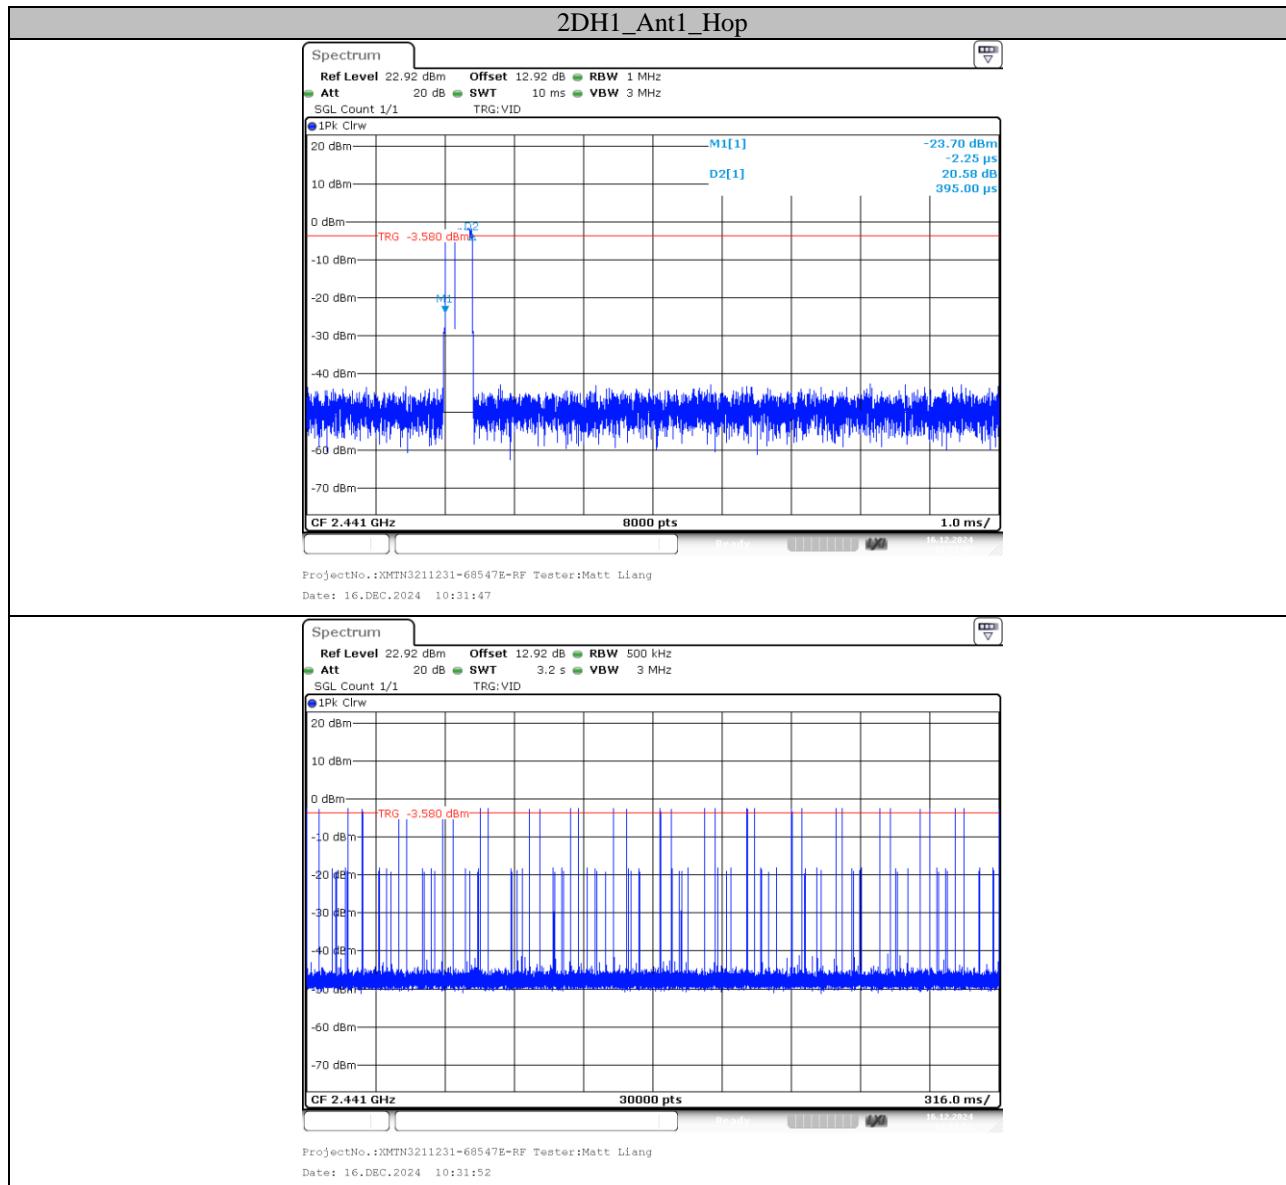


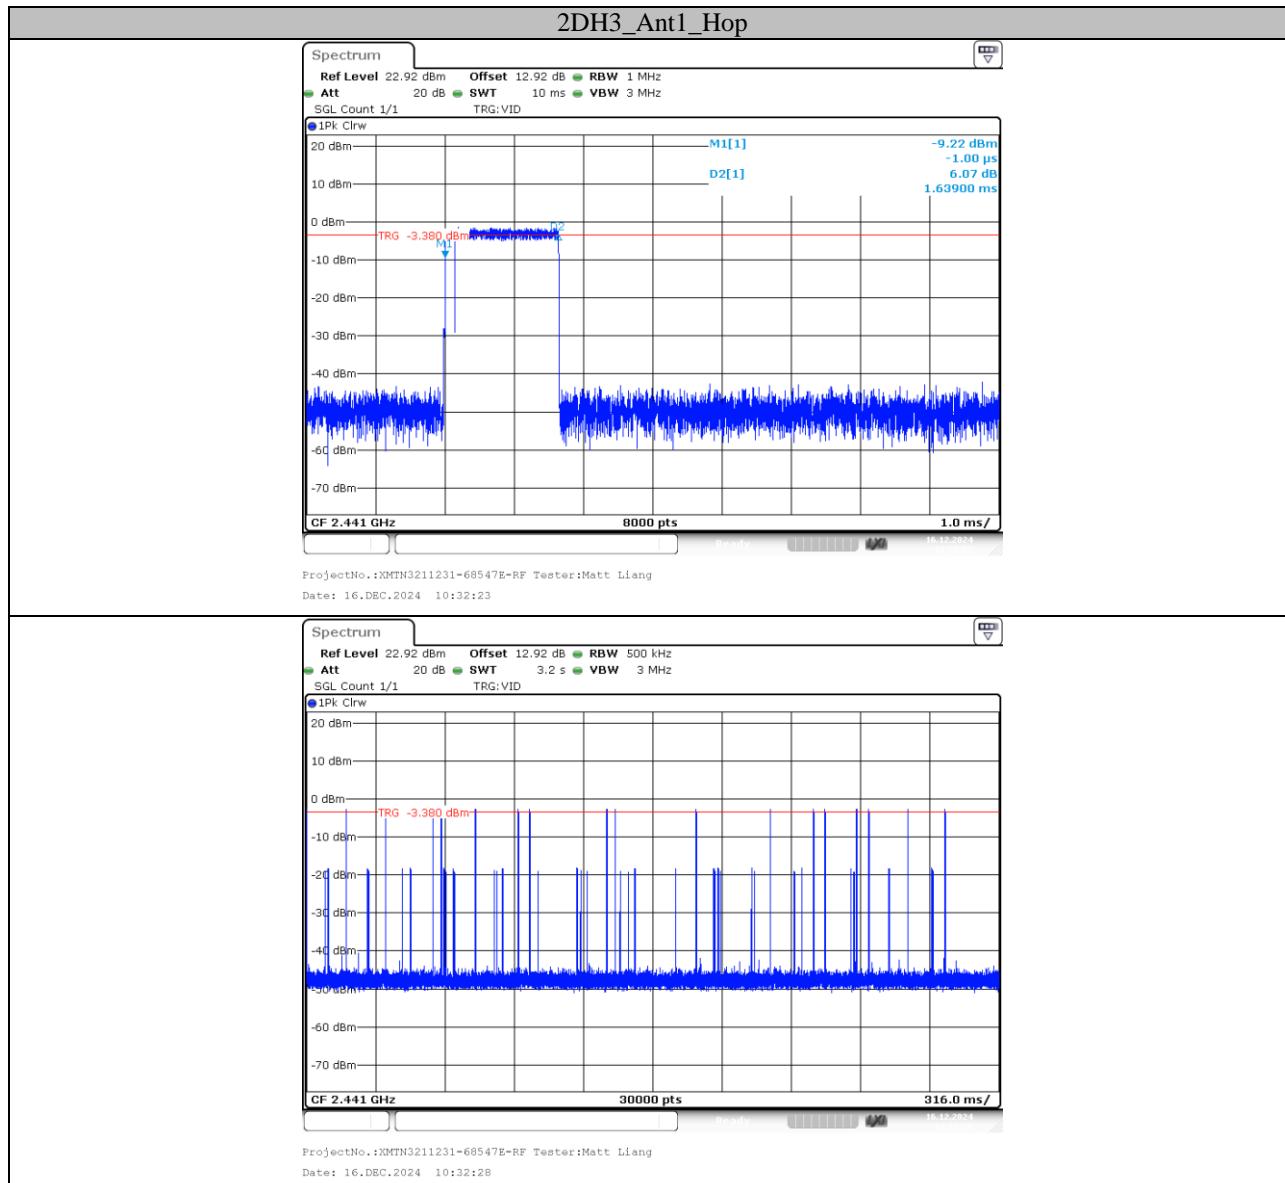

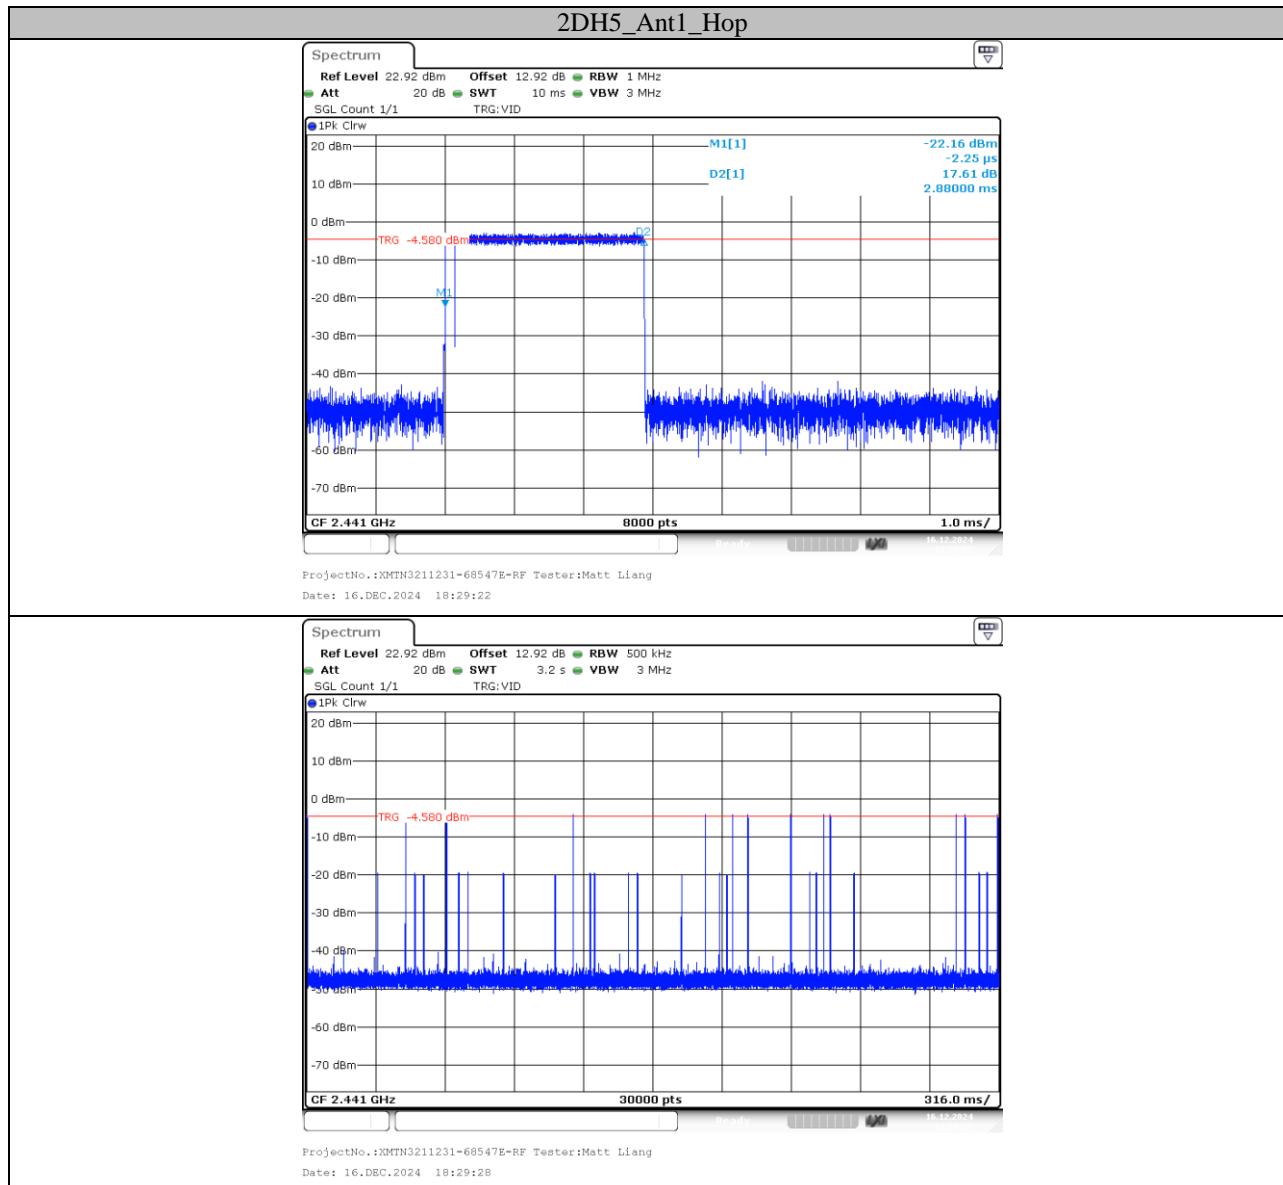

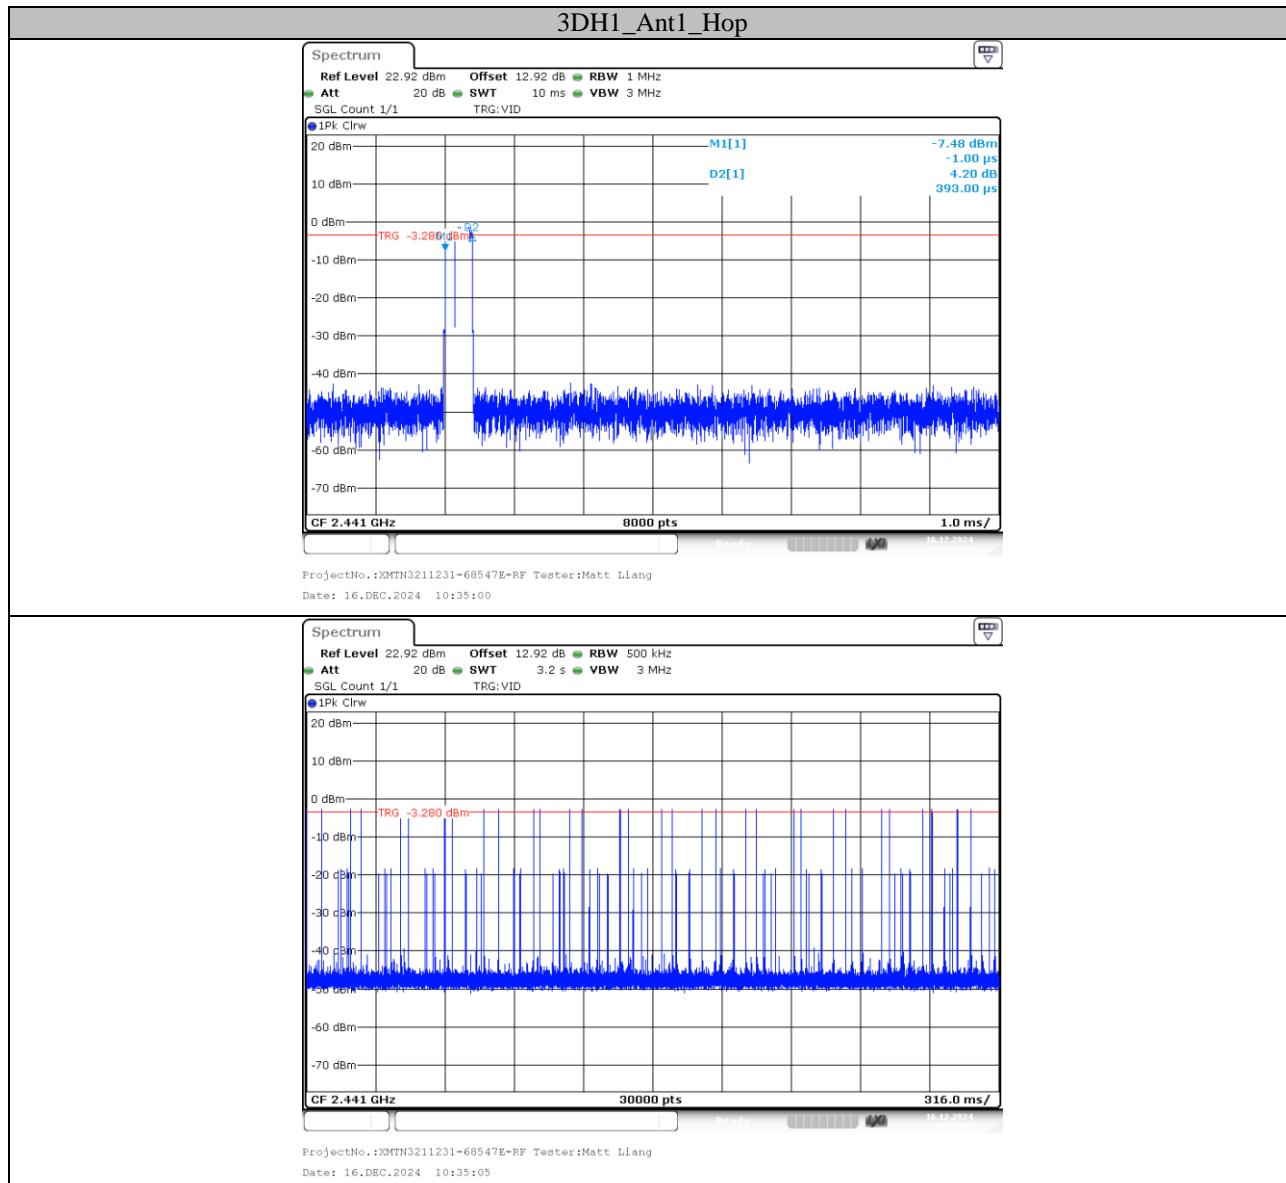

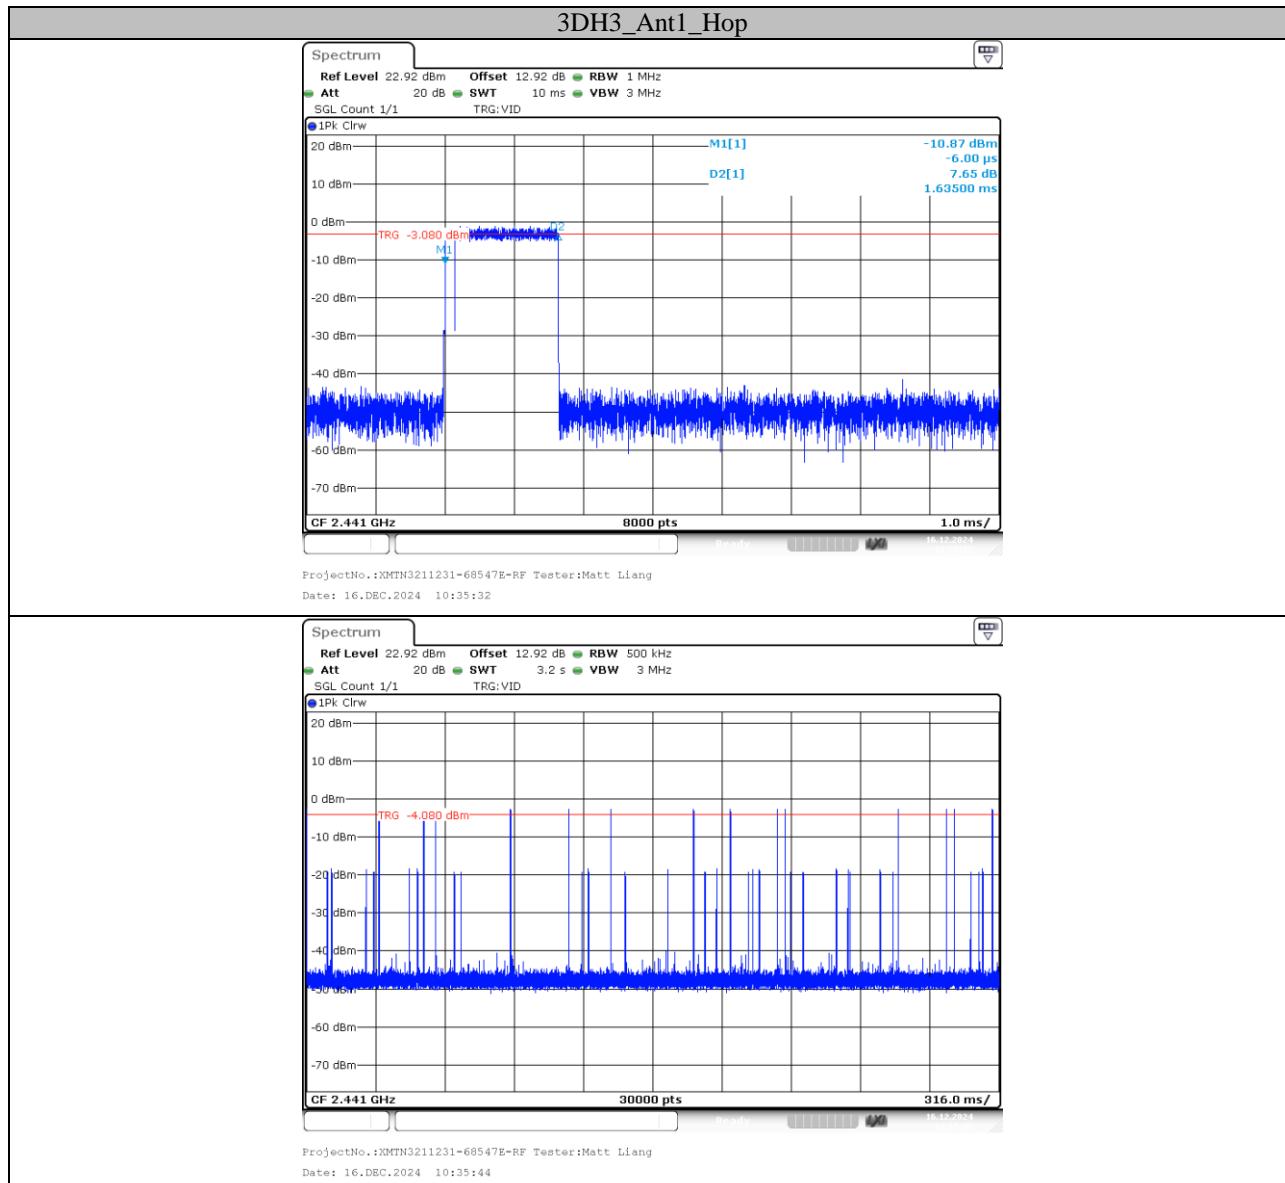

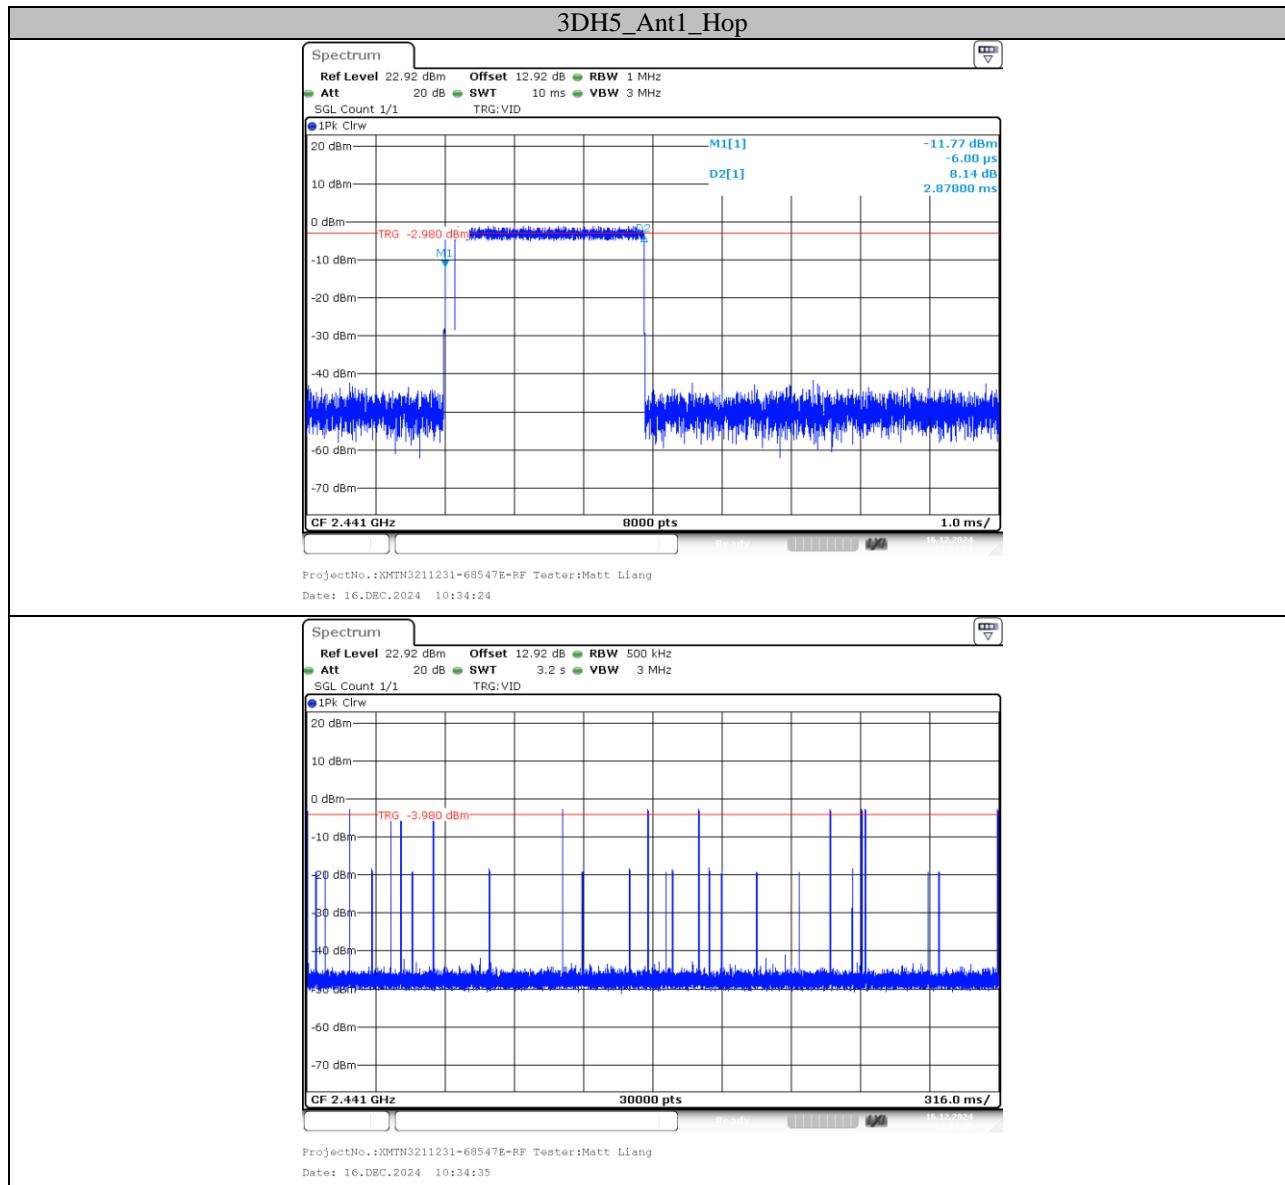



## Appendix F: Number of Hopping Channels

### Test Result

Test Mode	Antenna	Freq(MHz)	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	$\geq 15$	PASS
2DH5	Ant1	Hop	79	$\geq 15$	PASS
3DH5	Ant1	Hop	79	$\geq 15$	PASS

## Test Graphs

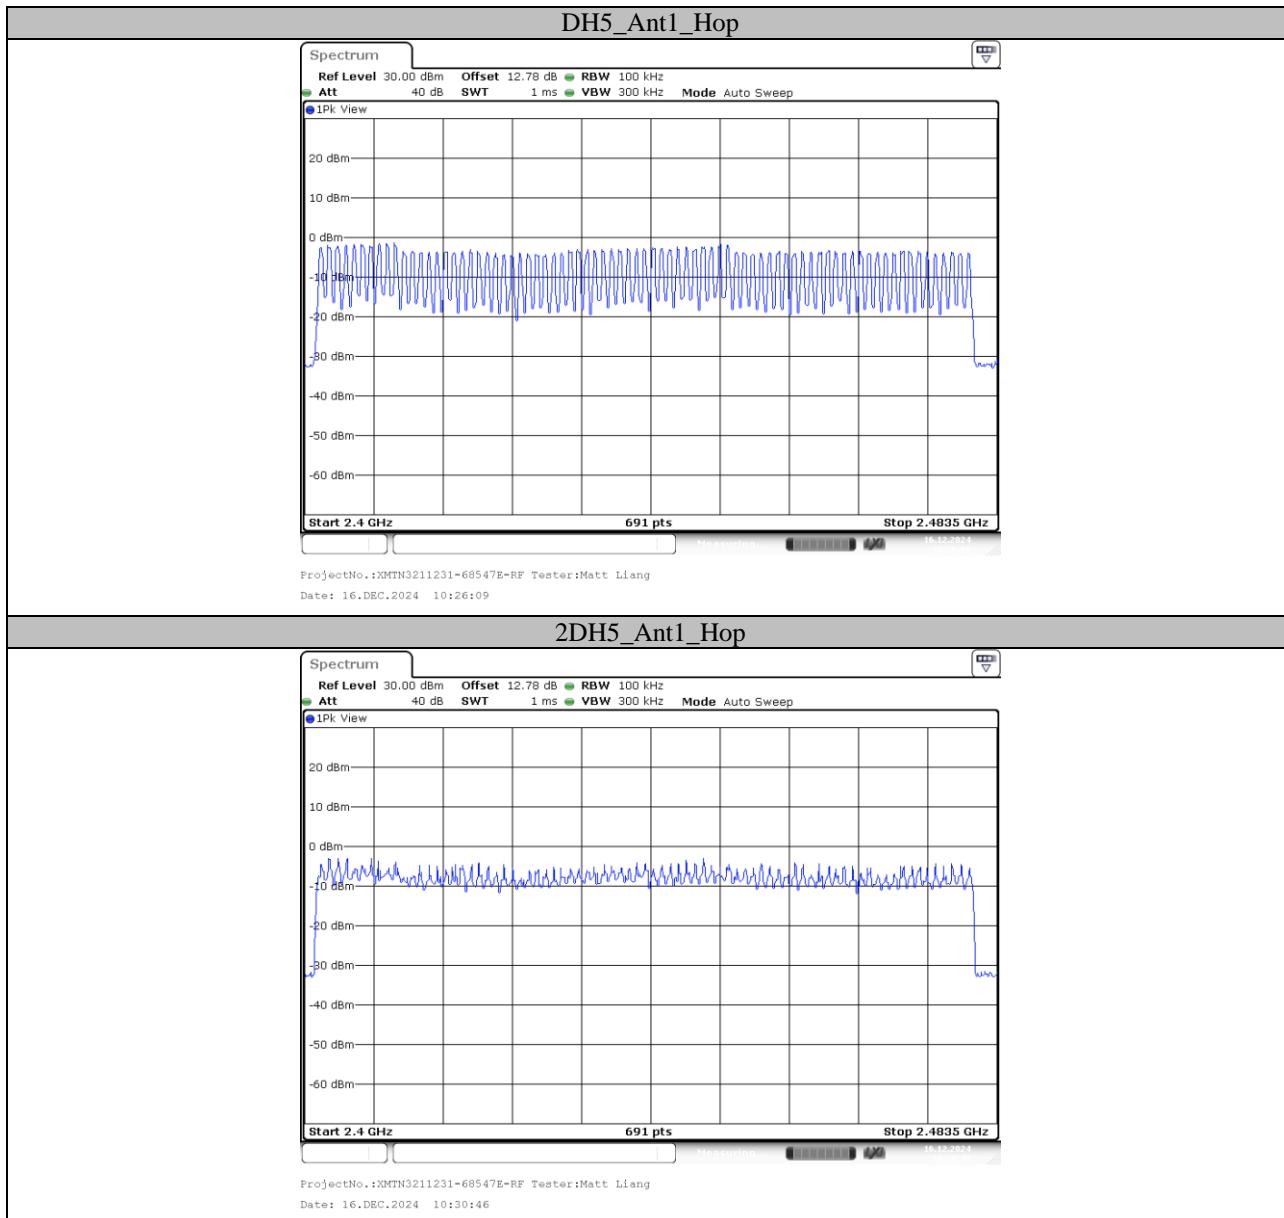

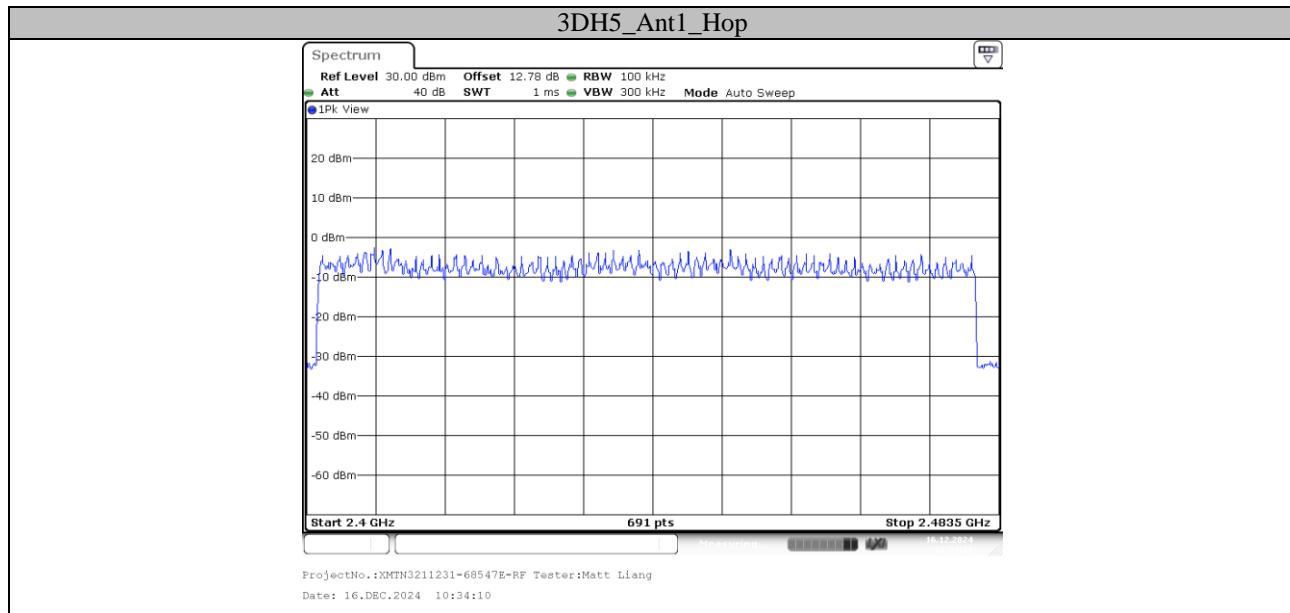


## Appendix G: Band Edge Measurements


### Test Result


Test Mode	Antenna	ChName	Freq(MHz)	Ref Level [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	-1.94	-45.29	≤-21.94	PASS
		High	2480	-3.27	-40.27	≤-23.27	PASS
		Low	Hop_2402	-2.10	-45.59	≤-22.1	PASS
		High	Hop_2480	-3.30	-40.12	≤-23.3	PASS
2DH5	Ant1	Low	2402	-2.88	-45.34	≤-22.88	PASS
		High	2480	-4.16	-39.95	≤-24.16	PASS
		Low	Hop_2402	-7.01	-45.84	≤-27.01	PASS
		High	Hop_2480	-4.23	-40.37	≤-24.23	PASS
3DH5	Ant1	Low	2402	-3.90	-44.72	≤-23.9	PASS
		High	2480	-4.11	-40.42	≤-24.11	PASS
		Low	Hop_2402	-5.89	-44.54	≤-25.89	PASS
		High	Hop_2480	-4.22	-40.82	≤-24.22	PASS

## Test Graphs

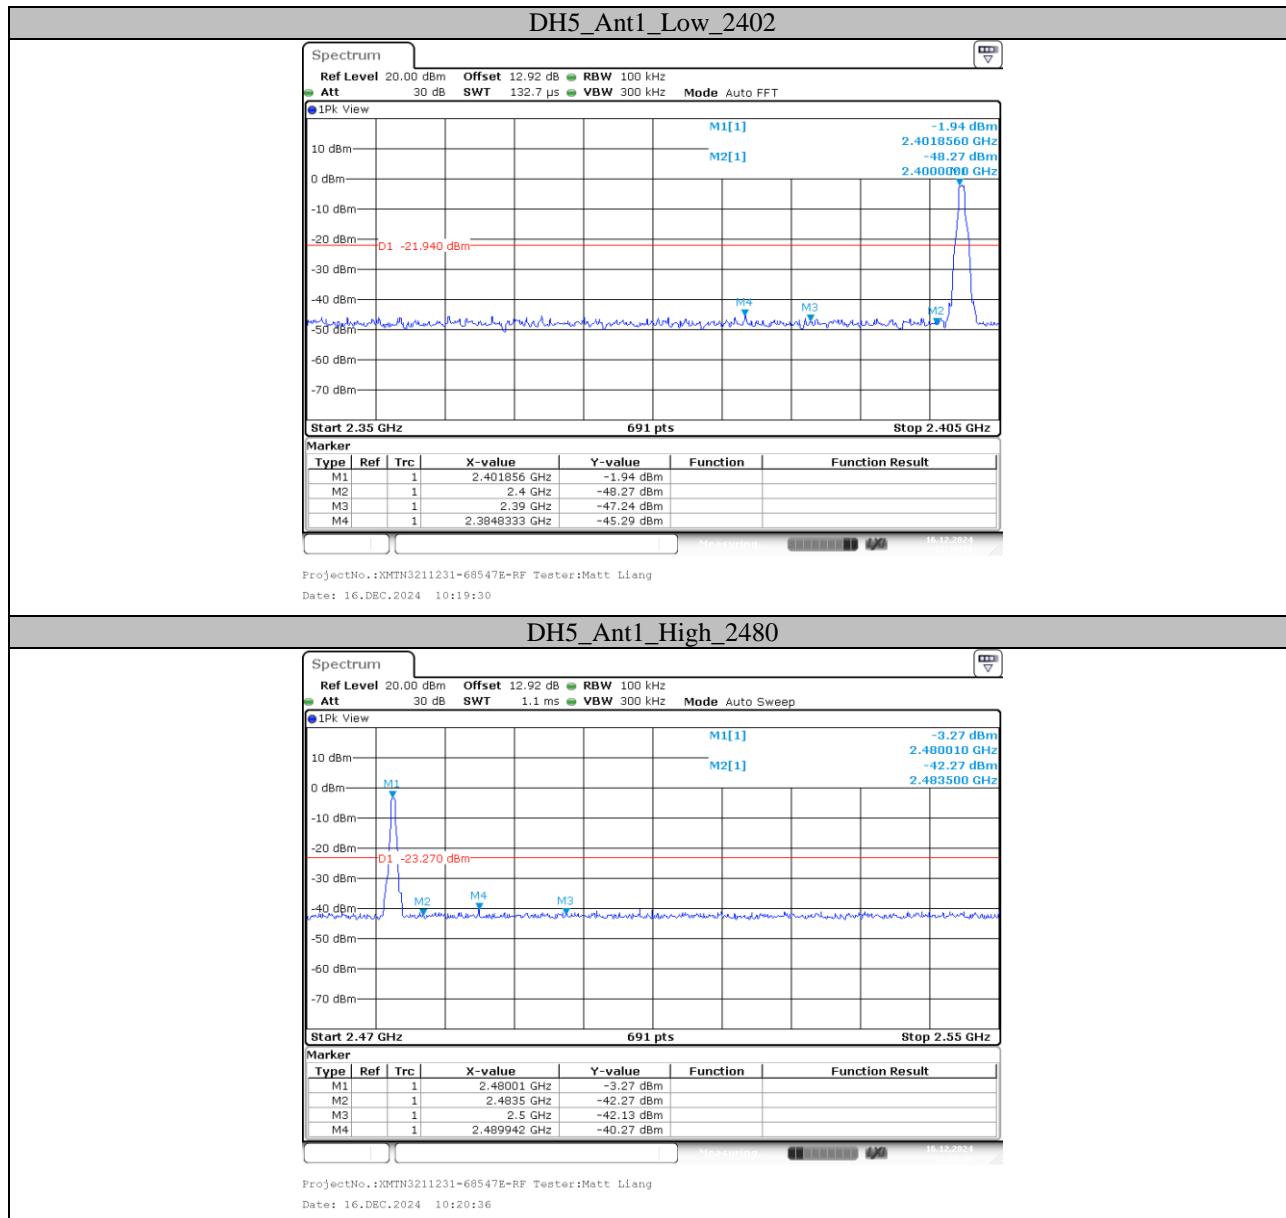



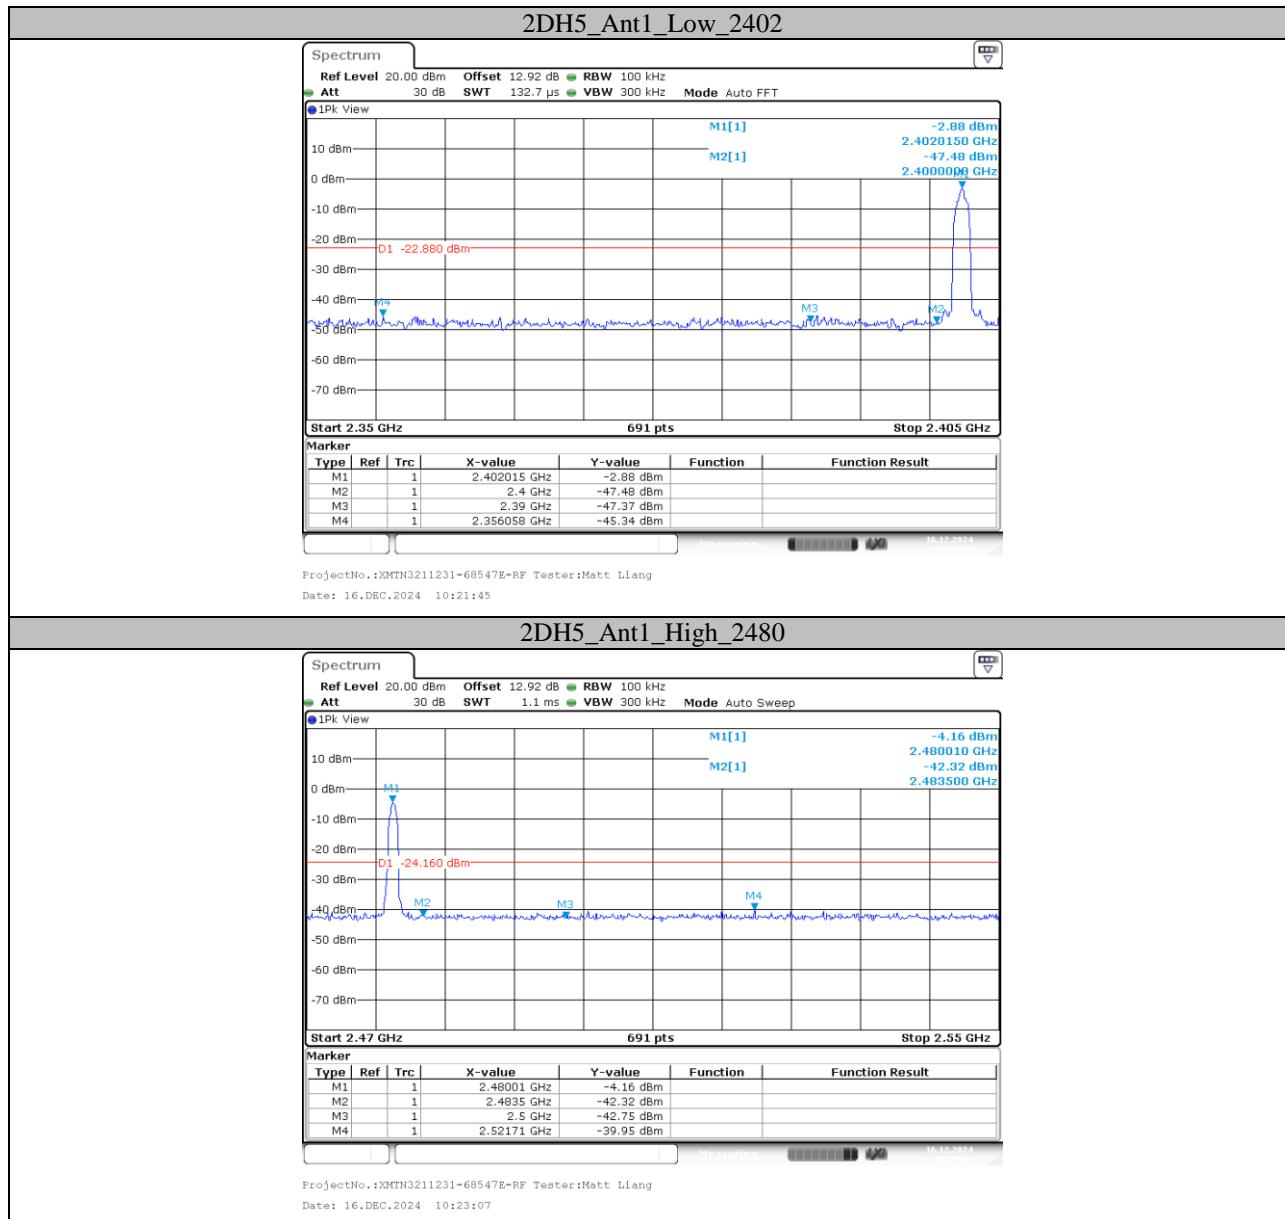

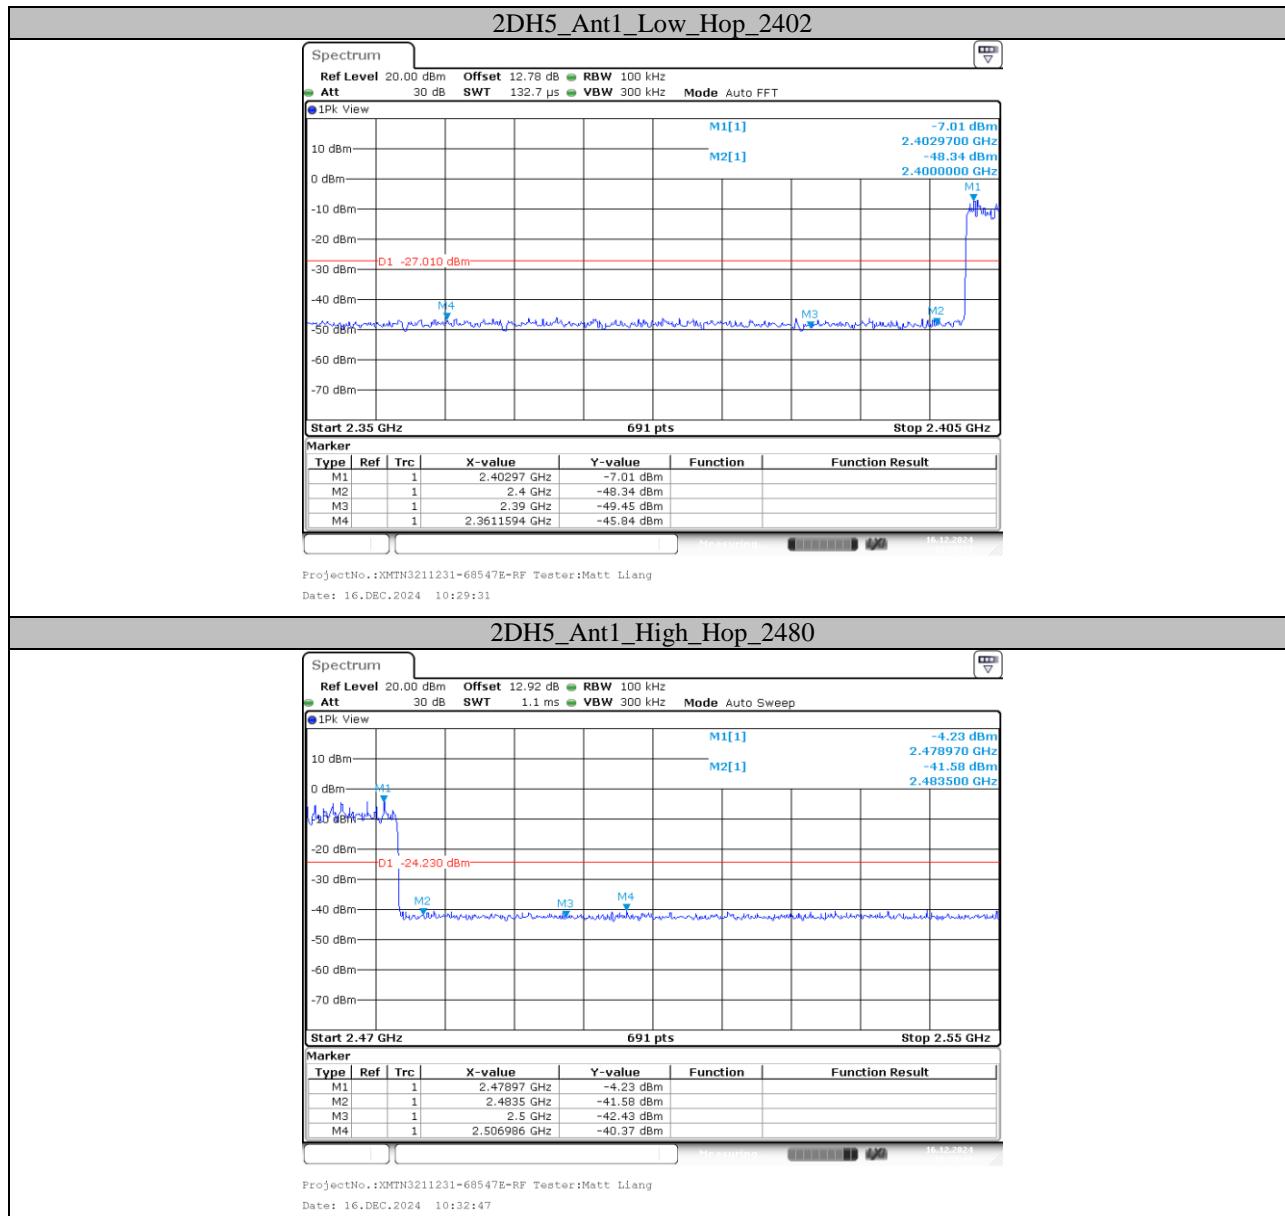





\*\*\*\*\* END OF REPORT \*\*\*\*\*