

Smart Wi-Fi Door Lock



Visit www.tapo.com/support
for technical support, user guides, warranty,
and more information



Quick Start Guide

Tapo DL100 DLW10



Welcome to Tapo!

Installation Guide & Video

Scan QR code or visit
<https://www.tp-link.com/support/faq/4335/>

Contact Us

Our expert Technical Support team is ready to assist you. Please don't hesitate to reach out with any questions.



EMAIL



CHAT



CALL




<https://www.tp-link.com/support/contact-technical-support/>






Contents


Parts in the Box	— — — — — — — — — —	1
Installation Preparation	— — — — — — — — — —	5
Installation	— — — — — — — — — —	8
Set Up	— — — — — — — — — —	20
How to set the PIN code?	— — — — — — — — — —	22
What if the battery is dead while you are outside?	— — — — — — — — — —	23
Appearance	— — — — — — — — — —	24

Parts in the Box

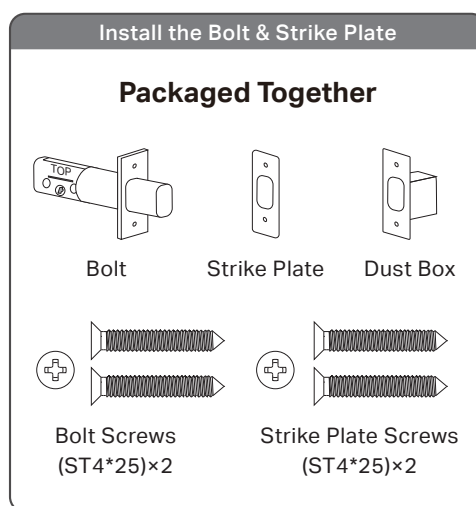

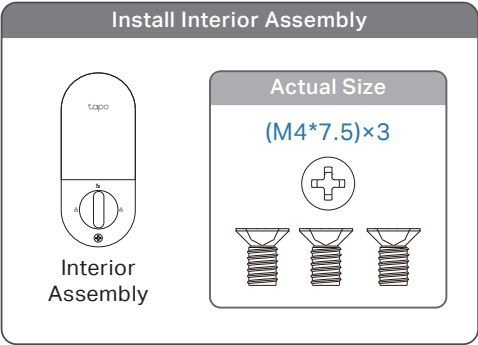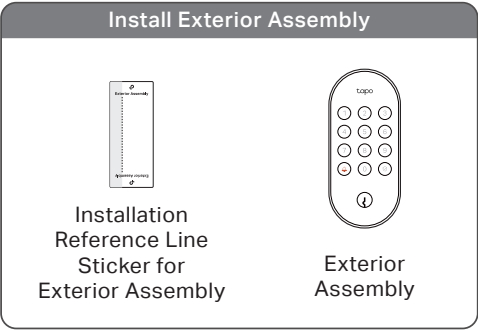

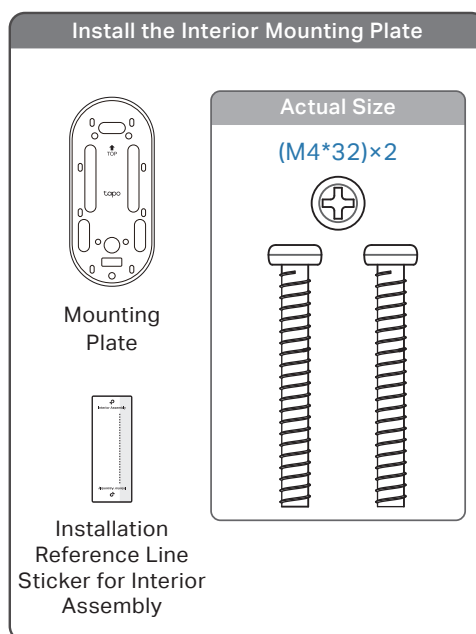


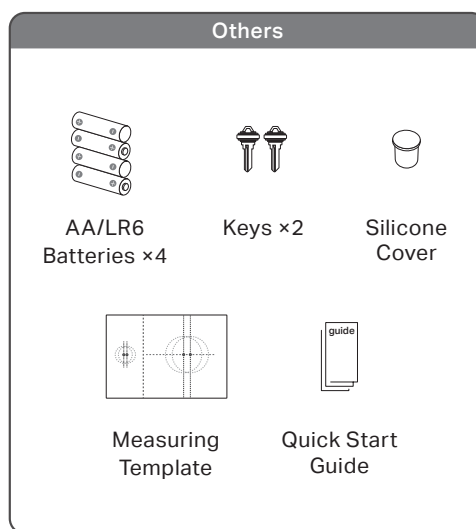


Installation Preparation

Check Compatibility


1. Check your existing door lock type.




Compatible with Single
Cylinder Deadbolt



Lever Handle Lock Not
Compatible




Integrated Locks
Not Compatible



Mortise Locks
Not Compatible


2. Measure your door.

Place the measuring template on the door, aligning its door edge line with the door edge.

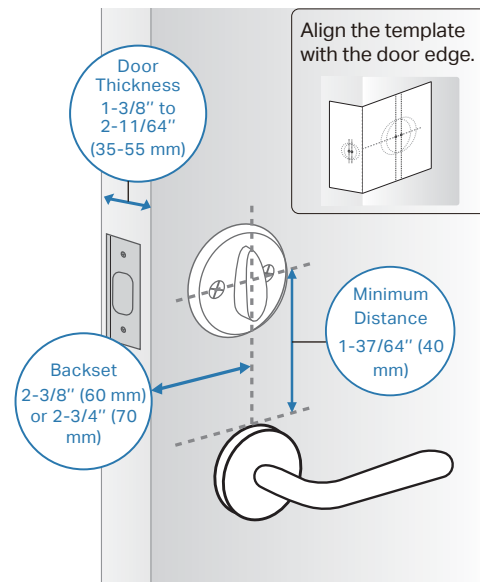


Installation

Installation Overview

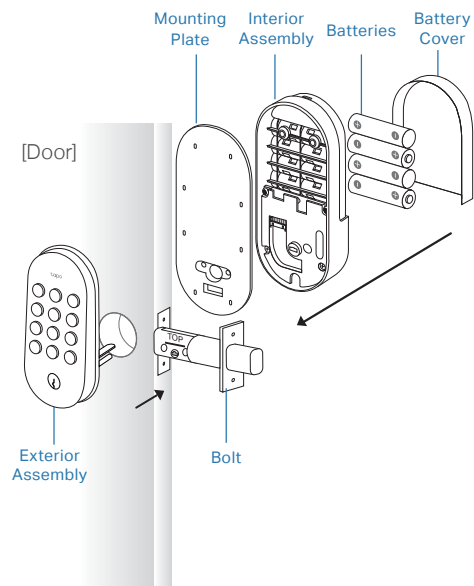


1 Remove your existing lock.


Remove your existing door lock and bolt.

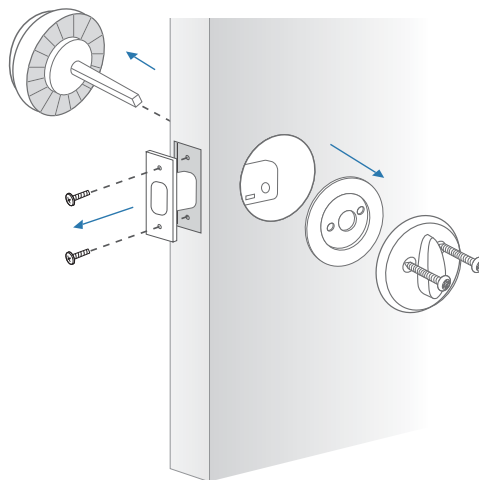


2 Install the new bolt.

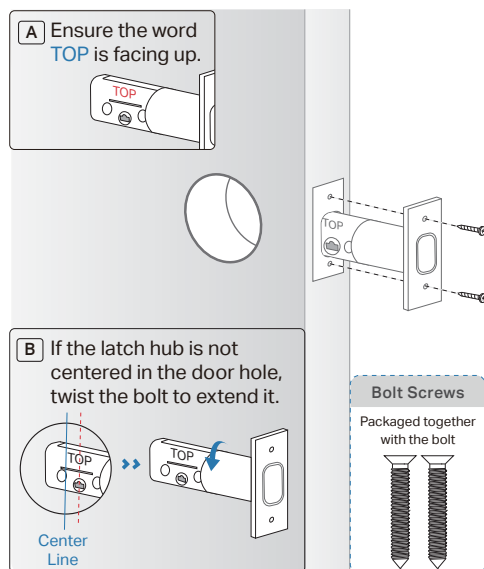


3 Install the exterior assembly.

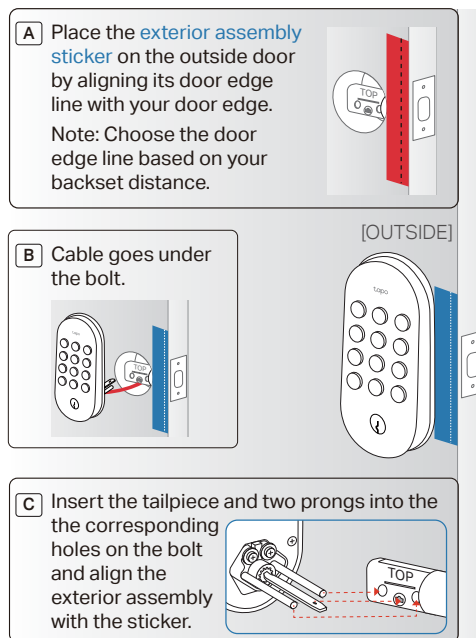



4 Install the mounting plate.

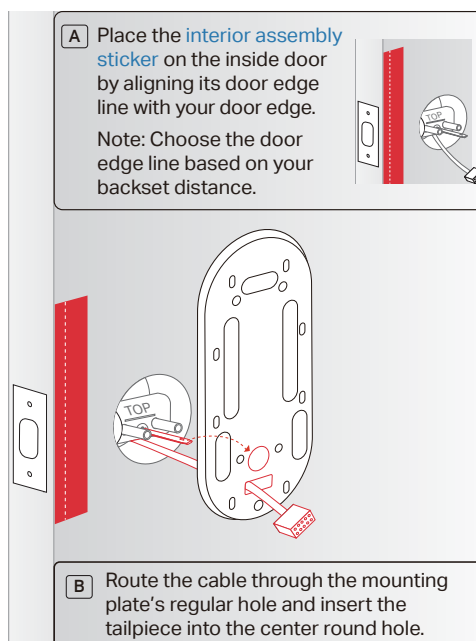

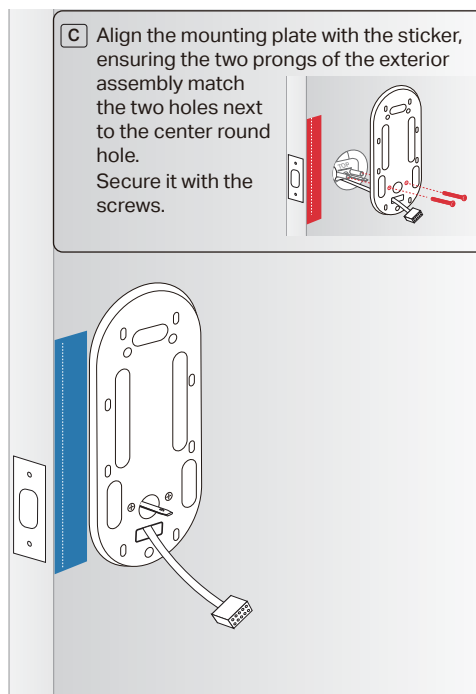


5 Install the interior assembly.

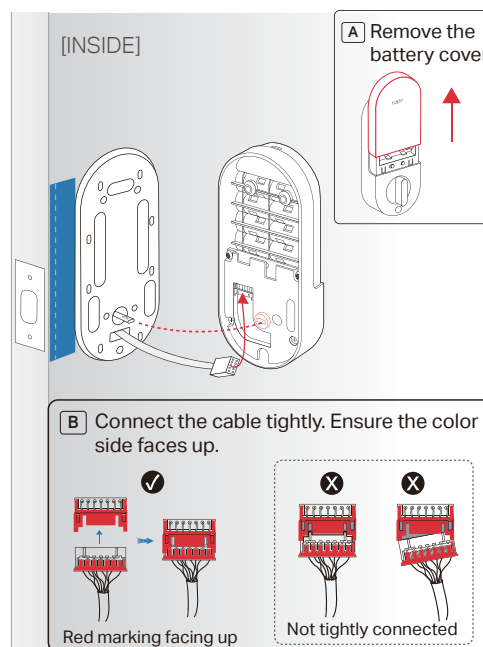


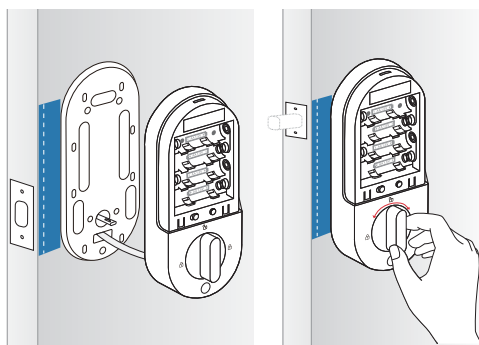


C Align the tailpiece with the key cylinder. Attach the interior assembly to the mounting plate.



D Rotate the thumb latch to ensure the latch retracts normally.

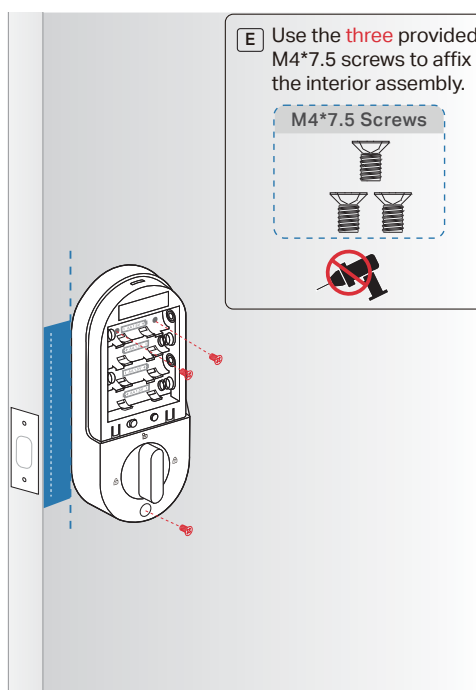

6 Install the batteries.

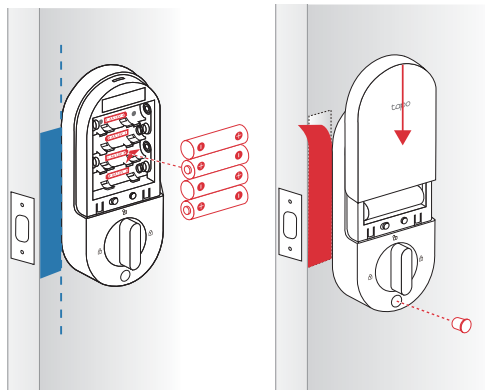


A Insert the batteries into the interior assembly, ensuring the positive and negative terminals are oriented correctly.

B Replace the cover by sliding it down. Insert the silicone cover into the bottom hole. Remove the stickers.

7 Install the dust box & strike plate.

Insert the dust box and strike plate into the strike hole on the door frame and secure with screws. Ensure the depth of the strike hole is at least 1" (25.4 mm).

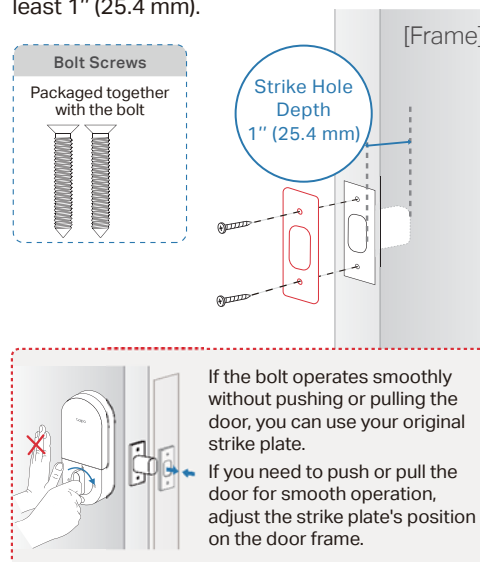

Setup

Set Up Your Lock

1. Get the [Tapo](#) app from the App Store or Google Play and log in with your TP-Link ID. If you do not have an account, create one first.




2. Tap the $\oplus$ button in the app. Select [Door Locks](#) and then your model. Follow the app instructions to complete setup.



The Tapo app is needed to use this lock. If this lock was professionally installed (or installed by someone other than the homeowner), make sure this step was performed by the homeowner.


How to set the PIN code

The PIN code should be set in the Tapo app.
Tapo will guide you to set your access code.




What if the battery is dead while you are outside?

- **Unlock via the provided key**



- **Temporarily power up the lock**


Connect to a power outlet or power bank using a USB cable to provide a temporary power supply. Note that this port is for power only and cannot transfer data.



Appearance

Appearance

Exterior Assembly

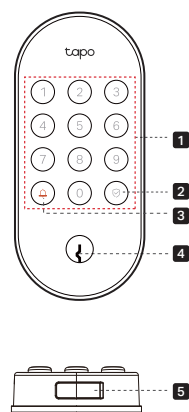

1 Key Pad

Lock/unlock the door by entering your PIN code.

2 Lock/Unlock Button & Indicator

Button:

- When entering the PIN code with scrambled digits, press this button to confirm unlocking.
- When the door is unlocked, press this button to lock it.

Indicator:

Indicates the lock/unlock status and device status.

3 Ring Button

When this button is pressed, you will receive notifications in the app.


4 Lock Cylinder

Unlock via the provided keys.

5 5V Type-C Port

Connect to a power outlet for a temporary power supply.

Interior Assembly



1 Battery Compartment

Insert the provided batteries to power your lock.

2 Reset

- Press and hold for 5s to reset Wi-Fi settings.
- Press and hold for 10s to factory reset your device.

3 Wi-Fi On/Off Button

Turn on Wi-Fi and connect to a Wi-Fi network for remote control.

Turn off Wi-Fi and only control locally via Bluetooth.

Note: When Wi-Fi is toggled off, sync the time in the app every time you replace the batteries.

4 Thumb Latch

Rotate to lock/unlock the door.

Lock/Unlock Indicator

Situation	Indicator Display
Being unlocked; Unlocking successful	Solid blue
Being locked; Locking successful	Solid yellow
Locking/unlocking failed	Solid red
Door lock jammed; Too many PIN code attempts	Solid red
Ready for setup	Blinking red and green

Specifications

Type-C Emergency Power Supply: 5V 

Batteries: 4× 1.5V SIZE AA/LR6

Rainproof Rating: IP54 (only for the exterior assembly)

Safety Information

- Do not attempt to disassemble, repair, or modify the device. If you need service, please contact us.
- Do not use the device where wireless devices are not allowed.
- Keep the device away from water, fire, humidity or hot environments.
- Do not place near automatically controlled devices such as fire alarms. Radio waves emitted from this product may cause such devices to malfunction resulting in an accident.
- Observe restrictions on using wireless products in fuel depots, chemical plants or when blasting operations are in progress.
- Never put metal objects inside the product. If a metal object enters the product turn off the circuit breaker and contact an authorised electrician.
- This product is not intended to be used when providing medical care. Consult the manufacturer of any personal medical devices, such as pacemakers or hearing aids to determine if they are adequately shielded from external RF (radio frequency) energy.
- Do not use this product in health care facilities. Hospitals or health care facilities may be using equipment that could be sensitive to external RF energy.
- Ensure to use a power bank or 5V power adapters when temporarily powering up the device.
- When the interior room temperature is below 0°C, the device may not be unlocked using PIN codes due to the limited battery discharge capacity of AA/LR6 Alkaline batteries.
- Exterior Assembly Operating Temperature: -30 °C ~ 70°C (-22°F ~ 158°F)

Please read and follow the above safety information when operating the device. We cannot guarantee that no accidents or damage will occur due to improper use of the device. Please use this product with care and operate at your own risk.

CAUTION! Risk of fire or explosion if the battery is replaced by an incorrect type
CAUTION! Avoid replacement of a battery with an incorrect type that can defeat a safeguard. Avoid disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion. Do not leave a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas. Do not leave a battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

*Images may differ from your actual product.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Canadian Compliance Statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

(1) This device may not cause interference.

(2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

1) L'appareil ne doit pas produire de brouillage;

2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition aux radiations:

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement et votre corps.

Industry Canada Statement

CAN ICES-3 (B)/NMB-3(B)