


Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

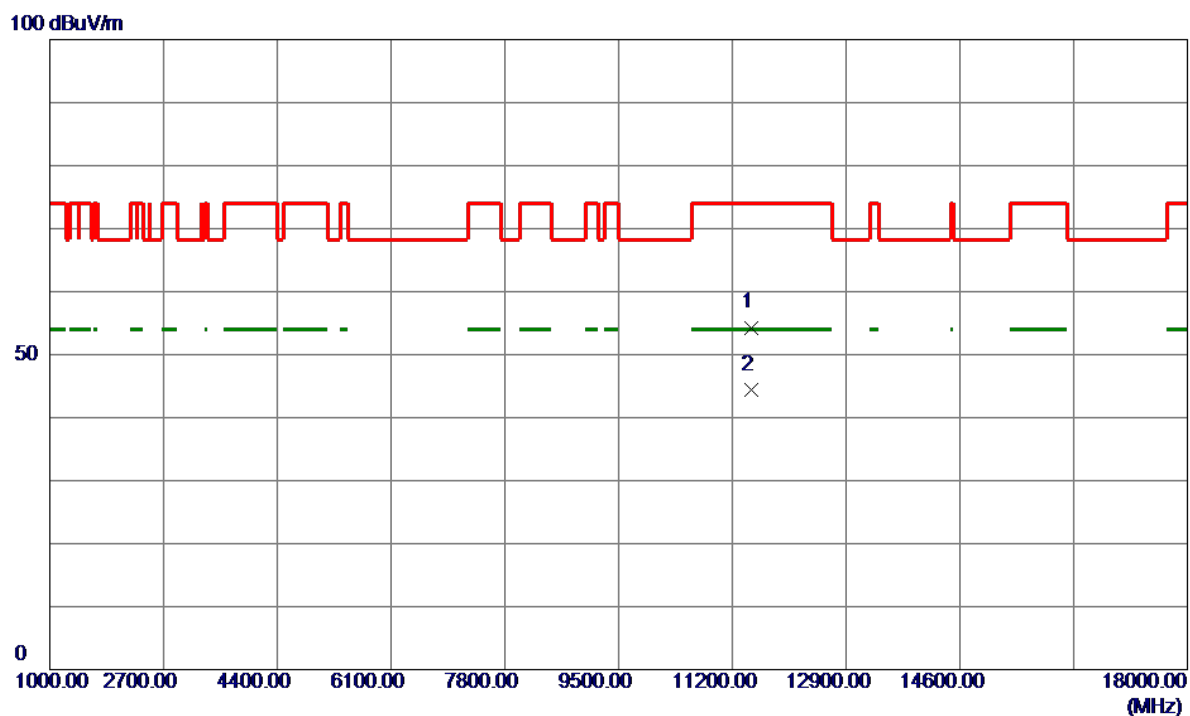


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11483.8000	43.20	11.10	54.30	74.00	-19.70	Peak	
2 *	11488.8000	33.38	11.10	44.48	54.00	-9.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

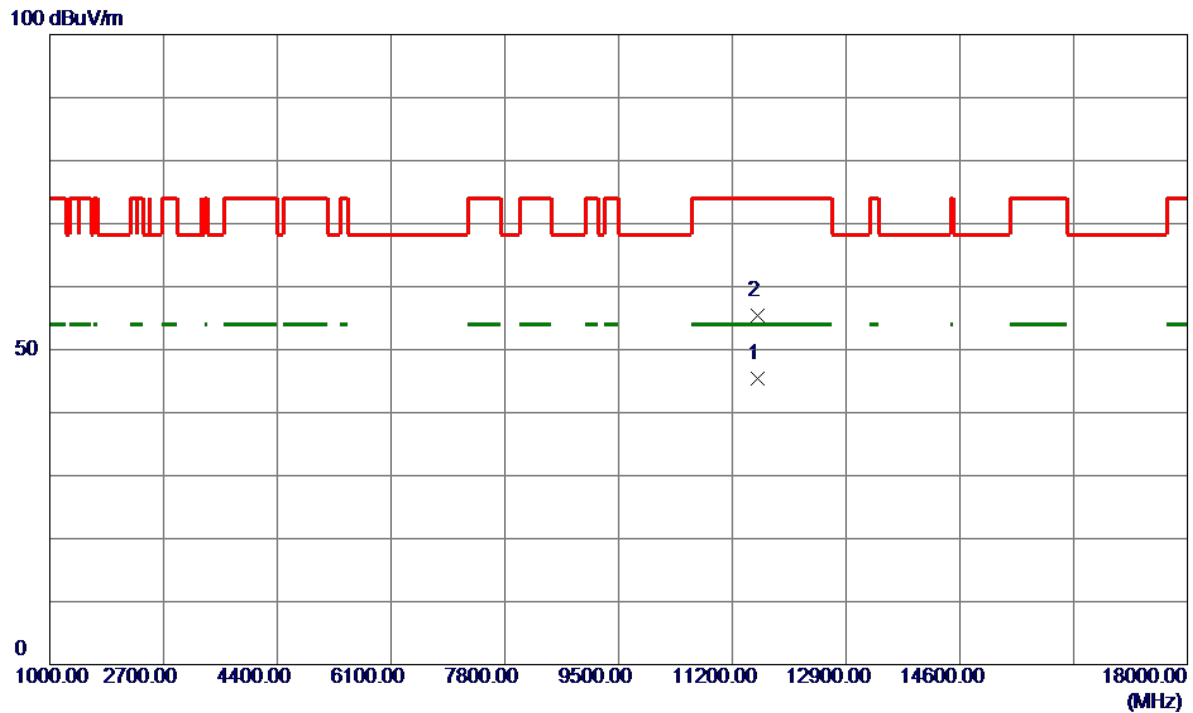


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11569.0000	34.38	11.10	45.48	54.00	-8.52	AVG	
2	11569.0500	44.22	11.10	55.32	74.00	-18.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

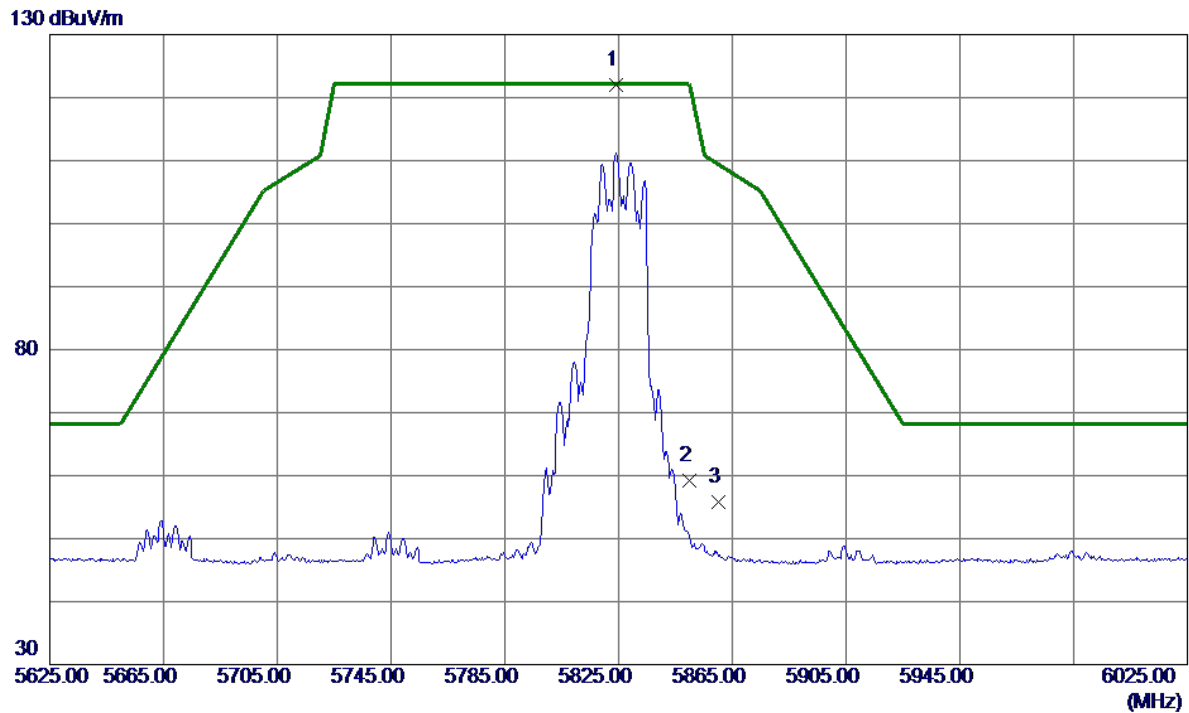


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.2000	106.42	15.57	121.99	122.20	-0.21	Peak	No Limit
2	5850.0000	43.53	15.64	59.17	122.20	-63.03	Peak	
3	5860.0000	40.23	15.66	55.89	109.40	-53.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

100 dBuV/m

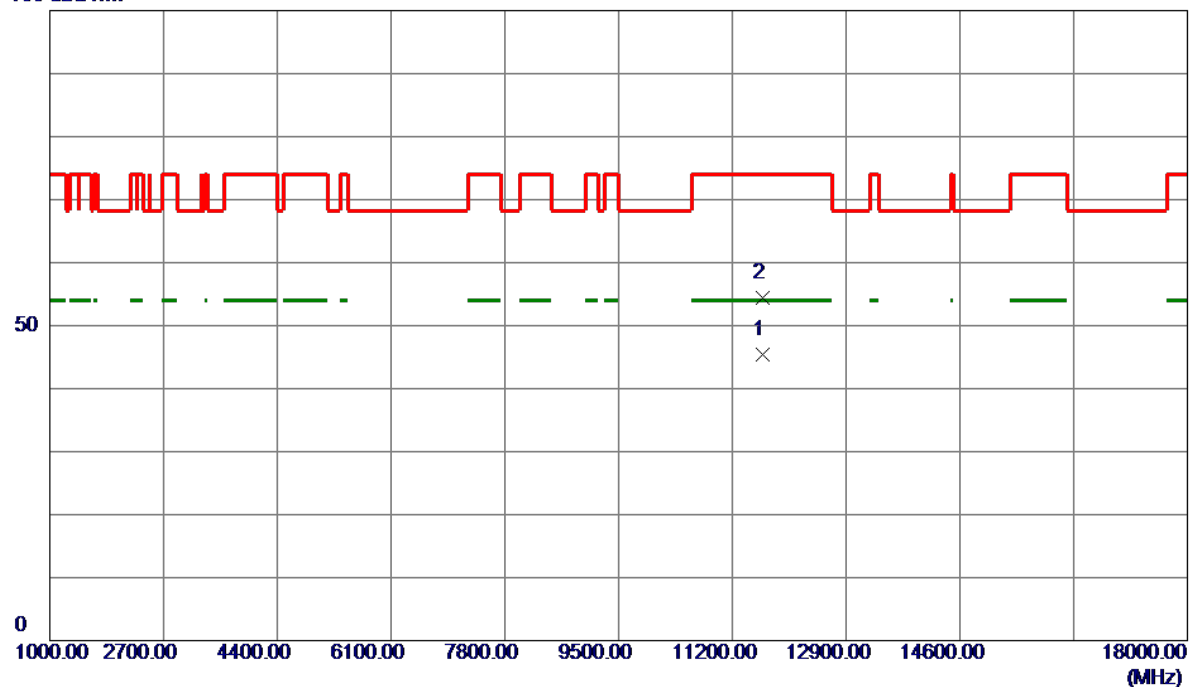


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11649.2500	34.27	11.09	45.36	54.00	-8.64	AVG	
2	11654.0000	43.27	11.09	54.36	74.00	-19.64	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

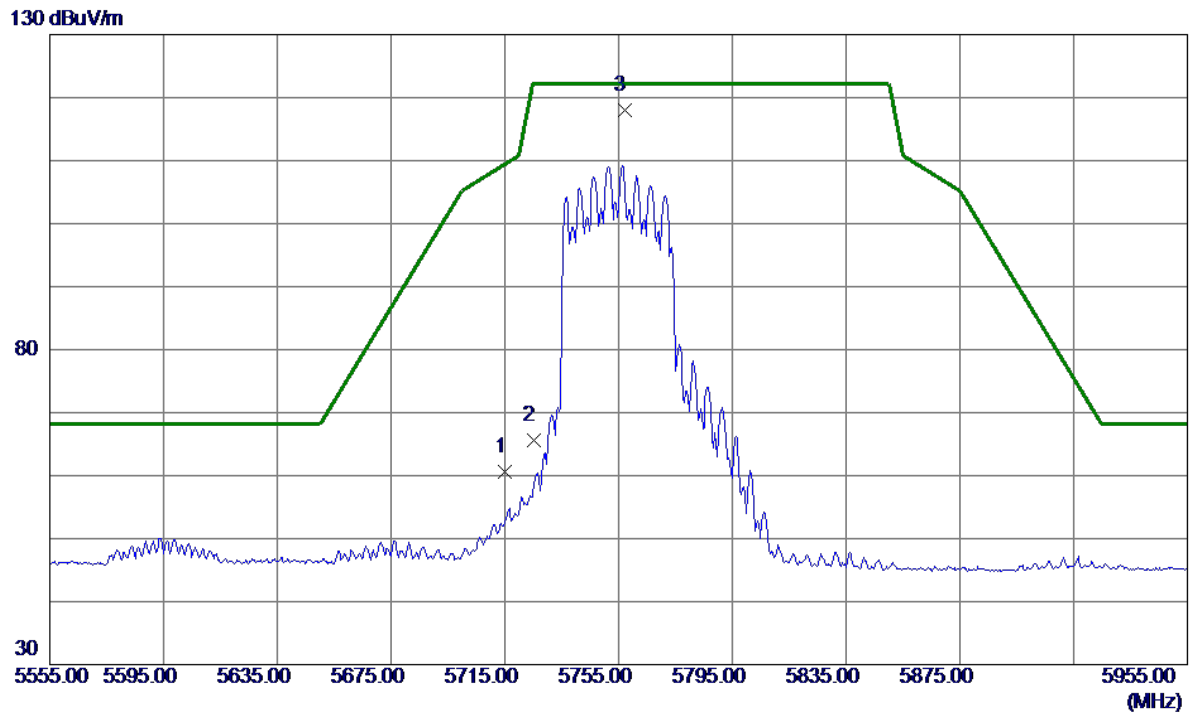


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	45.23	15.30	60.53	109.40	-48.87	Peak	
2	5725.0000	50.35	15.32	65.67	122.20	-56.53	Peak	
3 *	5757.0000	102.68	15.40	118.08	122.20	-4.12	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

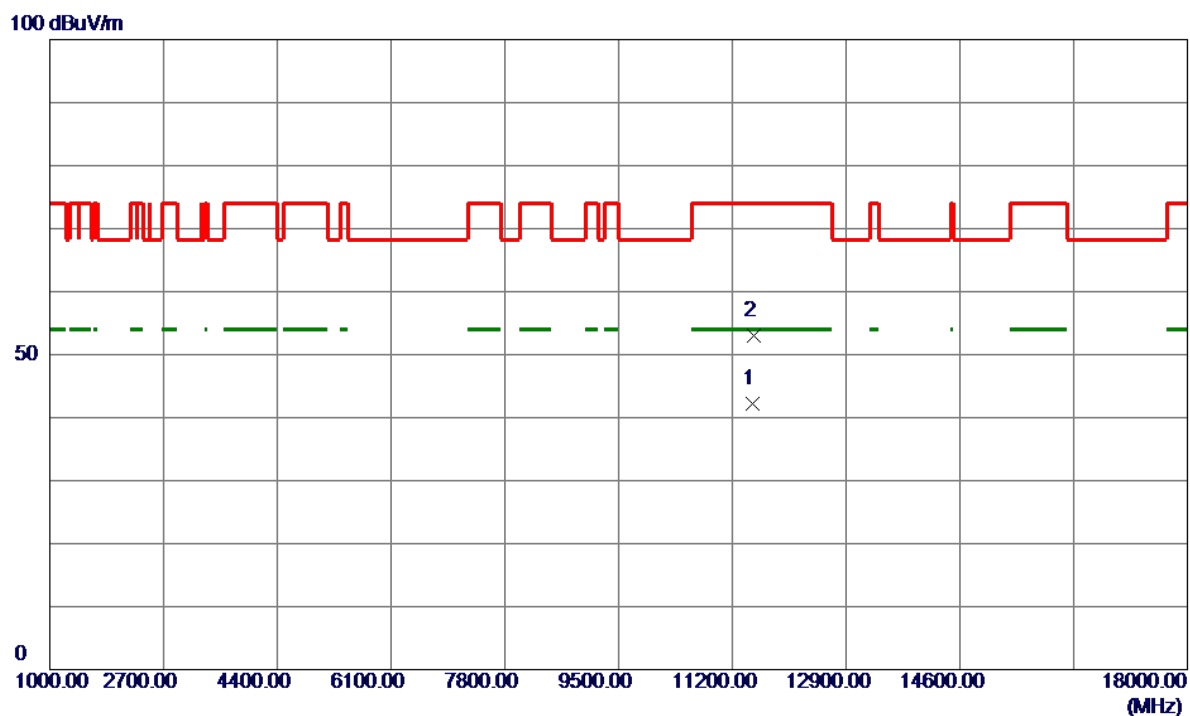


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11503.6000	31.08	11.10	42.18	54.00	-11.82	AVG	
2	11518.1000	41.87	11.10	52.97	74.00	-21.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

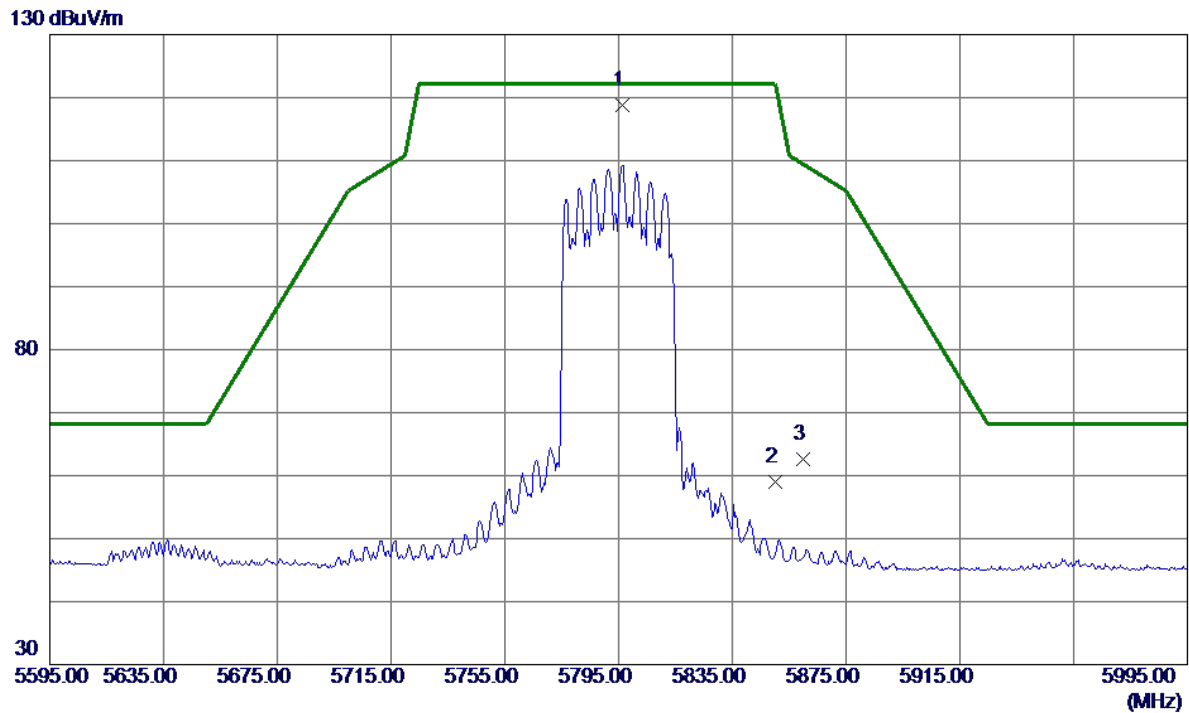


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5796.2000	103.34	15.50	118.84	122.20	-3.36	Peak	No Limit
2	5850.0000	43.33	15.64	58.97	122.20	-63.23	Peak	
3	5860.0000	46.90	15.66	62.56	109.40	-46.84	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

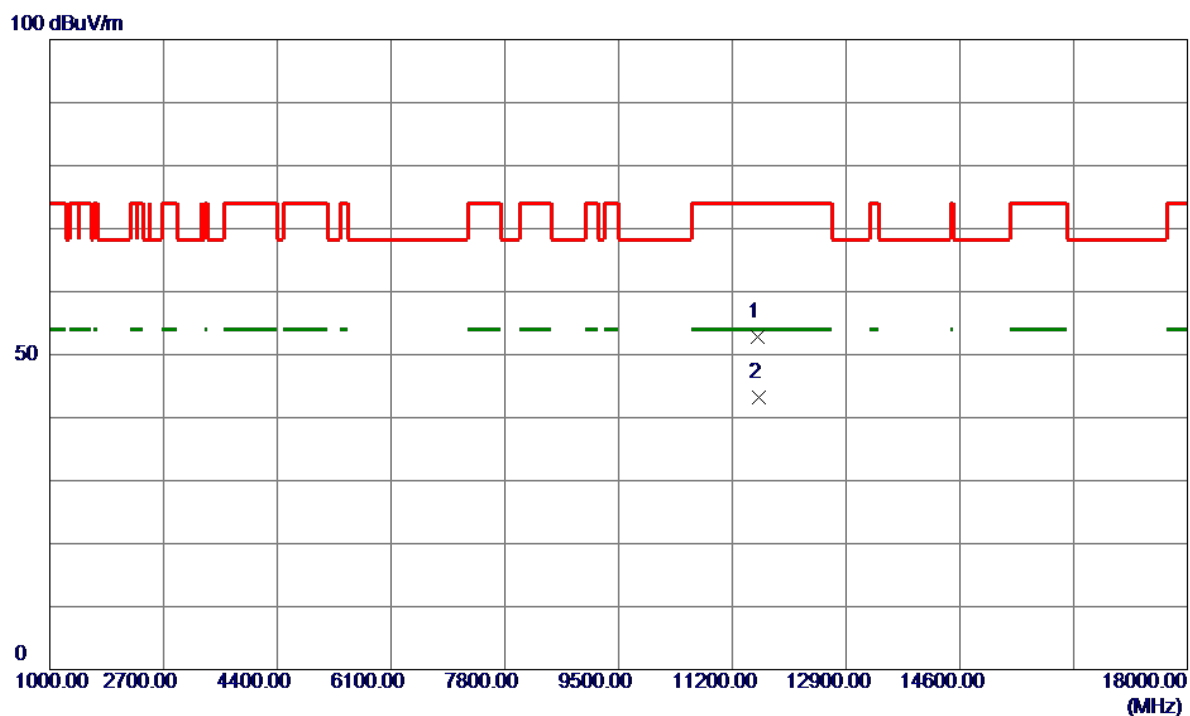


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11578.5500	41.79	11.10	52.89	74.00	-21.11	Peak	
2 *	11588.9500	32.11	11.10	43.21	54.00	-10.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

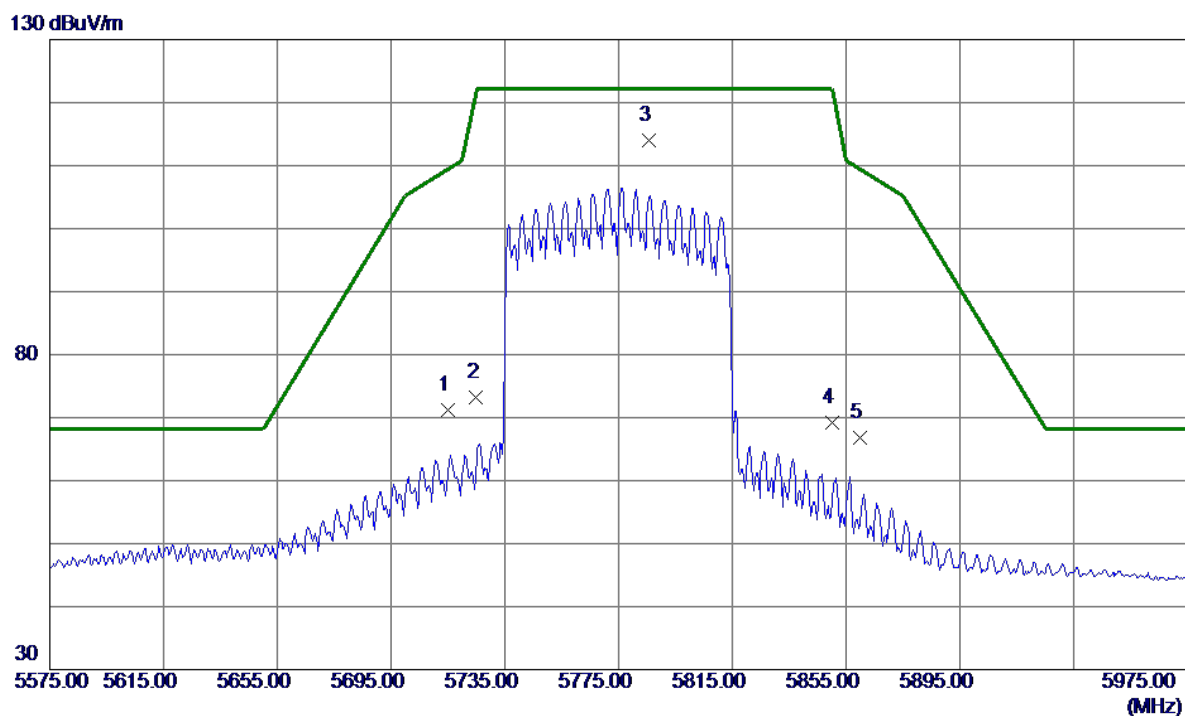


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	55.93	15.30	71.23	109.40	-38.17	Peak	
2	5725.0000	57.83	15.32	73.15	122.20	-49.05	Peak	
3 *	5785.8000	98.59	15.48	114.07	122.20	-8.13	Peak	No Limit
4	5850.0000	53.60	15.64	69.24	122.20	-52.96	Peak	
5	5860.0000	51.06	15.66	66.72	109.40	-42.68	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

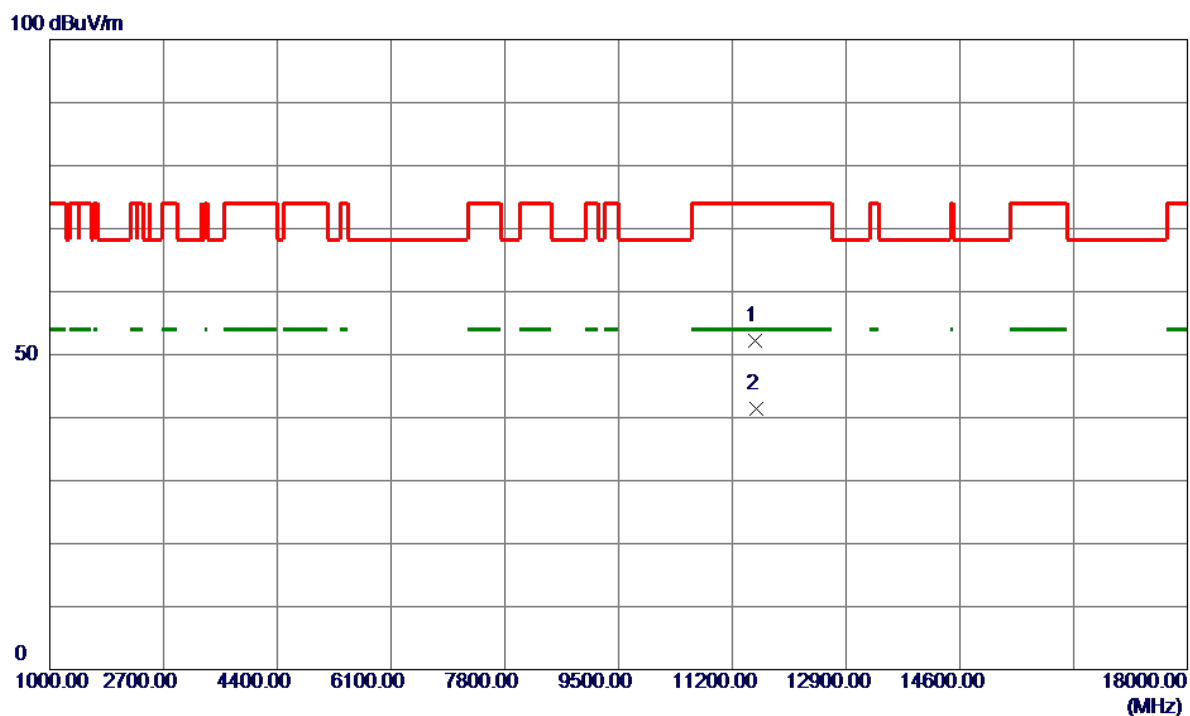


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11538.5500	41.05	11.10	52.15	74.00	-21.85	Peak	
2 *	11558.8000	30.27	11.10	41.37	54.00	-12.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

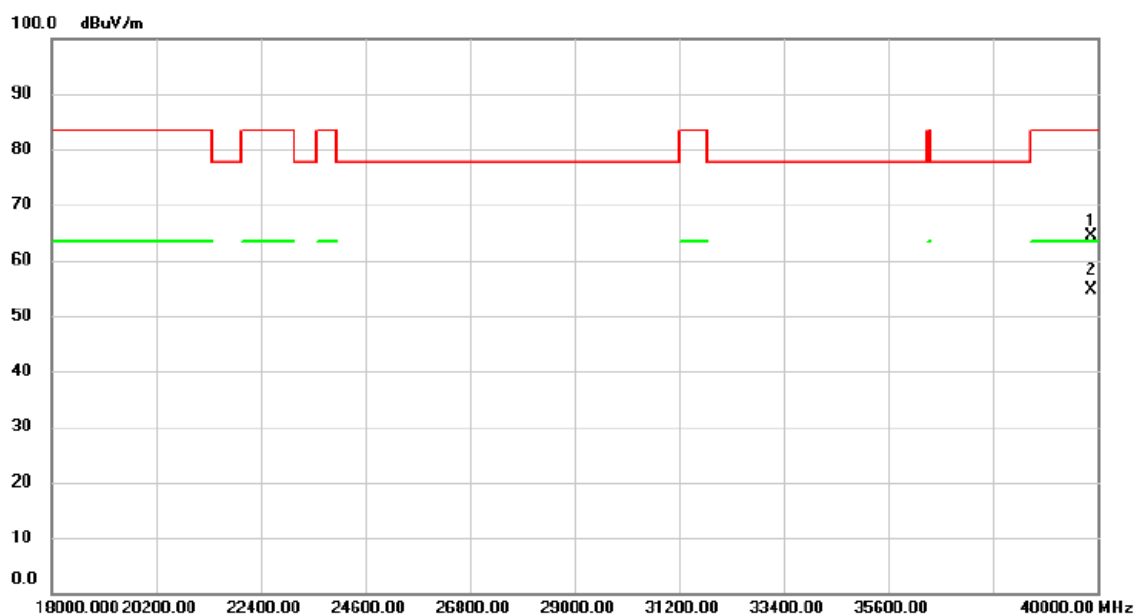


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		39868.000	48.53	15.89	64.42	83.50	-19.08	peak	
2	*	39868.000	38.70	15.89	54.59	63.50	-8.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

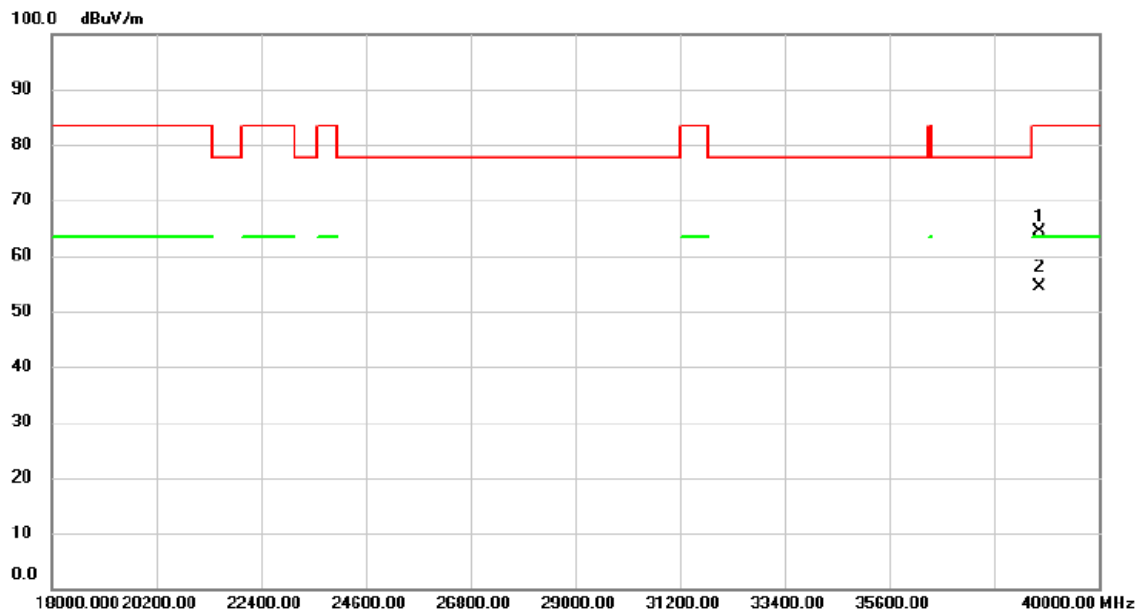

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		38746.000	50.20	14.16	64.36	83.50	-19.14	peak	
2	*	38746.000	40.15	14.16	54.31	63.50	-9.19	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Test Mode	UNII-1_TX A Mode
-----------	------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	22.680	16.738
40	5200	22.320	16.760
48	5240	19.200	16.576


CH36

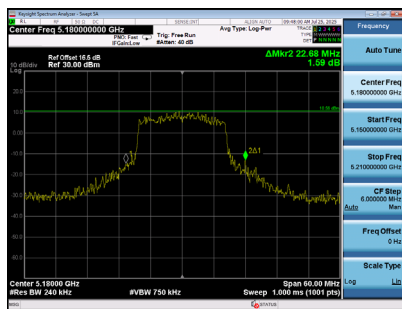




CH40
26 dB Bandwidth

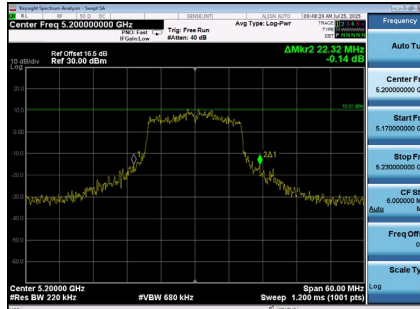

CH48

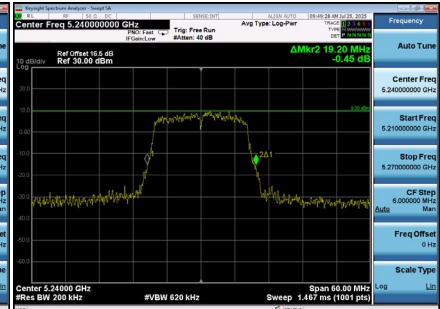


99 % Occupied Bandwidth

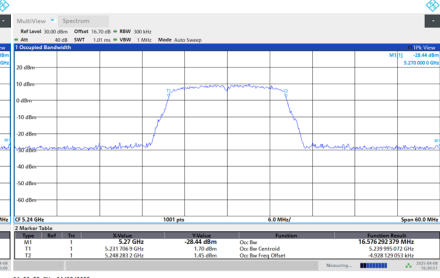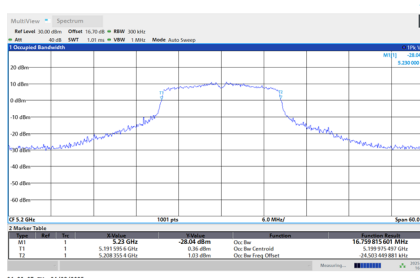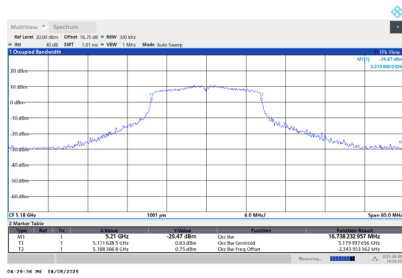


Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.360	17.775
40	5200	23.160	17.792
48	5240	19.920	17.644


CH36

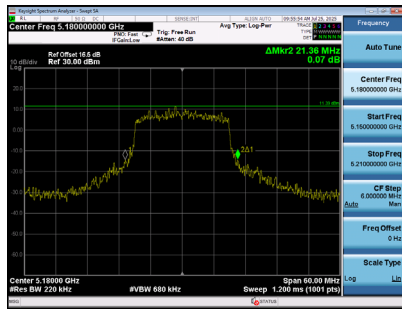




CH40
26 dB Bandwidth

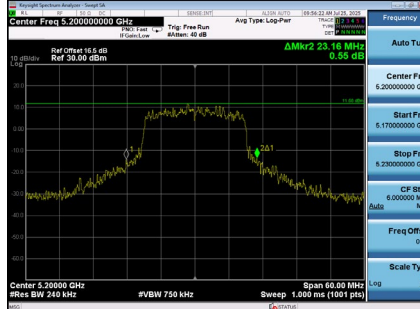

CH48

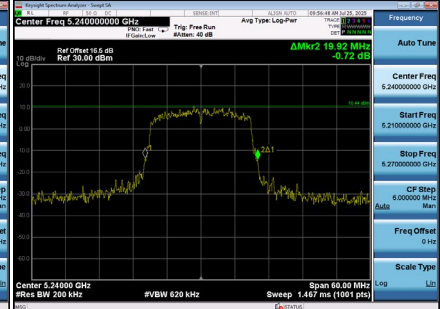


99 % Occupied Bandwidth

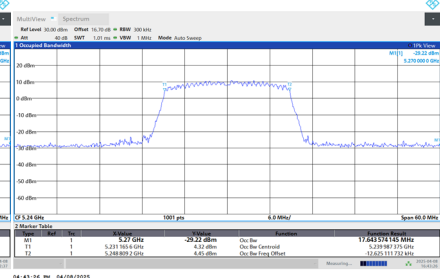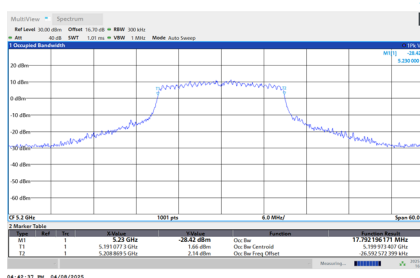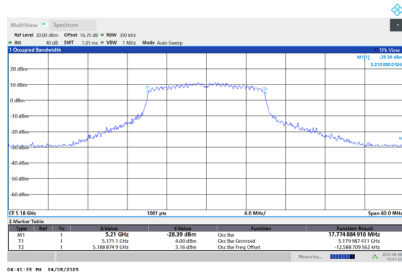

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	41.900	36.532
46	5230	39.500	36.262

CH38


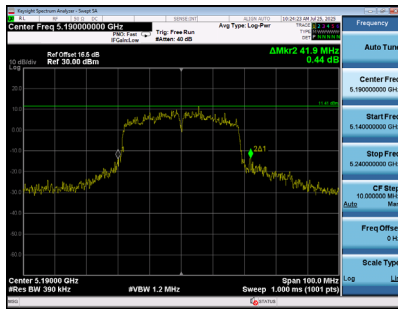


CH46

26 dB Bandwidth

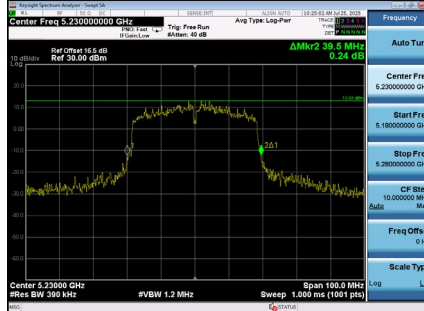

99 % Occupied Bandwidth

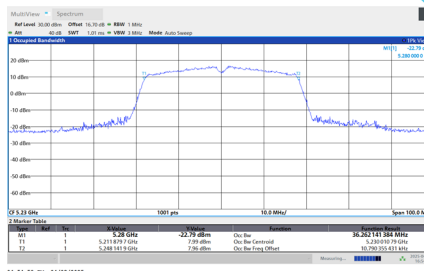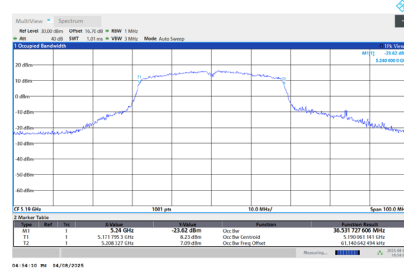


Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	80.800	75.499

CH42 26 dB Bandwidth




99 % Occupied Bandwidth

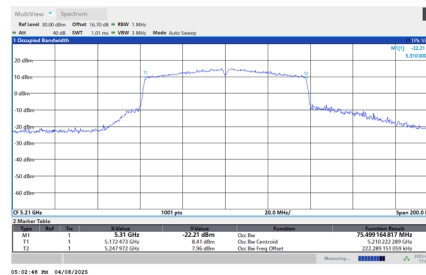

Test Mode	UNII-1_TX AX(HE20) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.420	19.013
40	5200	22.260	19.046
48	5240	19.560	18.832


CH36

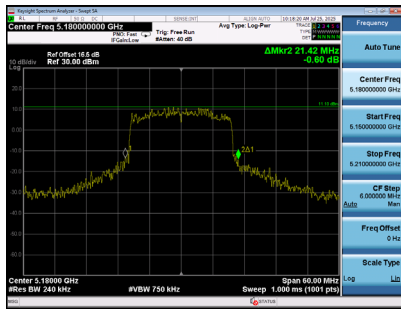




CH40
26 dB Bandwidth



CH48

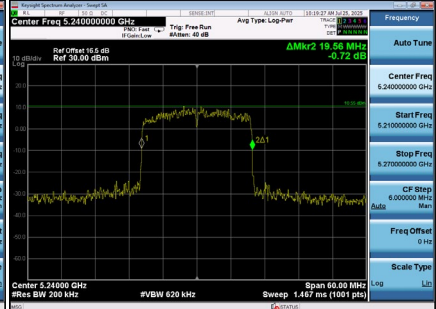


99 % Occupied Bandwidth

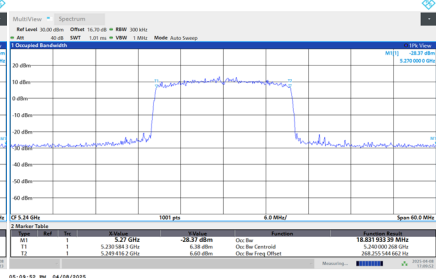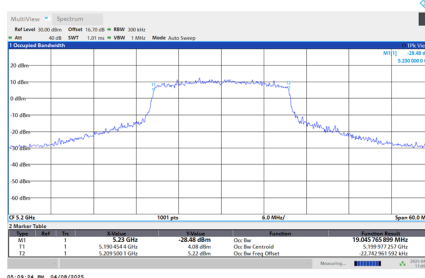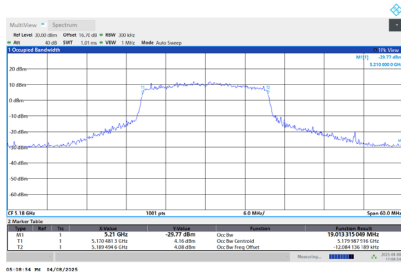


Test Mode	UNII-1_TX AX(HE40) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.300	37.776
46	5230	39.400	37.600

CH38

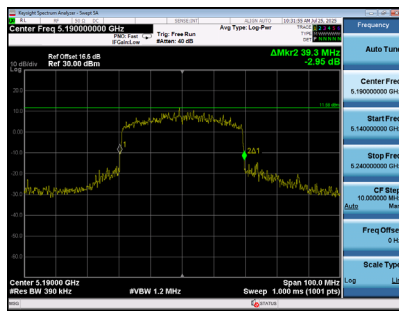

CH46
26 dB Bandwidth

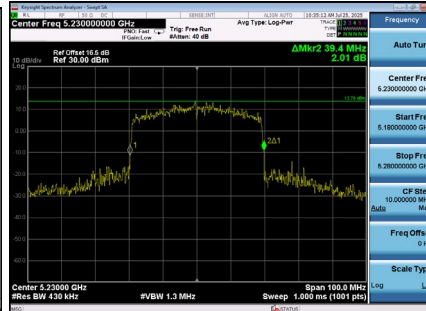


99 % Occupied Bandwidth




Test Mode	UNII-1_TX AX(HE80) Mode
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	84.400	77.083

CH42 26 dB Bandwidth

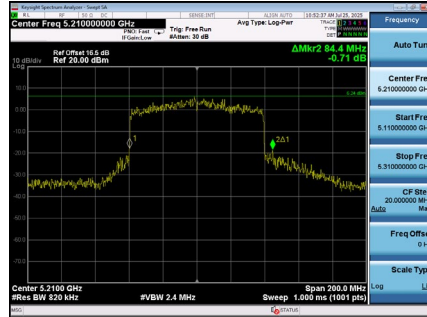


99 % Occupied Bandwidth

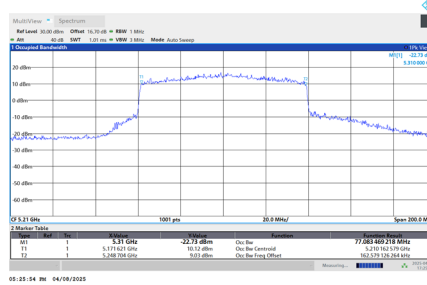


Test Mode	UNII-2A_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	18.480	16.644
60	5300	22.080	16.868
64	5320	21.900	16.891


CH52

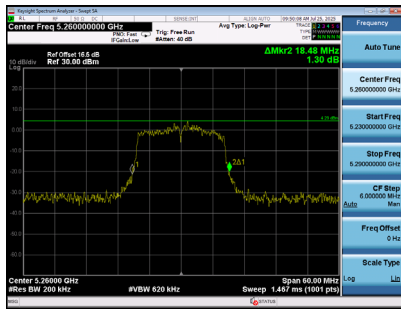




CH60
26 dB Bandwidth

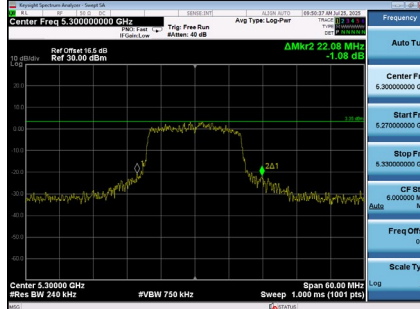

CH64

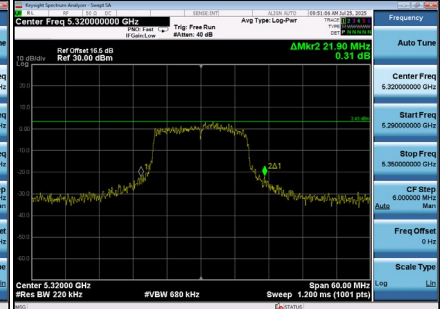


99 % Occupied Bandwidth

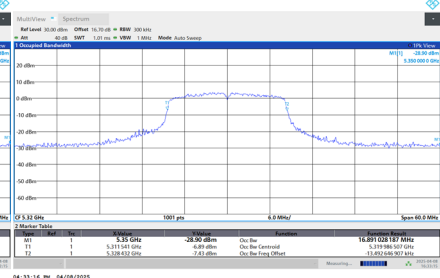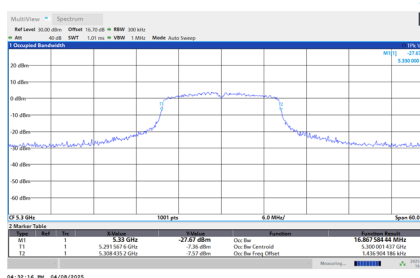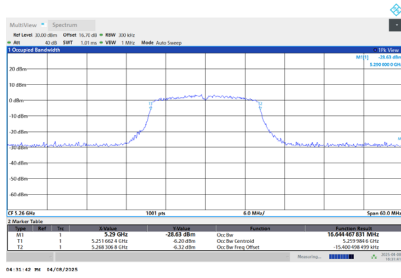


Test Mode	UNII-2A_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.220	17.714
60	5300	21.360	17.935
64	5320	22.260	17.892


CH52

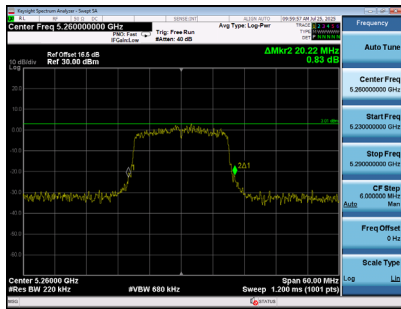




CH60
26 dB Bandwidth

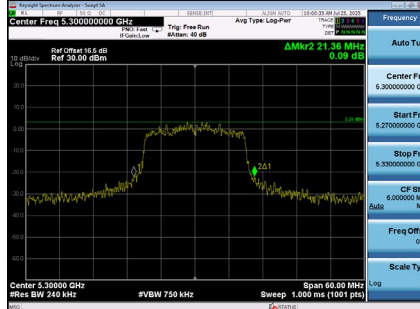

CH64

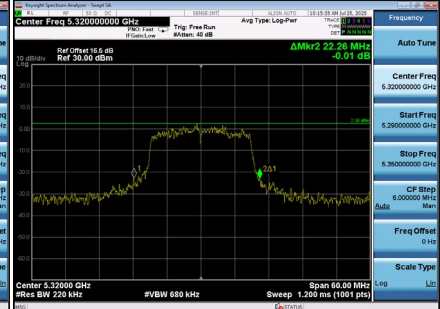


99 % Occupied Bandwidth

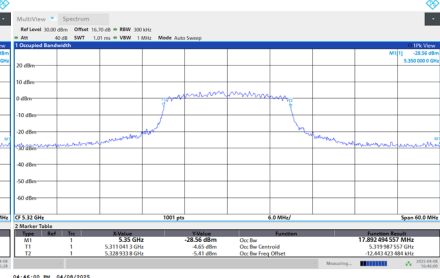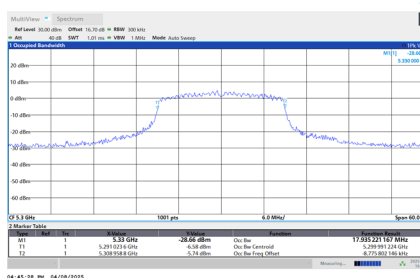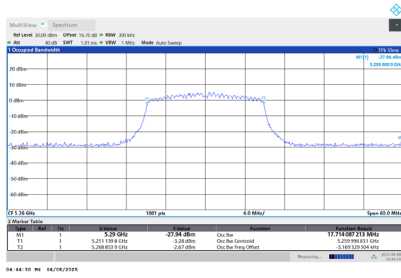


Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	38.500	36.371
62	5310	40.000	36.674


CH54

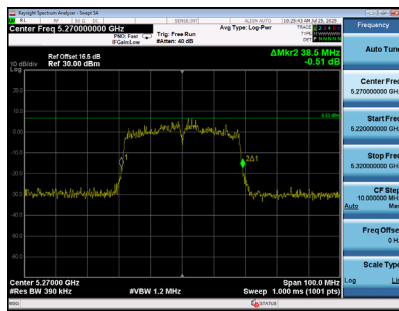

CH62
26 dB Bandwidth

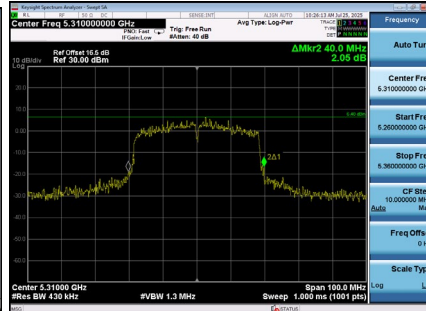


99 % Occupied Bandwidth

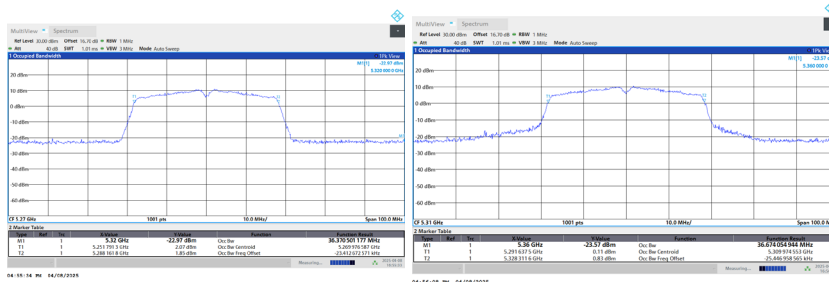


Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	84.400	75.403

CH58 26 dB Bandwidth

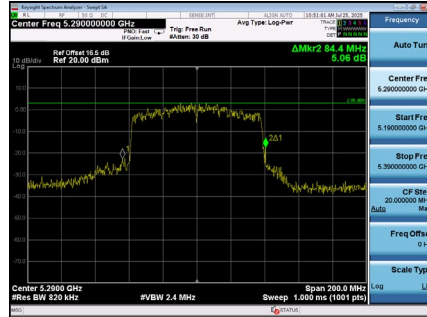


99 % Occupied Bandwidth

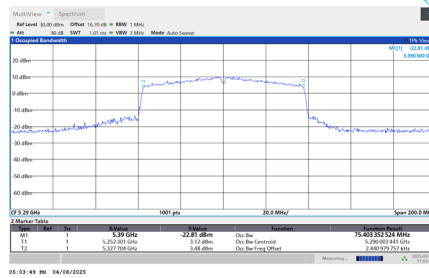


Test Mode	UNII-2A_TX AX(HE20) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	20.400	18.980
60	5300	21.840	19.092
64	5320	20.580	19.074


CH52

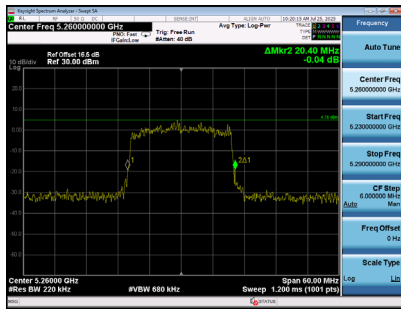




CH60
26 dB Bandwidth

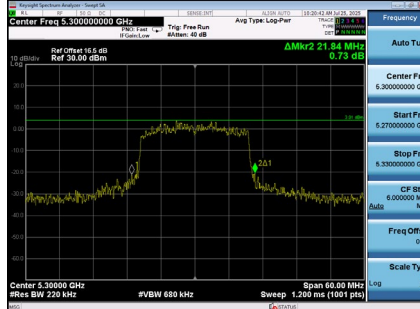

CH64

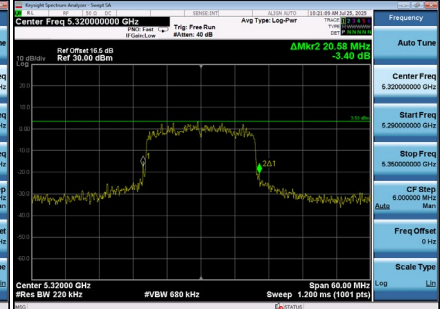


99 % Occupied Bandwidth

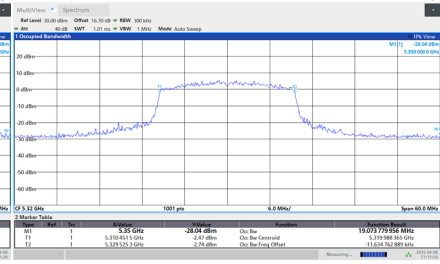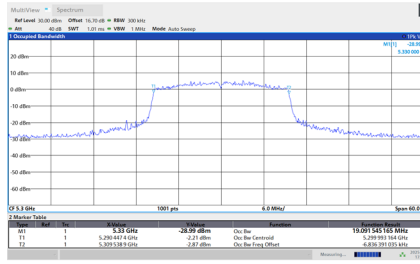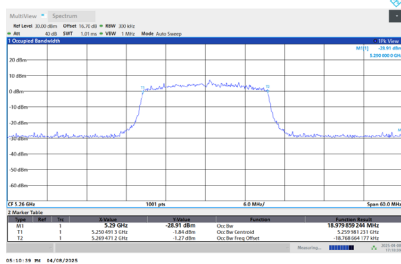


Test Mode	UNII-2A_TX AX(HE40) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.500	37.557
62	5310	41.000	37.881

CH54

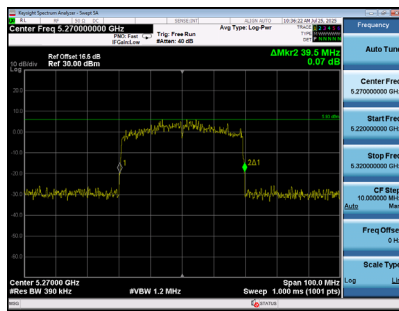

CH62
26 dB Bandwidth

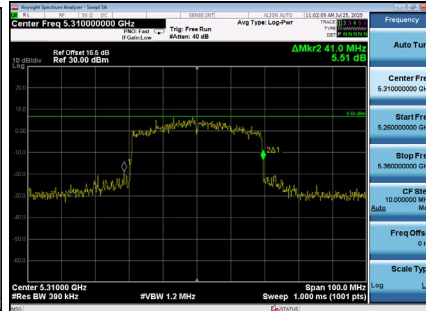


99 % Occupied Bandwidth




Test Mode	UNII-2A_TX AX(HE80) Mode
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	79.600	77.005

CH58 26 dB Bandwidth

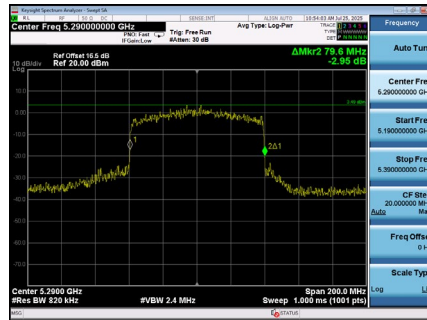


99 % Occupied Bandwidth

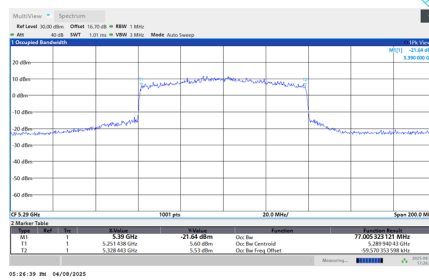


Test Mode	UNII-2C_TX A Mode
-----------	-------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	22.740	16.904
116	5580	19.680	16.635
140	5700	19.860	16.823


CH100

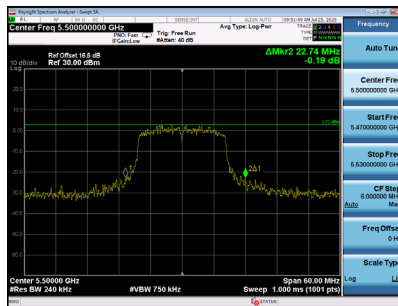




CH116
26 dB Bandwidth

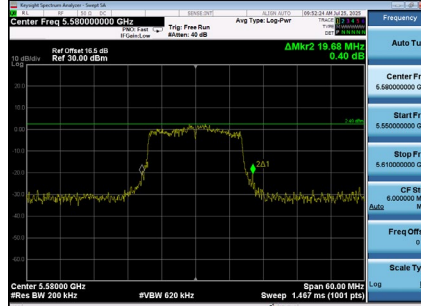

CH140

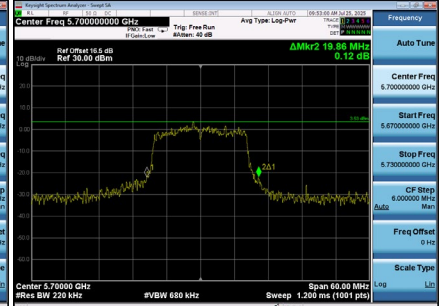


99 % Occupied Bandwidth

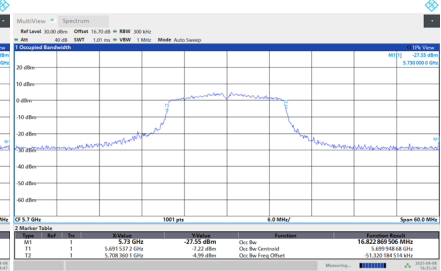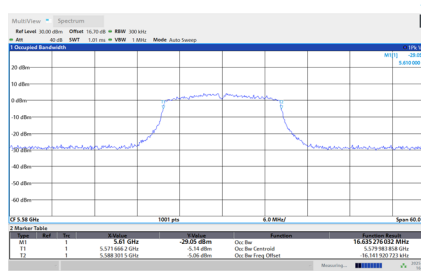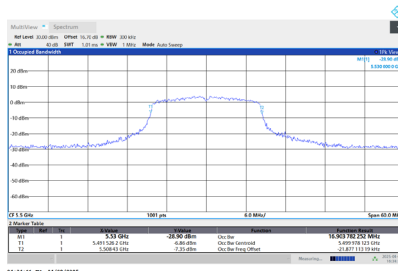


Test Mode	UNII-2C_TX AC(VHT20) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	22.440	17.907
116	5580	20.280	17.700
140	5700	22.380	17.833


CH100

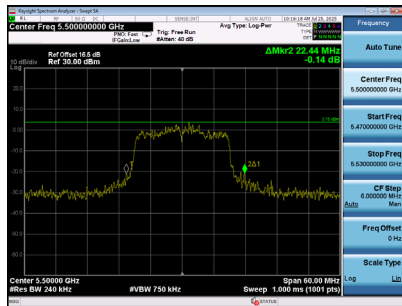

CH116
26 dB Bandwidth

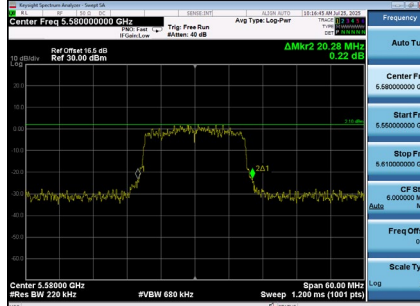

CH140

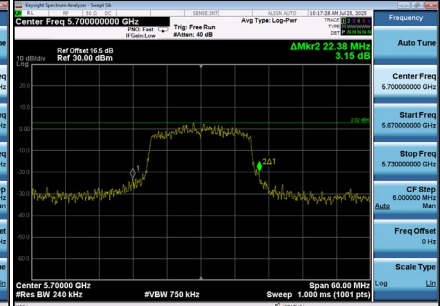

99 % Occupied Bandwidth

