



# TEST REPORT

**APPLICANT** : XINFENG 2D (FUJIAN)Material Technology Company LTD  
**PRODUCT NAME** : Air Purification Device  
**MODEL NAME** : 4E25959G01  
**BRAND NAME** : N/A  
**FCC ID** : 2A2HR-4E25959G01  
**STANDARD(S)** : 47 CFR Part 15 Subpart B  
**RECEIPT DATE** : 2022-05-12  
**TEST DATE** : 2022-05-12  
**ISSUE DATE** : 2022-06-20

Edited by:

A handwritten signature in black ink that reads "Yaming Luo".

Yaming Luo

Approved by:

A handwritten signature in black ink that reads "Anne Liu".

Anne Liu

**NOTE:** This report is issued by Morlab and may not be copied without written permission from Morlab. The test results in this report are only applicable to specific samples and specific tests. The information in this report can be verified and confirmed on our website.



## DIRECTORY

<b>1. Technical Information .....</b>	<b>3</b>
<b>1.1. Applicant and Manufacturer Information .....</b>	<b>3</b>
<b>1.2. Equipment Under Test (EUT) Description .....</b>	<b>3</b>
<b>2. Test Results .....</b>	<b>4</b>
<b>2.1. Applied Reference Documents .....</b>	<b>4</b>
<b>2.2. EUT Setup and Operating Conditions .....</b>	<b>5</b>
<b>3. 47 CFR Part 15 Subpart B Requirements .....</b>	<b>6</b>
<b>3.1. Conducted Emission .....</b>	<b>6</b>
<b>3.2. Radiated Emission .....</b>	<b>10</b>
<b>Annex A Test Uncertainty .....</b>	<b>15</b>
<b>Annex B Testing Laboratory Information .....</b>	<b>16</b>
<b>Annex C FCC Statements .....</b>	<b>17</b>
<b>Annex D Matters needing attention .....</b>	<b>18</b>

Change History		
Version	Date	Reason for change
1.0	2022-06-20	First edition



## 1. Technical Information

**Note:** Provided by applicant.

### 1.1. Applicant and Manufacturer Information

<b>Applicant:</b>	XINFENG 2D (FUJIAN)Material Technology Company LTD
<b>Applicant Address:</b>	1311 Nanhuan Road, Shangcun Community, Changtai Street, Licheng District, Quanzhou, Fujian Province
<b>Manufacturer :</b>	XINFENG 2D (FUJIAN)Material Technology Company LTD
<b>Manufacturer Address :</b>	1311 Nanhuan Road, Shangcun Community, Changtai Street, Licheng District, Quanzhou, Fujian Province

### 1.2. Equipment Under Test (EUT) Description

<b>EUT Type:</b>	Air Purification Device
<b>Serial No:</b>	(N/A, marked #1 by test site)
<b>Model Name:</b>	4E25959G01
<b>Hardware Version:</b>	N/A
<b>Software Version:</b>	N/A

**Note:**

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



## 2. Test Results

### 2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination /Remark
1	15.107	Conducted Emission	2022.05.12	Qijie Xiao	PASS	No deviation
2	15.109	Radiated Emission	2022.05.12	Qijie Xiao	PASS	No deviation

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.



## 2.2. EUT Setup and Operating Conditions

Frequency range was investigated: Conducted emission test: from 150kHz to 30MHz; Radiated emission test: from 30MHz to 1000MHz.

Test Item
<b>Radiated Emission</b>
Mode 1 : EUT ON
<b>Conducted Emission</b>
Mode 1 : EUT ON

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106



## 3. 47 CFR Part 15 Subpart B Requirements

### 3.1. Conducted Emission

#### 3.1.1. Requirement

According to FCC section 15.107, except for a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms LISN.


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

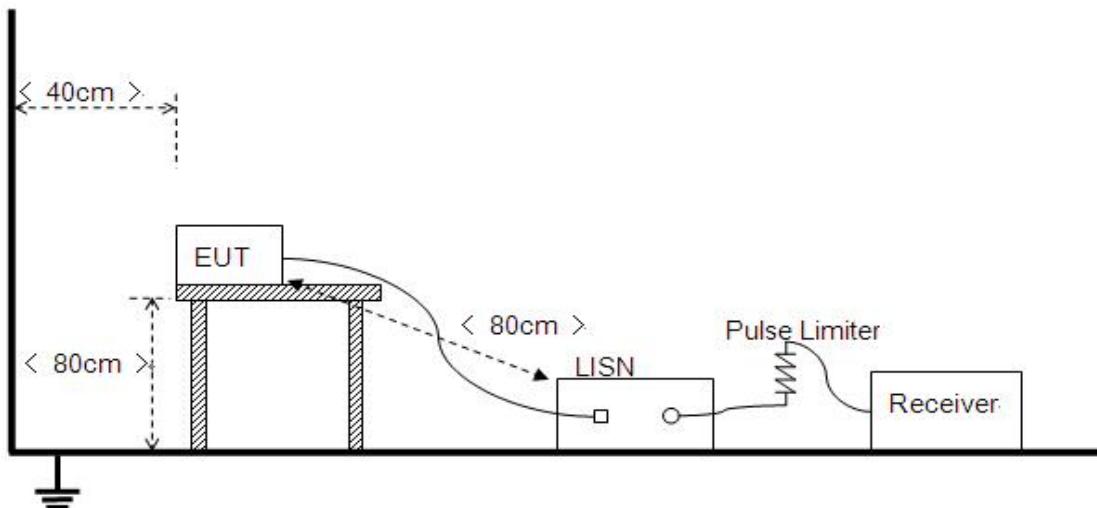


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.


Measurement bandwidth (RBW) for 150kHz to 30 MHz: 9 kHz.

### 3.1.3. Test Results

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

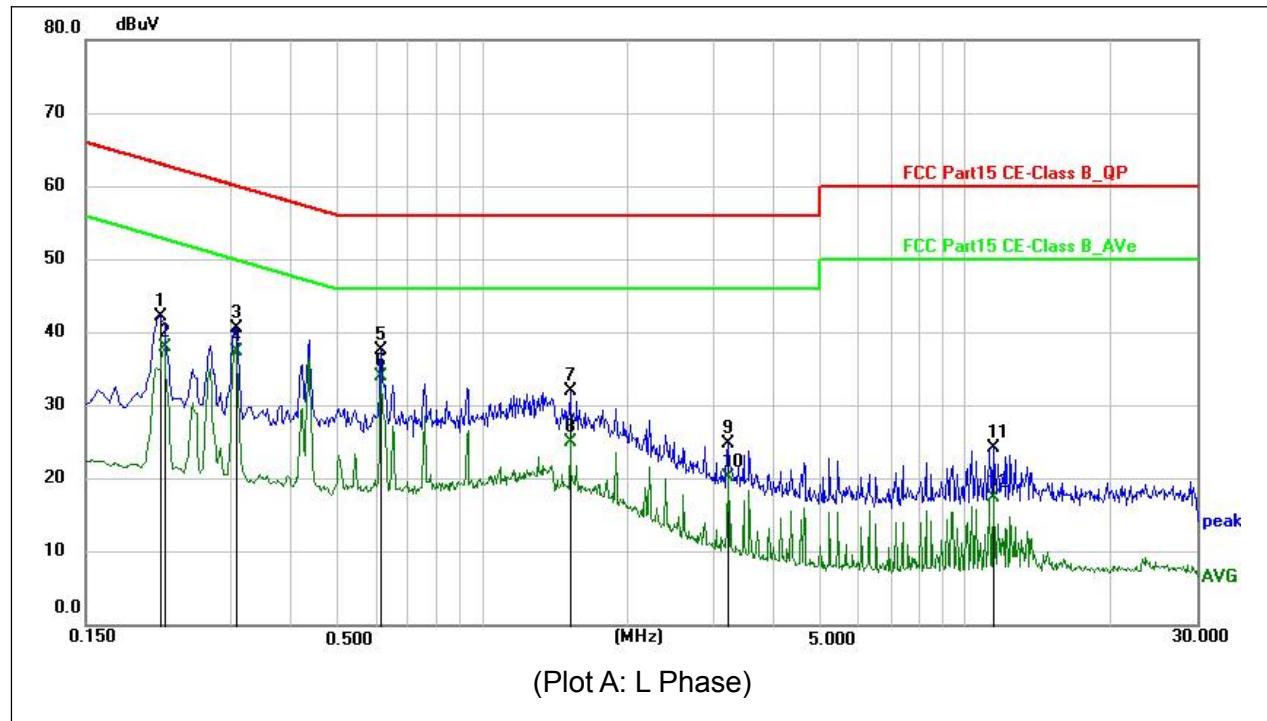**A. Test Plot and Suspicious Points:**
**Test Mode 1:**


Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark	Verdict
0.213000	32.25	10.01	42.26	63.09	-20.83	peak	PASS
0.217500	27.92	10.01	37.93	52.91	-14.98	AVG	PASS
0.307500	30.60	10.01	40.61	60.04	-19.43	peak	PASS
0.307500	27.33	10.01	37.34	50.04	-12.70	AVG	PASS
0.613500	27.52	10.01	37.53	56.00	-18.47	peak	PASS
0.613500	24.06	10.01	34.07	46.00	-11.93	AVG	PASS
1.518000	21.92	10.01	31.93	56.00	-24.07	peak	PASS
1.518000	15.04	10.01	25.05	46.00	-20.95	AVG	PASS
3.214500	14.67	10.15	24.82	56.00	-31.18	peak	PASS
3.214500	10.05	10.15	20.20	46.00	-25.80	AVG	PASS
11.409000	13.94	10.35	24.29	60.00	-35.71	peak	PASS
11.409000	7.05	10.35	17.40	50.00	-32.60	AVG	PASS

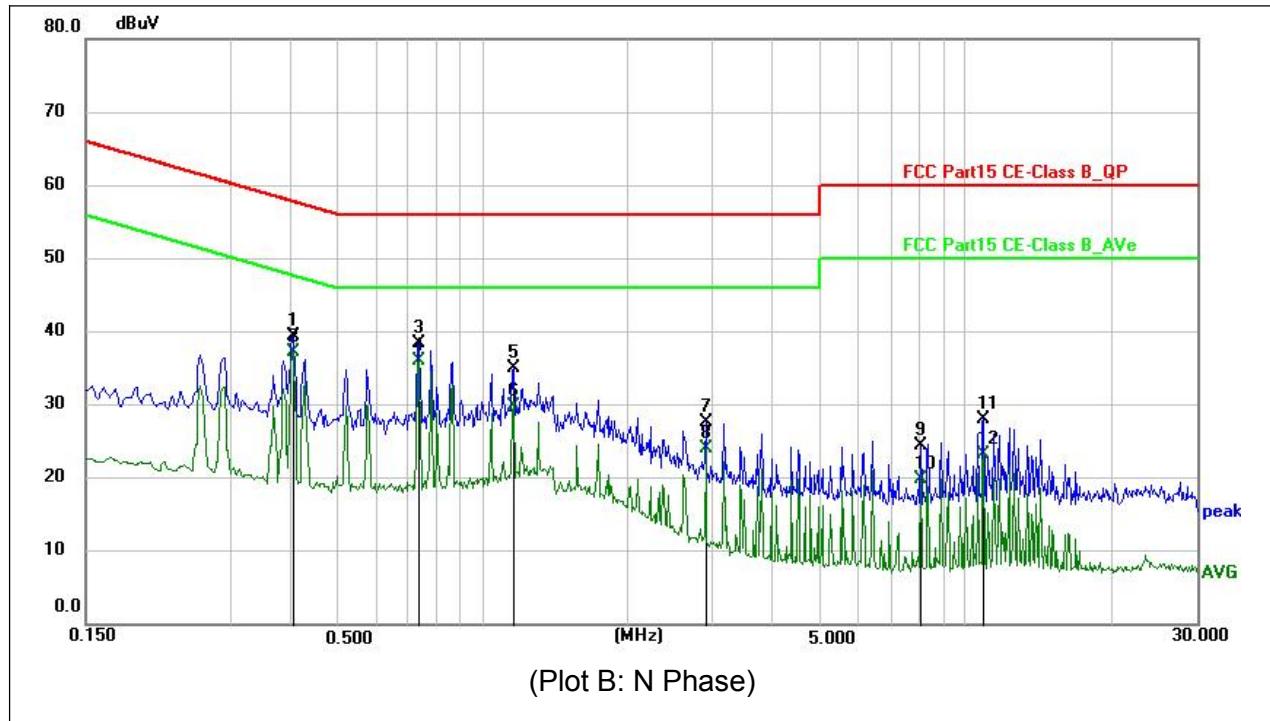

Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark	Verdict
0.402000	29.36	10.01	39.37	57.81	-18.44	peak	PASS
0.402000	27.26	10.01	37.27	47.81	-10.54	AVG	PASS
0.735000	28.38	10.01	38.39	56.00	-17.61	peak	PASS
0.735000	25.96	10.01	35.97	46.00	-10.03	AVG	PASS
1.153500	25.03	10.01	35.04	56.00	-20.96	peak	PASS
1.153500	19.88	10.01	29.89	46.00	-16.11	AVG	PASS
2.890500	17.50	10.13	27.63	56.00	-28.37	peak	PASS
2.890500	13.93	10.13	24.06	46.00	-21.94	AVG	PASS
8.047500	14.09	10.34	24.43	60.00	-35.57	peak	PASS
8.047500	9.47	10.34	19.81	50.00	-30.19	AVG	PASS
10.851000	17.65	10.35	28.00	60.00	-32.00	peak	PASS
10.851000	12.83	10.35	23.18	50.00	-26.82	AVG	PASS



## 3.2. Radiated Emission

### 3.2.1. Requirement

According to FCC section 15.109 (a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength Limitation at 3m Measurement Distance	
	( $\mu$ V/m)	(dB $\mu$ V/m)
30.0 - 88.0	100	40
88.0 - 216.0	150	43.5
216.0 - 960.0	200	46
Above 960.0	500	53.9

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB $\mu$ V/m is calculated by 20log Emission Level( $\mu$ V/m).

### 3.2.2. Frequency range of measurement


According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705 .....	30.
1.705-108 .....	1000.
108-500 .....	2000.
500-1000 .....	5000.
Above 1000 .....	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

The frequency range from 30MHz to 1000MHz is investigated.

### 3.2.3. Test Setup

For radiated emissions from 30MHz to 1GHz

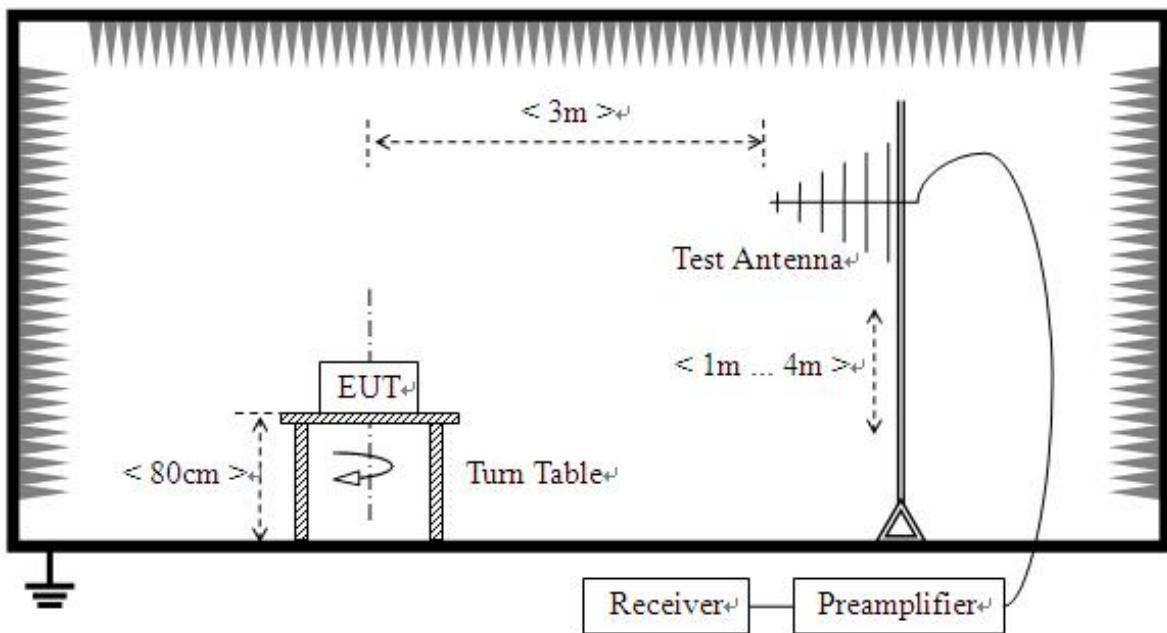

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasipeak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency




above 1GHz.

4. All modes of operation were investigated and the worst-case emissions are reported.

### 3.2.4. Test Results


The maximum radiated emission is searched using PK, QP detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

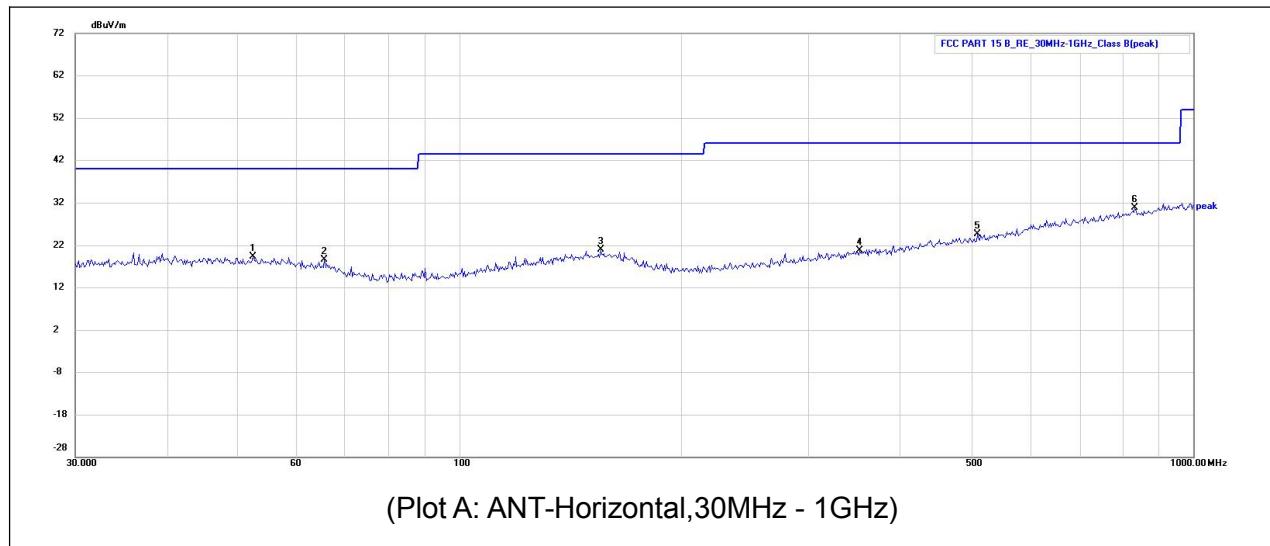**Test Mode 1:**

Frequency (MHz)	Reading (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Verdict
52.391	5.68	13.66	19.34	40.00	-20.66	peak	PASS
65.573	6.60	12.08	18.68	40.00	-21.32	peak	PASS
155.910	5.89	15.04	20.93	43.50	-22.57	peak	PASS
351.708	5.29	15.49	20.78	46.00	-25.22	peak	PASS
508.258	5.89	18.77	24.66	46.00	-21.34	peak	PASS
833.317	6.85	24.04	30.89	46.00	-15.11	peak	PASS



REPORT No. : XM22060031E01

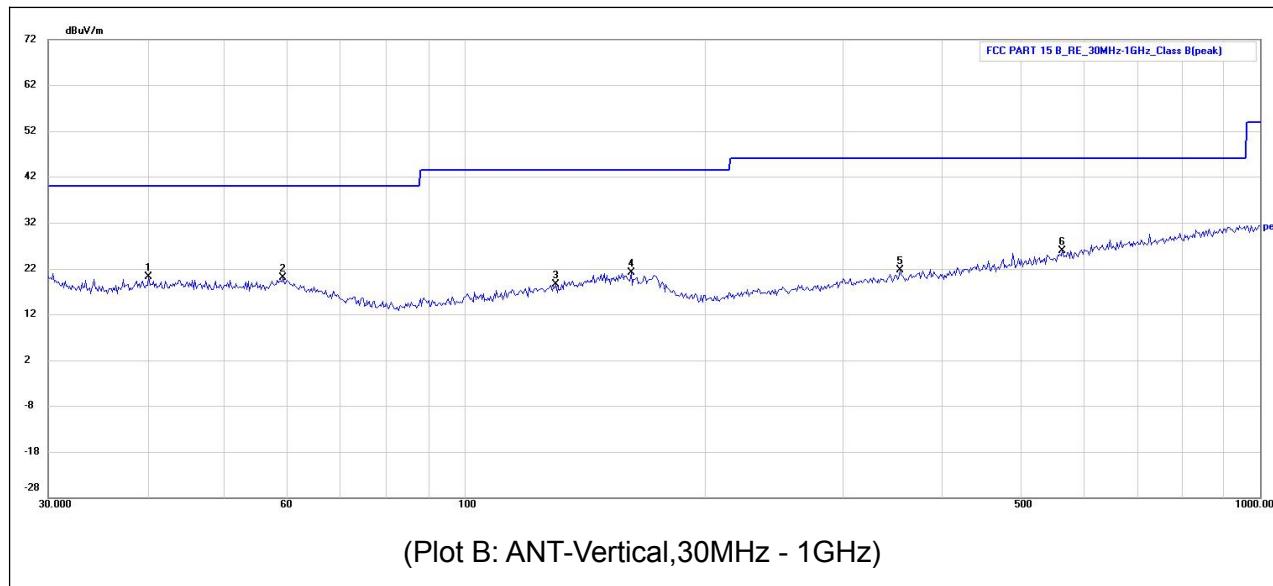

Frequency (MHz)	Reading (dBuV)	Correction Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Verdict
40.135	5.98	14.25	20.23	40.00	-19.77	peak	PASS
59.232	6.85	13.18	20.03	40.00	-19.97	peak	PASS
130.379	4.95	13.60	18.55	43.50	-24.95	peak	PASS
162.041	6.37	14.85	21.22	43.50	-22.28	peak	PASS
352.943	6.17	15.53	21.70	46.00	-24.30	peak	PASS
564.639	6.06	19.87	25.93	46.00	-20.07	peak	PASS



## Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

### Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2U <sub>c</sub> (y))	150kHz-30MHz	±2.61dB
---	--------------	---------

### Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2U <sub>c</sub> (y))	30MHz-200MHz	±3.66dB
	200MHz-1000MHz	±3.87dB



## Annex B Testing Laboratory Information

### 1. Identification of the Responsible Testing Laboratory

<b>Laboratory Name:</b>	Xiamen Morlab Communications Technology Co., Ltd.
<b>Laboratory Address:</b>	Unit 235-253, No.4 Gaodian Road, Xiamen Area, Pilot Free Trade Zone (Fujian) , P. R. China
<b>Telephone:</b>	+86 592 5612050
<b>Facsimile:</b>	+86 592 5612095

### 2. Identification of the Responsible Testing Location

<b>Name:</b>	Kehu-Morlab Test Laboratory
<b>Address:</b>	Unit 101, No.1732 Gangzhong Road, Xiamen Area, Pilot Free Trade Zone (Fujian) , P. R. China

### 3. Accreditation Certificate

<b>Accredited Testing Laboratory:</b>	The FCC designation number is CN1249. ( Kehu-Morlab Test Laboratory )
---------------------------------------	--

### 4. Test Equipment Utilized

#### List of Software Used

No.	Model	Version Number	Producer	Test Item
1	EMC 32	V10.00.00	R&S	RE
2	EMC 32	V10.20.01	R&S	CE

#### Conducted Emission Test Equipments

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Due Date
1	EMI Receiver	102174	ESR3	R&S	2023.03.14
2	LISN	101338	ENV432	R&S	2023.03.08

#### Radiated Test Equipments

No.	Equipment Name	Serial No.	Model No.	Manufacturer	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	ETS-Lindgren	2024.07.19
2	Receiver	101799	ESR7	R&S	2023.03.14
3	Linear Log Periodic Broad Band Antenna	949	VULB 9163	Schwarzbeck	2023.09.22



## Annex C FCC Statements

### Information to Users

According to the FCC Part 15.19,15.21, and 15.105 rules, for this EUT, the instructions or operation manual furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

### FCC Caution

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## Annex D Matters needing attention

1. The report is invalid without the seal of the testing unit.
2. The report is invalid without the signature of the author and signing person.
3. The altered report is invalid.
4. If you have any objection to the test report, please raise it to the testing unit within 15 days from the date of receiving the report.
5. "P" means "test results meet requirements", "F" means "test results do not meet requirements", "N/A" means "requirements do not apply to the product", "/" means "not tested".
6. "\*" means that the project is not recognized by CNAS/CMA.(This description only applies to CNAS/CMA seal).

————— END OF REPORT —————