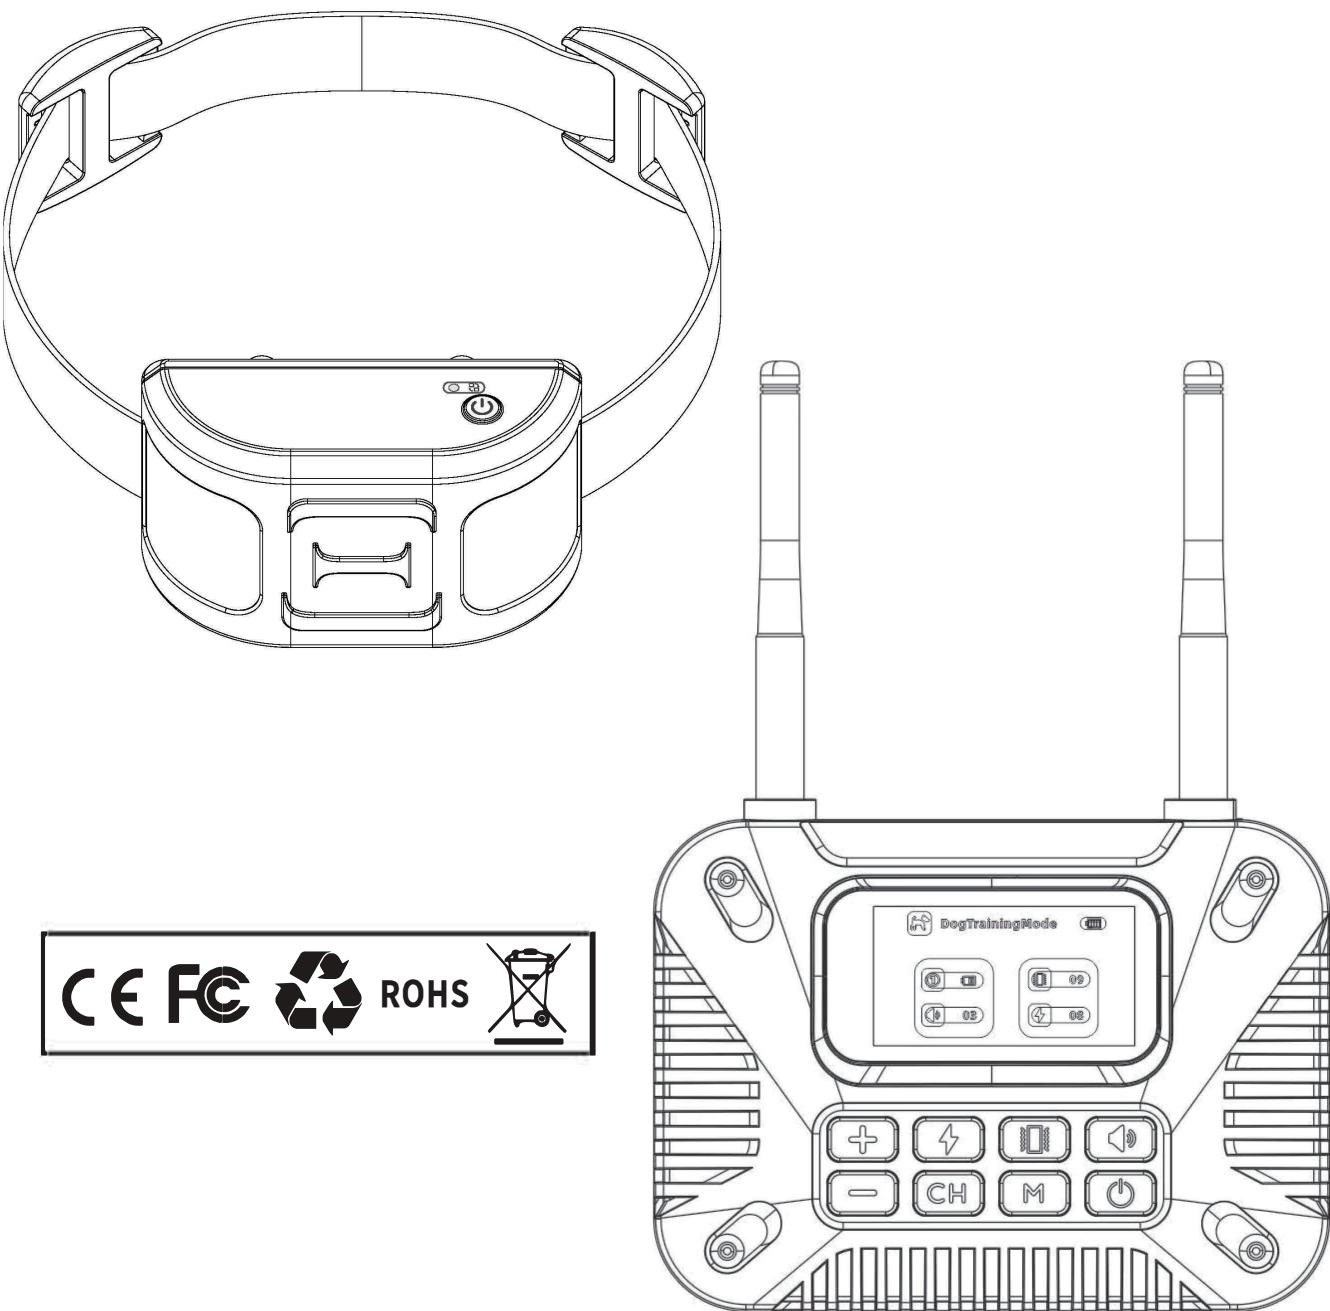


User Manual

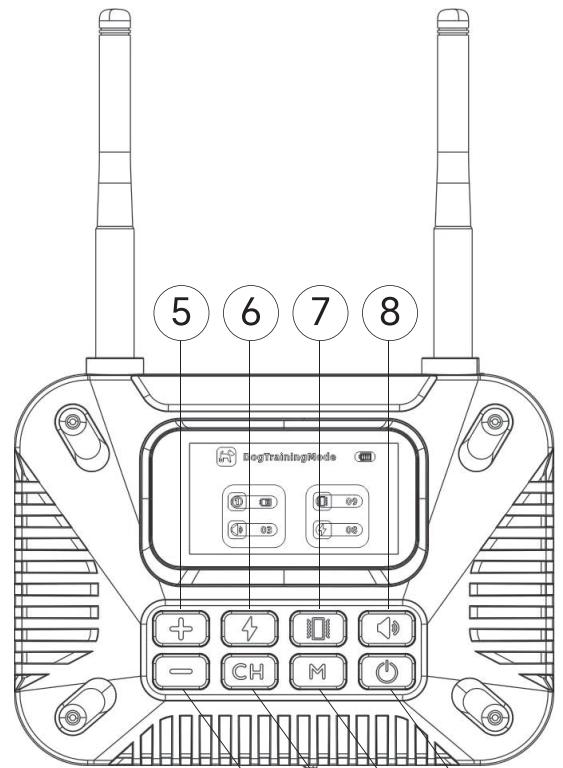
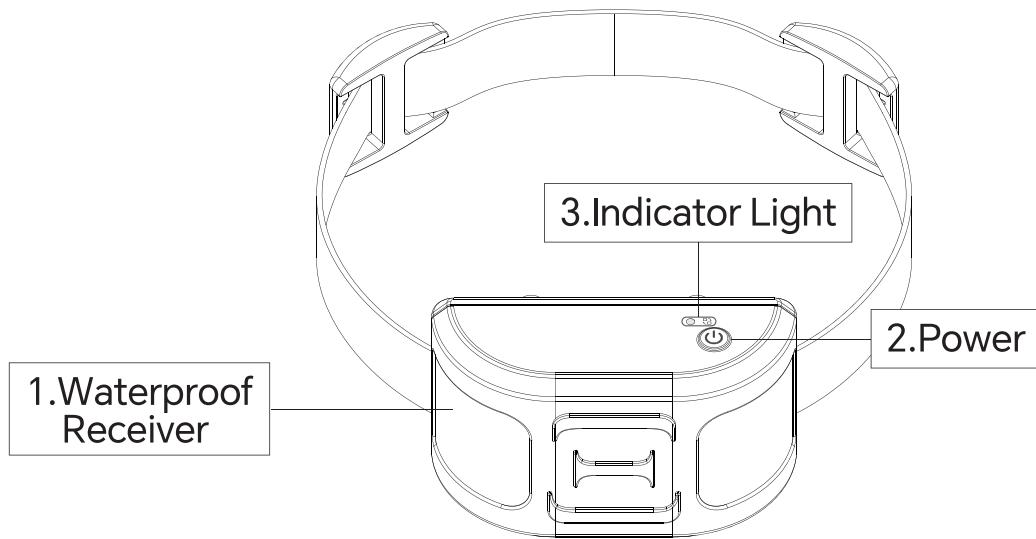
2-in-1 wireless electronic fence and dog trainer



Introduction

2 in 1 Wireless Training System combines the functions of wireless dog fence system and remote control dog training function. Our system adopts the most advanced technology with 2.4GHz signal source which is much more accurate and stable than any other old versions in the market. The biggest available radius can reach up to approximately 800 feet which can meet most requirements of Pet training applications.

Package content



- 1. Waterproof Receiver
- 2. Mode button
- 3. Channel
- 4. Decrease
- 5. Increase
- 6. Shock
- 7. Vibration
- 8. Beep

Work principle

Remote Dog Training Mode

Under this mode, user can train the dogs(up to 3 dogs) manually.

Press shock/ vibration/speaker button to send different punishments to corresponding dog via every single channel.

Wireless Dog Fence Mode

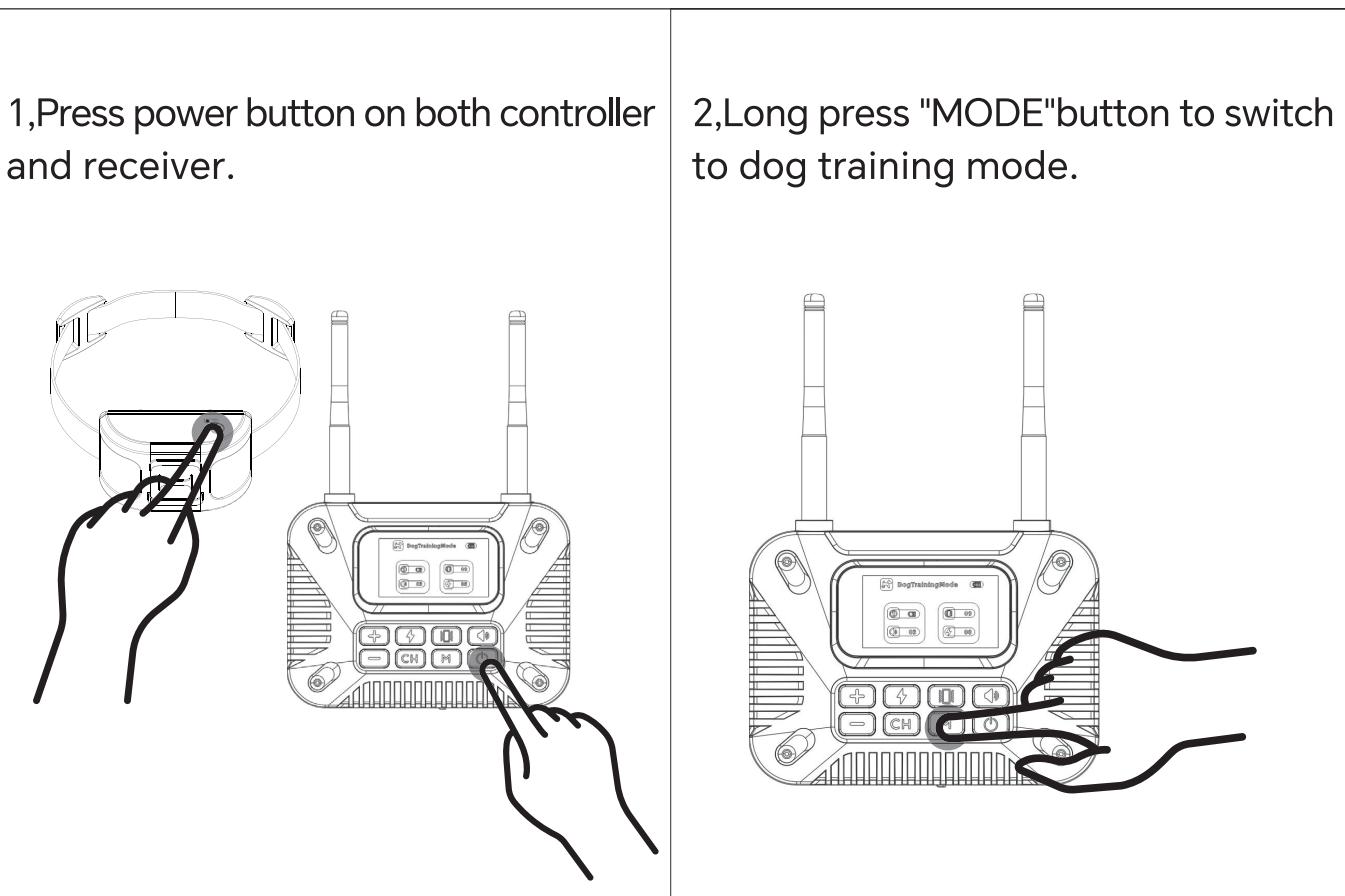
Under this mode, user can set a certain radius distance from controller to receiver for your dogs. Once the dogs get out of it, the fence system would trigger sound/shock/vibration to dogs as what user set up. punishment get stop if the dogs get back to the circle. The radius distance is adjustable from 30 feet/100-feet/....to 800 feet for level 1 to level 100.

Operate Illustration

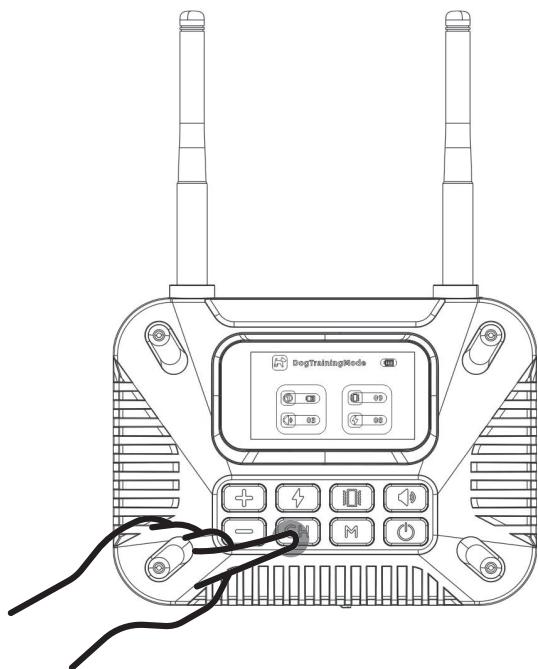
Pre-Setting

1, Pairing

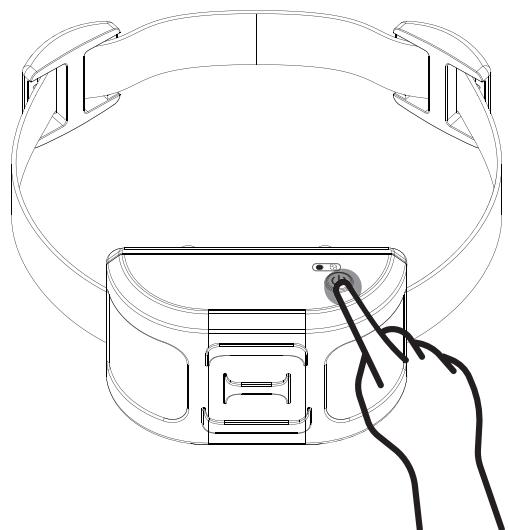
No pairing is required between the controller and receiver when user receives the product since it has been paired by producer.



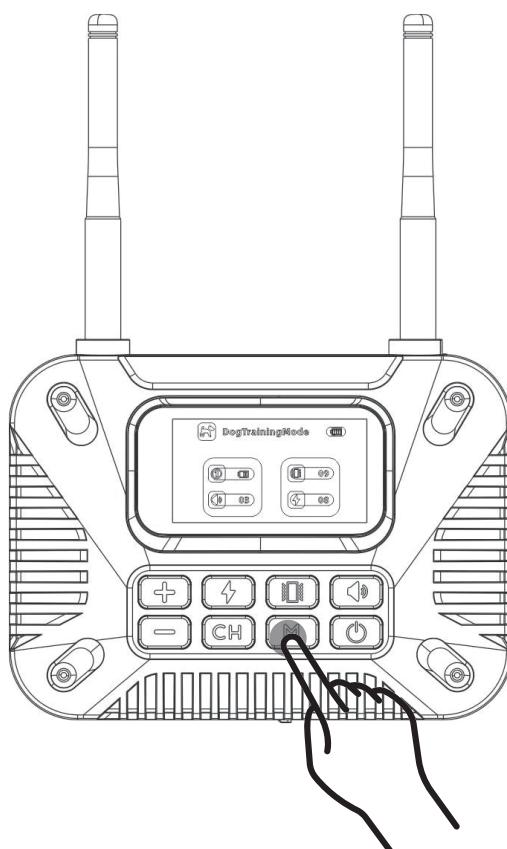
3,Press "CH"button to select channel (1,2,3 display on screen).



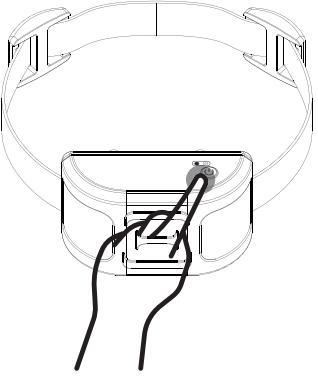
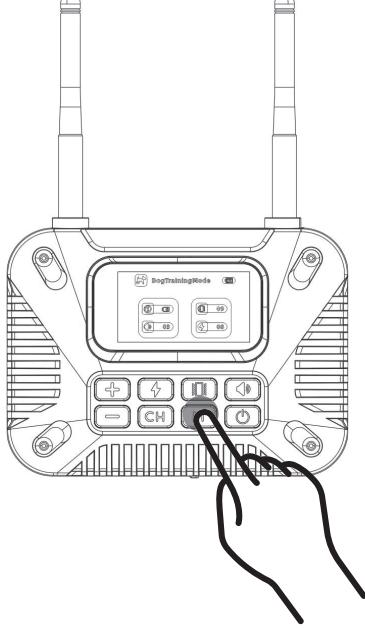
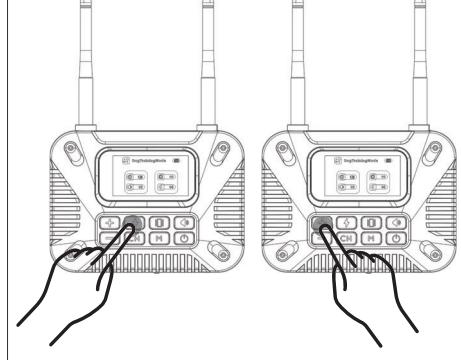
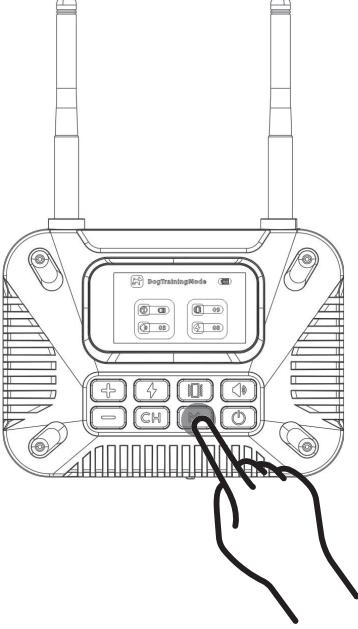
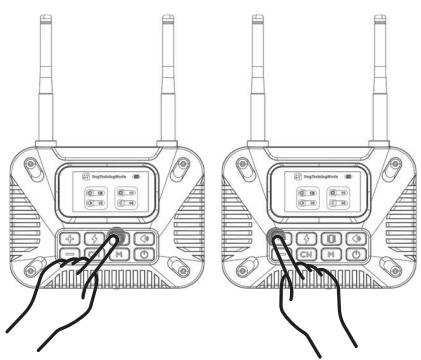
4, press receiver power button and hold on till hear the sound"Di~"from both receiver and controller. Pairing success.



5,Press "MODE"button and select another channel and operate as above....



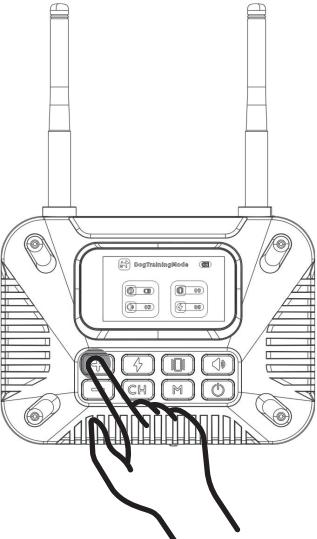
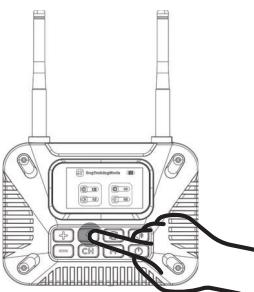
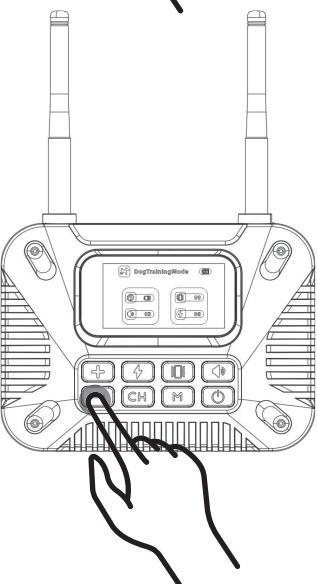
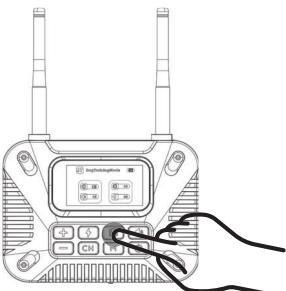
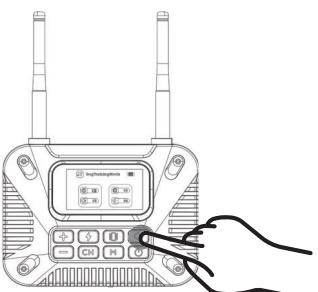
2, Intensity Adjustment

Step 1	Step 2	Step 3
<p>Ensure controller and all receiver is power on and pairing successfully. Or the receiver can not memorize the adjustment.</p> 	<p>Switch to Remote dog training Mode (the signal symbol stop flashing)</p> 	<p>Press shock button then press "+" "↑" to adjust shock intensity. The intensity level display on screen changed (level0 to level9), level 0 means no shock.</p> 
		<p>Press vibration button then press "+" "□" to adjust shock intensity. The intensity level display on screen changed (level0 to level9), level 0 means no vibration.</p> 

Remote Dog Training Mode

Remote training mode is to train the dog manually. user can press shock/vibration/speaker button to send different punishments to corresponding dog via every single channel.

Operate procedure:

Step 1	Step 2	Step 3
Press Mode button switch to "Remote dog training mode" (under this mode, the signal symbol stop flashing)	Press "+" "-" button to select the dog(the number display on the screen)	Press shock button to send shock
		
		Press vibration button to send vibration
		
		Press speaker button to send sound
		

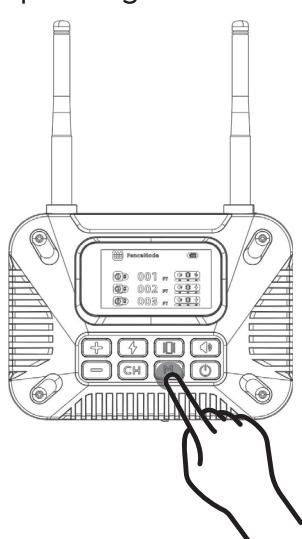
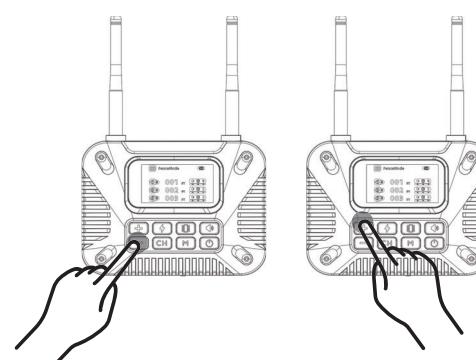
Wireless Dog Fence Mode

User can set a certain radius distance from controller to receiver for your dogs then put the receiver collar around the dog's neck as tight as possible to let the conductive silicone point contact the skin of the dog. Once the dogs get out of it, the fence system would trigger sound/shock/vibration to remind the dogs. After

a period of training, the dogs stay inside the circle consciously. The radius distance can be adjusted from 30 feet to 800 feet.

The intensity for both shock and vibration is the same with what it is under "remote dog training mode" . If user want to adjust the intensity, just need to operate as "Intensity adjustment" in "Pre-Setting" chapter.

Operate procedure:

Step 1	Step 2
<p>Press Mode button to switch to "Wireless Dog Fence Mode".(under this mode, the signal symbol keep flshing)</p> 	<p>Pres "+" or "-" to adjust proper radius distance from the controller to receiver depend practical situation. User would see the digit on screen from 1 to 100 which means the distance from 30 feet/ 100feet/....to 800 feet. Once the range set up, the wireless dog fence build up. Pet would be punished if they get out of it.</p> 

Working pattern:

USB charging DC 5V, 3.7V lithium battery 2500mah,battery icon on the LED screen will flash. When-charging.

The last red section will flash when battery is low.Full charge takes 4-5 hours for controller.

Receiver:

With power saving mode, the receiver can have a long battery life.

DC 5V,3.7V lithium battery 400mah. LED light will flash when the battery is low.It will need 2 hours for fully charge.

When the receiver is not working for 2 minutes, it will automatically switch to standby mode, and the indicator light will flash every 3 seconds during standby.

Remark

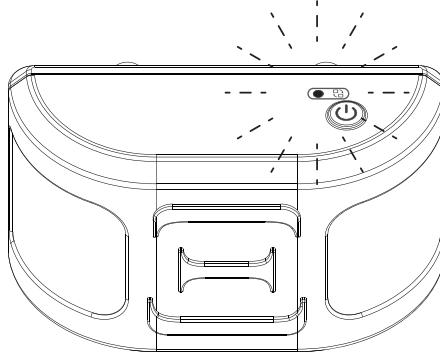
- 1,Please use this device in an open area, the controller should be placed 3 feet. Above ground at least to avoid barriers which will disturb radio signal.
- 2,Not recommended for aggressive dogs. DO NOT use this device if your dog is behav ing aggressively.
- 3,If you are not sure that if this device is right for your dog, please talk to your is behav narian or a certified dog trainer.
- 4,No more than 12 hours per day to wear the receiver collar.
- 5,If a rash or sore is found, stop using the collar until the skin is healed.
- 6,Always keep dog's neck clean.
- 7,Keep this device away from children.
- 8,This device is intended to use for dogs only.

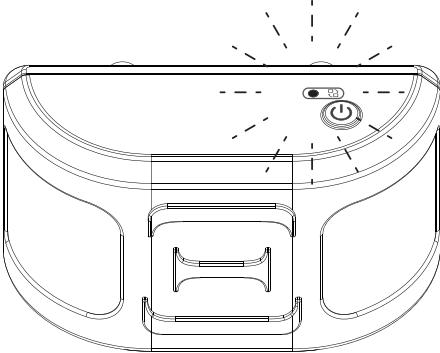
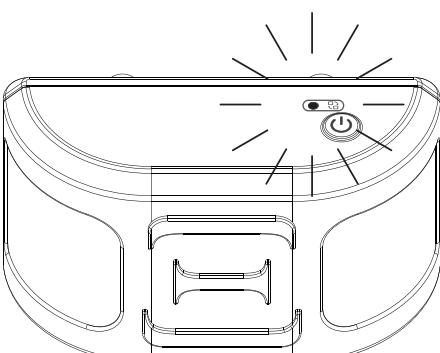
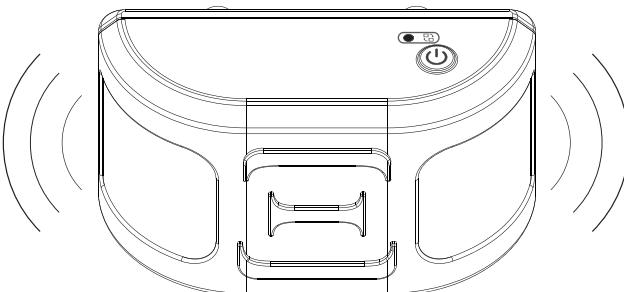
Specification:

Controller:

With original power saving signal output strategy, the controller can have a fairly long battery life.

The receive collar will not send any punishments when the dog is within the set range. When the dog is out of the set range, the receiving collar will work as follows:

	Work strategy
The first punishment	sound 1 sec+ vibration and electric shock 1 sec(synchronized work),the receiver flash with a red LED light. 

<p>The second punishment send at 2 second later after the first punishment finished.</p>	<p>Sound 1 sec+ vibration and electric shock for 2 seconds(synchronized work),the receiver flash with a red LED light.</p> 
<p>The third punishment send at 2 second later after the second punishment finished.</p>	<p>Sound 1 sec+ vibration and electric shock for 3 sec (synchronized work), the receiver lights up red LED light</p> 
<p>Further 10 minutes</p>	<p>Reminding the dog by sound</p> 

Once the dog return to the set range, the receiver will stop working.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction



Thank you so much for choosing our product.
Your satisfaction is always our first priority.
We hope you have a fabulous using experience.

