



Appendix E

RF Test Data for 5.8GWIFI (Conducted Measurement)

Product Name: OpenWrt One

Test Model: HW 24.03

Environmental Conditions

Temperature:	23.8° C
Relative Humidity:	52.1%
ATM Pressure:	100.0 kPa
Test Engineer:	Jay Luo
Supervised by:	Nick Peng



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



E.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant0	16.344	≥ 0.5	Pass
NVNT	a	5785	Ant0	16.331	≥ 0.5	Pass
NVNT	a	5825	Ant0	16.334	≥ 0.5	Pass
NVNT	n20	5745	Ant0	17.535	≥ 0.5	Pass
NVNT	n20	5785	Ant0	17.546	≥ 0.5	Pass
NVNT	n20	5825	Ant0	17.543	≥ 0.5	Pass
NVNT	n40	5755	Ant0	36.277	≥ 0.5	Pass
NVNT	n40	5795	Ant0	36.11	≥ 0.5	Pass
NVNT	ac20	5745	Ant0	17.554	≥ 0.5	Pass
NVNT	ac20	5785	Ant0	17.531	≥ 0.5	Pass
NVNT	ac20	5825	Ant0	17.569	≥ 0.5	Pass
NVNT	ac40	5755	Ant0	36.416	≥ 0.5	Pass
NVNT	ac40	5795	Ant0	36.042	≥ 0.5	Pass
NVNT	ac80	5775	Ant0	75.496	≥ 0.5	Pass
NVNT	ax20	5745	Ant0	17.538	≥ 0.5	Pass
NVNT	ax20	5785	Ant0	17.243	≥ 0.5	Pass
NVNT	ax20	5825	Ant0	17.258	≥ 0.5	Pass
NVNT	ax40	5755	Ant0	36.272	≥ 0.5	Pass
NVNT	ax40	5795	Ant0	36.303	≥ 0.5	Pass
NVNT	ax80	5775	Ant0	75.495	≥ 0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant0

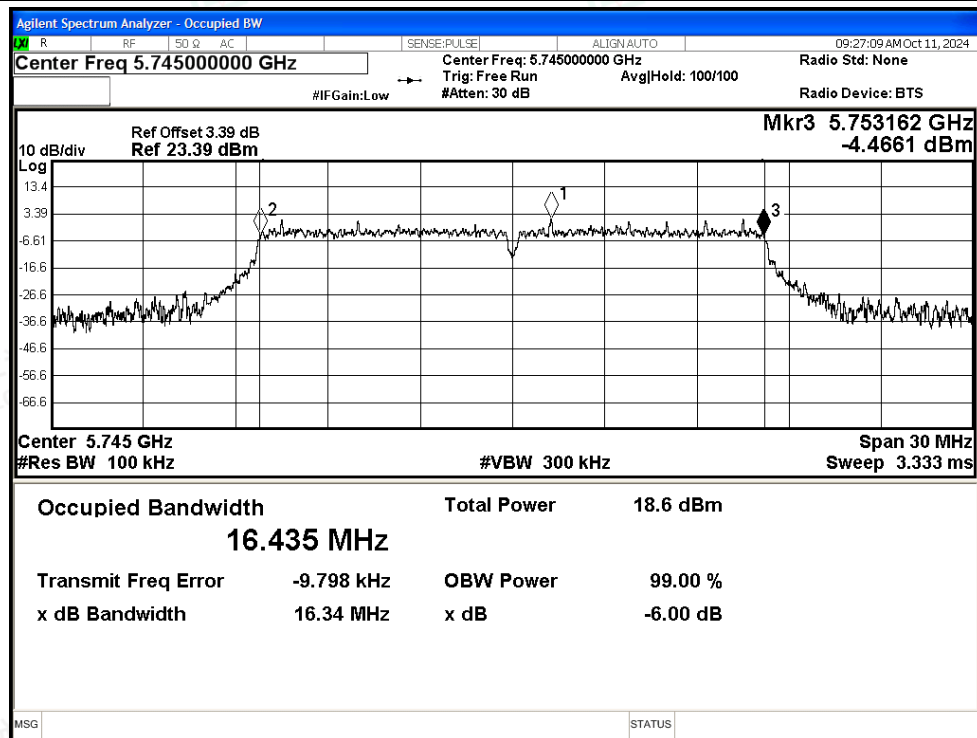


-6dB Bandwidth NVNT a 5785MHz Ant0

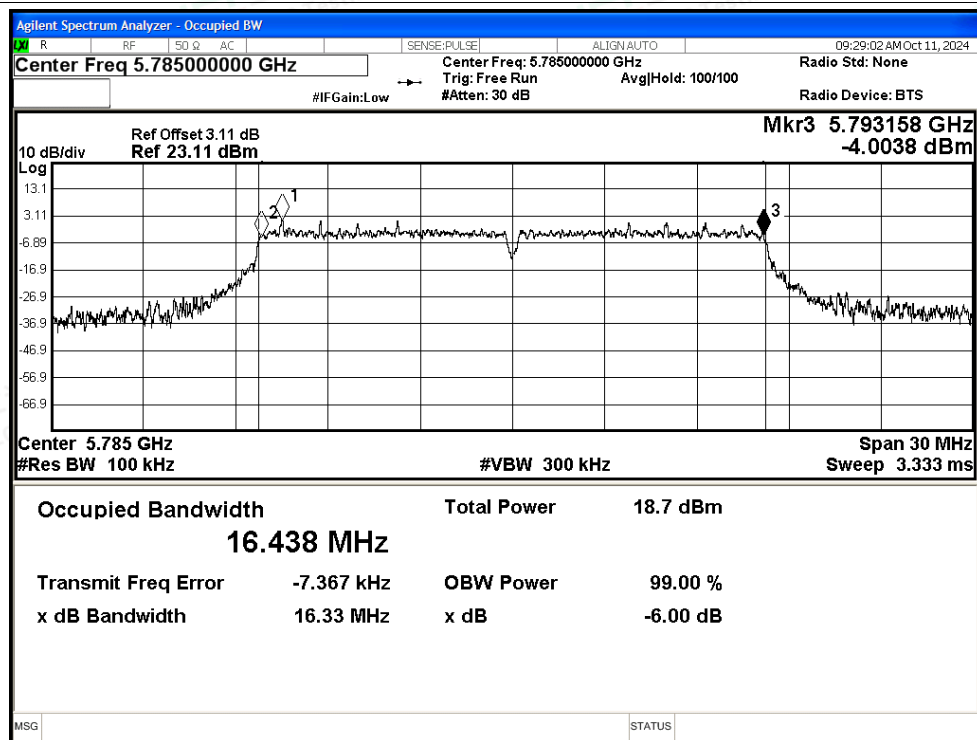




-6dB Bandwidth NVNT a 5825MHz Ant0

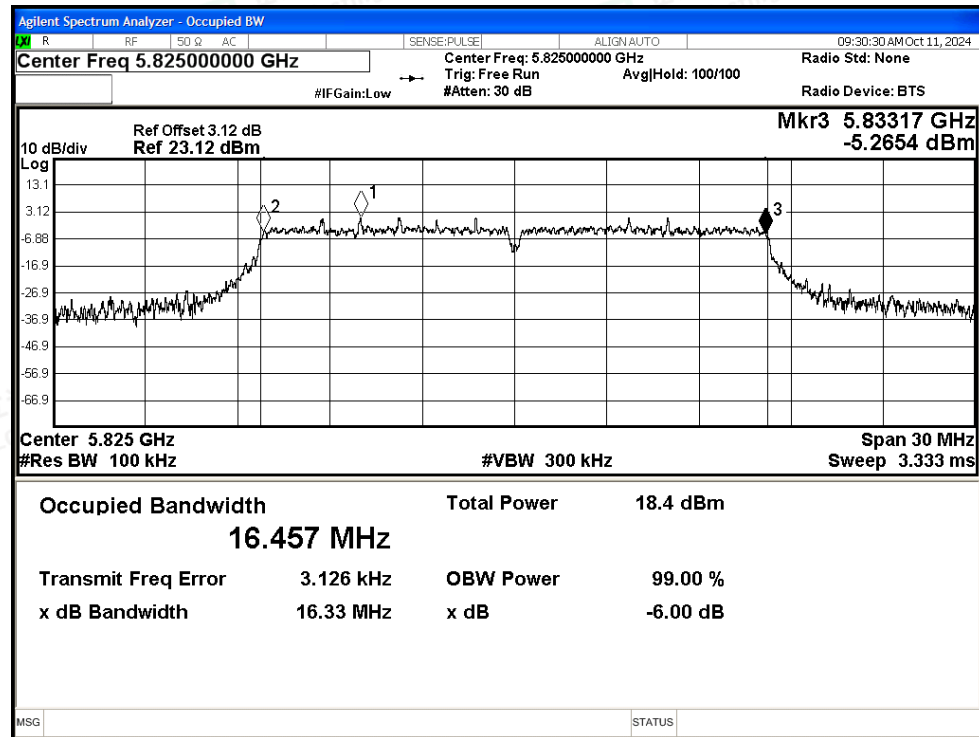


-6dB Bandwidth NVNT n20 5745MHz Ant0

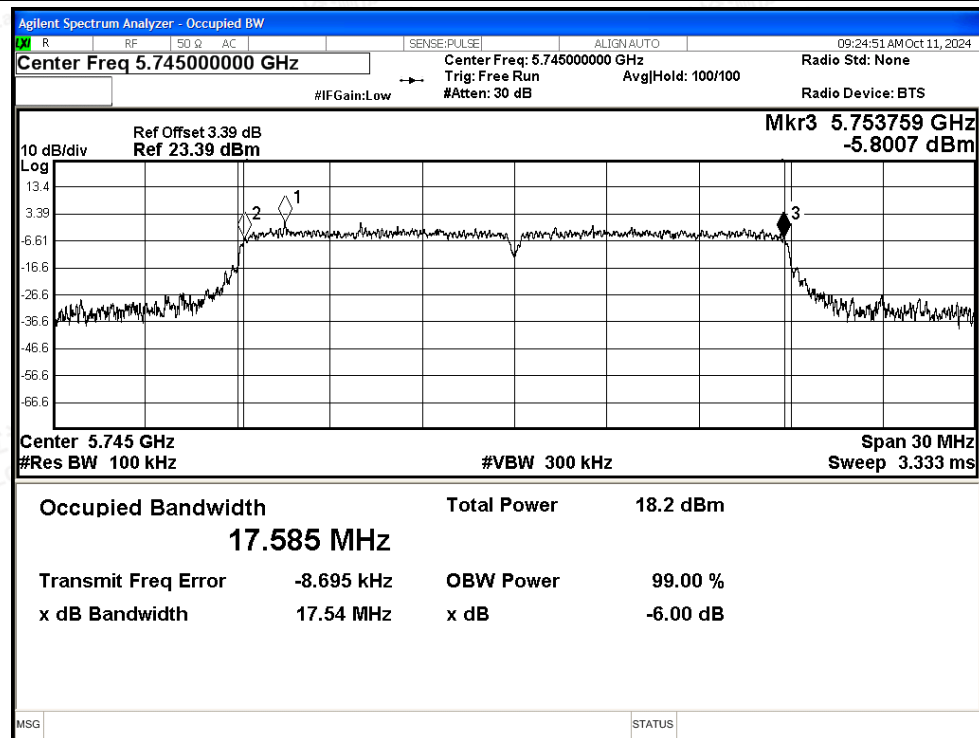




-6dB Bandwidth NVNT n20 5785MHz Ant0

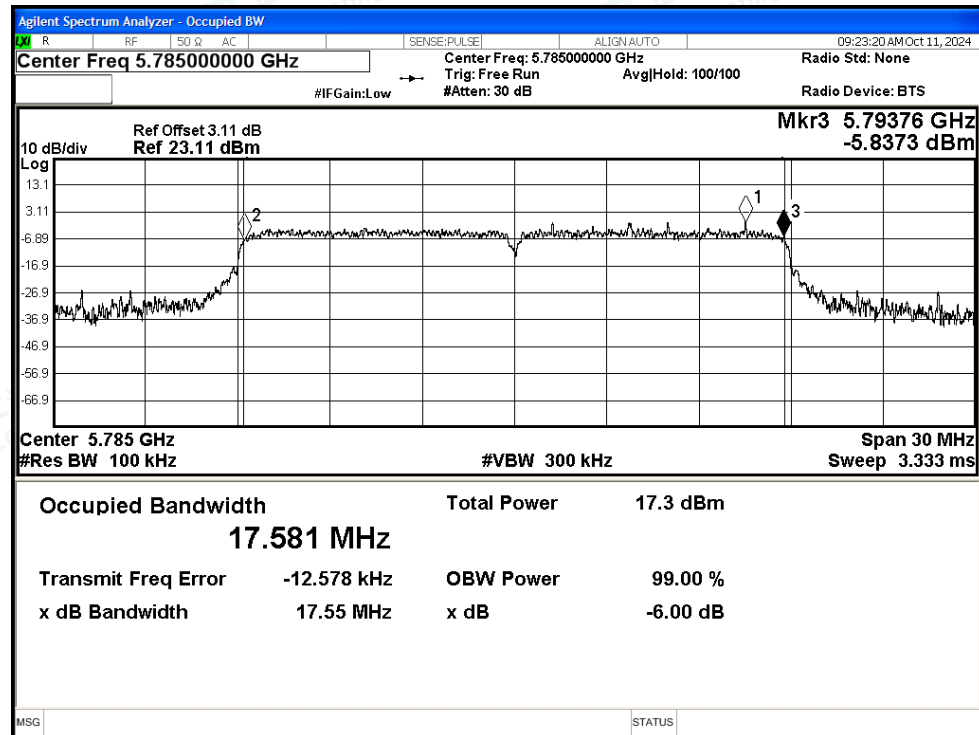


-6dB Bandwidth NVNT n20 5825MHz Ant0

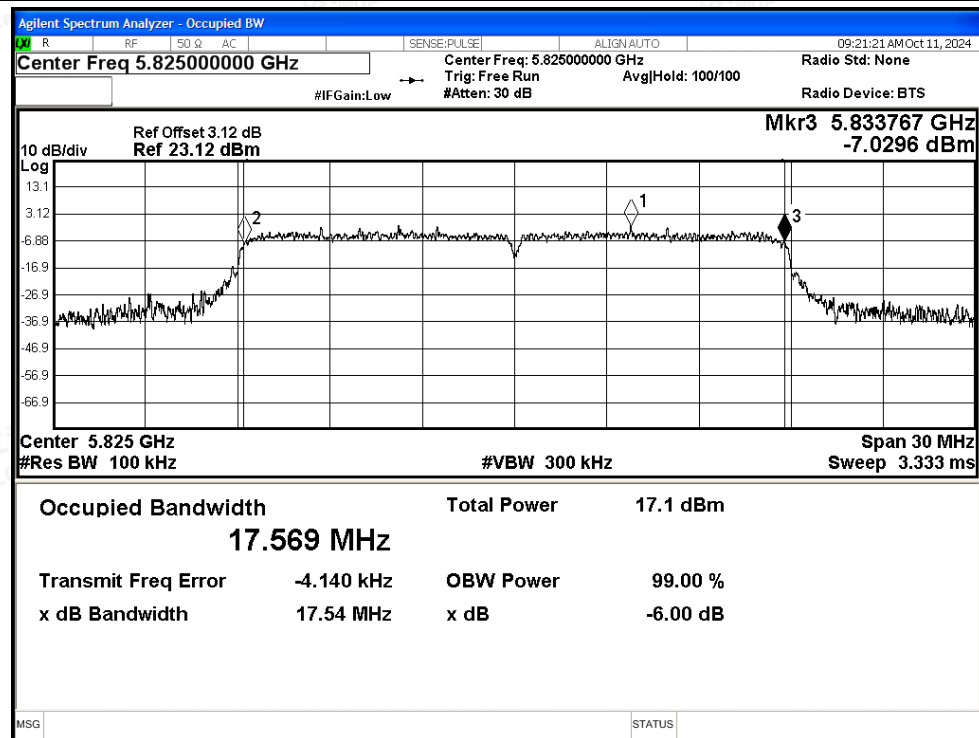




-6dB Bandwidth NVNT n40 5755MHz Ant0

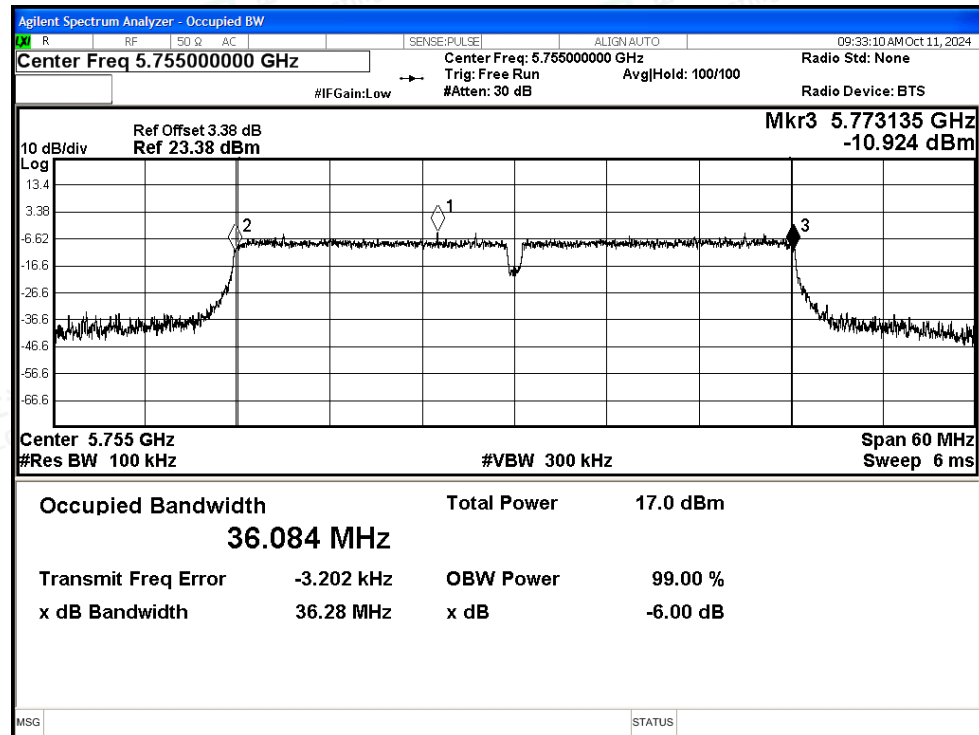


-6dB Bandwidth NVNT n40 5795MHz Ant0

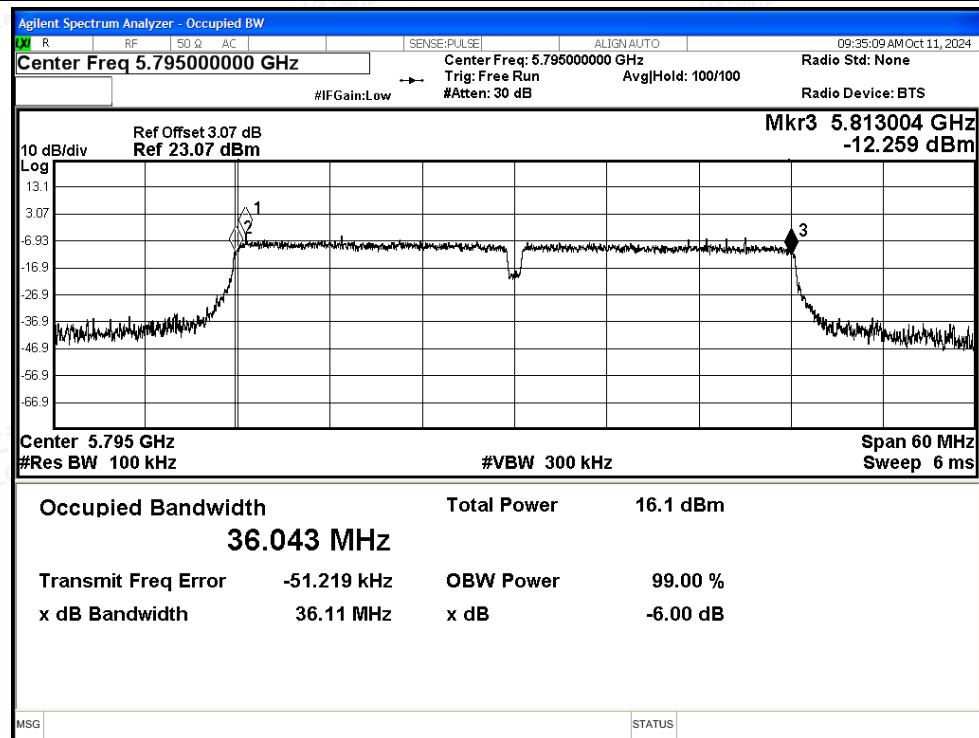




-6dB Bandwidth NVNT ac20 5745MHz Ant0

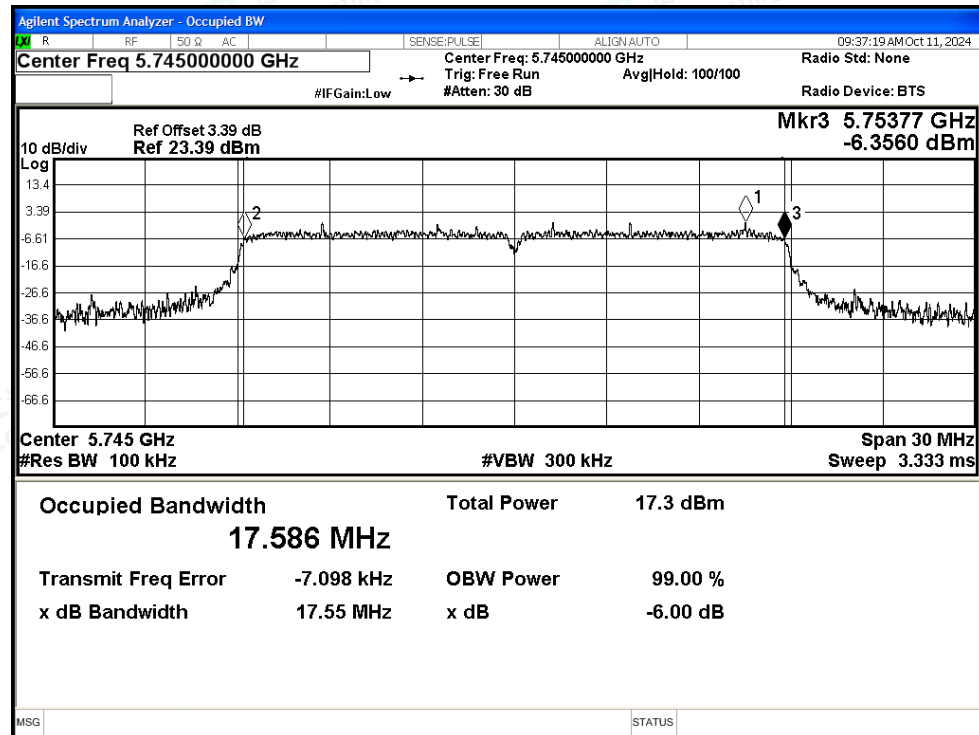


-6dB Bandwidth NVNT ac20 5785MHz Ant0

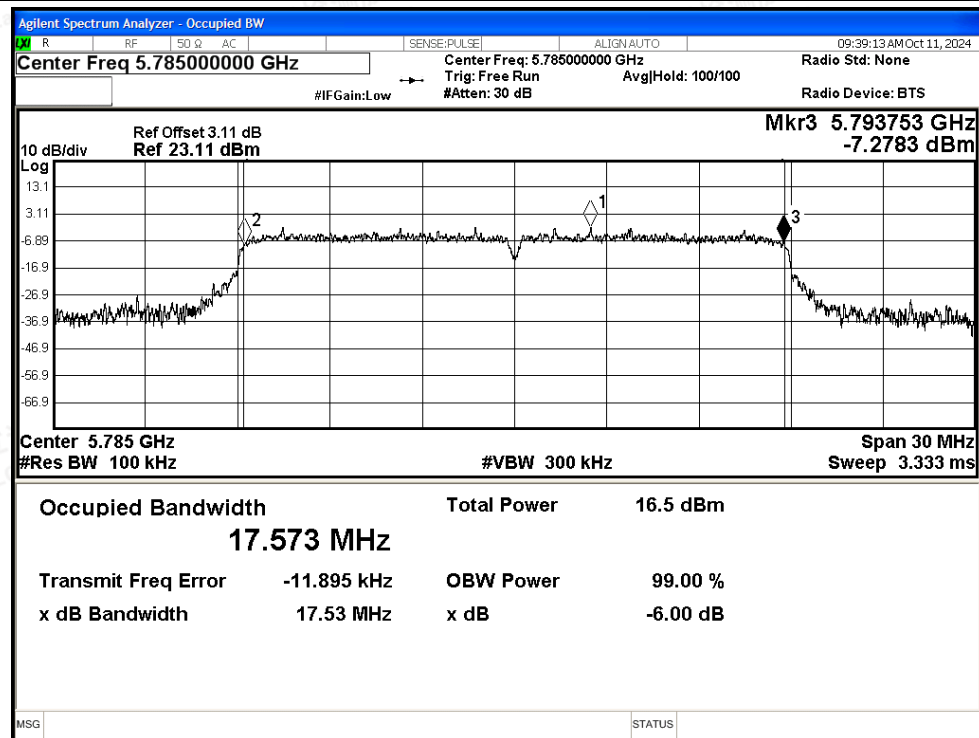




-6dB Bandwidth NVNT ac20 5825MHz Ant0

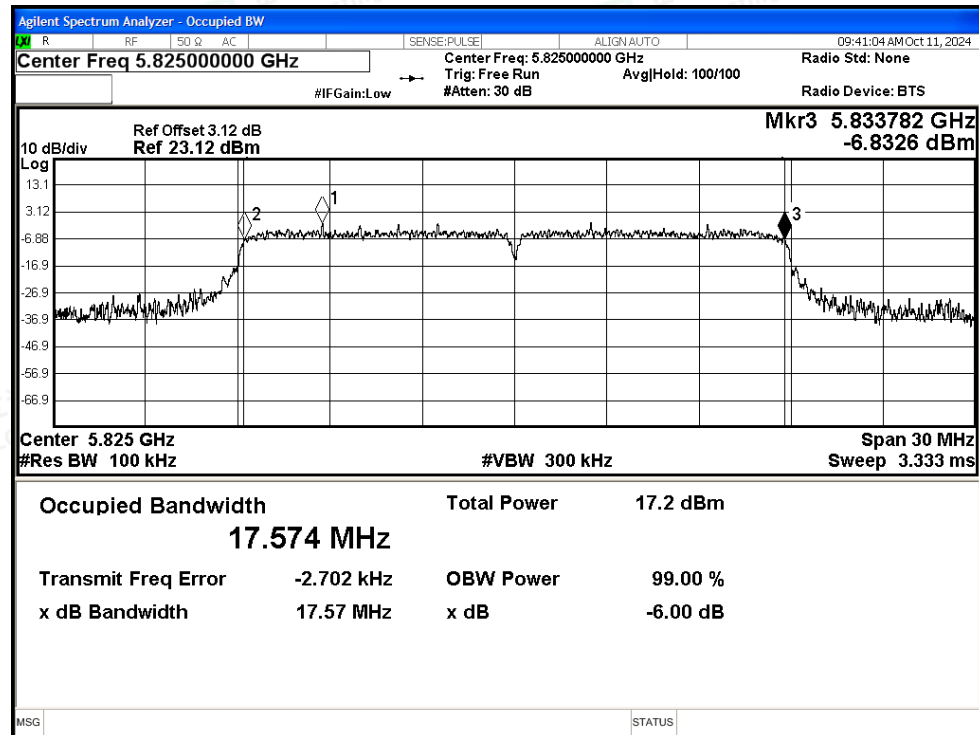


-6dB Bandwidth NVNT ac40 5755MHz Ant0

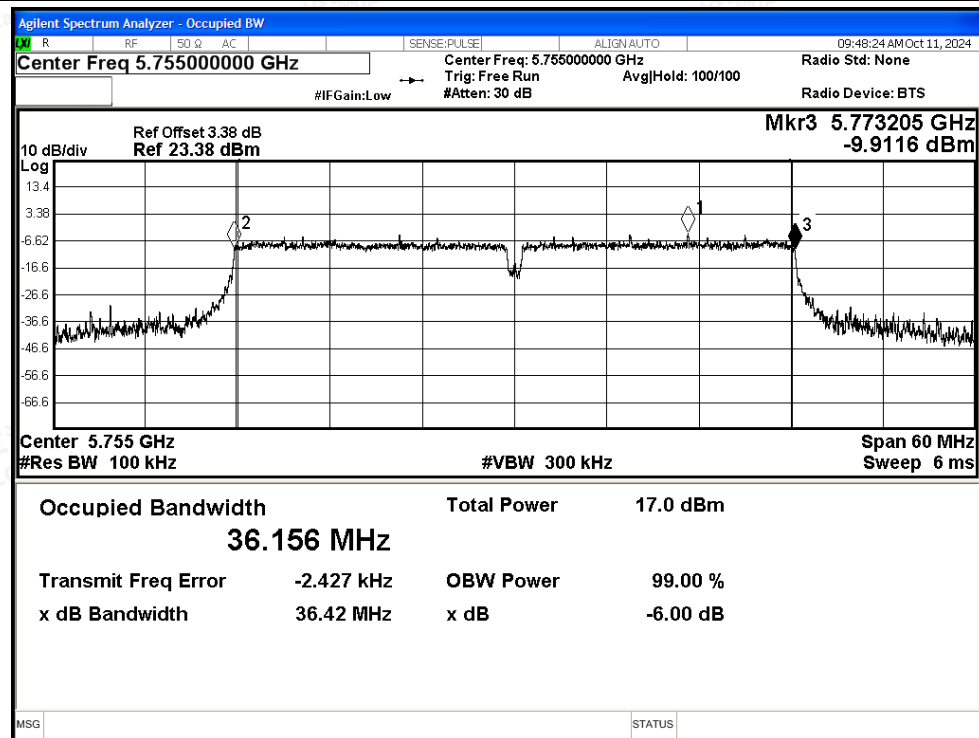




-6dB Bandwidth NVNT ac40 5795MHz Ant0

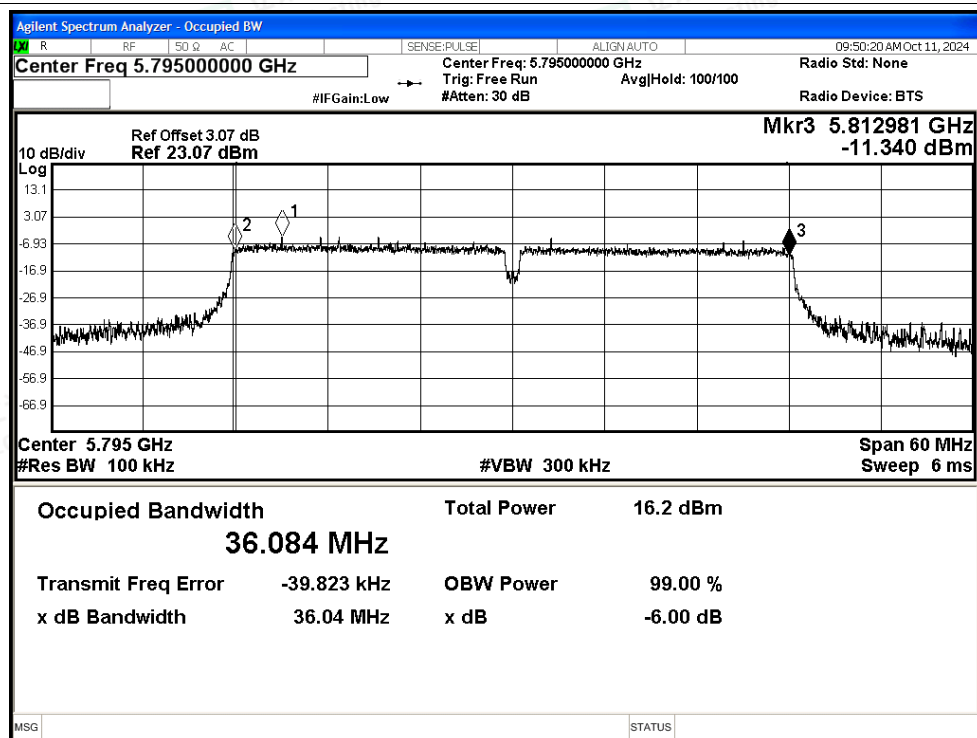


-6dB Bandwidth NVNT ac80 5775MHz Ant0

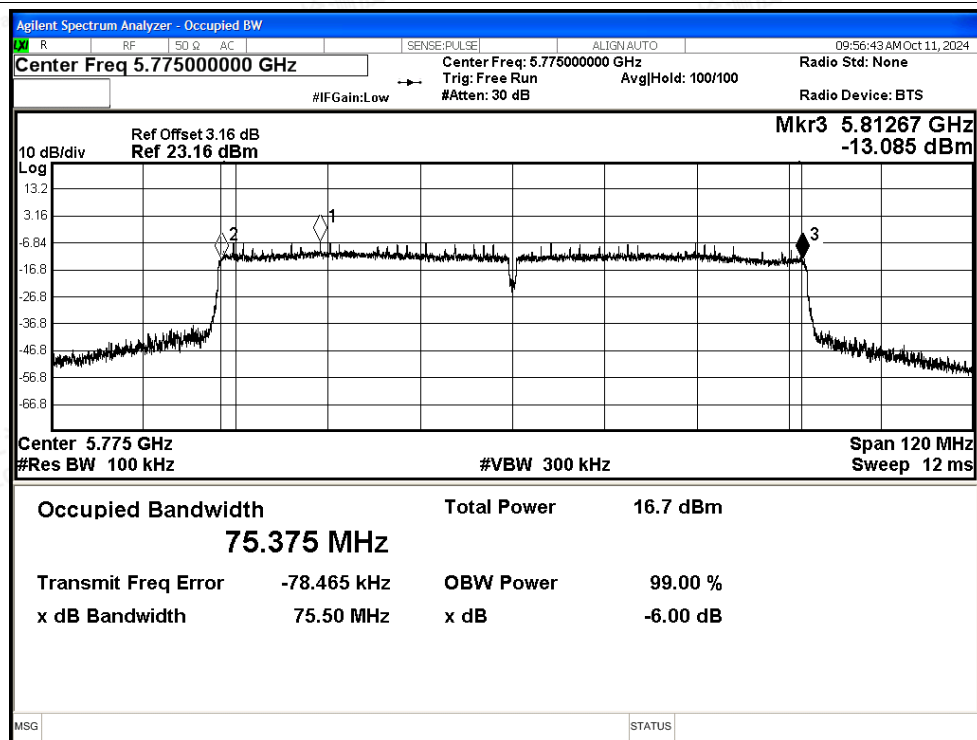




-6dB Bandwidth NVNT ax20 5745MHz Ant0

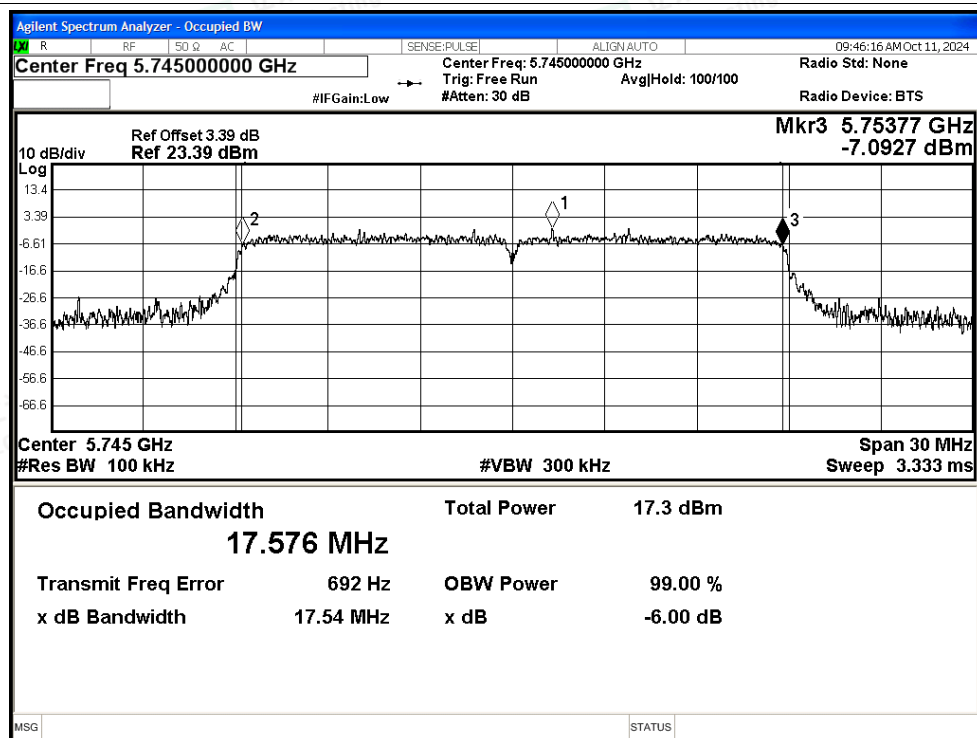


-6dB Bandwidth NVNT ax20 5785MHz Ant0

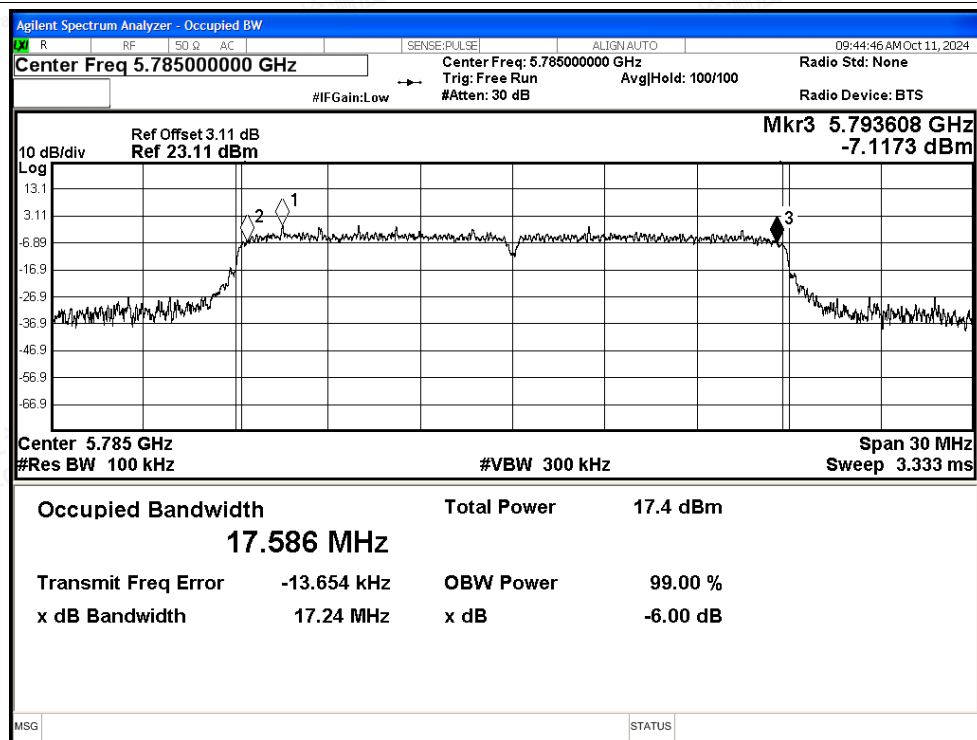




-6dB Bandwidth NVNT ax20 5825MHz Ant0

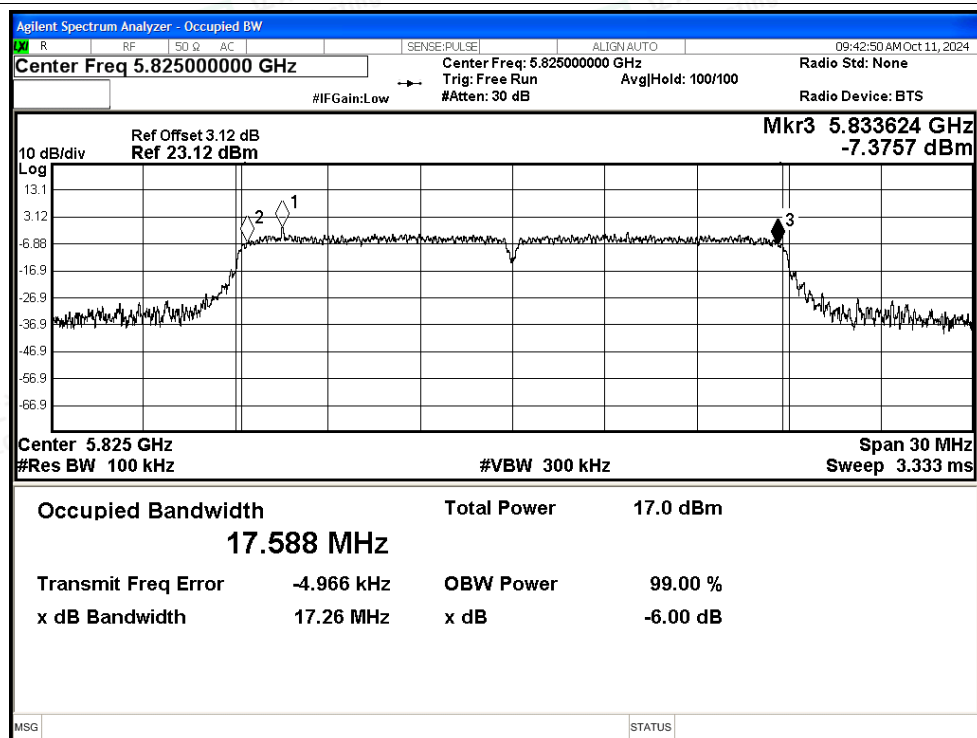


-6dB Bandwidth NVNT ax40 5755MHz Ant0

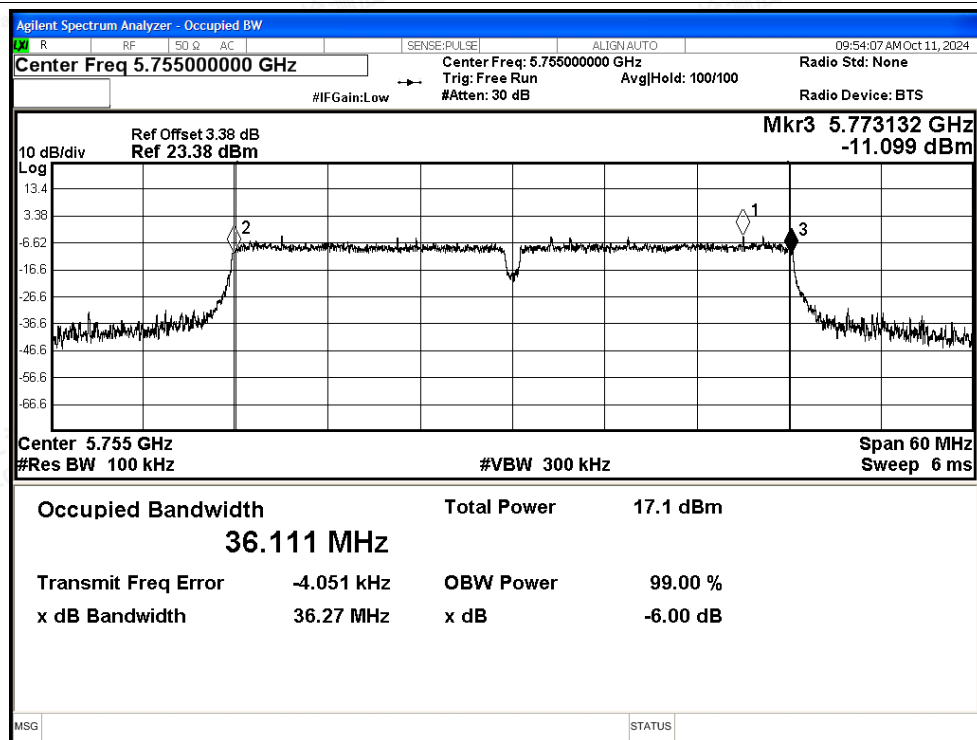




-6dB Bandwidth NVNT ax40 5795MHz Ant0

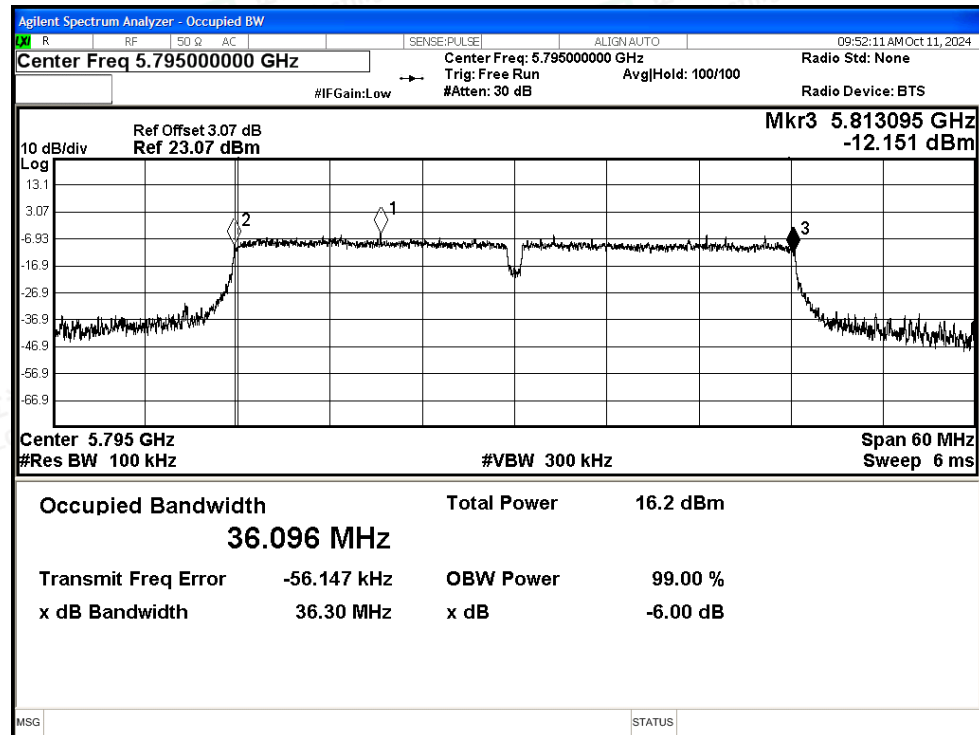

-6dB Bandwidth NVNT ax80 5775MHz Ant0

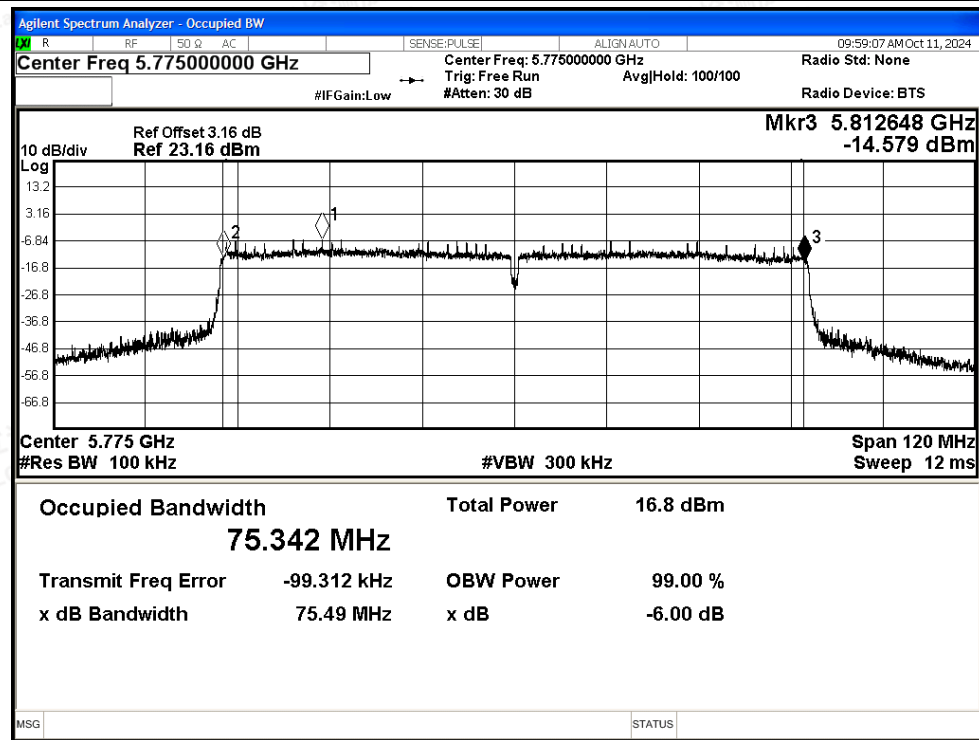



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.323	≥ 0.5	Pass
NVNT	a	5785	Ant1	16.329	≥ 0.5	Pass
NVNT	a	5825	Ant1	16.341	≥ 0.5	Pass
NVNT	n20	5745	Ant1	17.559	≥ 0.5	Pass
NVNT	n20	5785	Ant1	17.561	≥ 0.5	Pass
NVNT	n20	5825	Ant1	17.398	≥ 0.5	Pass
NVNT	n40	5755	Ant1	36.283	≥ 0.5	Pass
NVNT	n40	5795	Ant1	36.165	≥ 0.5	Pass
NVNT	ac20	5745	Ant1	17.405	≥ 0.5	Pass
NVNT	ac20	5785	Ant1	17.565	≥ 0.5	Pass
NVNT	ac20	5825	Ant1	17.566	≥ 0.5	Pass
NVNT	ac40	5755	Ant1	36.28	≥ 0.5	Pass
NVNT	ac40	5795	Ant1	35.744	≥ 0.5	Pass
NVNT	ac80	5775	Ant1	75.73	≥ 0.5	Pass
NVNT	ax20	5745	Ant1	17.532	≥ 0.5	Pass
NVNT	ax20	5785	Ant1	17.57	≥ 0.5	Pass
NVNT	ax20	5825	Ant1	17.543	≥ 0.5	Pass
NVNT	ax40	5755	Ant1	36.125	≥ 0.5	Pass
NVNT	ax40	5795	Ant1	35.995	≥ 0.5	Pass
NVNT	ax80	5775	Ant1	75.326	≥ 0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

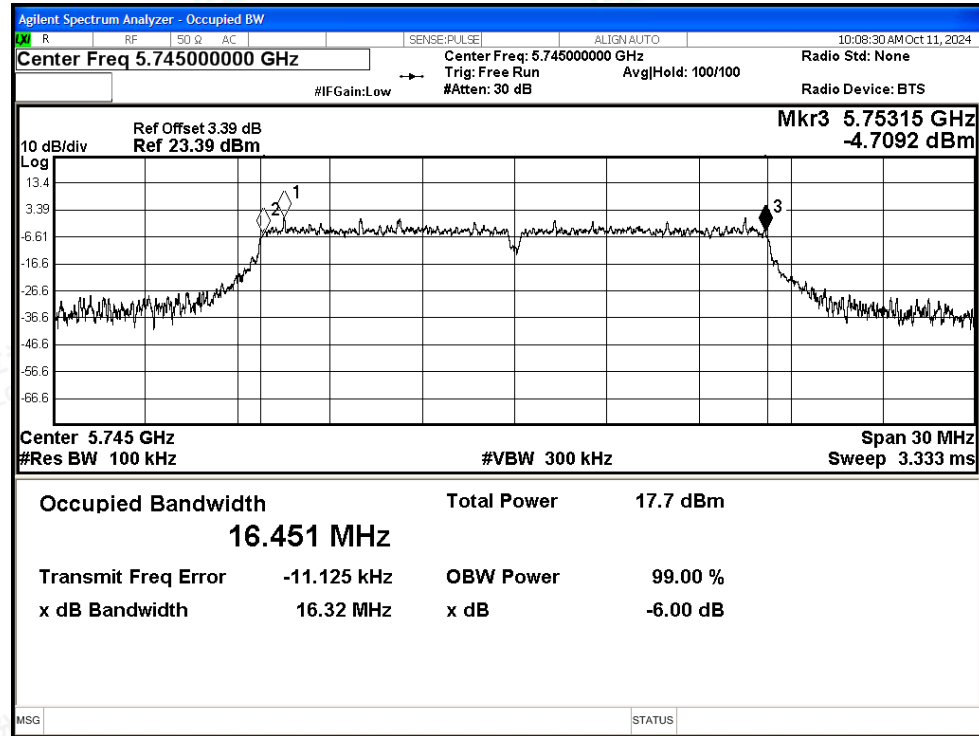


-6dB Bandwidth NVNT a 5785MHz Ant1

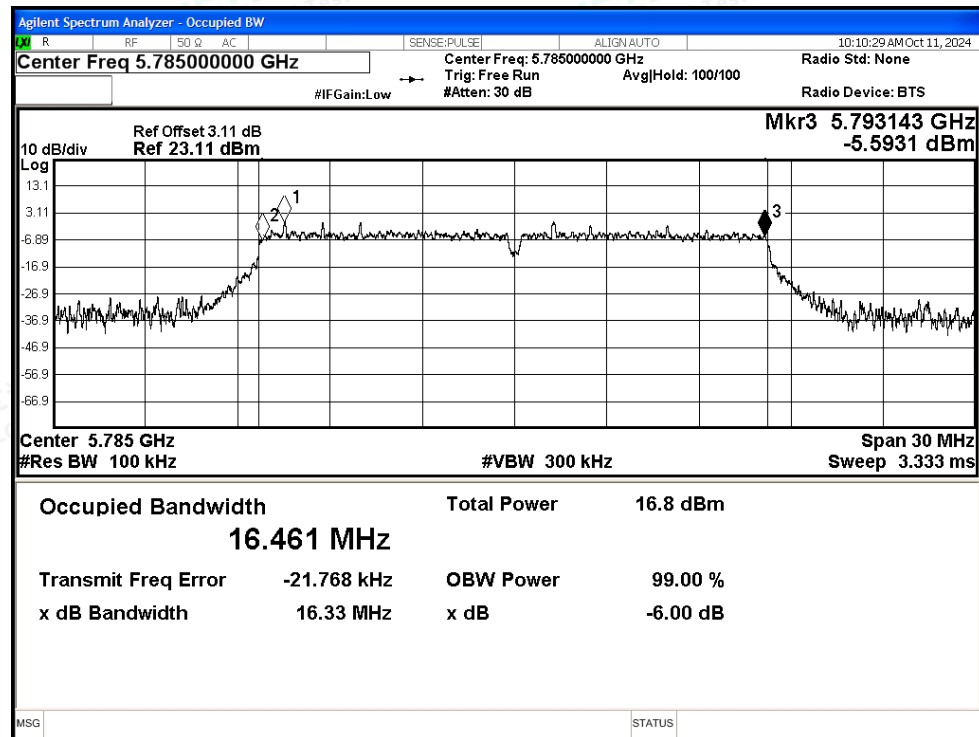




-6dB Bandwidth NVNT a 5825MHz Ant1

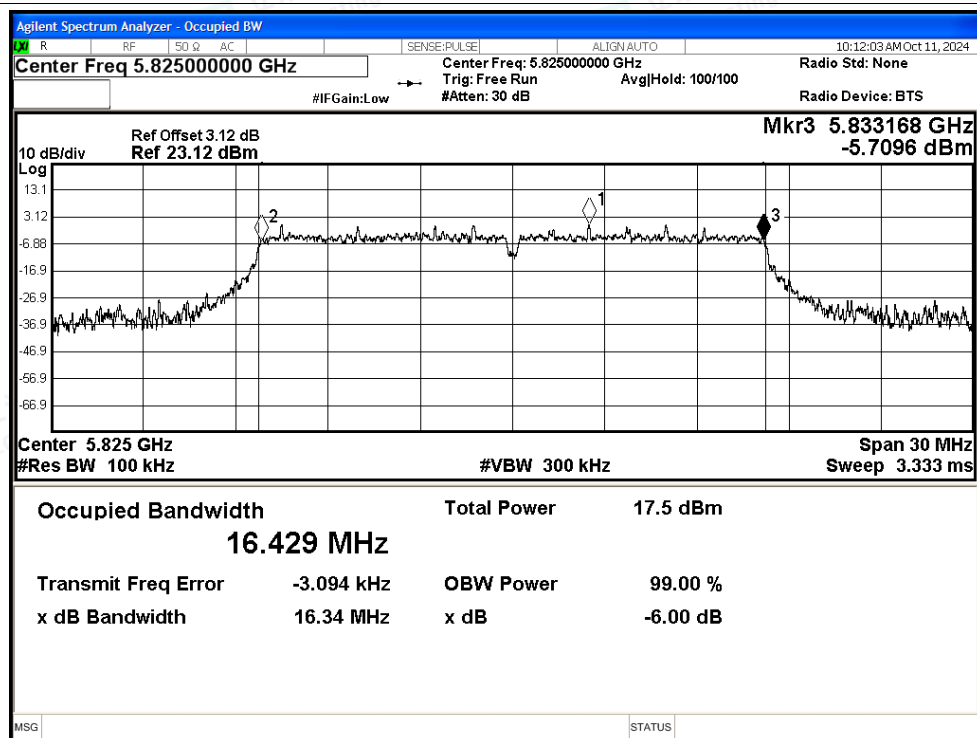


-6dB Bandwidth NVNT n20 5745MHz Ant1

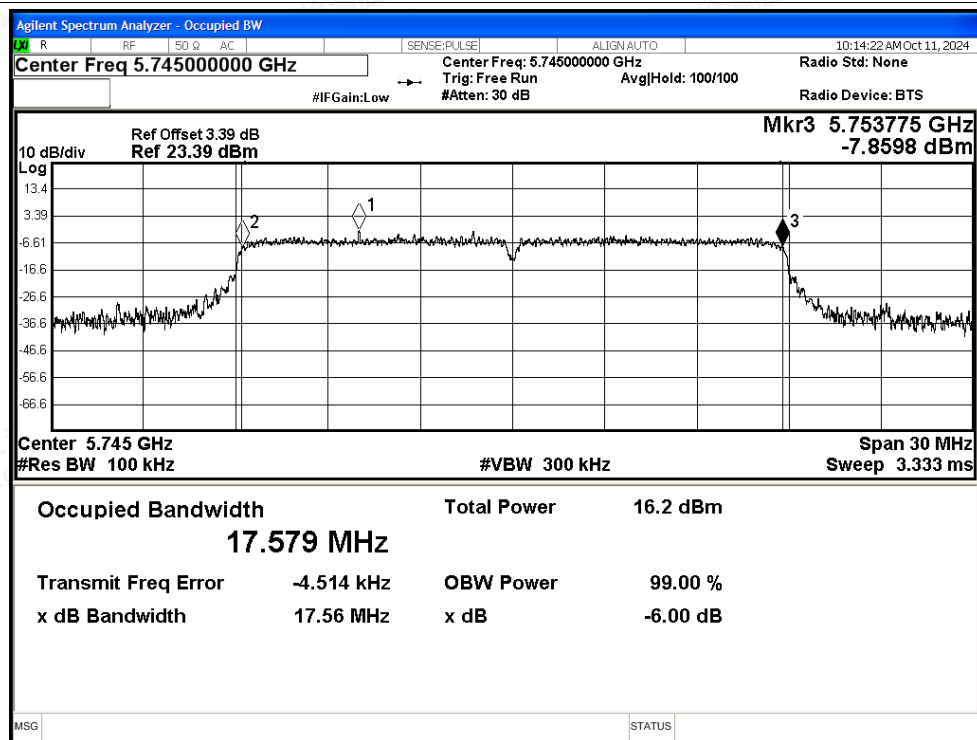




-6dB Bandwidth NVNT n20 5785MHz Ant1

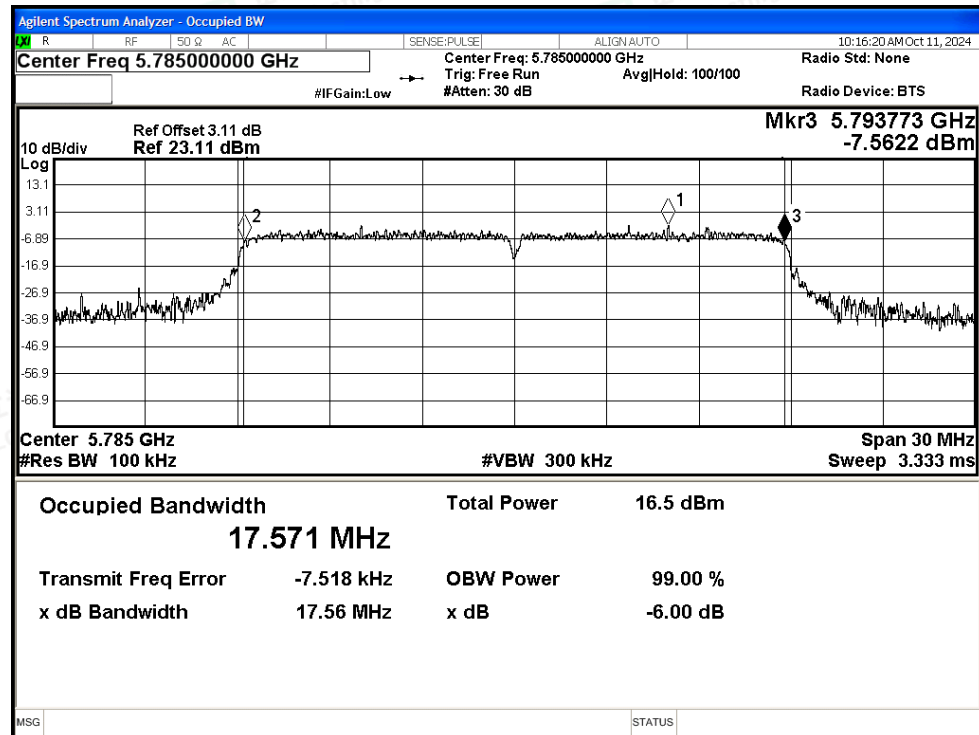


-6dB Bandwidth NVNT n20 5825MHz Ant1

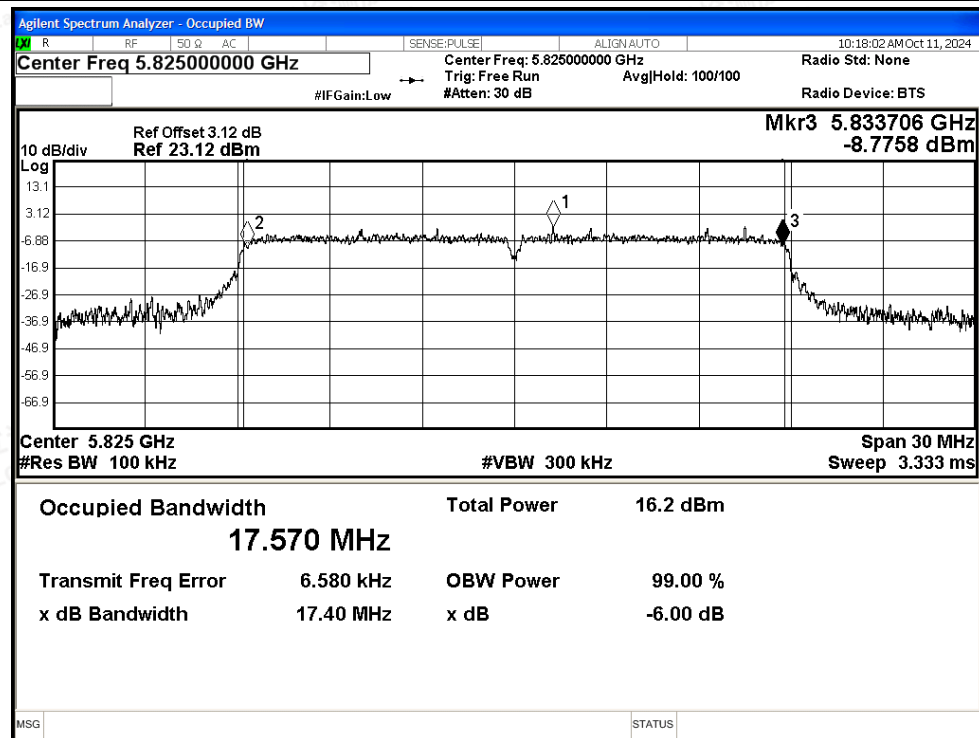




-6dB Bandwidth NVNT n40 5755MHz Ant1

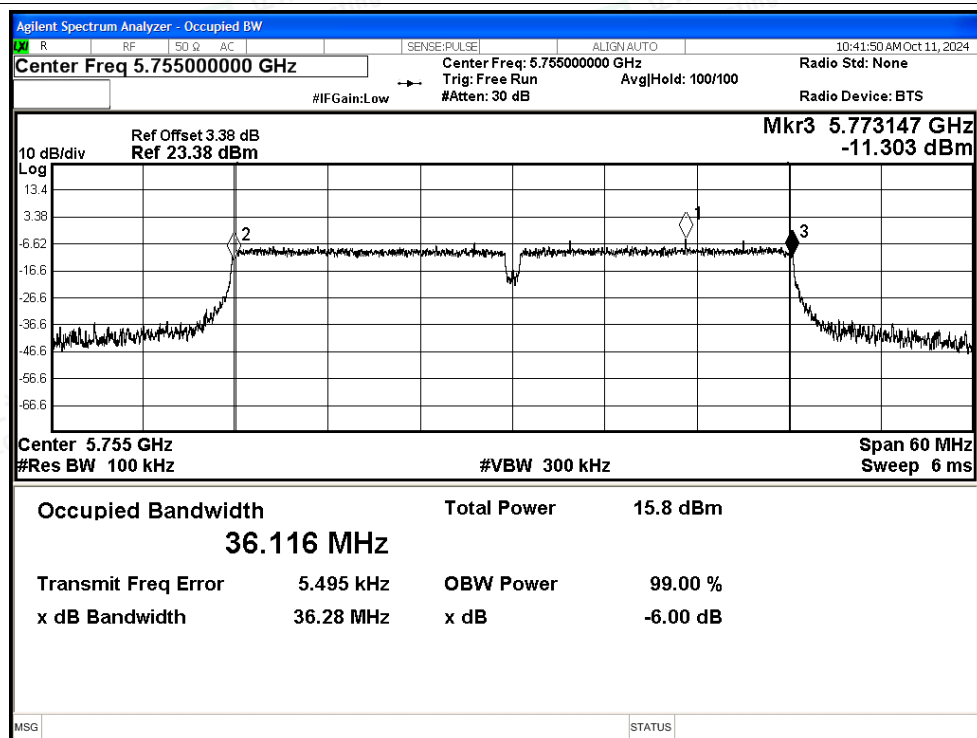


-6dB Bandwidth NVNT n40 5795MHz Ant1

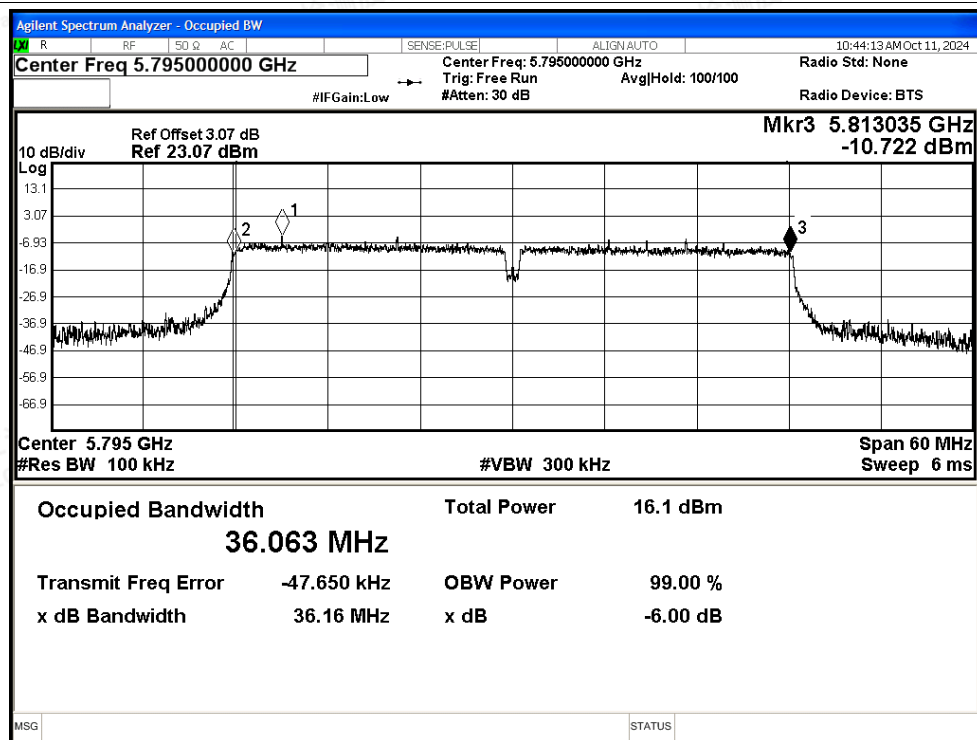




-6dB Bandwidth NVNT ac20 5745MHz Ant1

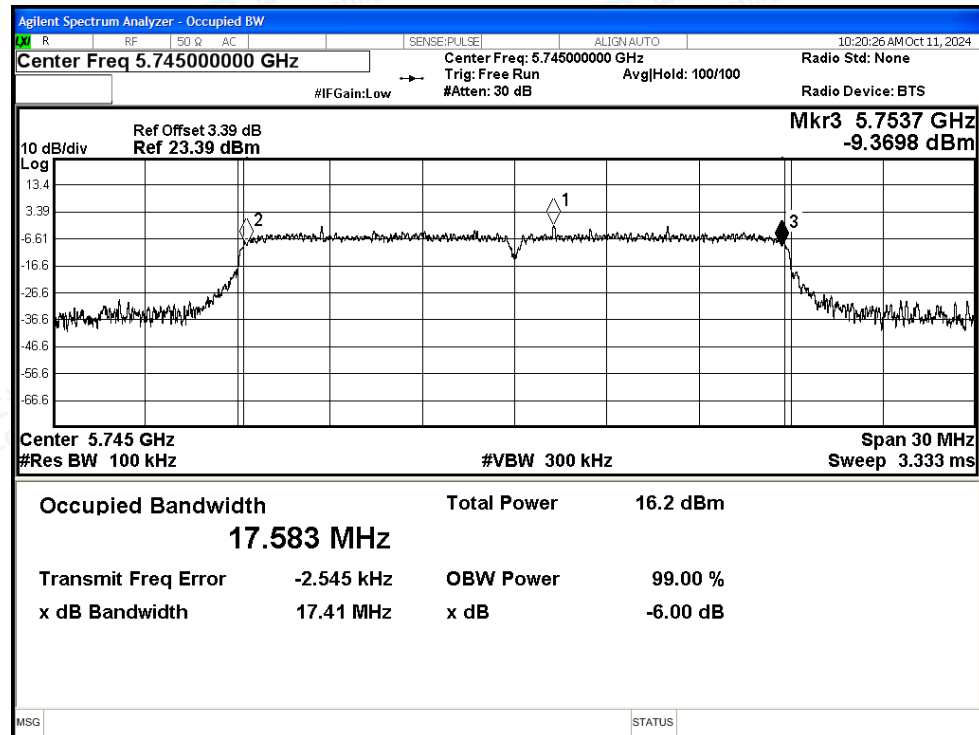


-6dB Bandwidth NVNT ac20 5785MHz Ant1

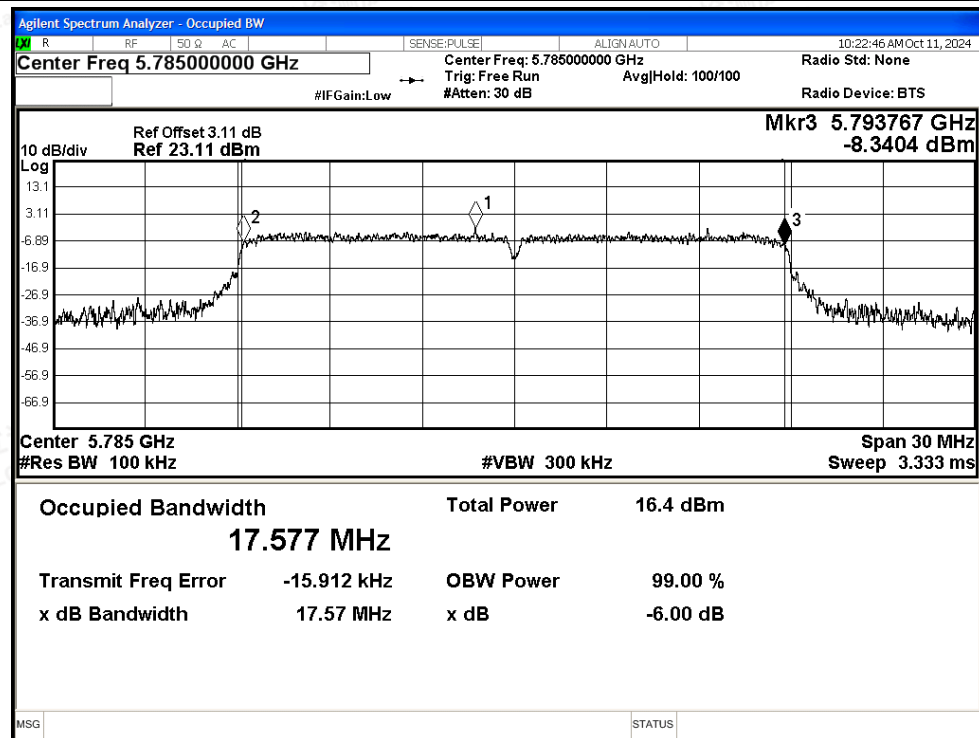




-6dB Bandwidth NVNT ac20 5825MHz Ant1

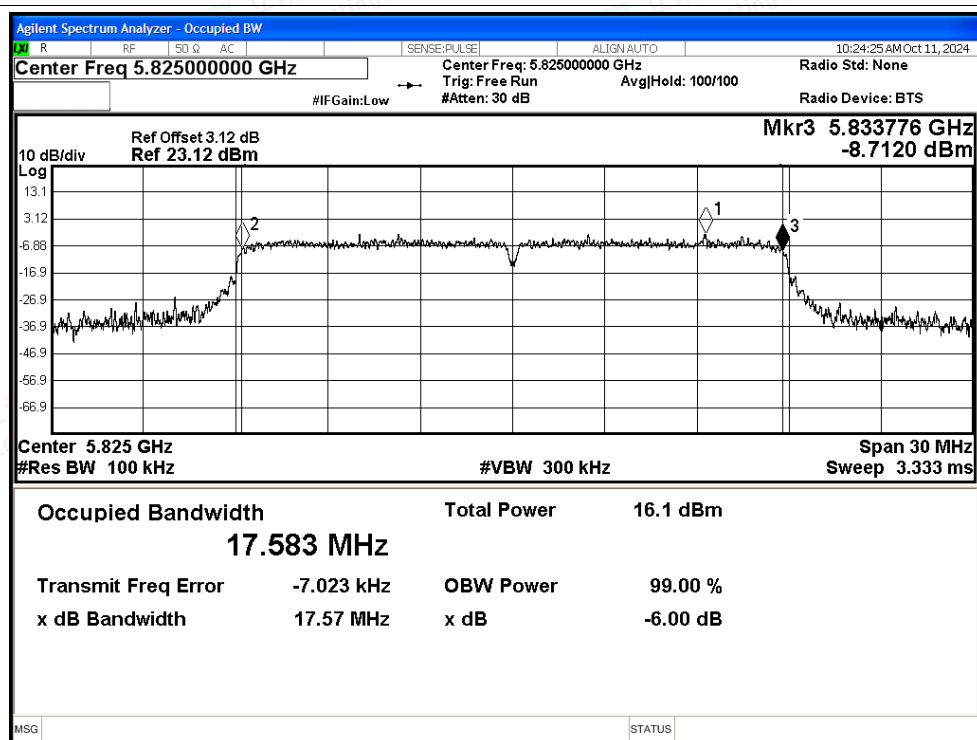


-6dB Bandwidth NVNT ac40 5755MHz Ant1

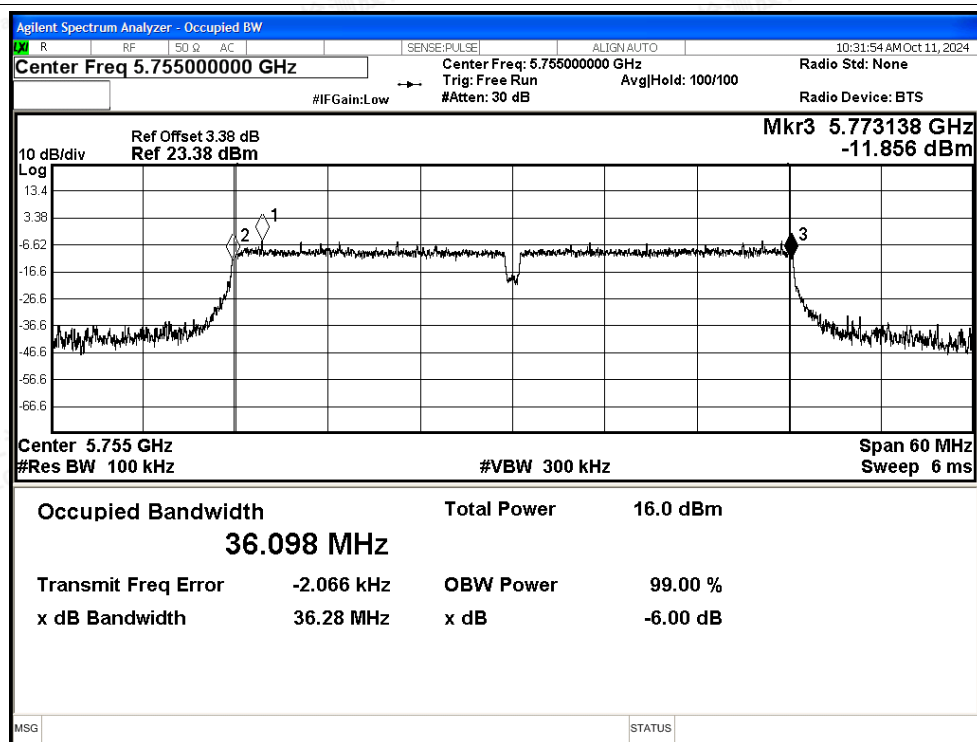




-6dB Bandwidth NVNT ac40 5795MHz Ant1

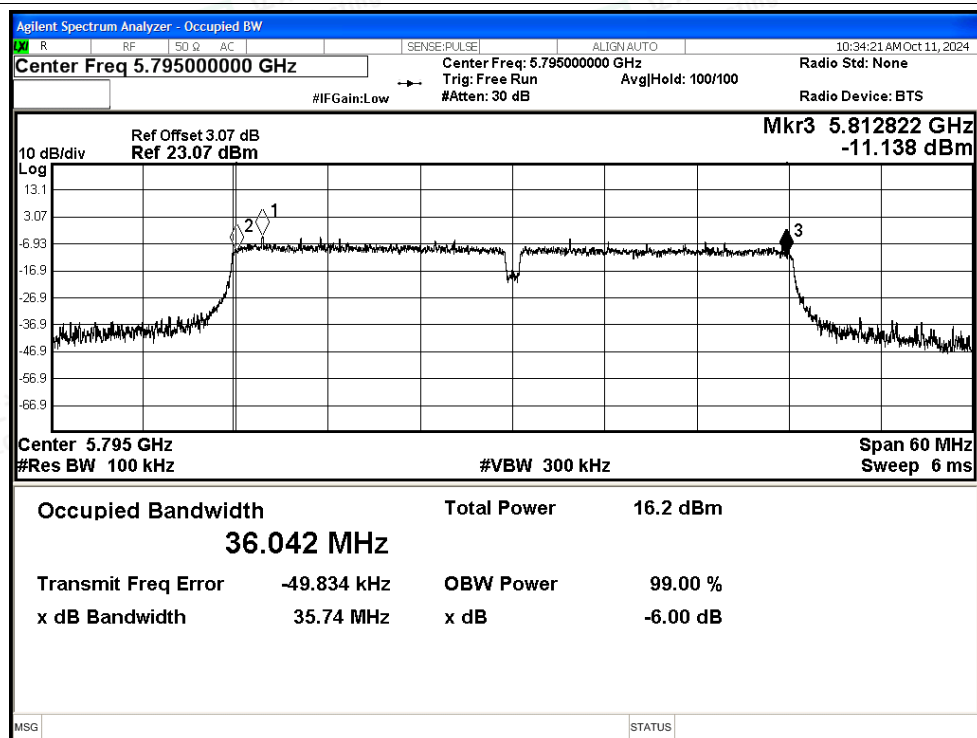


-6dB Bandwidth NVNT ac80 5775MHz Ant1

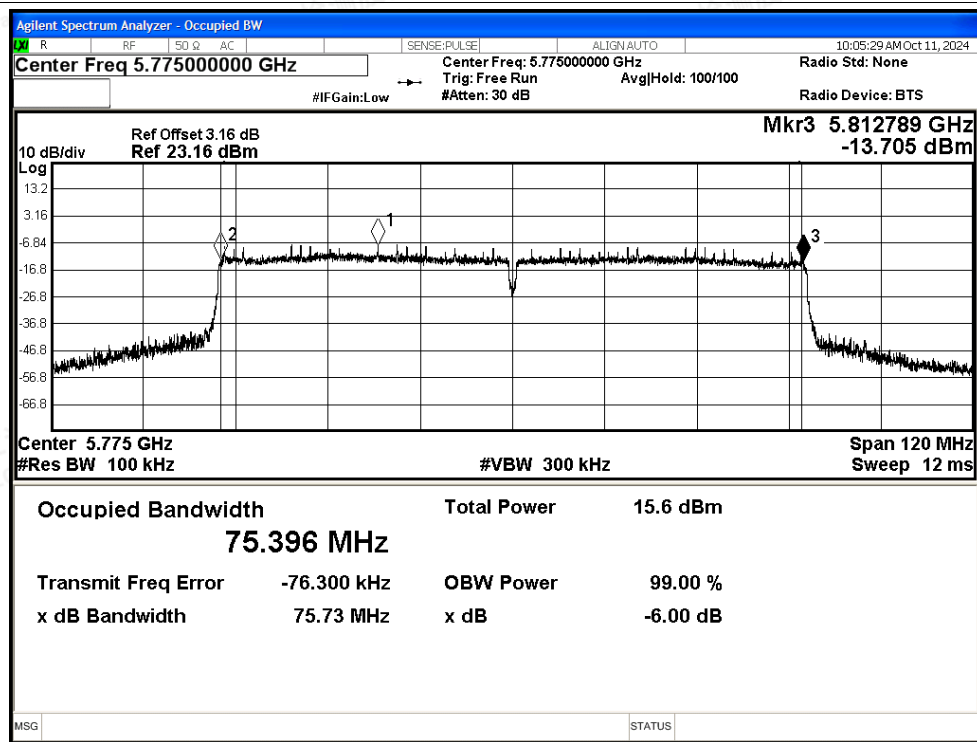




-6dB Bandwidth NVNT ax20 5745MHz Ant1

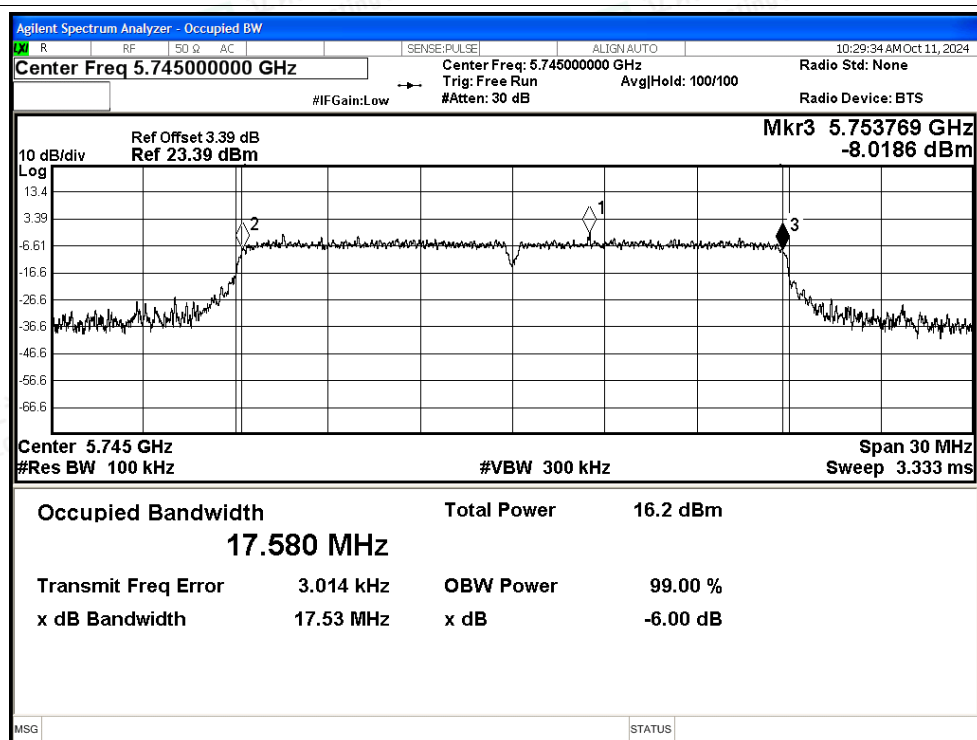


-6dB Bandwidth NVNT ax20 5785MHz Ant1

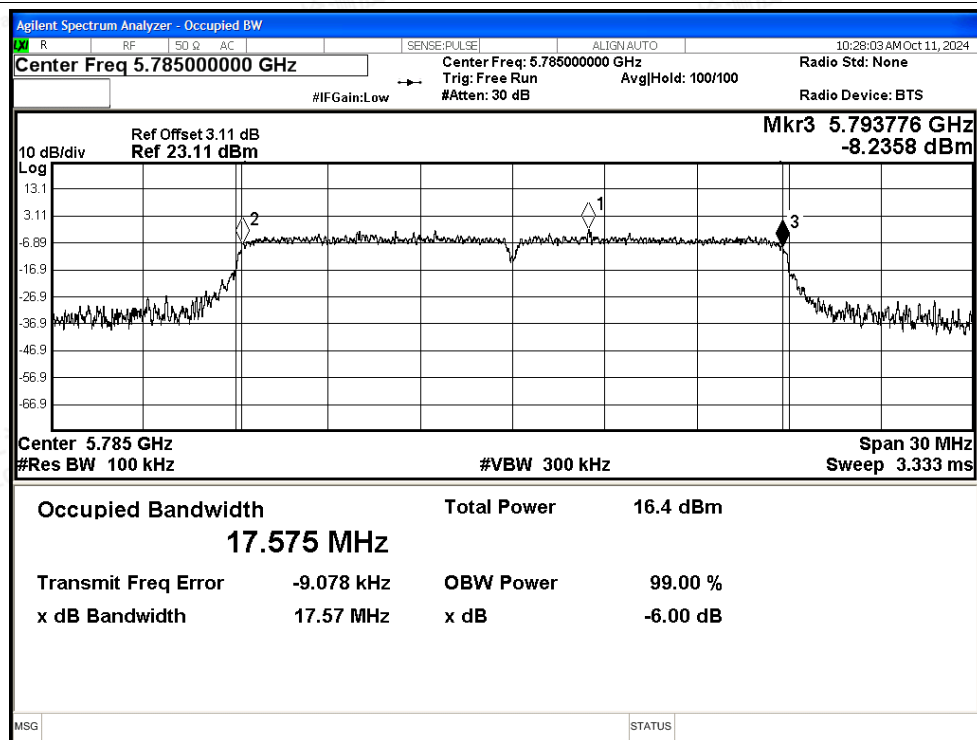


Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



-6dB Bandwidth NVNT ax20 5825MHz Ant1

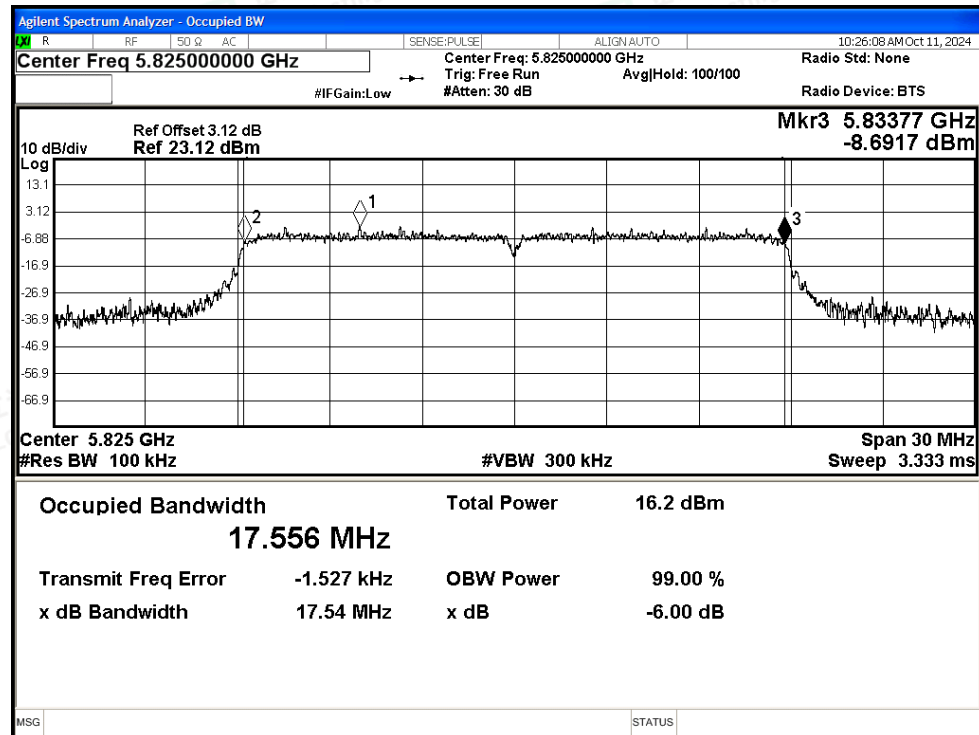


-6dB Bandwidth NVNT ax40 5755MHz Ant1

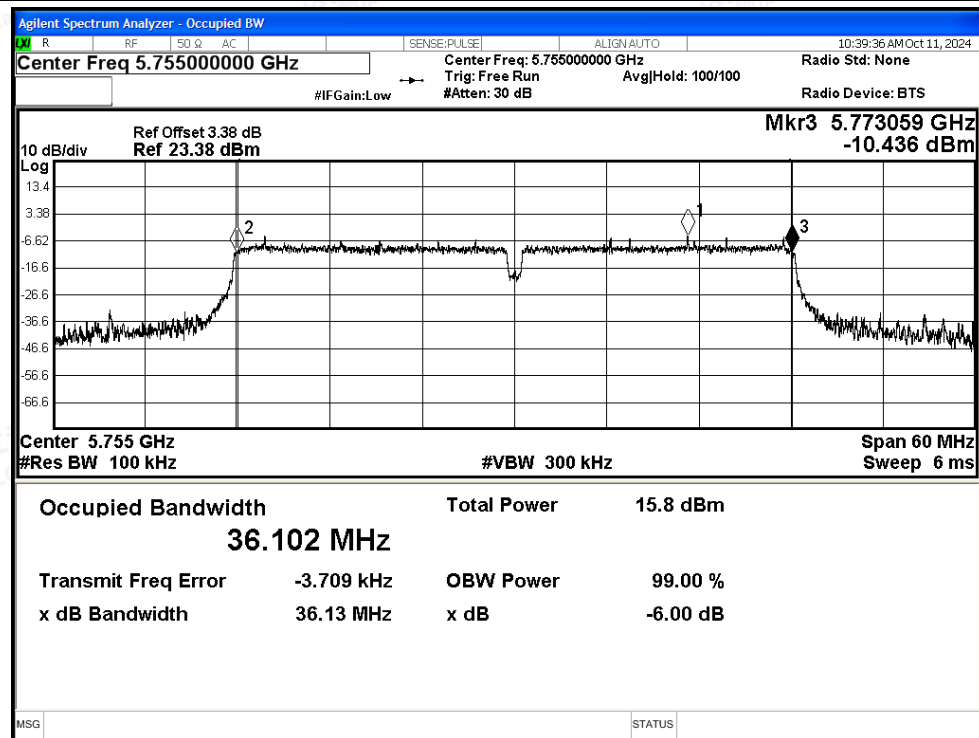




-6dB Bandwidth NVNT ax40 5795MHz Ant1

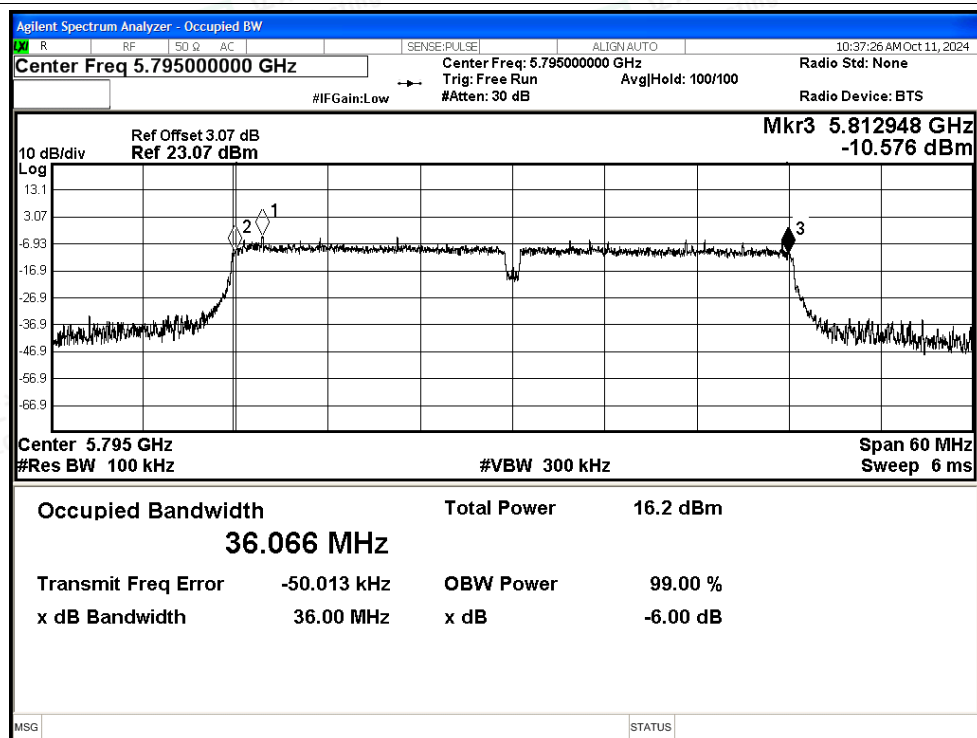

-6dB Bandwidth NVNT ax80 5775MHz Ant1

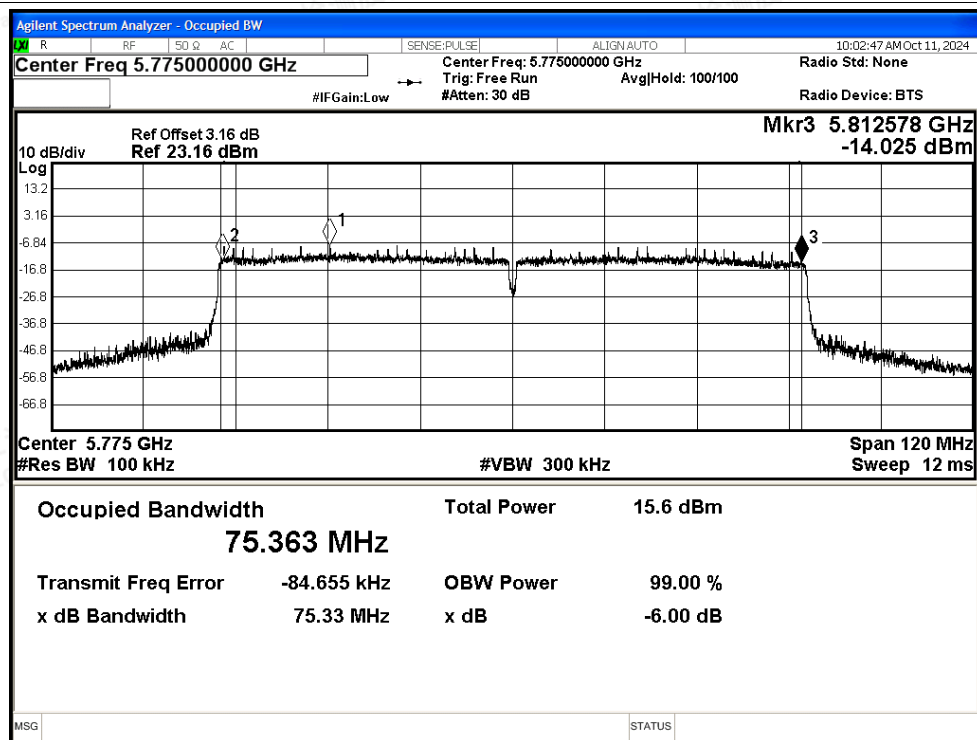

Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant2	16.351	≥ 0.5	Pass
NVNT	a	5785	Ant2	16.331	≥ 0.5	Pass
NVNT	a	5825	Ant2	16.328	≥ 0.5	Pass
NVNT	n20	5745	Ant2	17.564	≥ 0.5	Pass
NVNT	n20	5785	Ant2	17.537	≥ 0.5	Pass
NVNT	n20	5825	Ant2	17.509	≥ 0.5	Pass
NVNT	n40	5755	Ant2	36.445	≥ 0.5	Pass
NVNT	n40	5795	Ant2	36.029	≥ 0.5	Pass
NVNT	ac20	5745	Ant2	17.392	≥ 0.5	Pass
NVNT	ac20	5785	Ant2	17.553	≥ 0.5	Pass
NVNT	ac20	5825	Ant2	17.413	≥ 0.5	Pass
NVNT	ac40	5755	Ant2	36.248	≥ 0.5	Pass
NVNT	ac40	5795	Ant2	36.281	≥ 0.5	Pass
NVNT	ac80	5775	Ant2	75.353	≥ 0.5	Pass
NVNT	ax20	5745	Ant2	17.558	≥ 0.5	Pass
NVNT	ax20	5785	Ant2	17.535	≥ 0.5	Pass
NVNT	ax20	5825	Ant2	17.49	≥ 0.5	Pass
NVNT	ax40	5755	Ant2	36.287	≥ 0.5	Pass
NVNT	ax40	5795	Ant2	36.147	≥ 0.5	Pass
NVNT	ax80	5775	Ant2	75.601	≥ 0.5	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant2

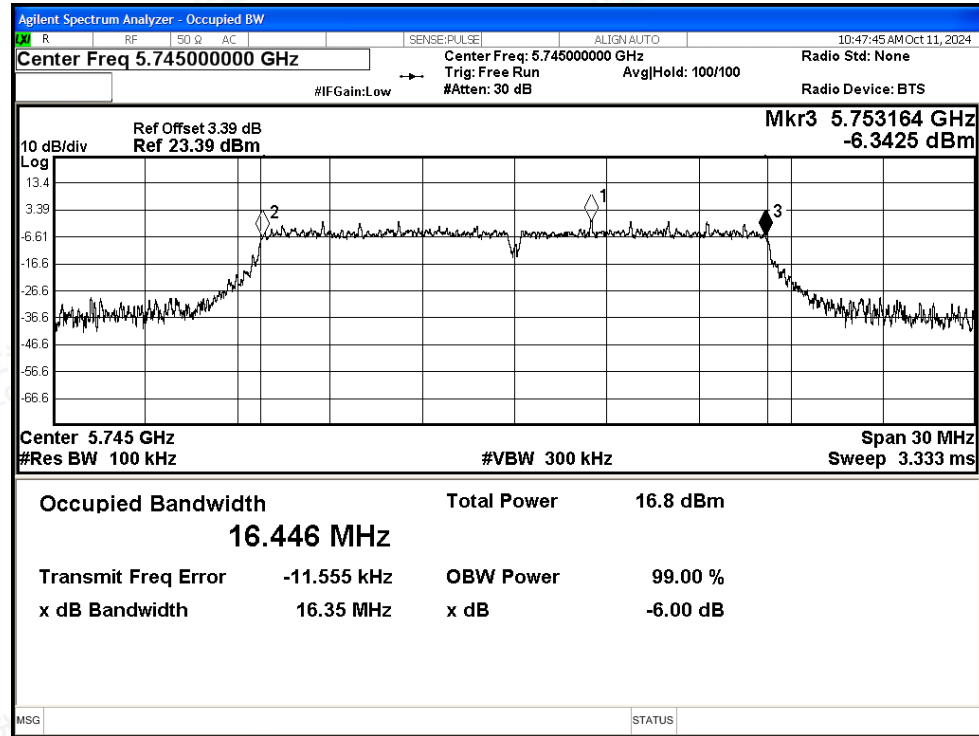


-6dB Bandwidth NVNT a 5785MHz Ant2

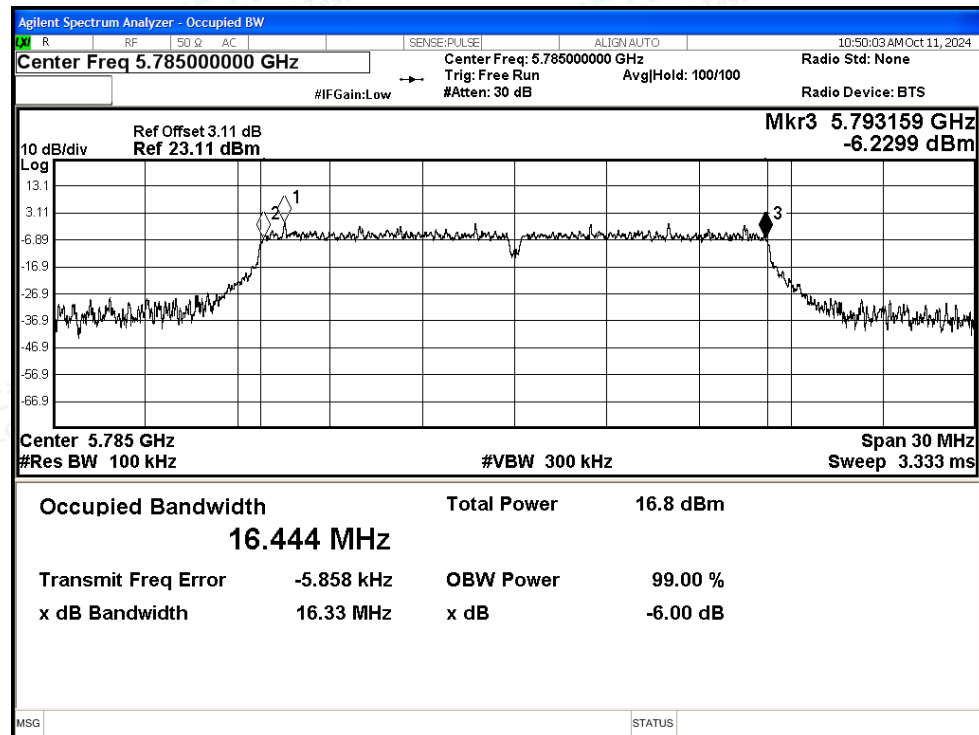




-6dB Bandwidth NVNT a 5825MHz Ant2

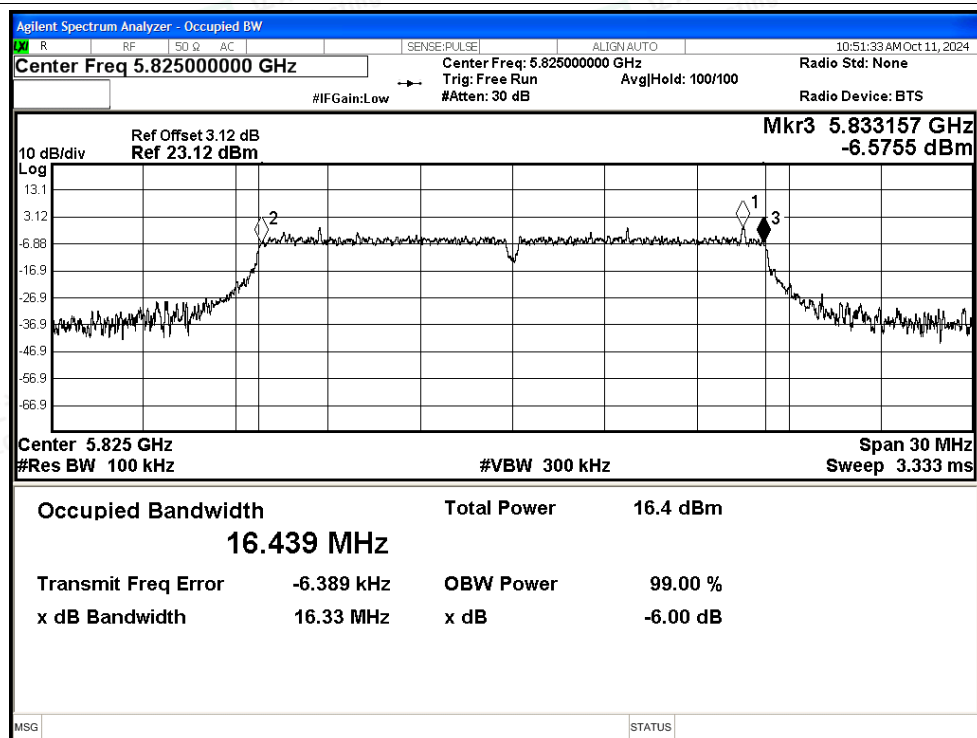


-6dB Bandwidth NVNT n20 5745MHz Ant2

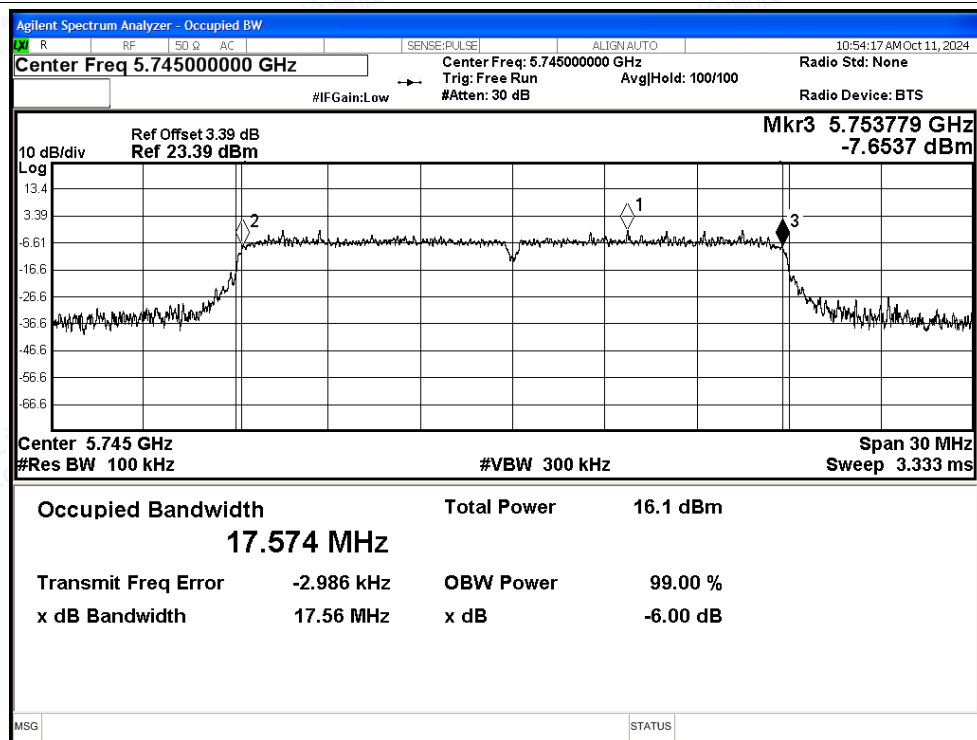




-6dB Bandwidth NVNT n20 5785MHz Ant2

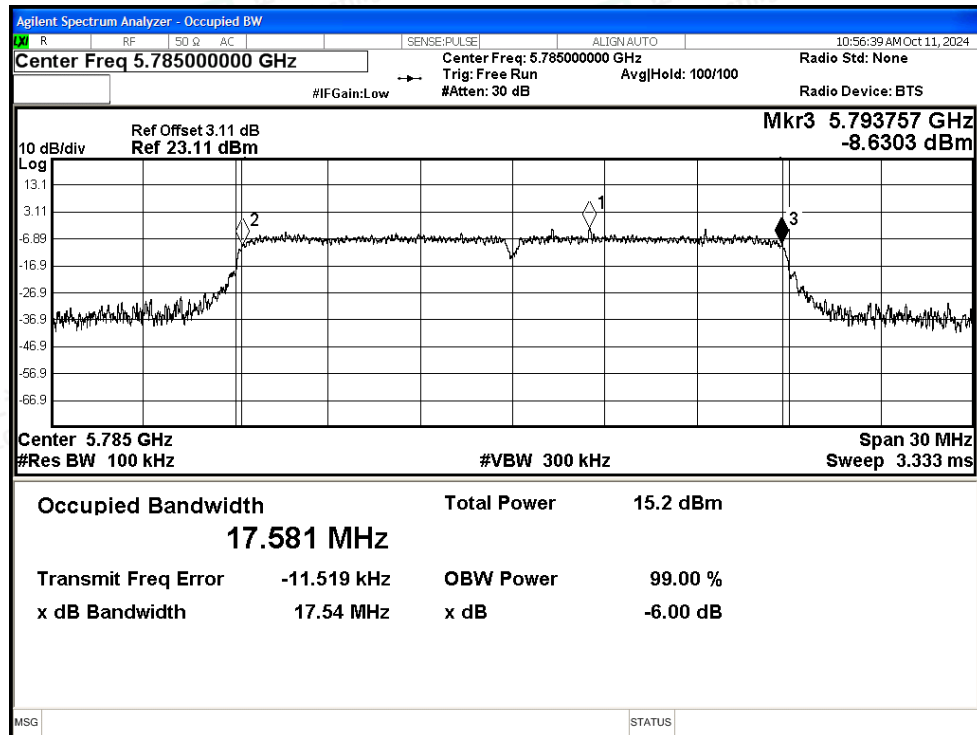


-6dB Bandwidth NVNT n20 5825MHz Ant2

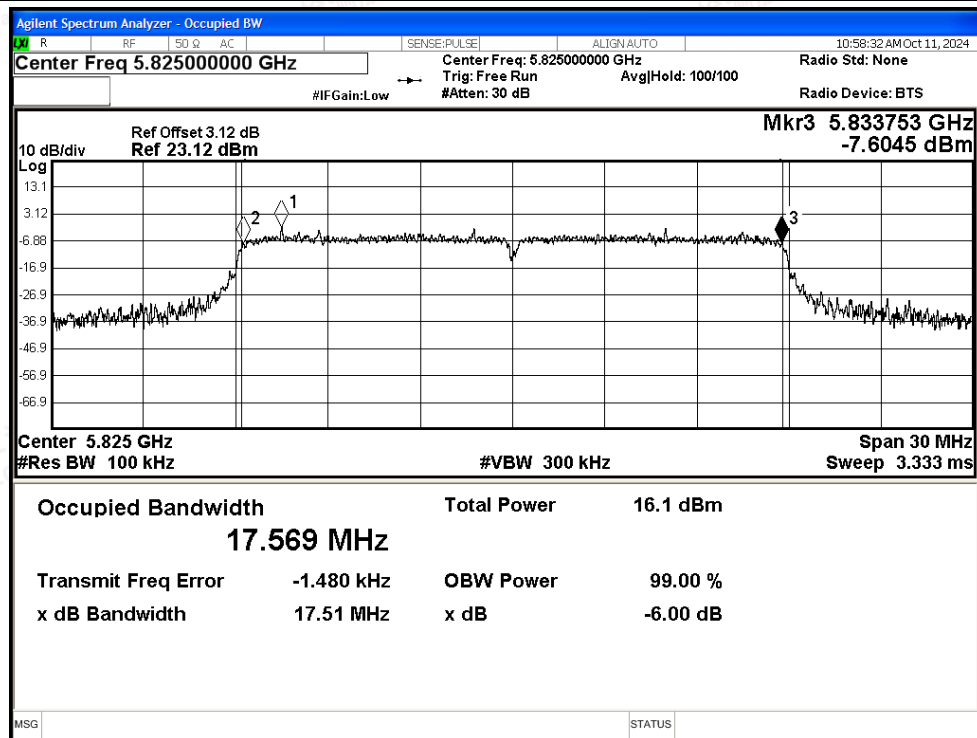




-6dB Bandwidth NVNT n40 5755MHz Ant2

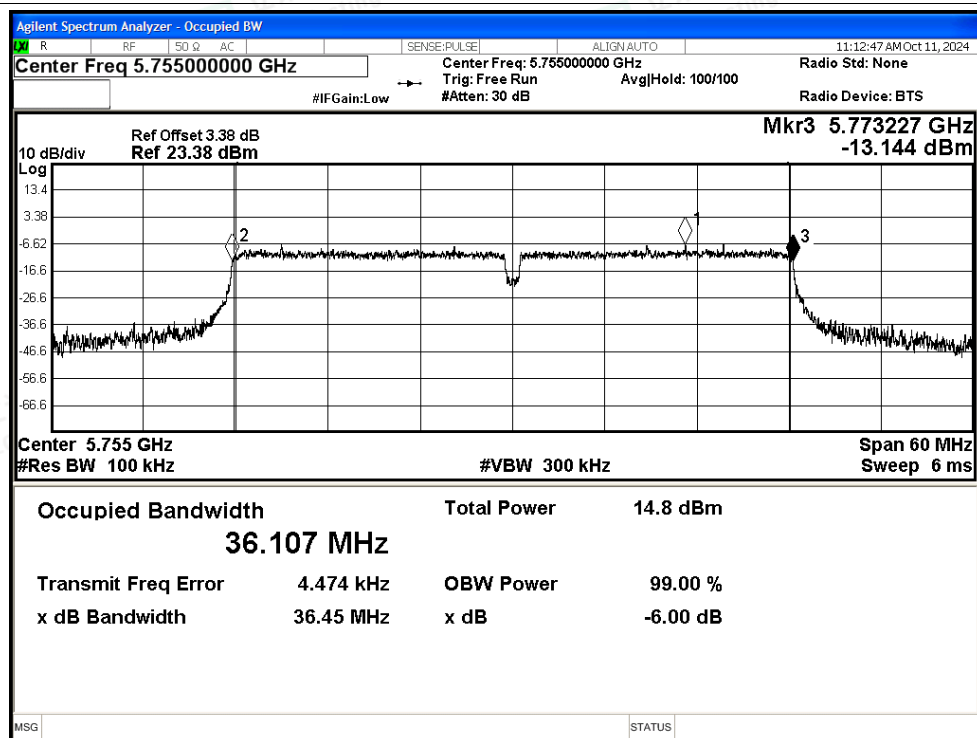


-6dB Bandwidth NVNT n40 5795MHz Ant2

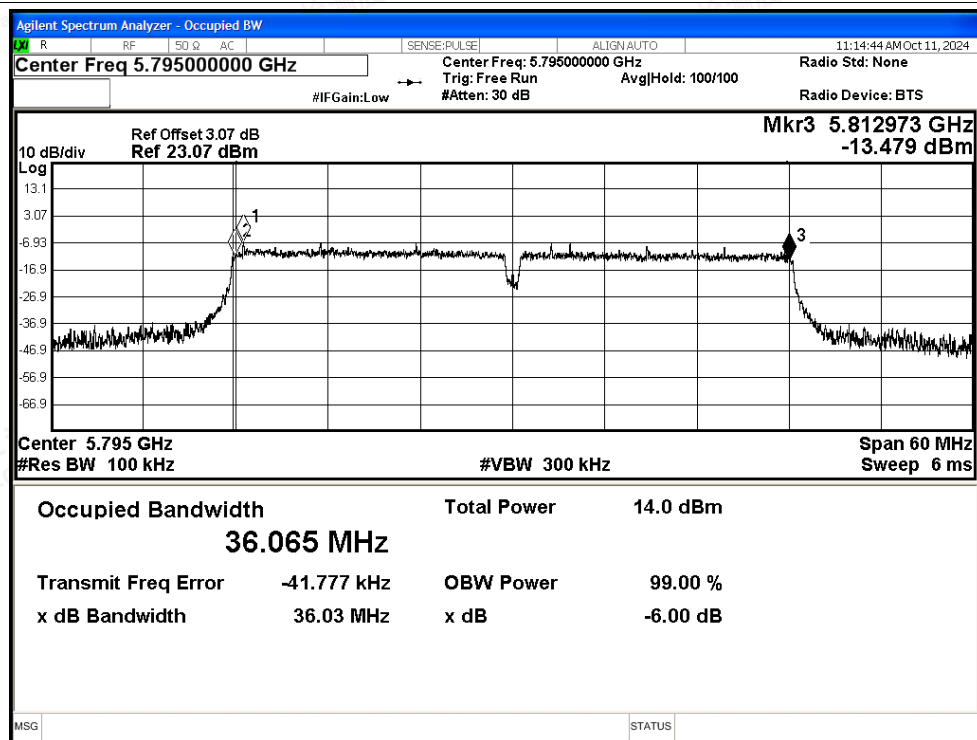




-6dB Bandwidth NVNT ac20 5745MHz Ant2

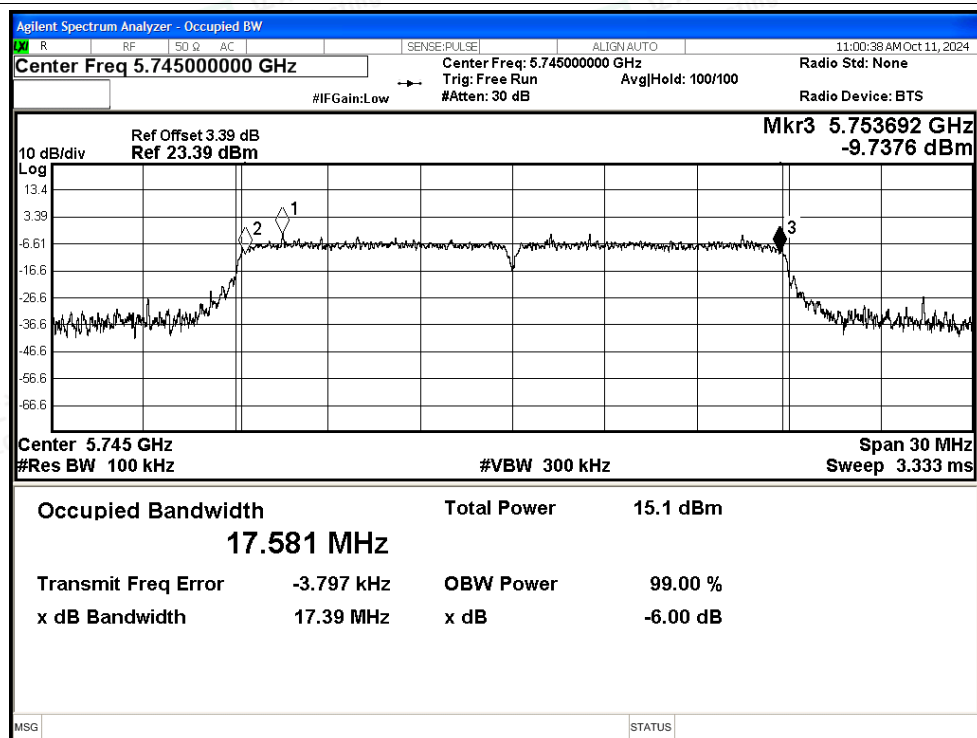


-6dB Bandwidth NVNT ac20 5785MHz Ant2

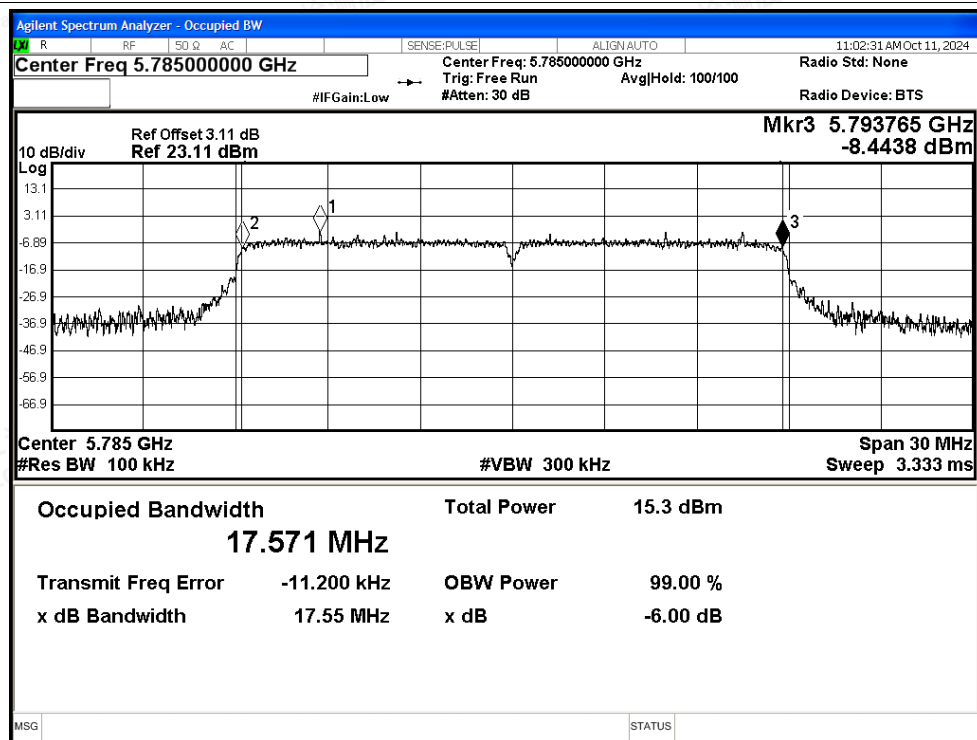




-6dB Bandwidth NVNT ac20 5825MHz Ant2

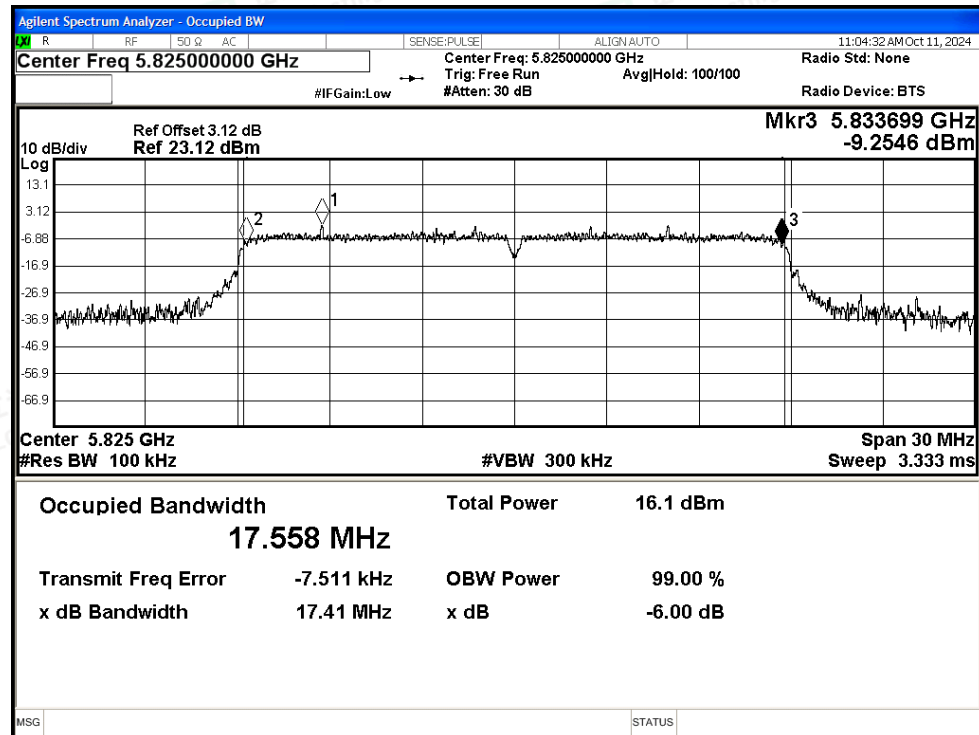


-6dB Bandwidth NVNT ac40 5755MHz Ant2

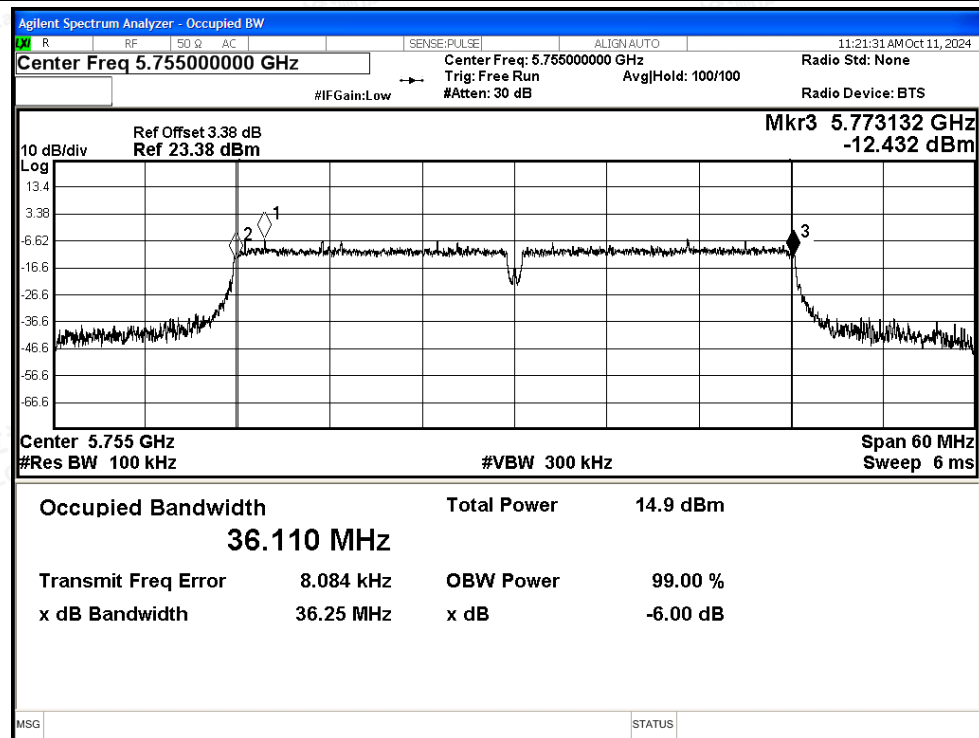




-6dB Bandwidth NVNT ac40 5795MHz Ant2

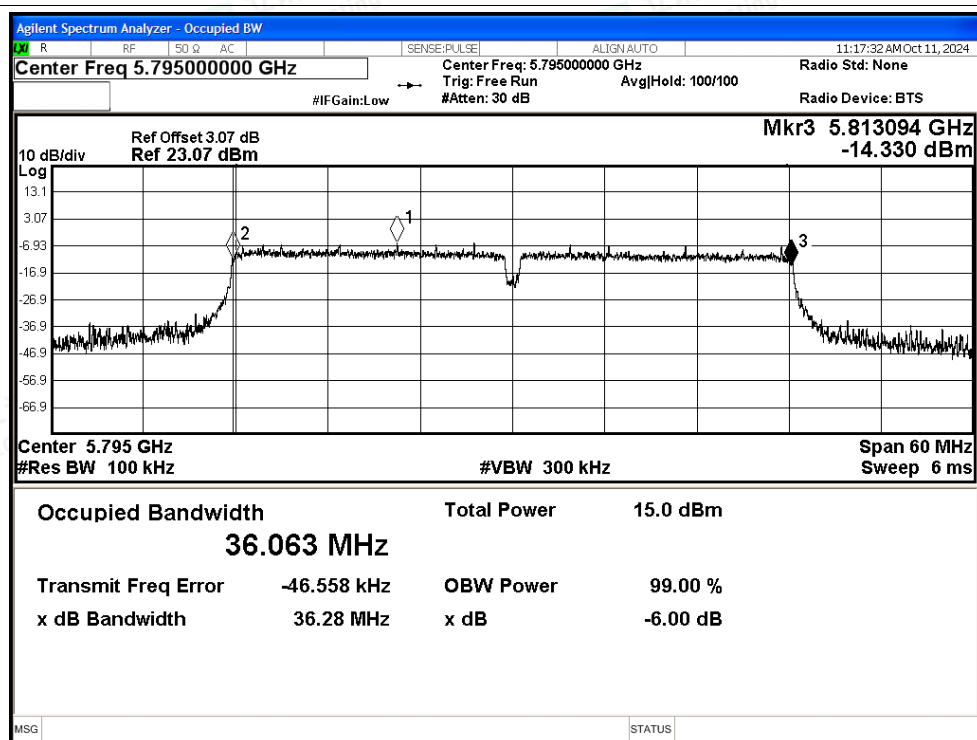


-6dB Bandwidth NVNT ac80 5775MHz Ant2

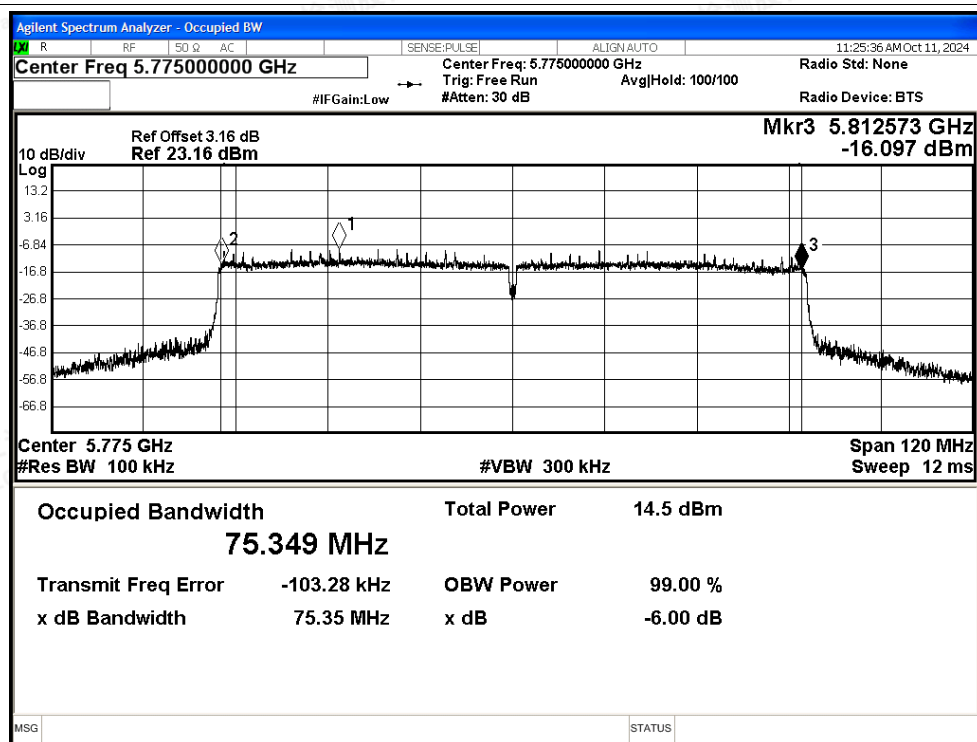




-6dB Bandwidth NVNT ax20 5745MHz Ant2

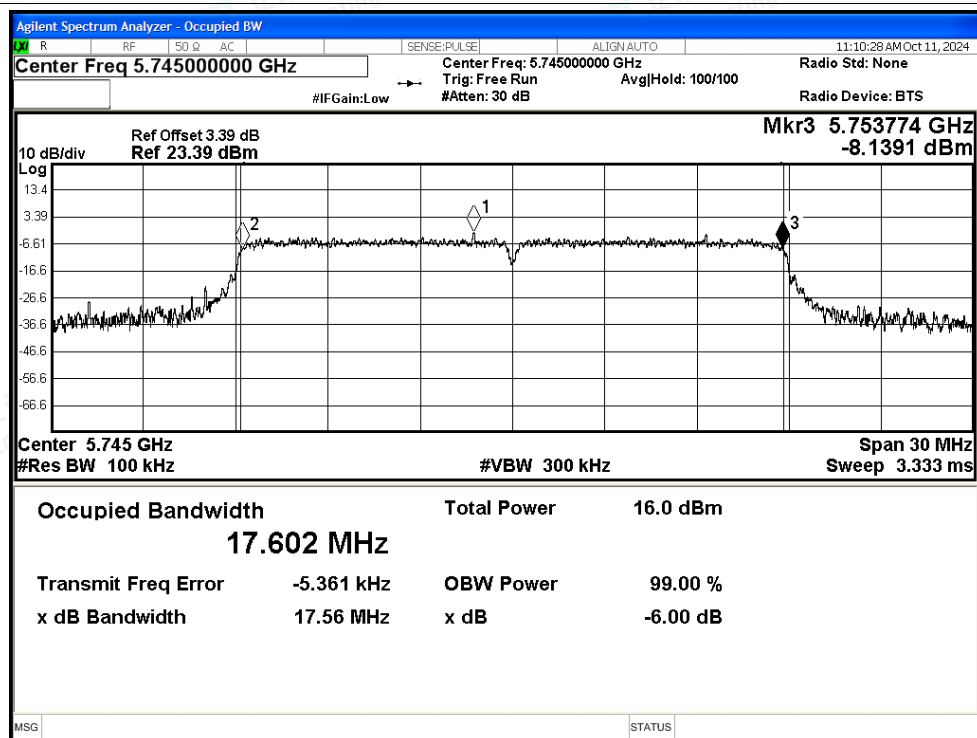


-6dB Bandwidth NVNT ax20 5785MHz Ant2

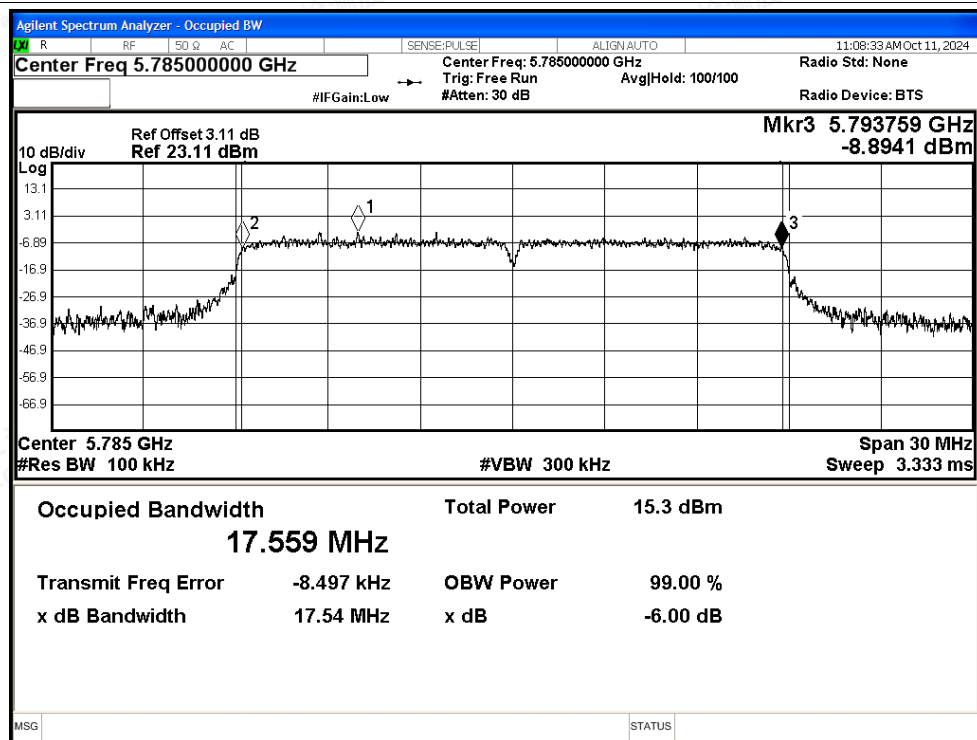




-6dB Bandwidth NVNT ax20 5825MHz Ant2

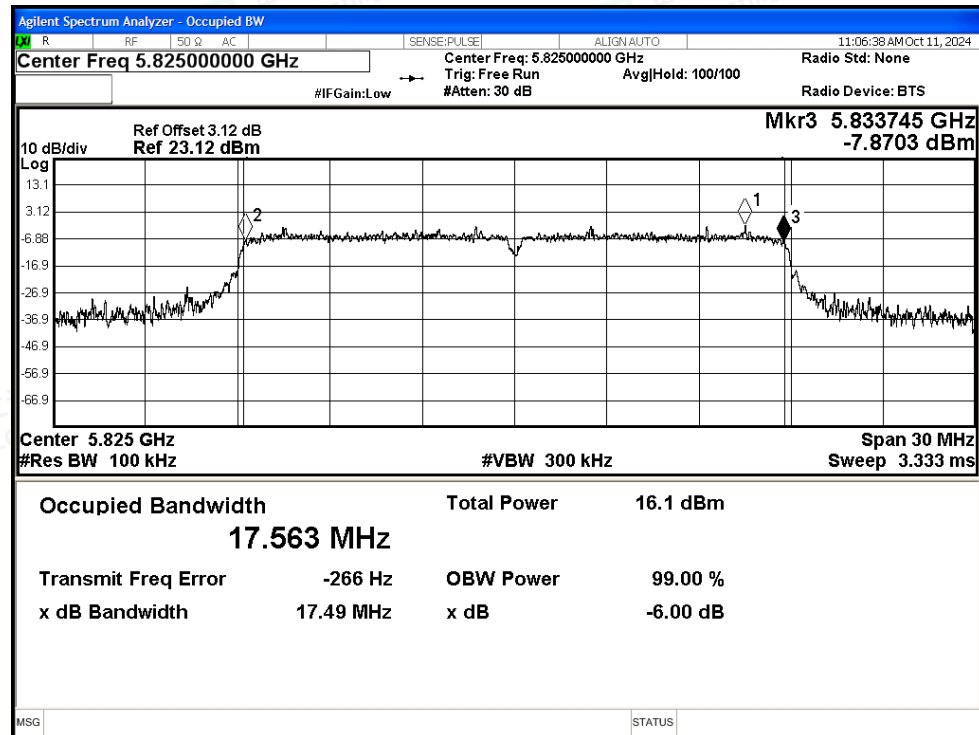


-6dB Bandwidth NVNT ax40 5755MHz Ant2

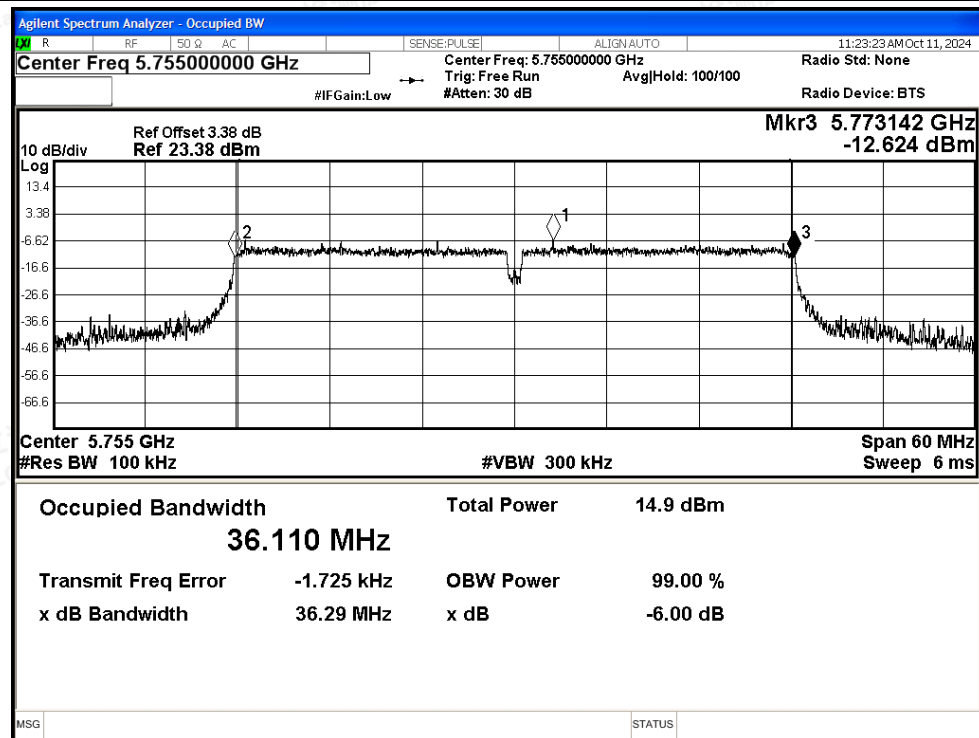




-6dB Bandwidth NVNT ax40 5795MHz Ant2

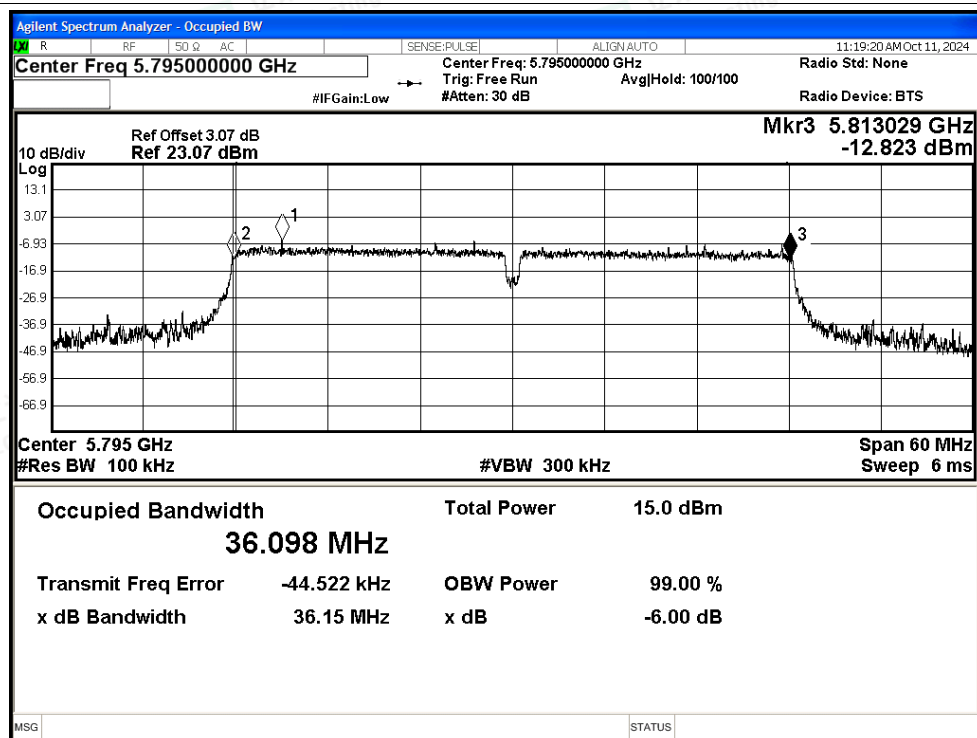

-6dB Bandwidth NVNT ax80 5775MHz Ant2

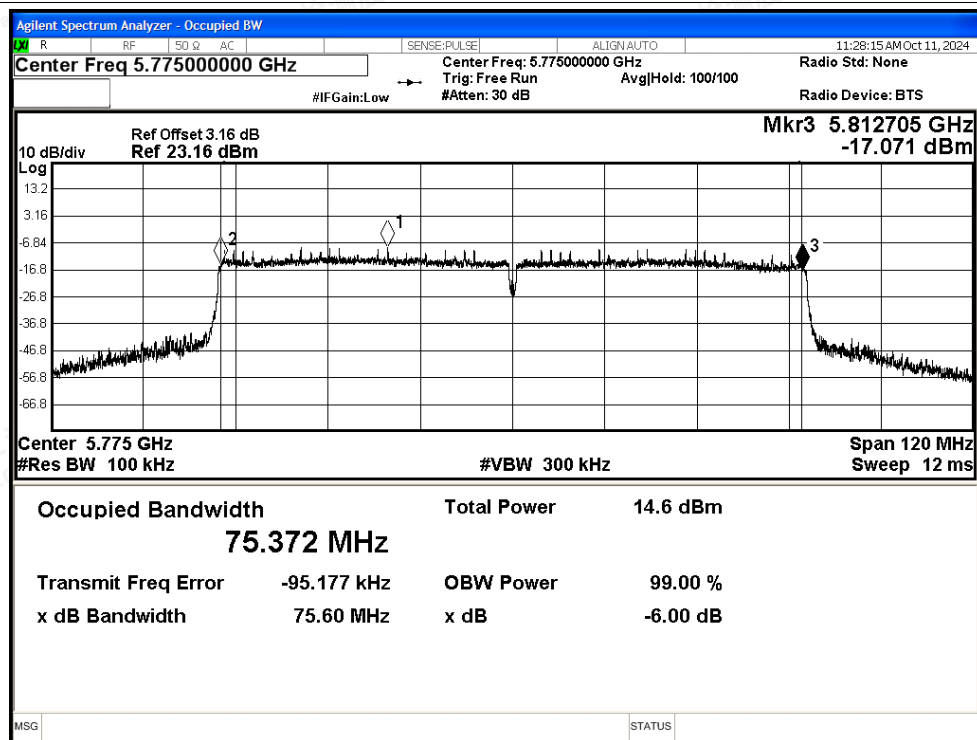



E.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	12.61	0.24	12.85	30	Pass
NVNT	a	5785	Ant0	12.64	0.24	12.88	30	Pass
NVNT	a	5825	Ant0	12.41	0.24	12.65	30	Pass
NVNT	n20	5745	Ant0	12.05	0.12	12.17	30	Pass
NVNT	n20	5785	Ant0	11.23	0.12	11.35	30	Pass
NVNT	n20	5825	Ant0	10.96	0.12	11.08	30	Pass
NVNT	n40	5755	Ant0	10.69	0.12	10.81	30	Pass
NVNT	n40	5795	Ant0	9.8	0.12	9.92	30	Pass
NVNT	ac20	5745	Ant0	11.15	0.12	11.27	30	Pass
NVNT	ac20	5785	Ant0	11.27	0.12	11.39	30	Pass
NVNT	ac20	5825	Ant0	10.95	0.12	11.07	30	Pass
NVNT	ac40	5755	Ant0	10.64	0.12	10.76	30	Pass
NVNT	ac40	5795	Ant0	9.86	0.12	9.98	30	Pass
NVNT	ac80	5775	Ant0	9.8	0.25	10.05	30	Pass
NVNT	ax20	5745	Ant0	11.11	0.12	11.23	30	Pass
NVNT	ax20	5785	Ant0	11.21	0.12	11.33	30	Pass
NVNT	ax20	5825	Ant0	10.96	0.12	11.08	30	Pass
NVNT	ax40	5755	Ant0	10.7	0.12	10.82	30	Pass
NVNT	ax40	5795	Ant0	9.81	0.12	9.93	30	Pass
NVNT	ax80	5775	Ant0	9.78	0.25	10.03	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	11.71	0.24	11.95	30	Pass
NVNT	a	5785	Ant1	10.85	0.24	11.09	30	Pass
NVNT	a	5825	Ant1	11.5	0.24	11.74	30	Pass
NVNT	n20	5745	Ant1	10	0.12	10.12	30	Pass
NVNT	n20	5785	Ant1	10.33	0.12	10.45	30	Pass
NVNT	n20	5825	Ant1	10.03	0.12	10.15	30	Pass
NVNT	n40	5755	Ant1	9.46	0.12	9.58	30	Pass
NVNT	n40	5795	Ant1	9.75	0.12	9.87	30	Pass
NVNT	ac20	5745	Ant1	10	0.12	10.12	30	Pass
NVNT	ac20	5785	Ant1	10.22	0.12	10.34	30	Pass
NVNT	ac20	5825	Ant1	10	0.12	10.12	30	Pass
NVNT	ac40	5755	Ant1	9.48	0.12	9.6	30	Pass
NVNT	ac40	5795	Ant1	9.73	0.12	9.85	30	Pass
NVNT	ac80	5775	Ant1	8.76	0.25	9.01	30	Pass
NVNT	ax20	5745	Ant1	10.02	0.12	10.14	30	Pass
NVNT	ax20	5785	Ant1	10.27	0.12	10.39	30	Pass
NVNT	ax20	5825	Ant1	10.01	0.12	10.13	30	Pass
NVNT	ax40	5755	Ant1	9.5	0.12	9.62	30	Pass
NVNT	ax40	5795	Ant1	9.75	0.12	9.87	30	Pass
NVNT	ax80	5775	Ant1	8.71	0.25	8.96	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant2	10.78	0.24	11.02	30	Pass
NVNT	a	5785	Ant2	10.79	0.24	11.03	30	Pass
NVNT	a	5825	Ant2	10.53	0.24	10.77	30	Pass
NVNT	n20	5745	Ant2	9.9	0.12	10.02	30	Pass
NVNT	n20	5785	Ant2	9.07	0.12	9.19	30	Pass
NVNT	n20	5825	Ant2	9.94	0.12	10.06	30	Pass
NVNT	n40	5755	Ant2	8.48	0.12	8.6	30	Pass
NVNT	n40	5795	Ant2	8.64	0.12	8.76	30	Pass
NVNT	ac20	5745	Ant2	8.91	0.12	9.03	30	Pass
NVNT	ac20	5785	Ant2	9.1	0.12	9.22	30	Pass
NVNT	ac20	5825	Ant2	9.9	0.12	10.02	30	Pass
NVNT	ac40	5755	Ant2	8.49	0.12	8.61	30	Pass
NVNT	ac40	5795	Ant2	8.63	0.12	8.75	30	Pass
NVNT	ac80	5775	Ant2	7.64	0.25	7.89	30	Pass
NVNT	ax20	5745	Ant2	9.93	0.12	10.05	30	Pass
NVNT	ax20	5785	Ant2	9.14	0.12	9.26	30	Pass
NVNT	ax20	5825	Ant2	9.91	0.12	10.03	30	Pass
NVNT	ax40	5755	Ant2	8.48	0.12	8.6	30	Pass
NVNT	ax40	5795	Ant2	8.63	0.12	8.75	30	Pass
NVNT	ax80	5775	Ant2	7.69	0.25	7.94	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total Power (dBm)				Limit (dBm)	Verdict
			Ant0	Ant1	Ant2	Ant0+Ant1+Ant2		
NVNT	n20	5745	12.17	10.12	10.02	15.66	30	Pass
NVNT	n20	5785	11.35	10.45	9.19	15.19	30	Pass
NVNT	n20	5825	11.08	10.15	10.06	15.23	30	Pass
NVNT	n40	5755	10.81	9.58	8.6	14.53	30	Pass
NVNT	n40	5795	9.92	9.87	8.76	14.32	30	Pass
NVNT	ac20	5745	11.27	10.12	9.03	15.01	30	Pass
NVNT	ac20	5785	11.39	10.34	9.22	15.18	30	Pass
NVNT	ac20	5825	11.07	10.12	10.02	15.20	30	Pass
NVNT	ac40	5755	10.76	9.6	8.61	14.52	30	Pass
NVNT	ac40	5795	9.98	9.85	8.75	14.33	30	Pass
NVNT	ac80	5775	10.05	9.01	7.89	13.84	30	Pass
NVNT	ax20	5745	11.23	10.14	10.05	15.28	30	Pass
NVNT	ax20	5785	11.33	10.39	9.26	15.18	30	Pass
NVNT	ax20	5825	11.08	10.13	10.03	15.21	30	Pass
NVNT	ax40	5755	10.82	9.62	8.6	14.55	30	Pass
NVNT	ax40	5795	9.93	9.87	8.75	14.32	30	Pass
NVNT	ax80	5775	10.03	8.96	7.94	13.83	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



E.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant0	-1.04	0.24	-0.8	30	Pass
NVNT	a	5785	Ant0	-0.89	0.24	-0.65	30	Pass
NVNT	a	5825	Ant0	-1.15	0.24	-0.91	30	Pass
NVNT	n20	5745	Ant0	-1.87	0.12	-1.75	30	Pass
NVNT	n20	5785	Ant0	-2.76	0.12	-2.64	30	Pass
NVNT	n20	5825	Ant0	-2.84	0.12	-2.72	30	Pass
NVNT	n40	5755	Ant0	-6.26	0.12	-6.14	30	Pass
NVNT	n40	5795	Ant0	-6.69	0.12	-6.57	30	Pass
NVNT	ac20	5745	Ant0	-2.67	0.12	-2.55	30	Pass
NVNT	ac20	5785	Ant0	-3.54	0.12	-3.42	30	Pass
NVNT	ac20	5825	Ant0	-2.92	0.12	-2.8	30	Pass
NVNT	ac40	5755	Ant0	-6.12	0.12	-6	30	Pass
NVNT	ac40	5795	Ant0	-6.21	0.12	-6.09	30	Pass
NVNT	ac80	5775	Ant0	-9.74	0.25	-9.49	30	Pass
NVNT	ax20	5745	Ant0	-2.7	0.12	-2.58	30	Pass
NVNT	ax20	5785	Ant0	-2.59	0.12	-2.47	30	Pass
NVNT	ax20	5825	Ant0	-2.77	0.12	-2.65	30	Pass
NVNT	ax40	5755	Ant0	-5.99	0.12	-5.87	30	Pass
NVNT	ax40	5795	Ant0	-6.56	0.12	-6.44	30	Pass
NVNT	ax80	5775	Ant0	-9.65	0.25	-9.4	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant1	-2.07	0.24	-1.83	30	Pass
NVNT	a	5785	Ant1	-2.68	0.24	-2.44	30	Pass
NVNT	a	5825	Ant1	-1.99	0.24	-1.75	30	Pass
NVNT	n20	5745	Ant1	-3.96	0.12	-3.84	30	Pass
NVNT	n20	5785	Ant1	-3.58	0.12	-3.46	30	Pass
NVNT	n20	5825	Ant1	-3.8	0.12	-3.68	30	Pass
NVNT	n40	5755	Ant1	-7.32	0.12	-7.2	30	Pass
NVNT	n40	5795	Ant1	-6.27	0.12	-6.15	30	Pass
NVNT	ac20	5745	Ant1	-3.81	0.12	-3.69	30	Pass
NVNT	ac20	5785	Ant1	-3.57	0.12	-3.45	30	Pass
NVNT	ac20	5825	Ant1	-3.82	0.12	-3.7	30	Pass
NVNT	ac40	5755	Ant1	-6.87	0.12	-6.75	30	Pass
NVNT	ac40	5795	Ant1	-6.68	0.12	-6.56	30	Pass
NVNT	ac80	5775	Ant1	-10.4	0.25	-10.15	30	Pass
NVNT	ax20	5745	Ant1	-3.85	0.12	-3.73	30	Pass
NVNT	ax20	5785	Ant1	-3.6	0.12	-3.48	30	Pass
NVNT	ax20	5825	Ant1	-3.82	0.12	-3.7	30	Pass
NVNT	ax40	5755	Ant1	-7.45	0.12	-7.33	30	Pass
NVNT	ax40	5795	Ant1	-6.49	0.12	-6.37	30	Pass
NVNT	ax80	5775	Ant1	-10.69	0.25	-10.44	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/500KHz)	Duty Factor (dB)	Total PSD (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
NVNT	a	5745	Ant2	-2.79	0.24	-2.55	30	Pass
NVNT	a	5785	Ant2	-2.82	0.24	-2.58	30	Pass
NVNT	a	5825	Ant2	-3.21	0.24	-2.97	30	Pass
NVNT	n20	5745	Ant2	-3.94	0.12	-3.82	30	Pass
NVNT	n20	5785	Ant2	-4.72	0.12	-4.6	30	Pass
NVNT	n20	5825	Ant2	-3.84	0.12	-3.72	30	Pass
NVNT	n40	5755	Ant2	-8.42	0.12	-8.3	30	Pass
NVNT	n40	5795	Ant2	-8.66	0.12	-8.54	30	Pass
NVNT	ac20	5745	Ant2	-4.97	0.12	-4.85	30	Pass
NVNT	ac20	5785	Ant2	-4.53	0.12	-4.41	30	Pass
NVNT	ac20	5825	Ant2	-3.99	0.12	-3.87	30	Pass
NVNT	ac40	5755	Ant2	-8.32	0.12	-8.2	30	Pass
NVNT	ac40	5795	Ant2	-7.9	0.12	-7.78	30	Pass
NVNT	ac80	5775	Ant2	-11.79	0.25	-11.54	30	Pass
NVNT	ax20	5745	Ant2	-3.99	0.12	-3.87	30	Pass
NVNT	ax20	5785	Ant2	-4.76	0.12	-4.64	30	Pass
NVNT	ax20	5825	Ant2	-4.01	0.12	-3.89	30	Pass
NVNT	ax40	5755	Ant2	-8.25	0.12	-8.13	30	Pass
NVNT	ax40	5795	Ant2	-7.62	0.12	-7.5	30	Pass
NVNT	ax80	5775	Ant2	-11.69	0.25	-11.44	30	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



MIMO

Condition	Mode	Frequency (MHz)	Total PSD (dBm/500KHz)				Limit (dBm/500KHz)	Verdict
			Ant0	Ant1	Ant2	Ant0+Ant1+Ant2		
NVNT	n20	5745	-0.8	-1.83	-2.55	3.10	28.14	Pass
NVNT	n20	5785	-0.65	-2.44	-2.58	2.97	28.14	Pass
NVNT	n20	5825	-0.91	-1.75	-2.97	2.98	28.14	Pass
NVNT	n40	5755	-1.75	-3.84	-3.82	1.75	28.14	Pass
NVNT	n40	5795	-2.64	-3.46	-4.6	1.28	28.14	Pass
NVNT	ac20	5745	-2.72	-3.68	-3.72	1.42	28.14	Pass
NVNT	ac20	5785	-6.14	-7.2	-8.3	-2.35	28.14	Pass
NVNT	ac20	5825	-6.57	-6.15	-8.54	-2.20	28.14	Pass
NVNT	ac40	5755	-2.55	-3.69	-4.85	1.18	28.14	Pass
NVNT	ac40	5795	-3.42	-3.45	-4.41	1.03	28.14	Pass
NVNT	ac80	5775	-2.8	-3.7	-3.87	1.34	28.14	Pass
NVNT	ax20	5745	-6	-6.75	-8.2	-2.12	28.14	Pass
NVNT	ax20	5785	-6.09	-6.56	-7.78	-1.98	28.14	Pass
NVNT	ax20	5825	-9.49	-10.15	-11.54	-5.54	28.14	Pass
NVNT	ax40	5755	-2.58	-3.73	-3.87	1.42	28.14	Pass
NVNT	ax40	5795	-2.47	-3.48	-4.64	1.33	28.14	Pass
NVNT	ax80	5775	-2.65	-3.7	-3.89	1.39	28.14	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

PSD NVNT a 5745MHz Ant0

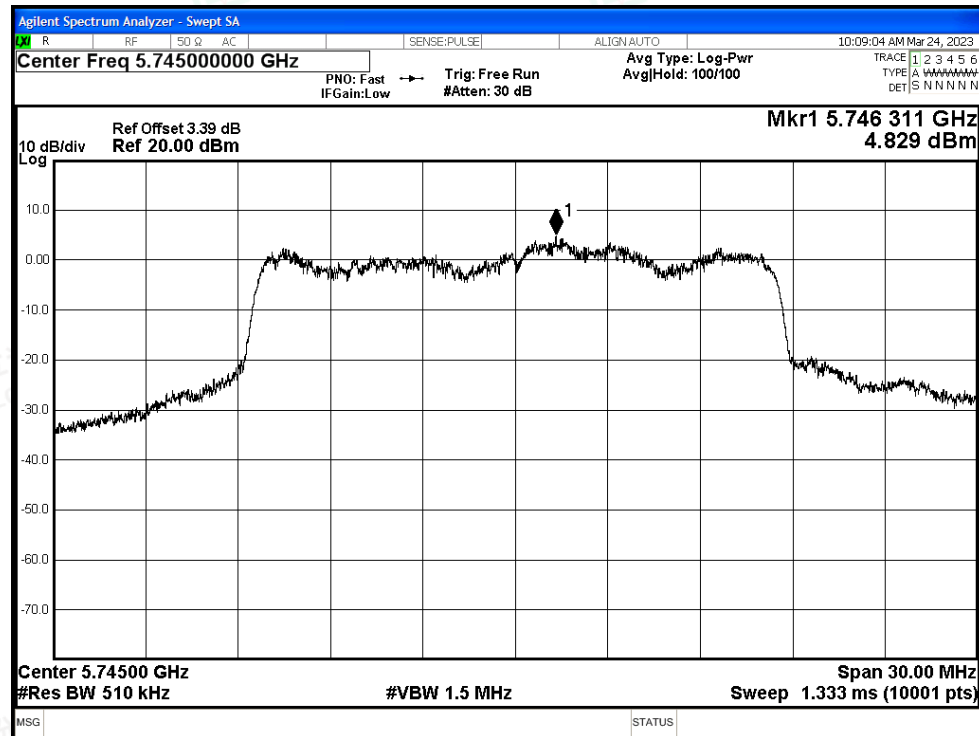


PSD NVNT a 5785MHz Ant0

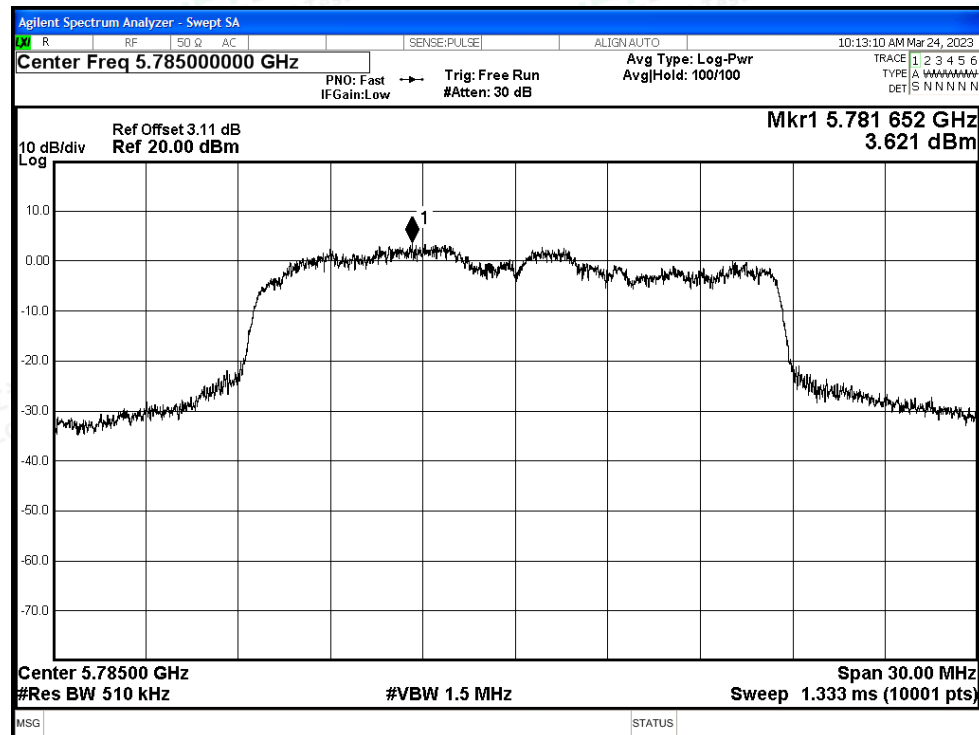








PSD NVNT a 5825MHz Ant0

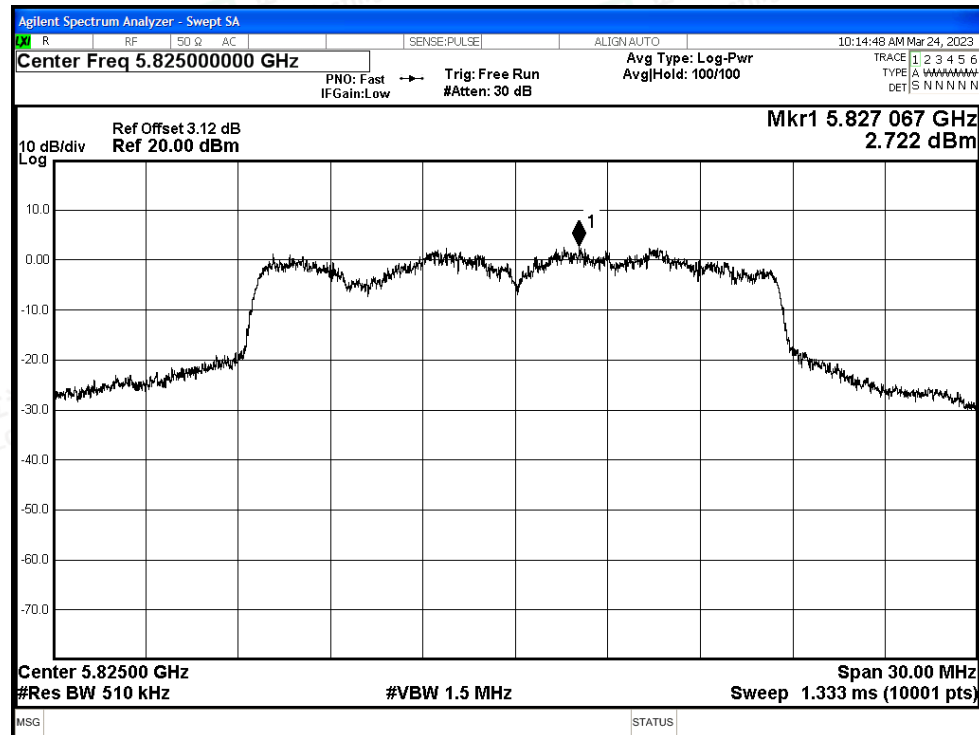

PSD NVNT n20 5745MHz Ant0

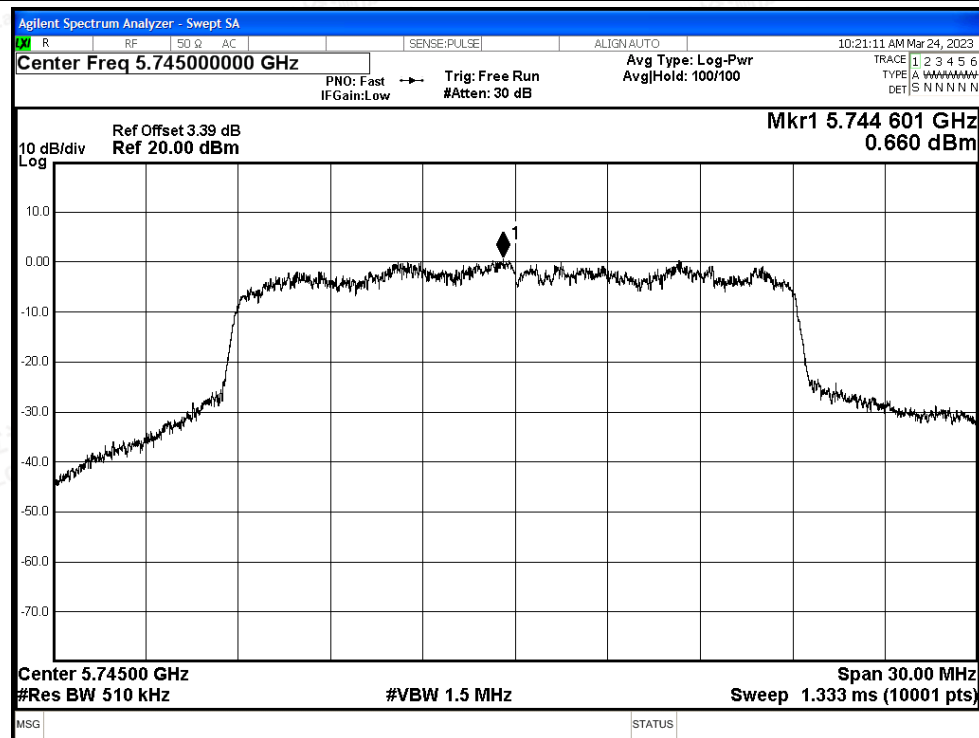


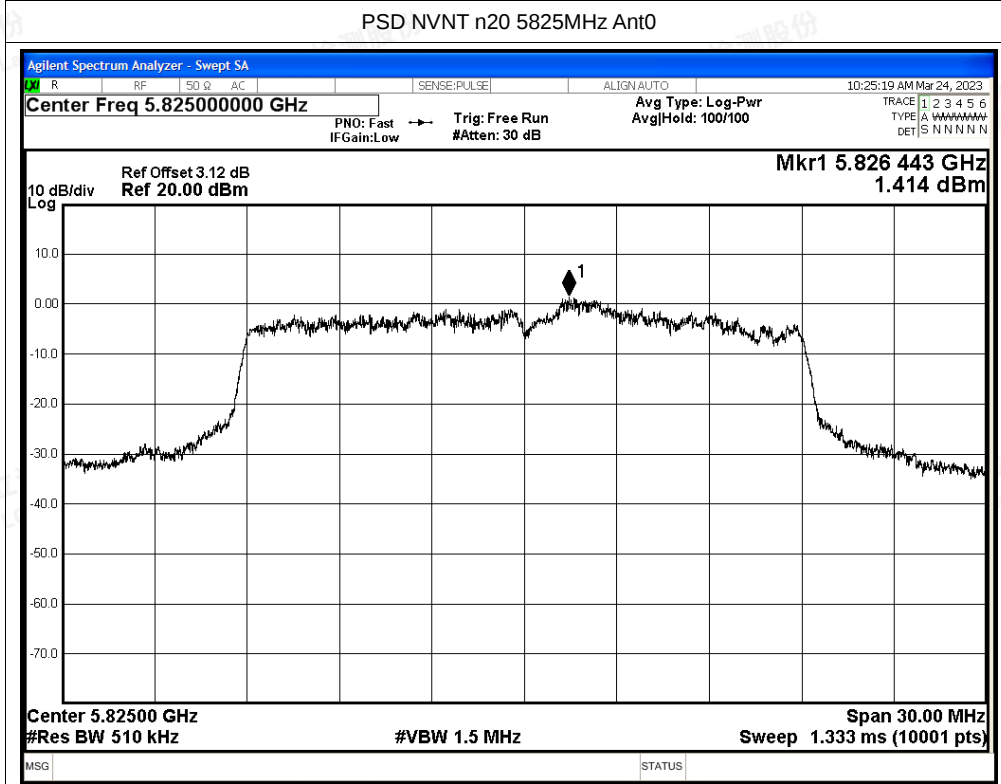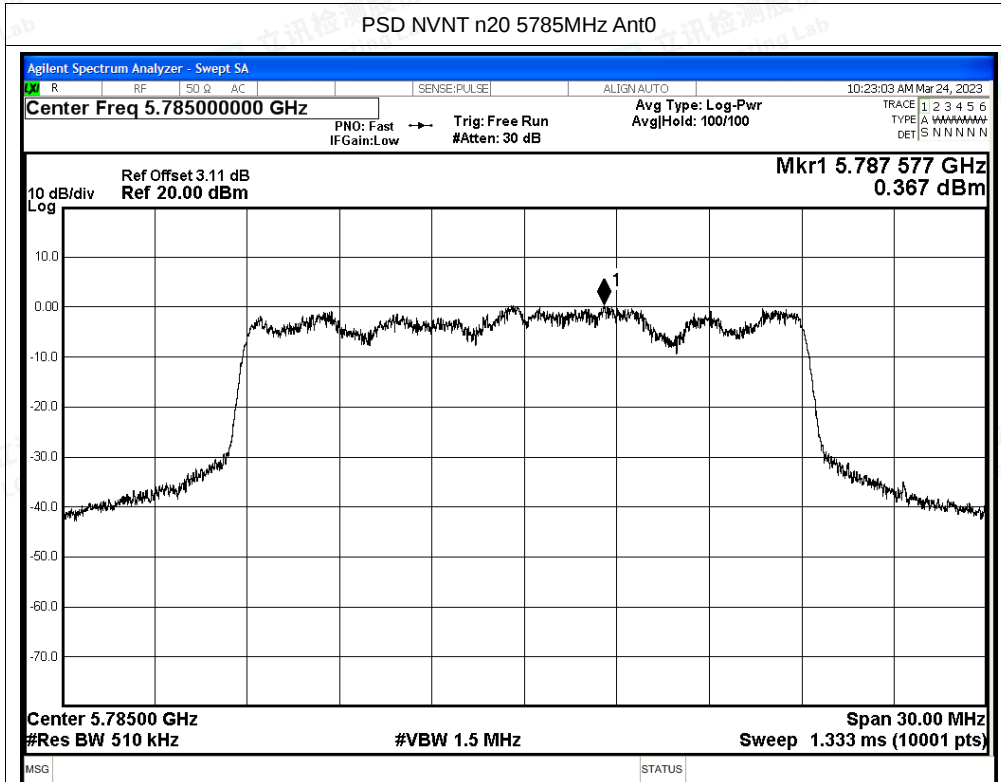

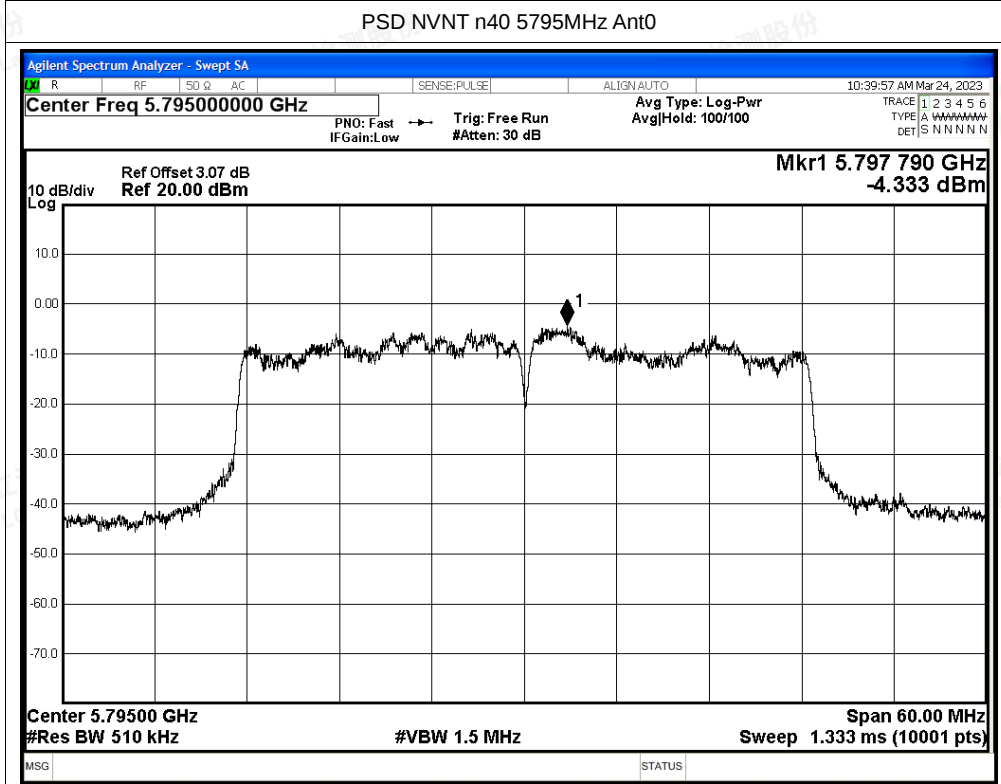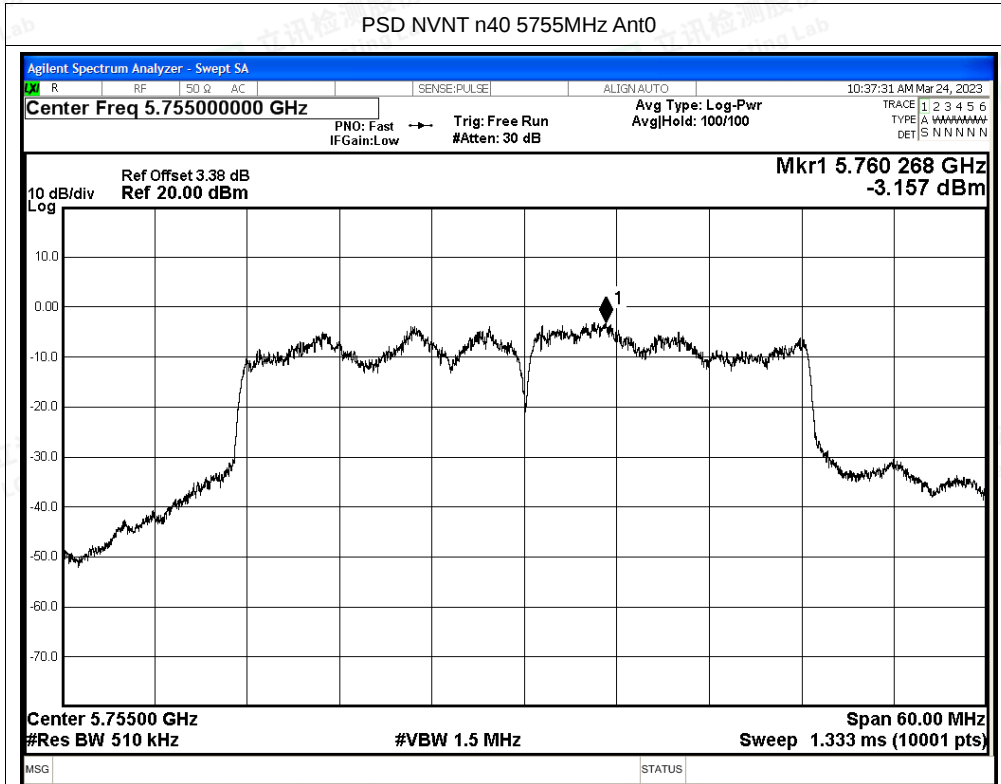



PSD NVNT ac20 5745MHz Ant0

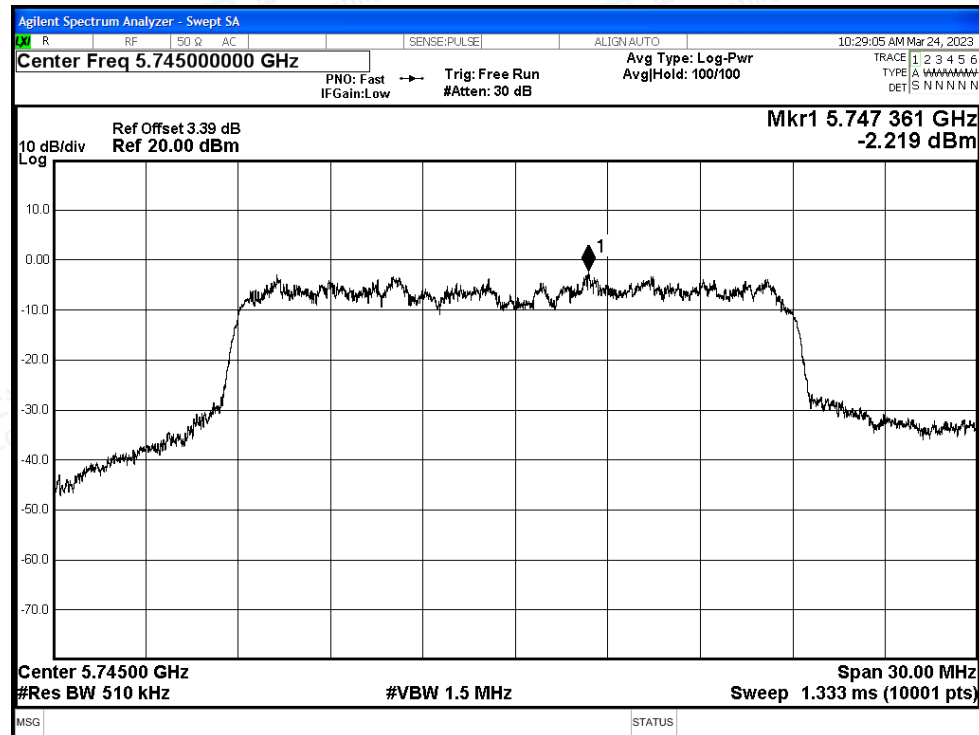


PSD NVNT ac20 5785MHz Ant0






PSD NVNT ac20 5825MHz Ant0

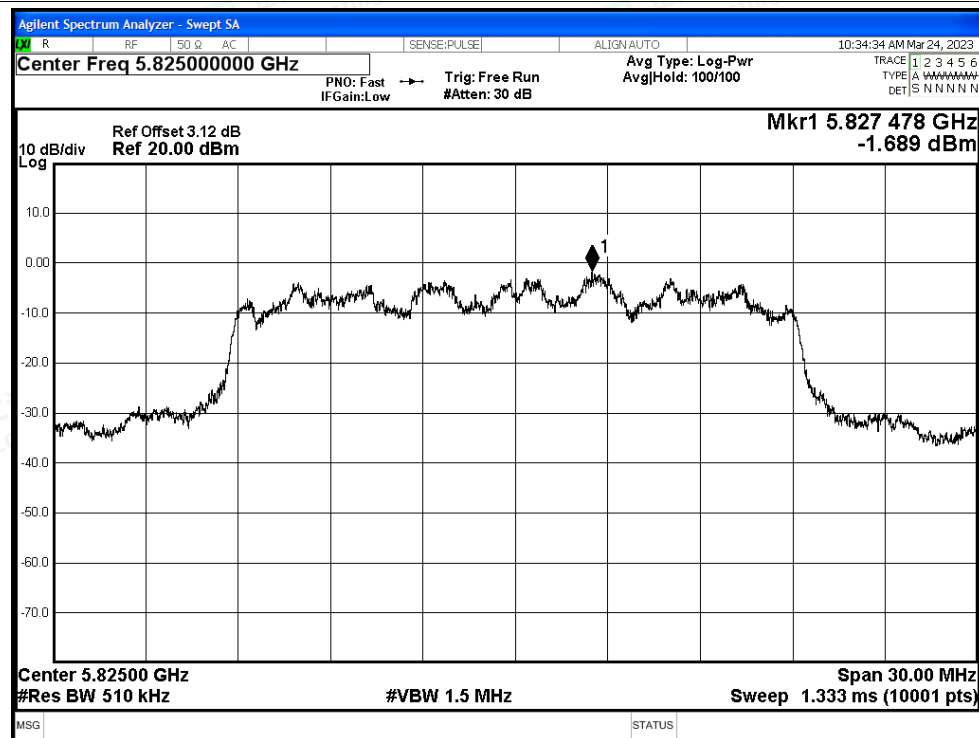


PSD NVNT ac40 5755MHz Ant0

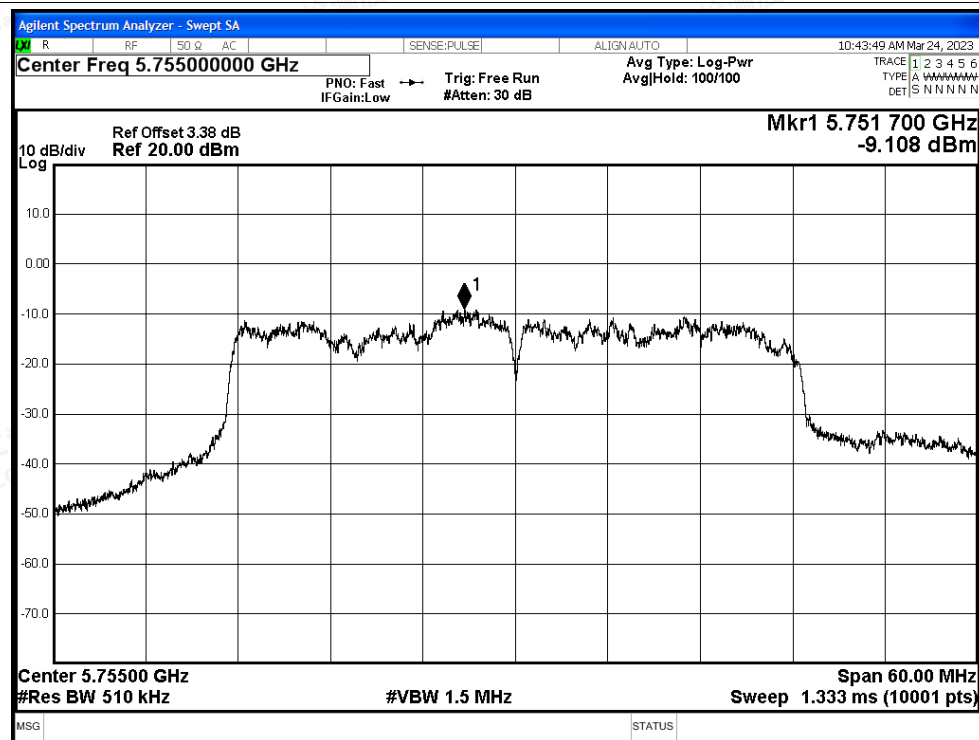




PSD NVNT ac40 5795MHz Ant0

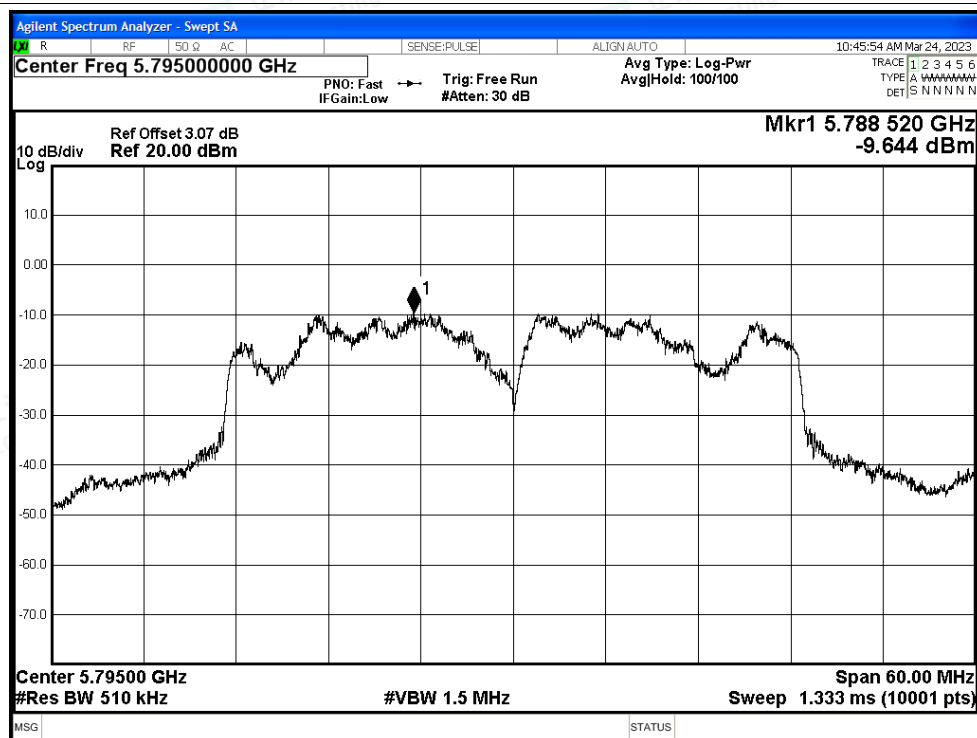


PSD NVNT ac80 5775MHz Ant0

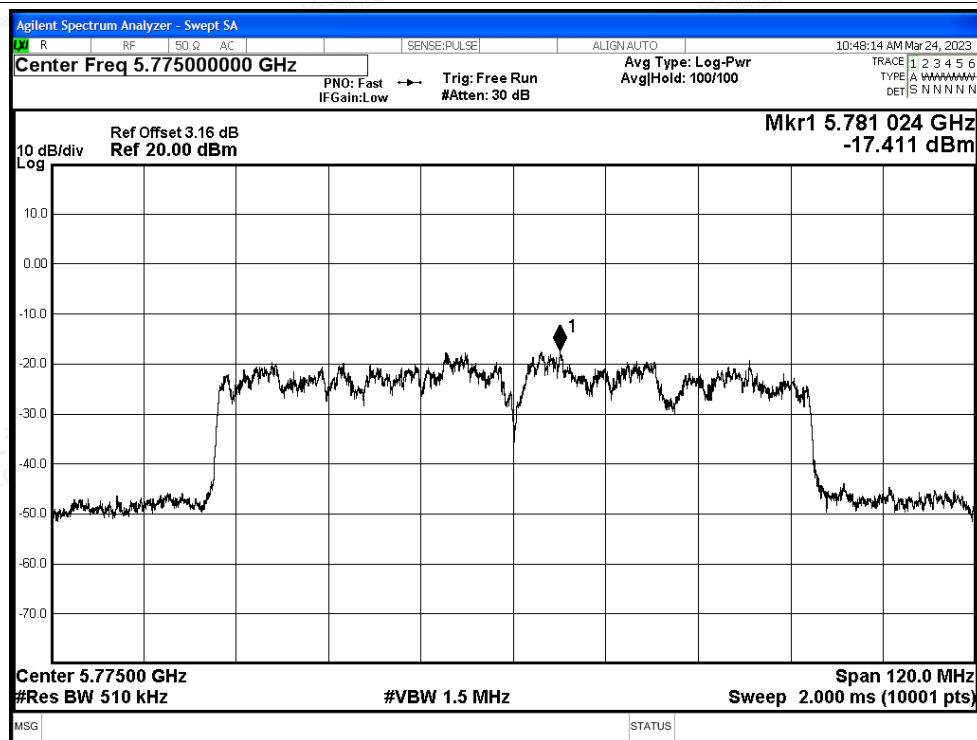






PSD NVNT ax20 5745MHz Ant0

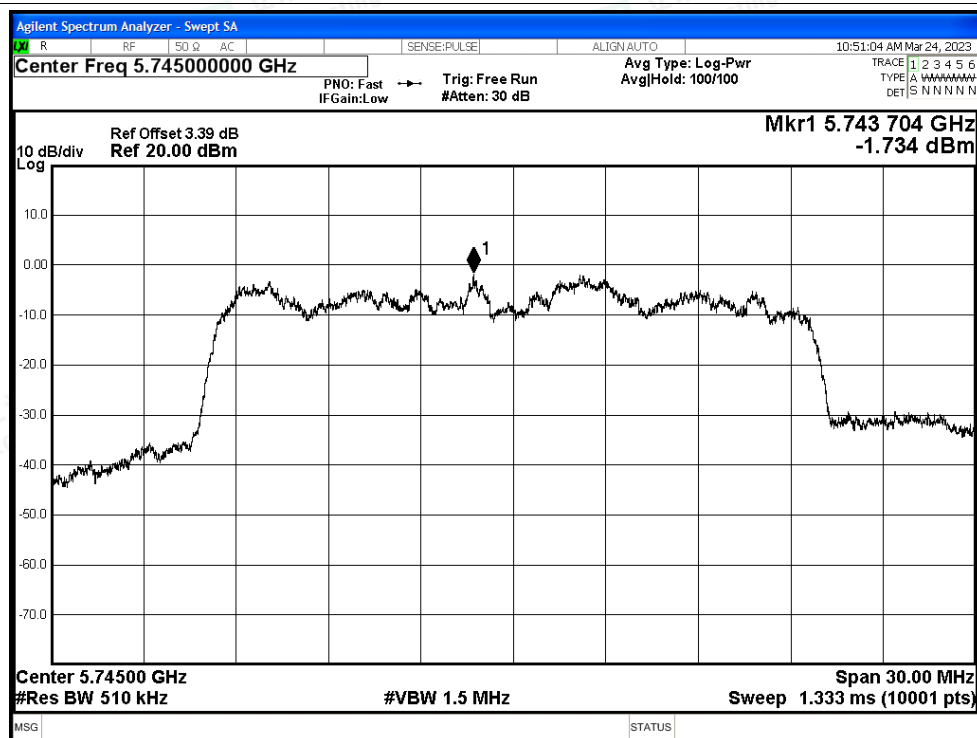


PSD NVNT ax20 5785MHz Ant0

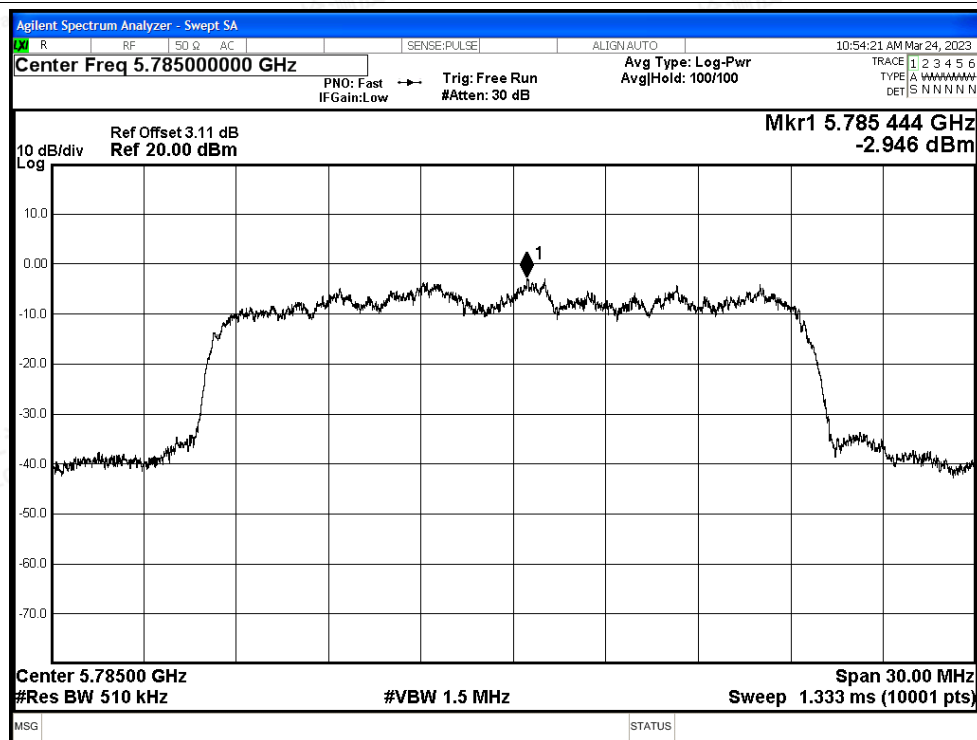

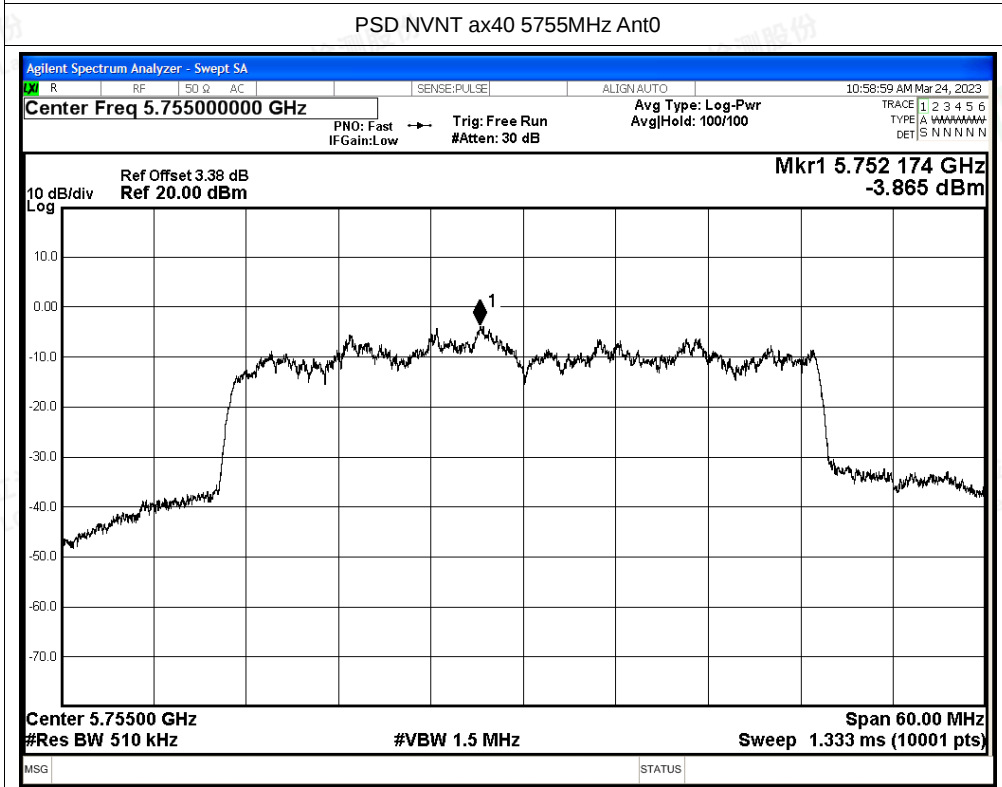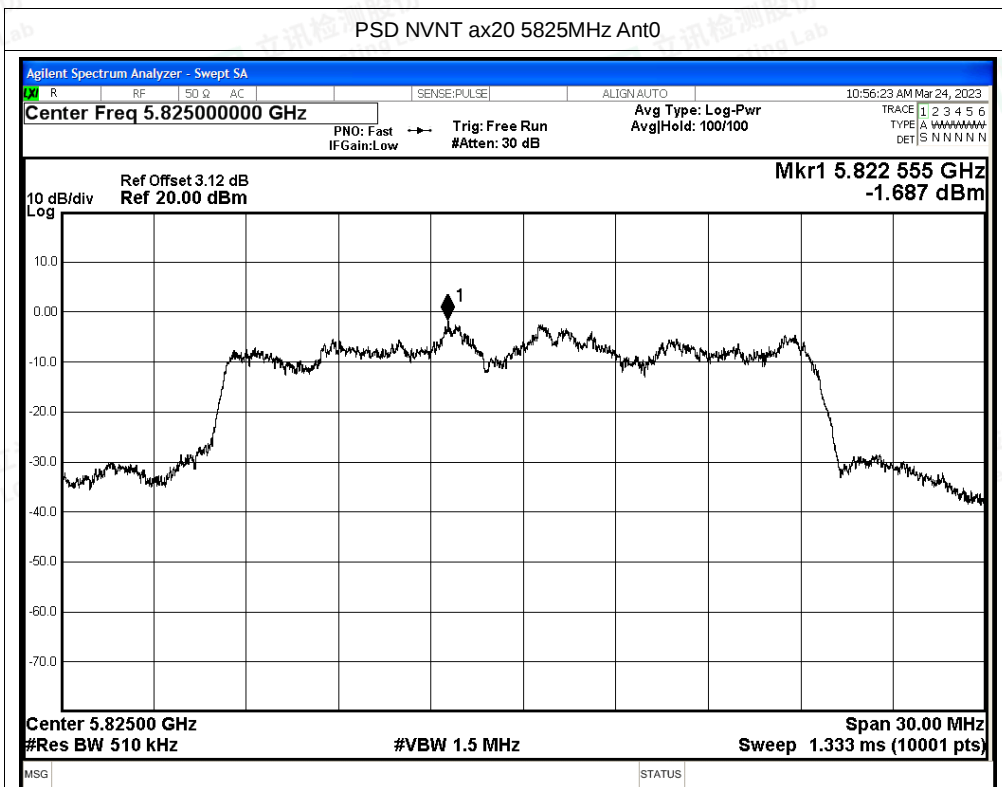




PSD NVNT ax40 5795MHz Ant0

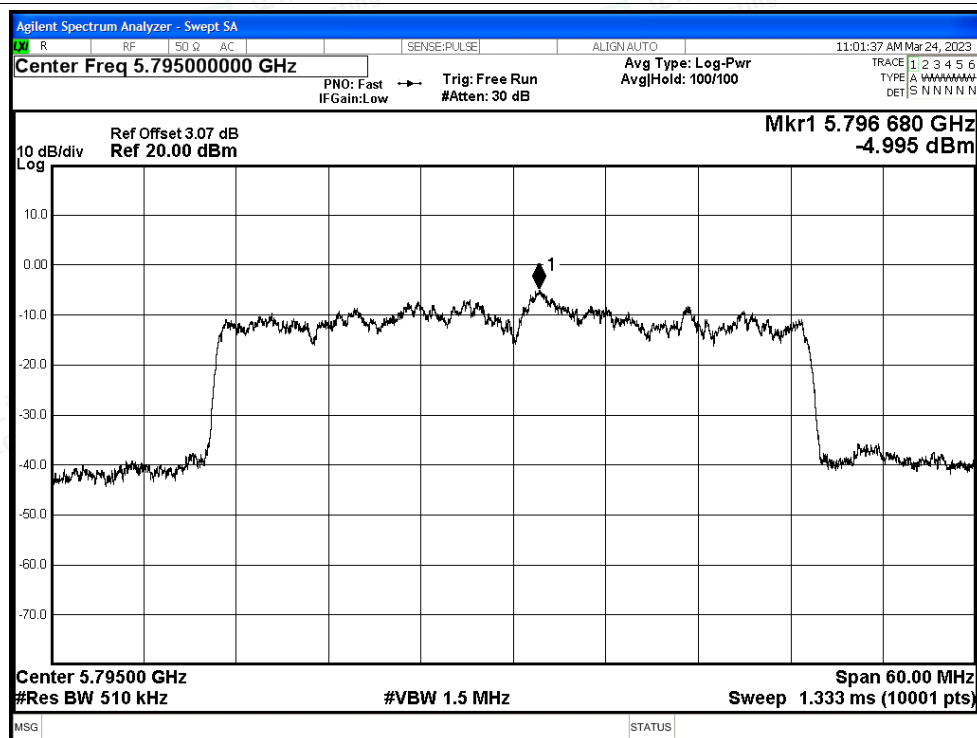


PSD NVNT ax80 5775MHz Ant0

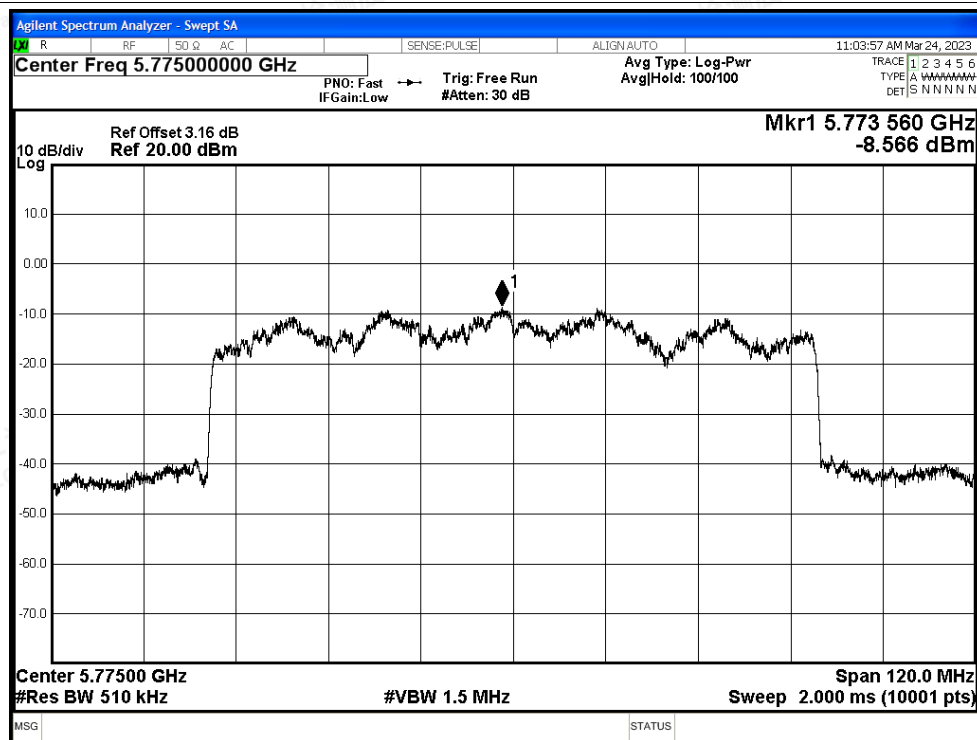




Test Graphs

PSD NVNT a 5745MHz Ant0

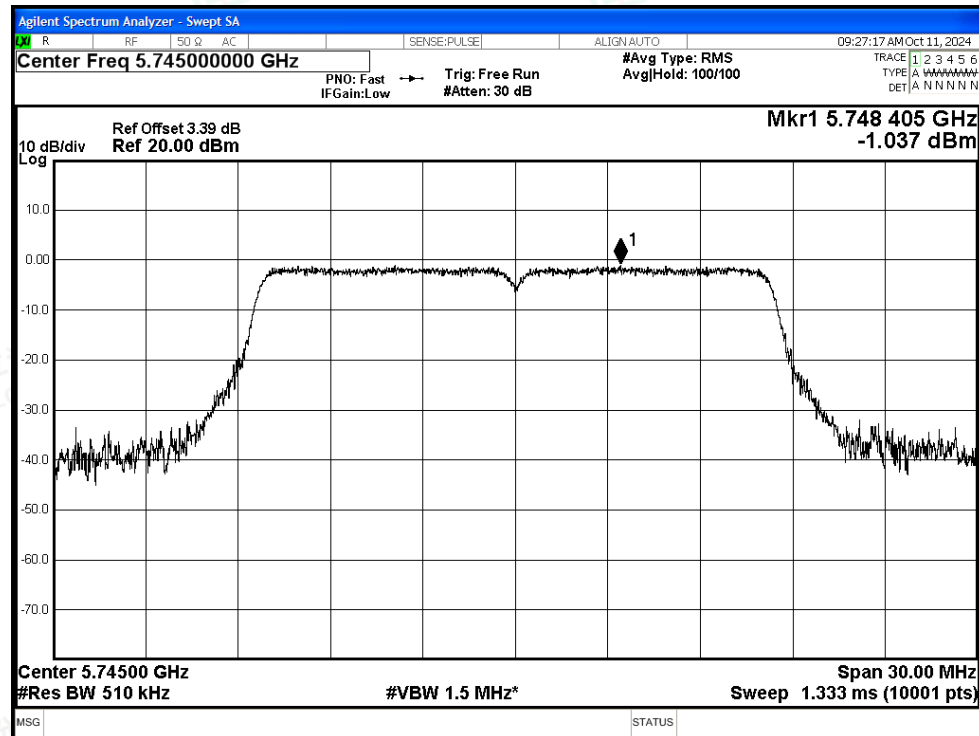


PSD NVNT a 5785MHz Ant0

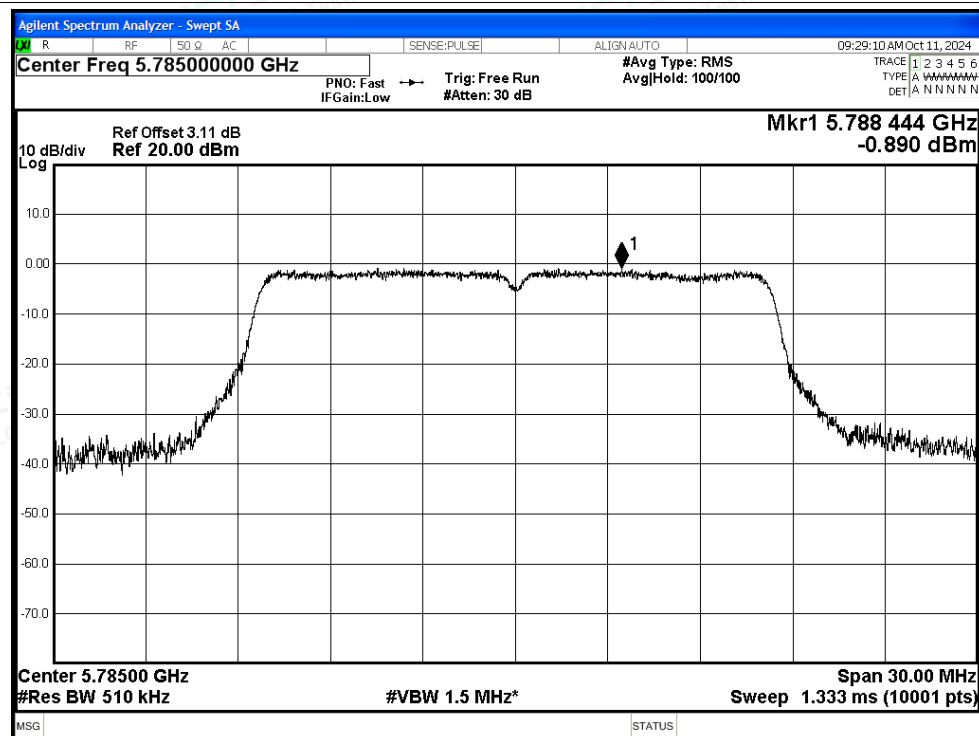








PSD NVNT a 5825MHz Ant0

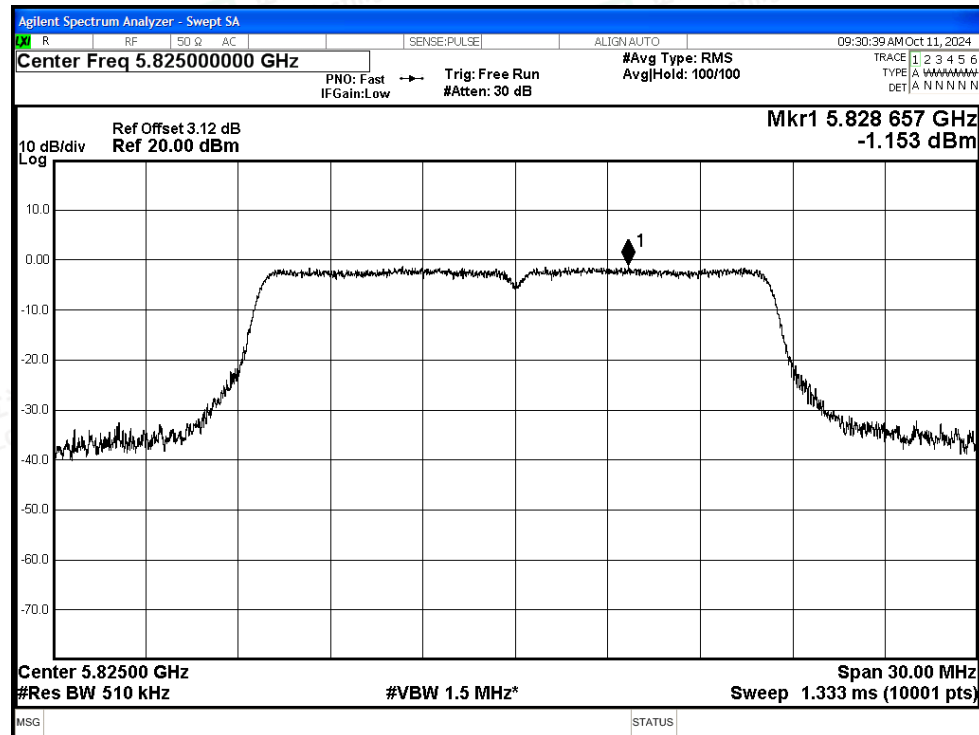

PSD NVNT n20 5745MHz Ant0

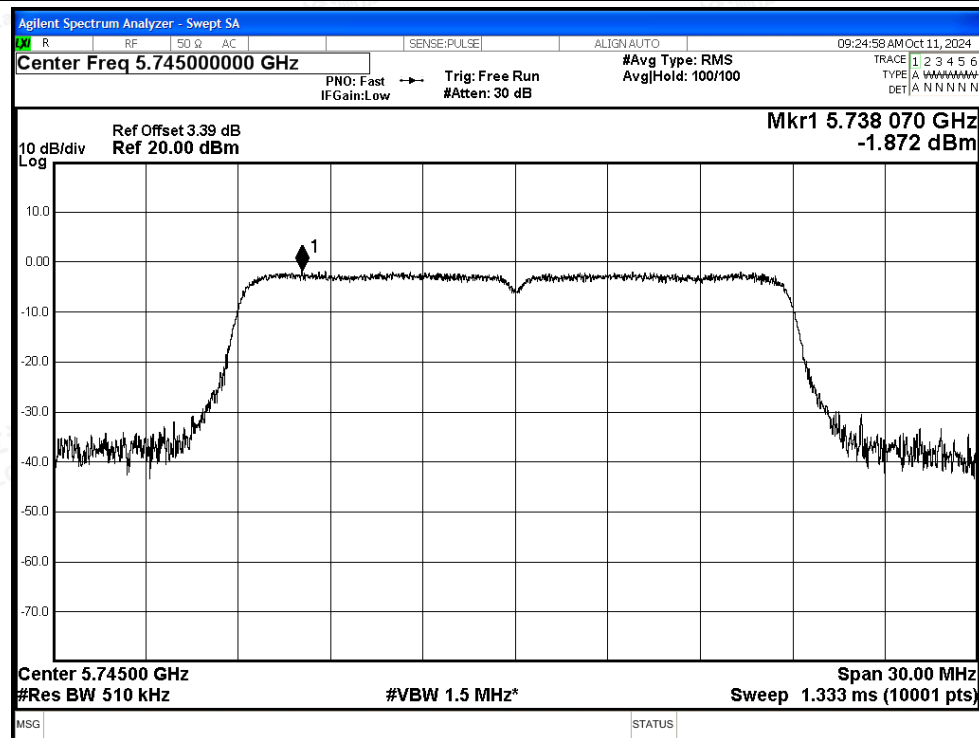


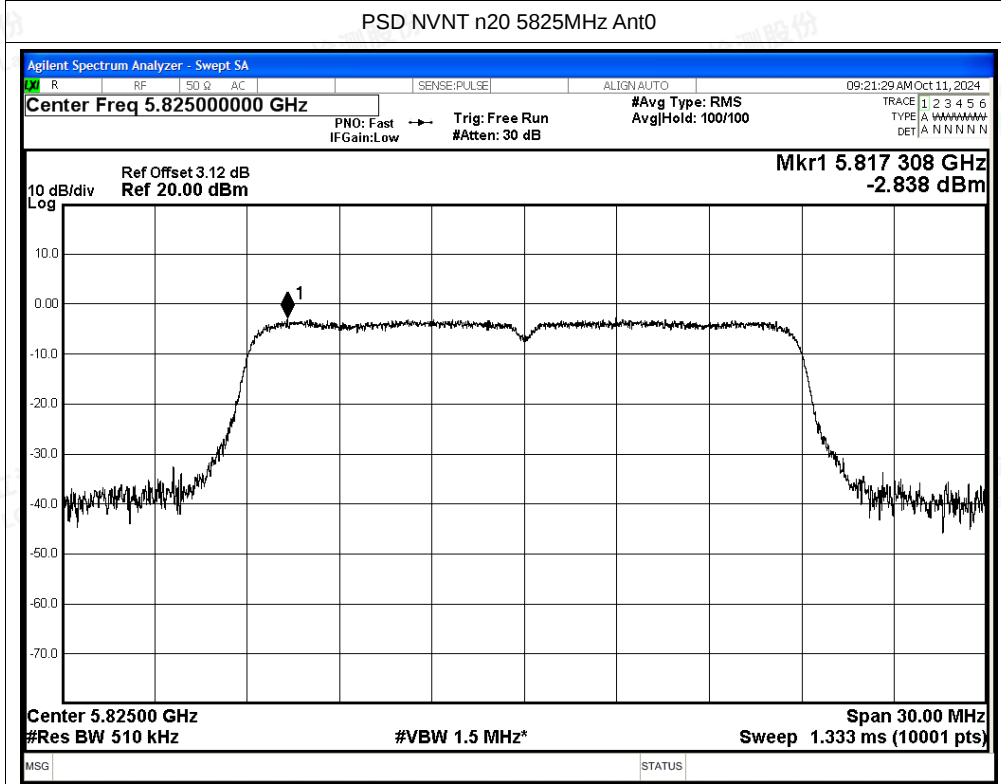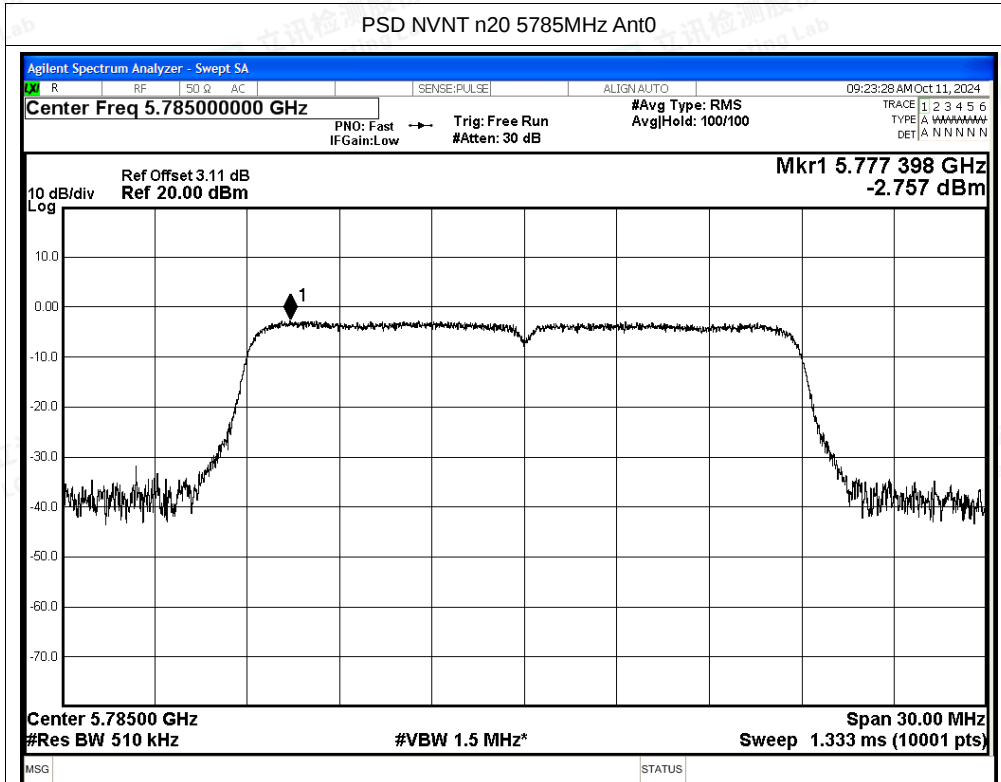

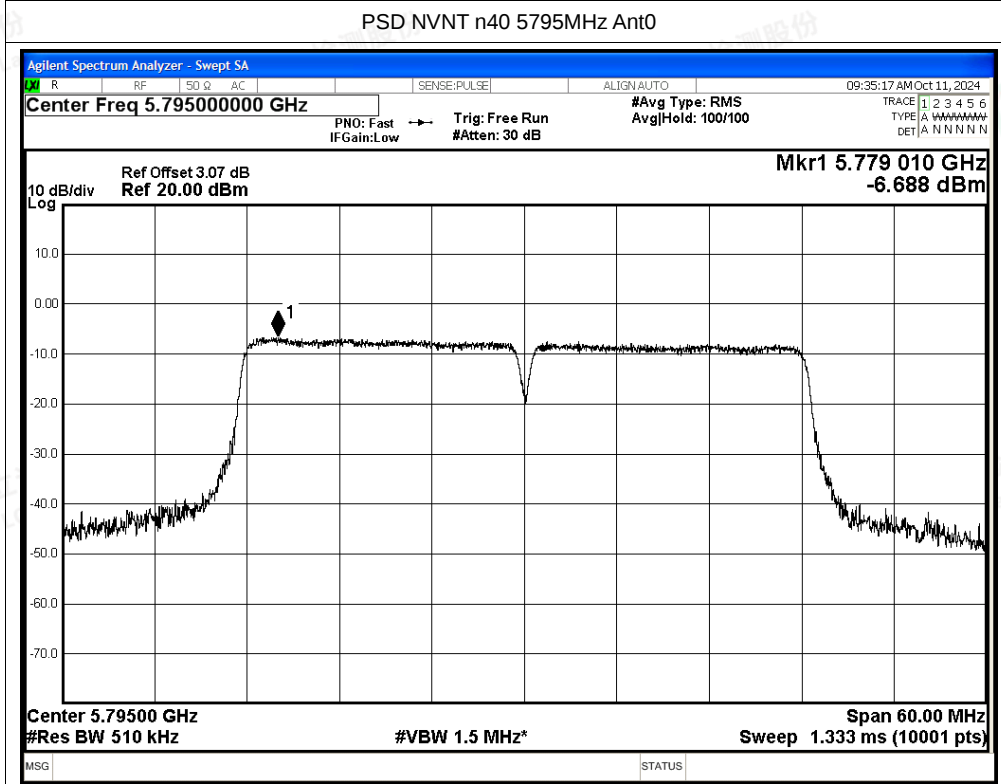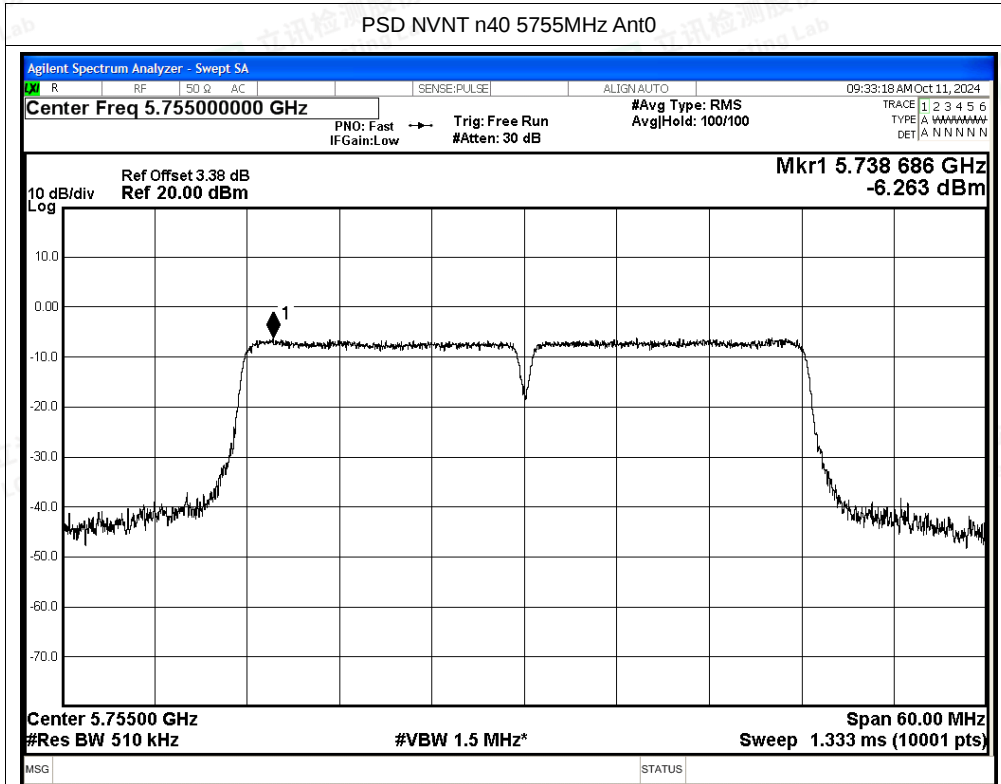




PSD NVNT ac20 5745MHz Ant0

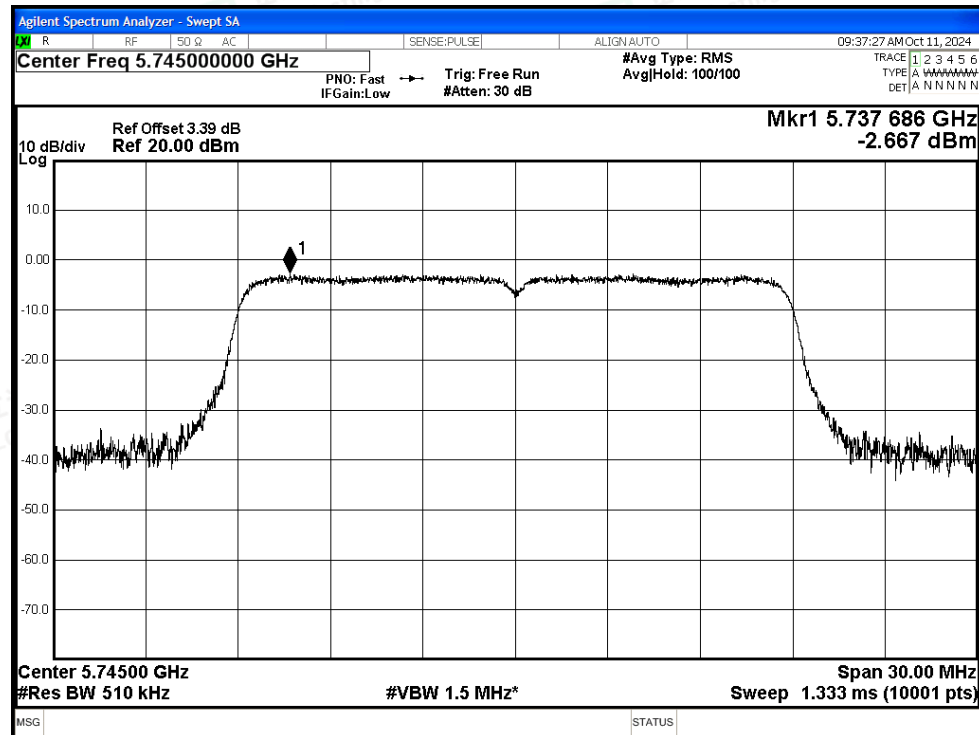


PSD NVNT ac20 5785MHz Ant0

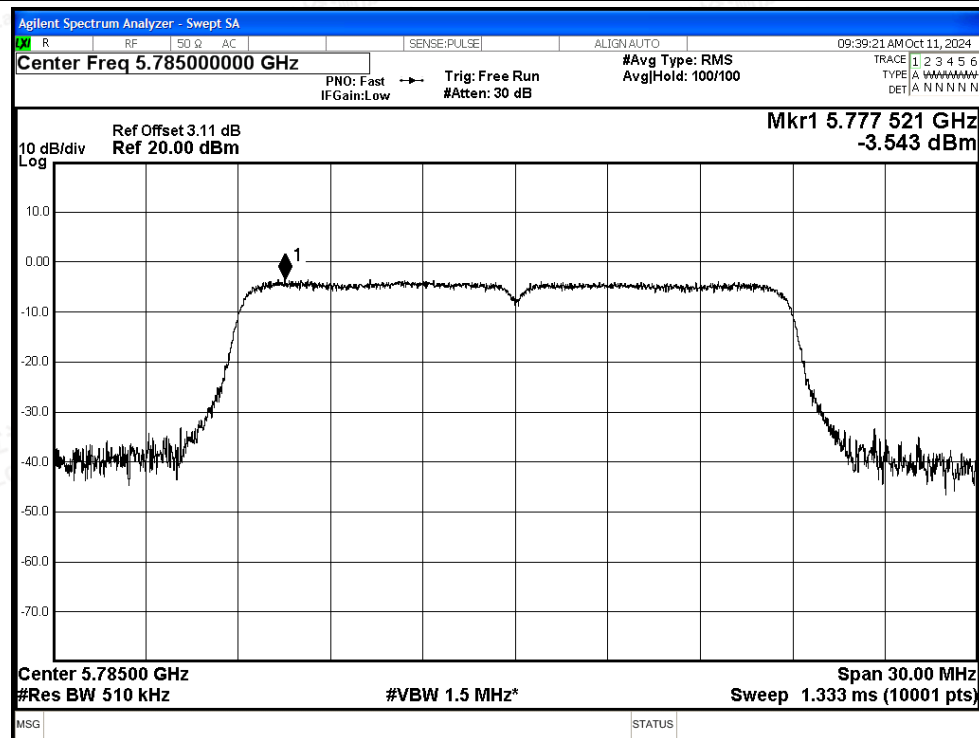




PSD NVNT ac20 5825MHz Ant0

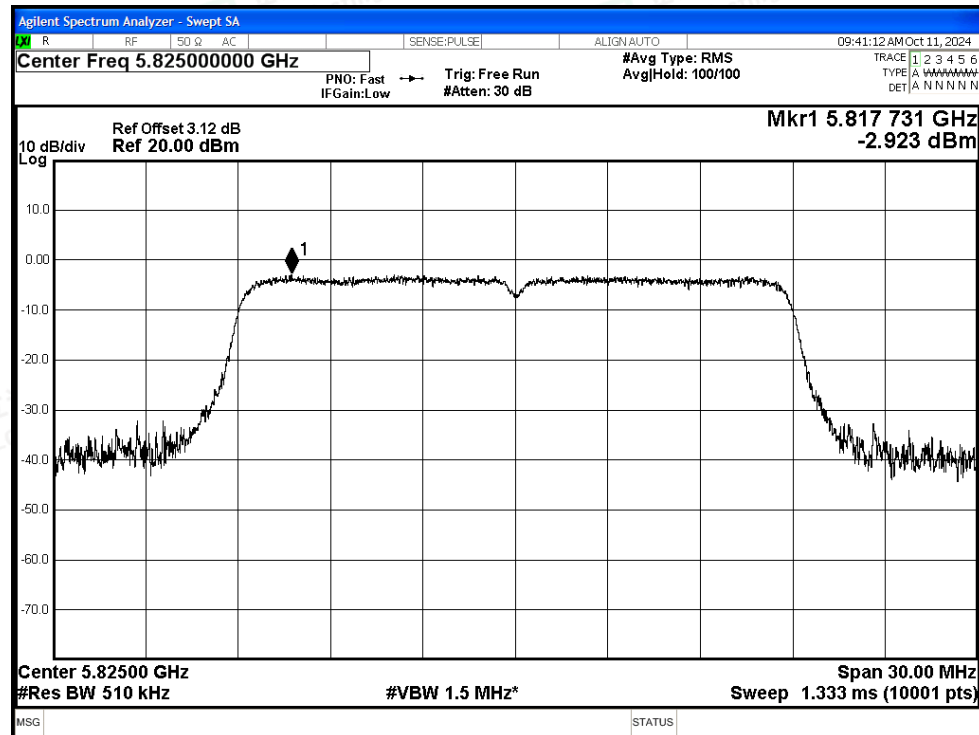


PSD NVNT ac40 5755MHz Ant0

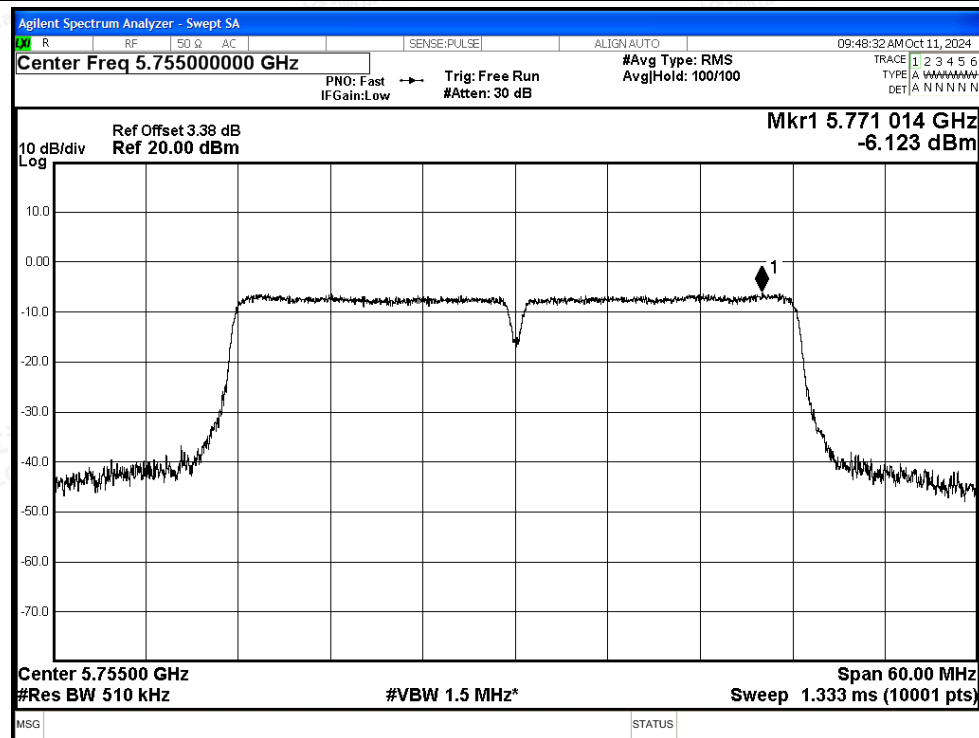




PSD NVNT ac40 5795MHz Ant0

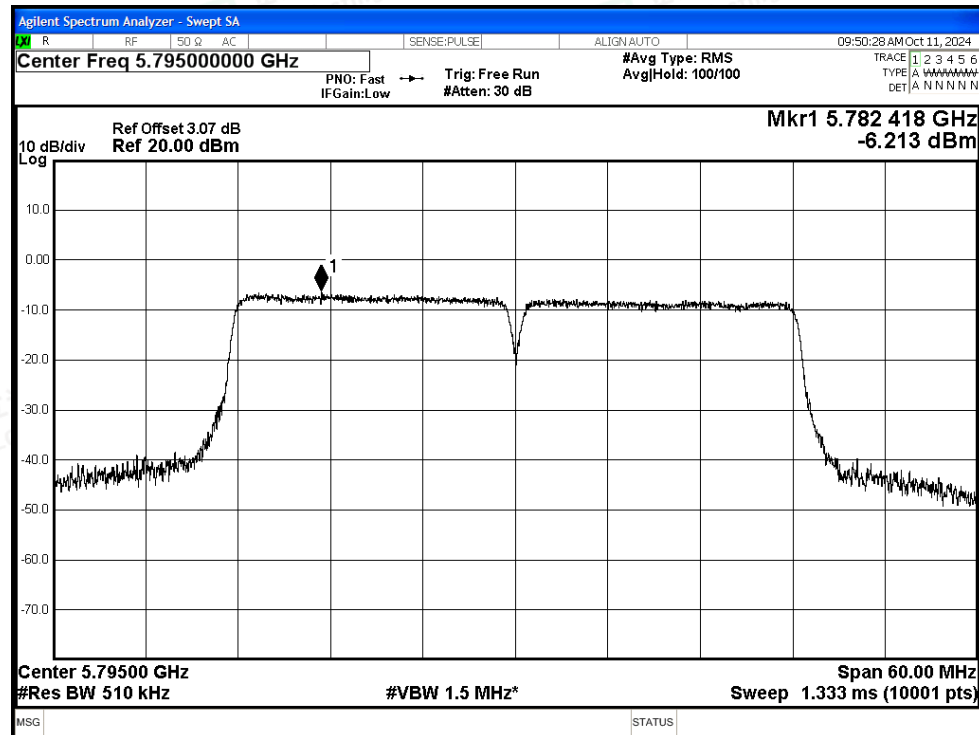


PSD NVNT ac80 5775MHz Ant0

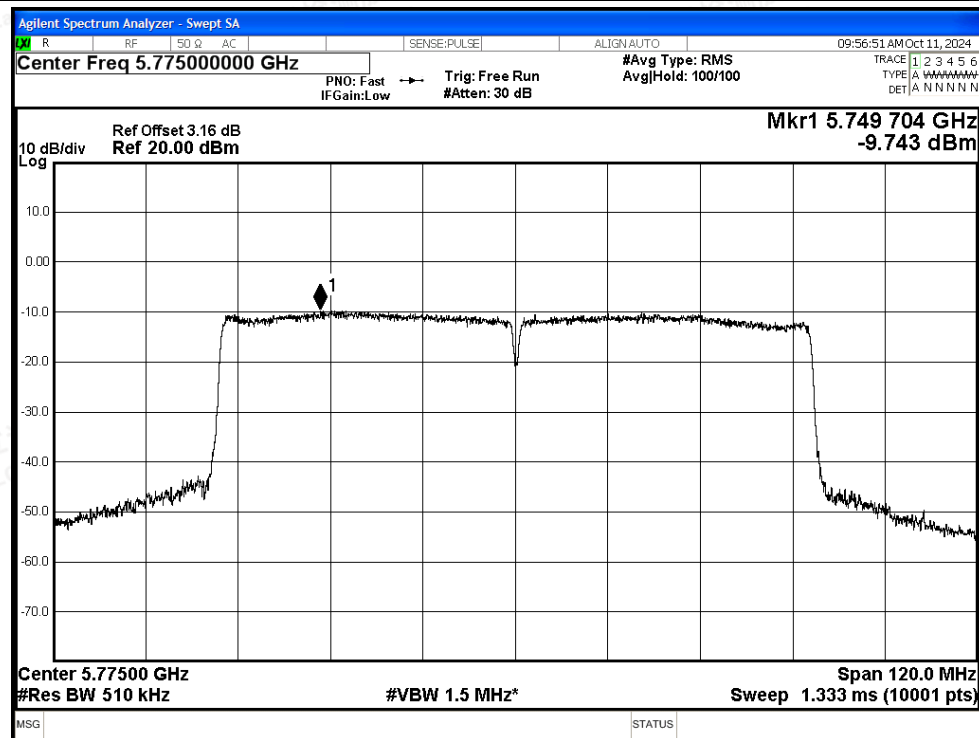




PSD NVNT ax20 5745MHz Ant0

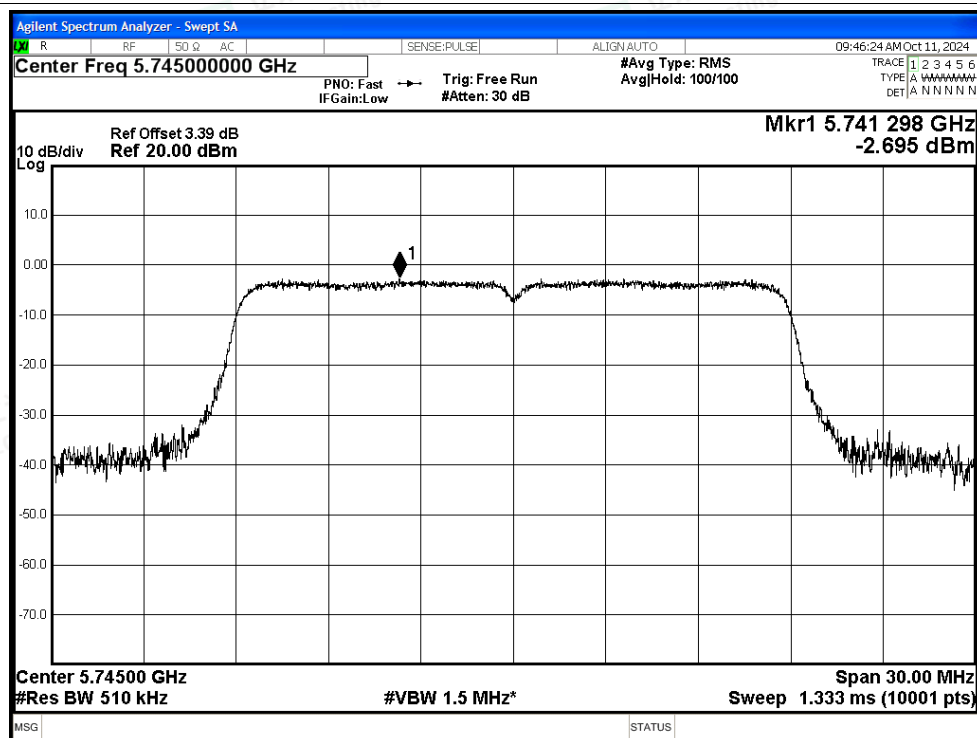


PSD NVNT ax20 5785MHz Ant0

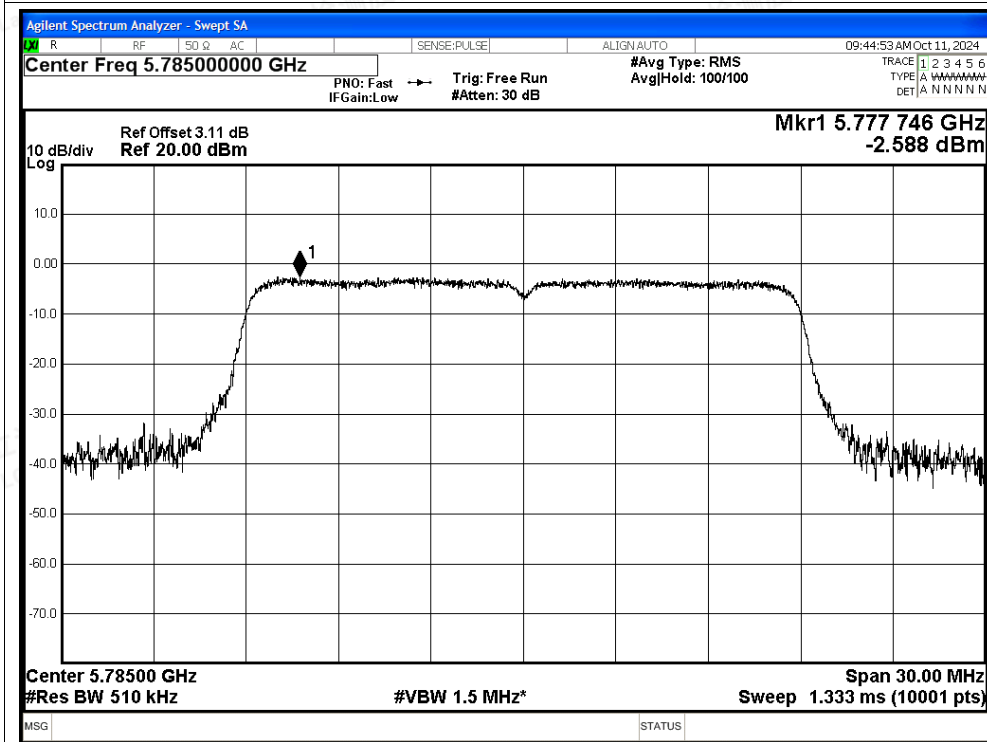




PSD NVNT ax20 5825MHz Ant0

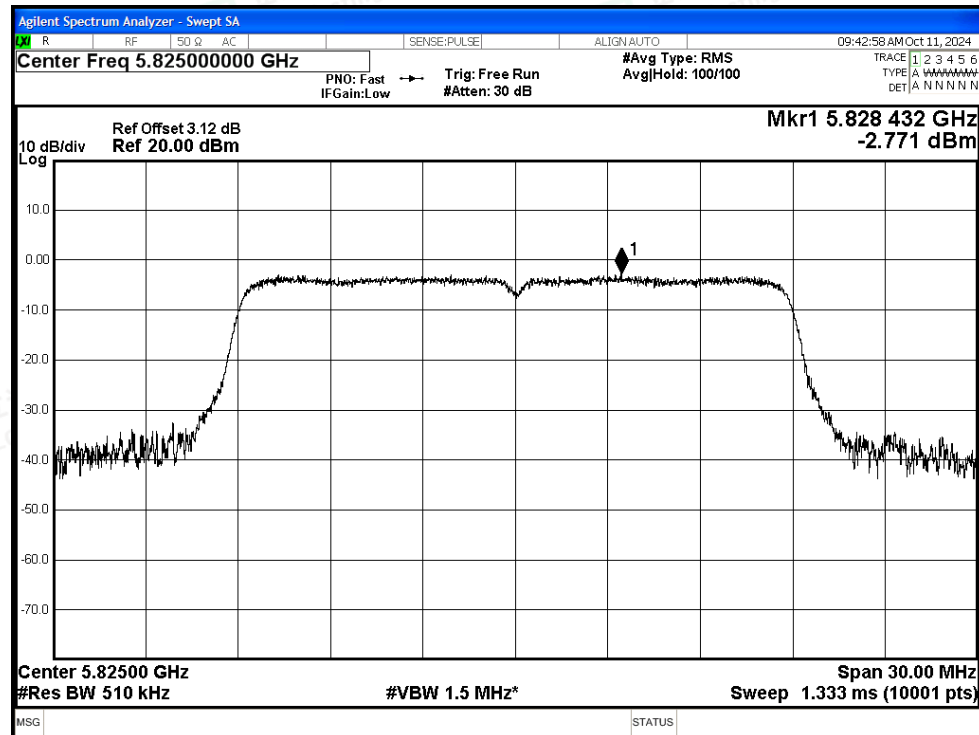


PSD NVNT ax40 5755MHz Ant0

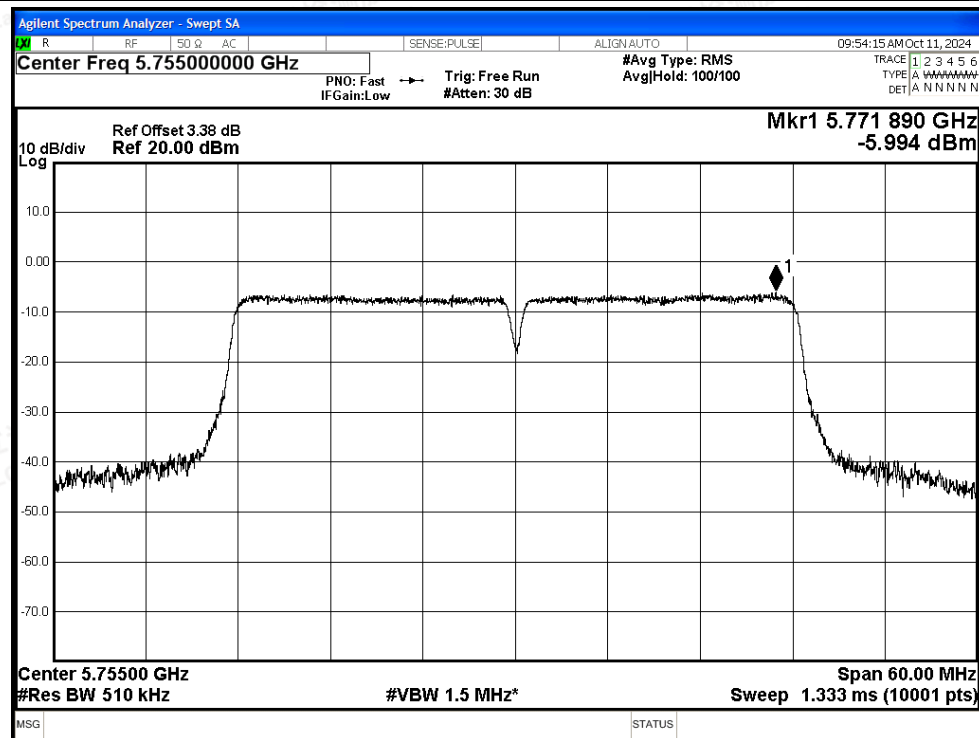




PSD NVNT ax40 5795MHz Ant0

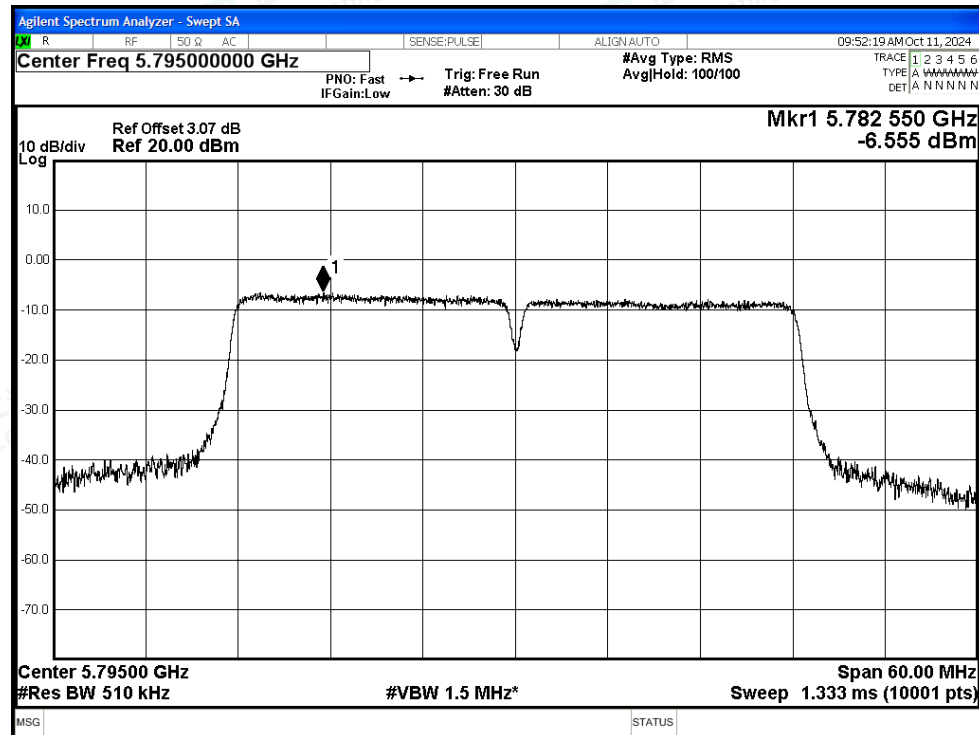


PSD NVNT ax80 5775MHz Ant0

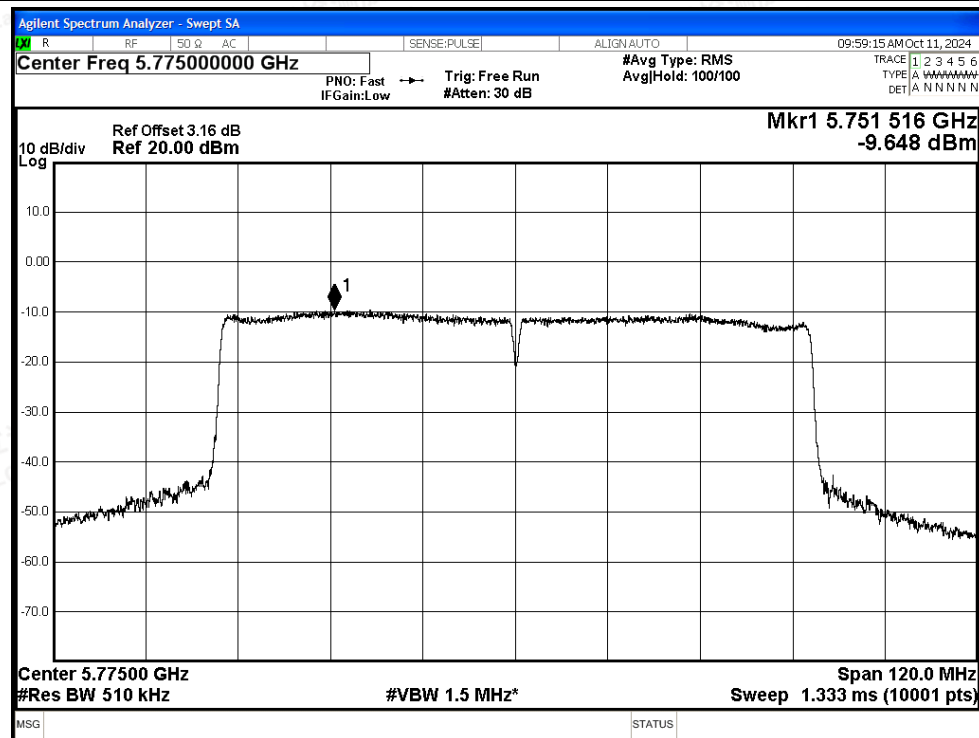




Test Graphs

PSD NVNT a 5745MHz Ant1

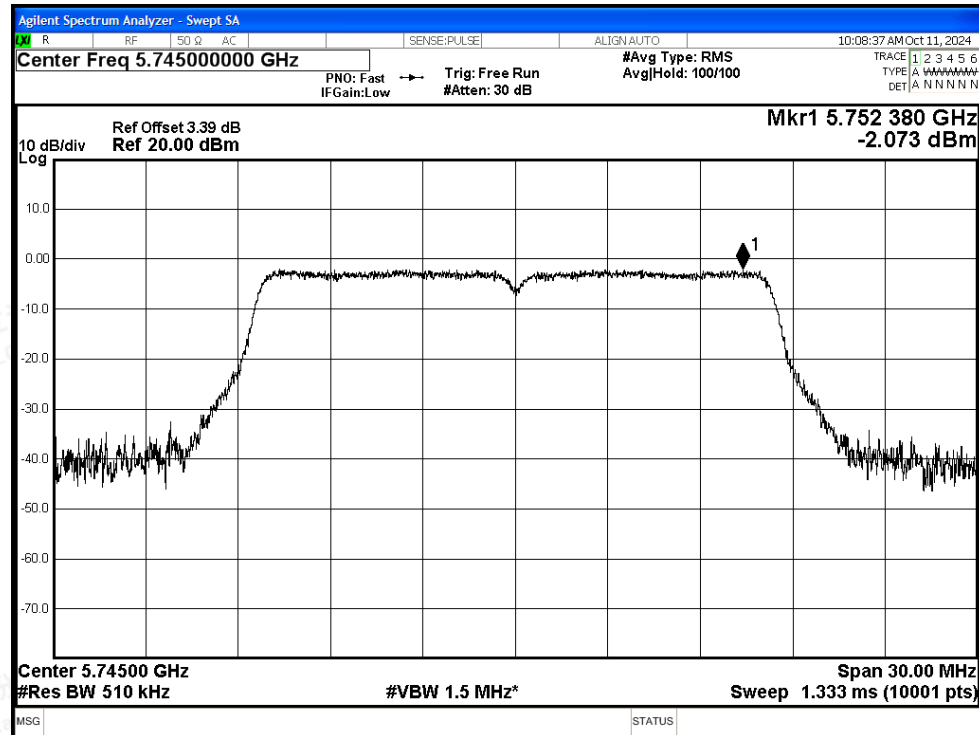


PSD NVNT a 5785MHz Ant1

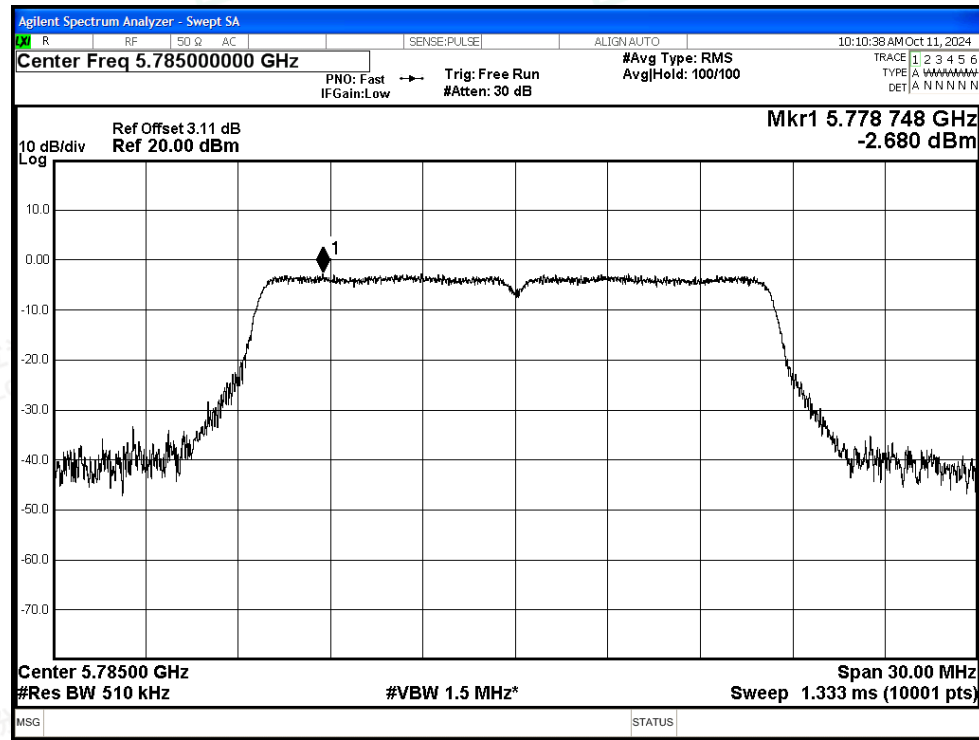








PSD NVNT a 5825MHz Ant1

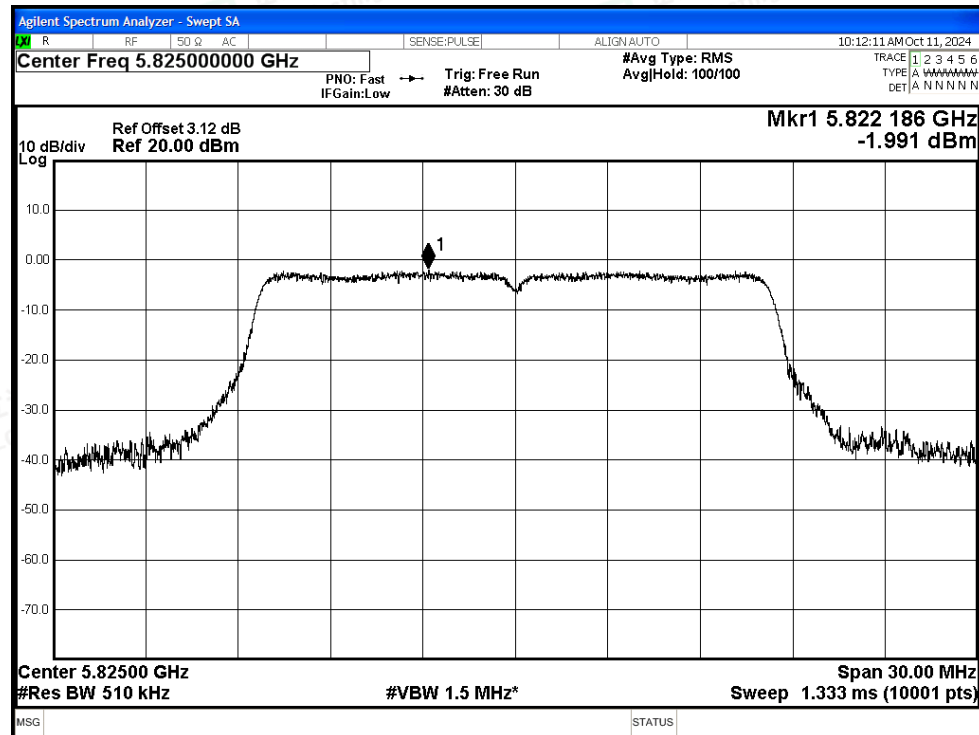

PSD NVNT n20 5745MHz Ant1

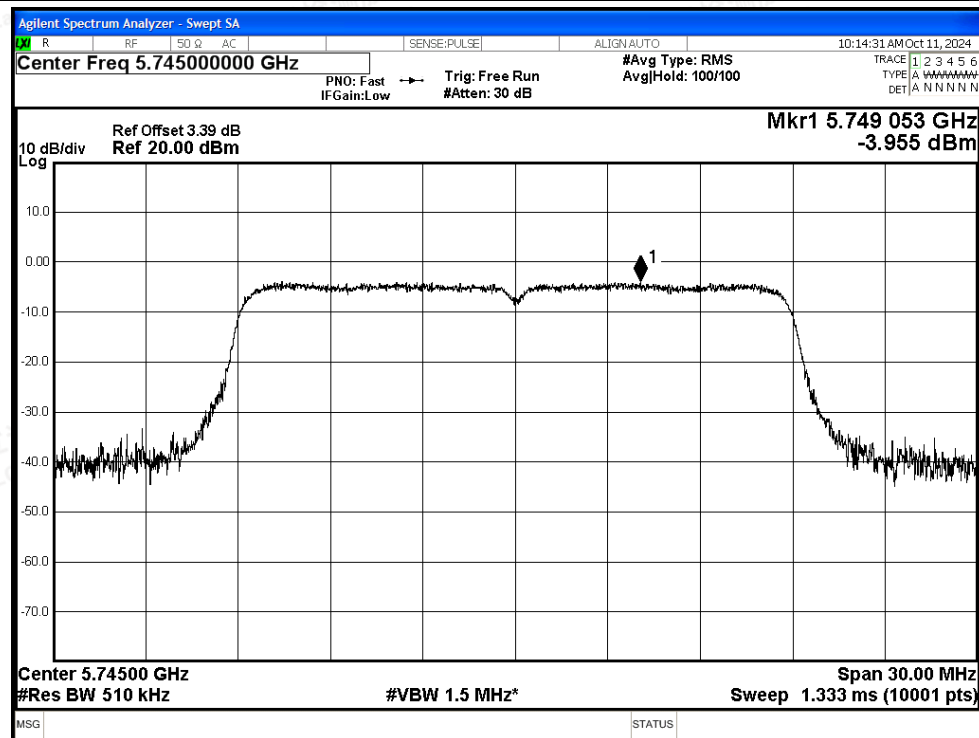


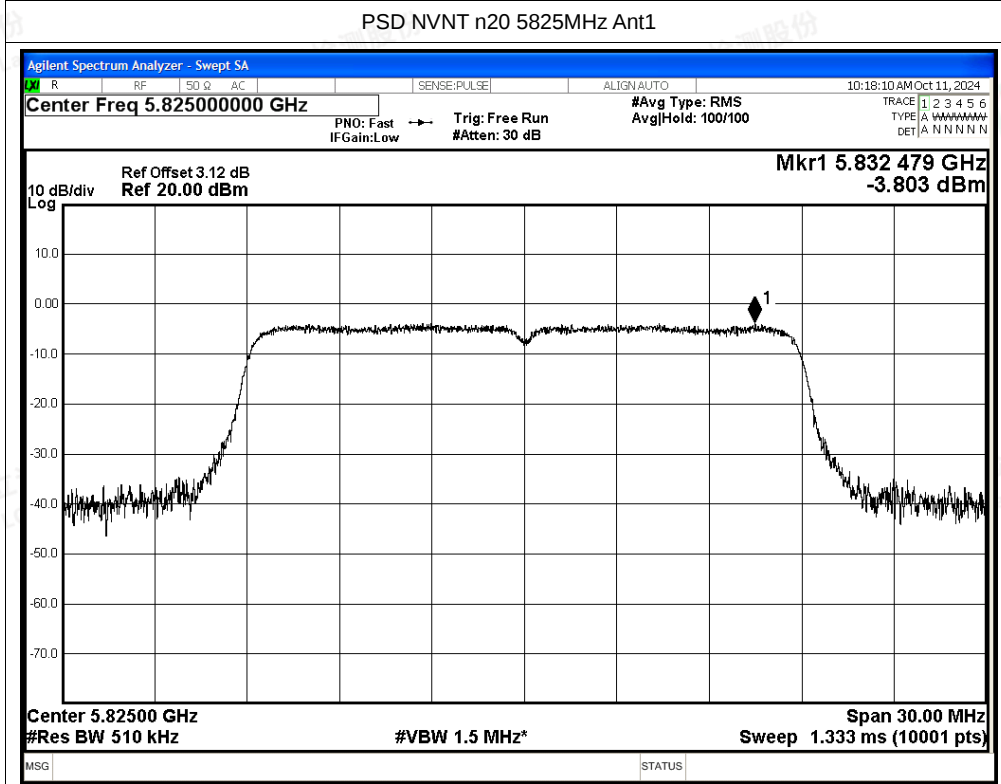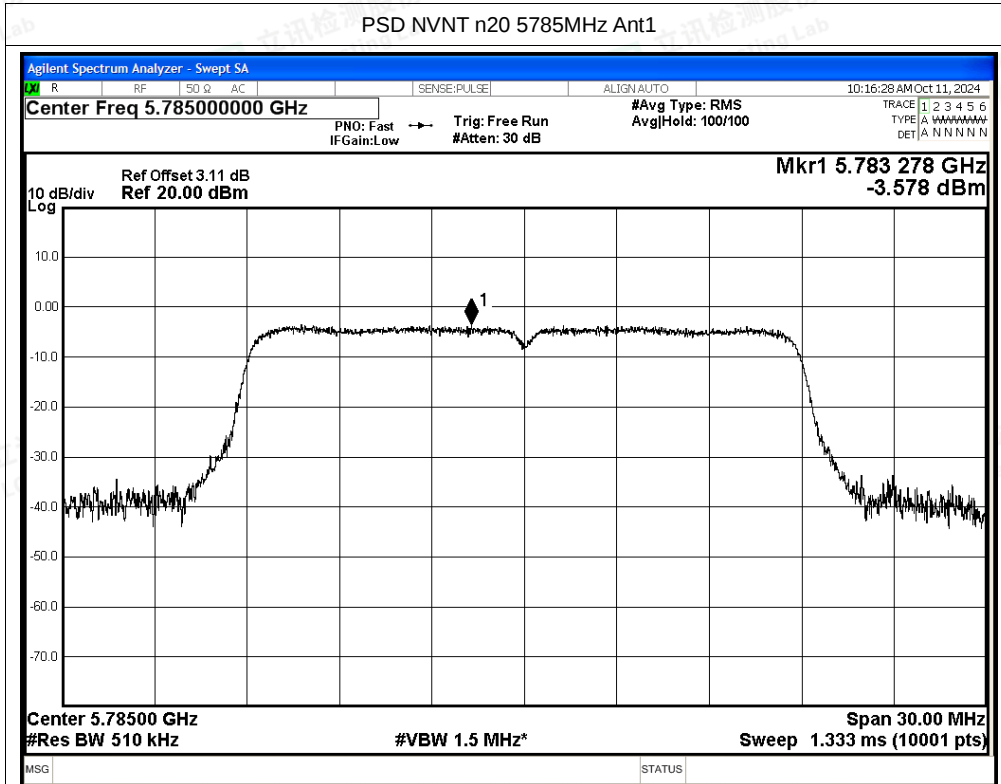

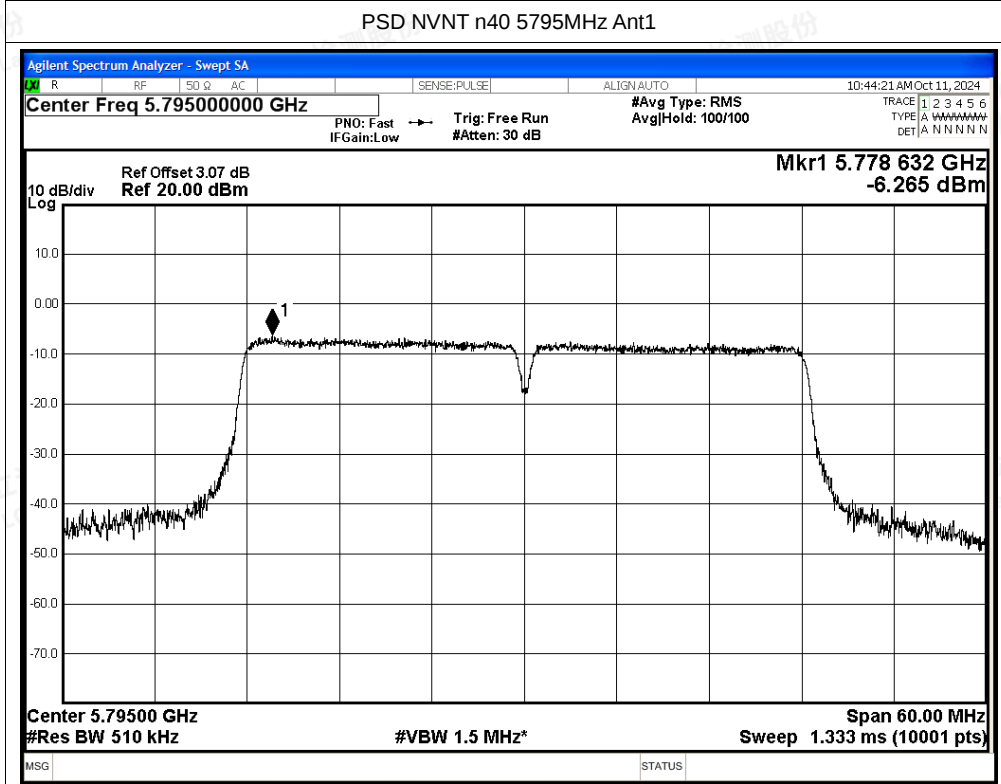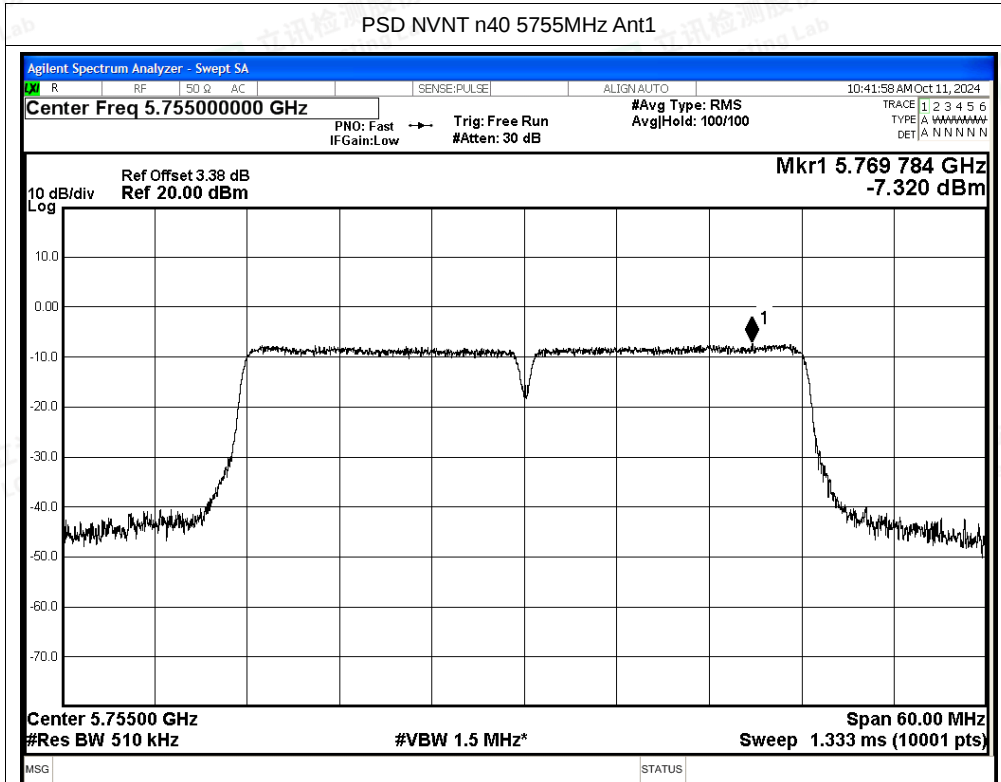




PSD NVNT ac20 5745MHz Ant1

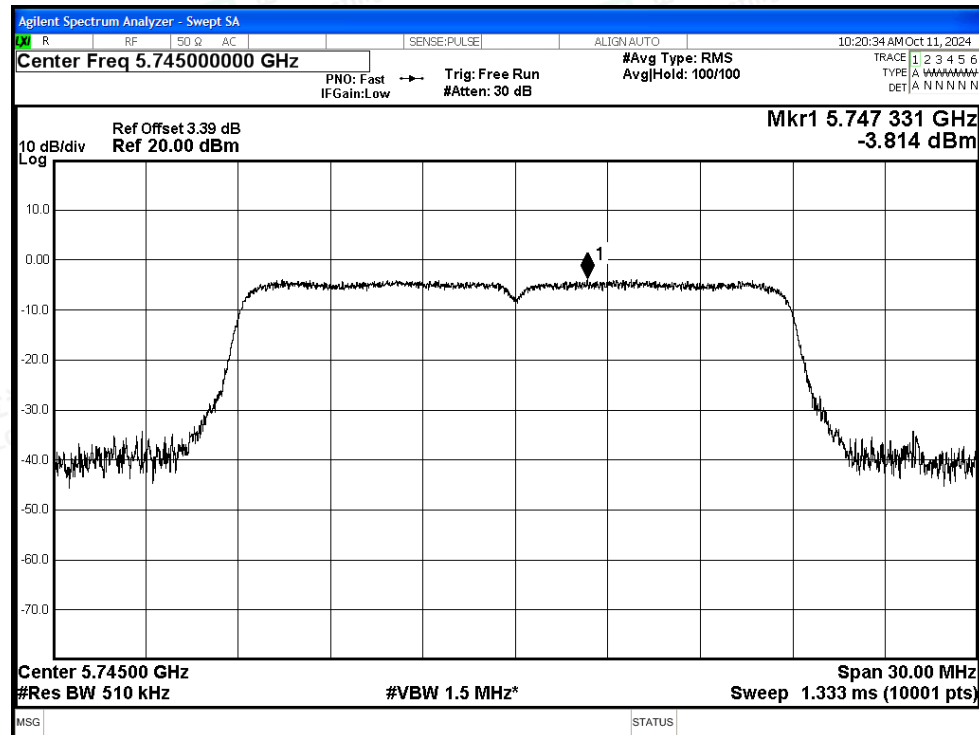


PSD NVNT ac20 5785MHz Ant1

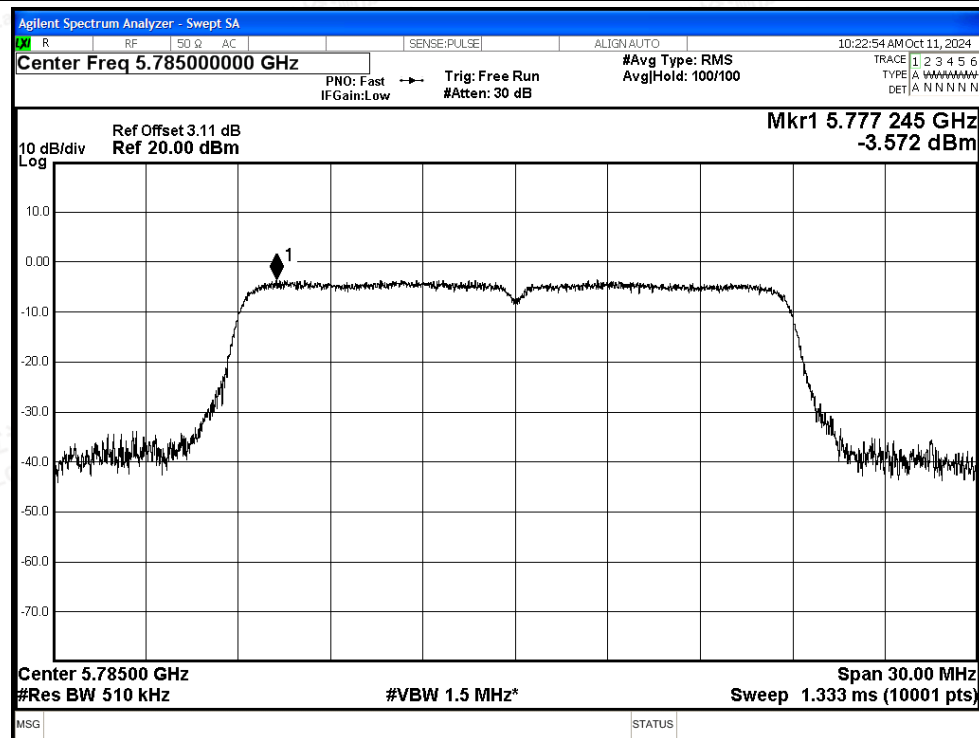




PSD NVNT ac20 5825MHz Ant1

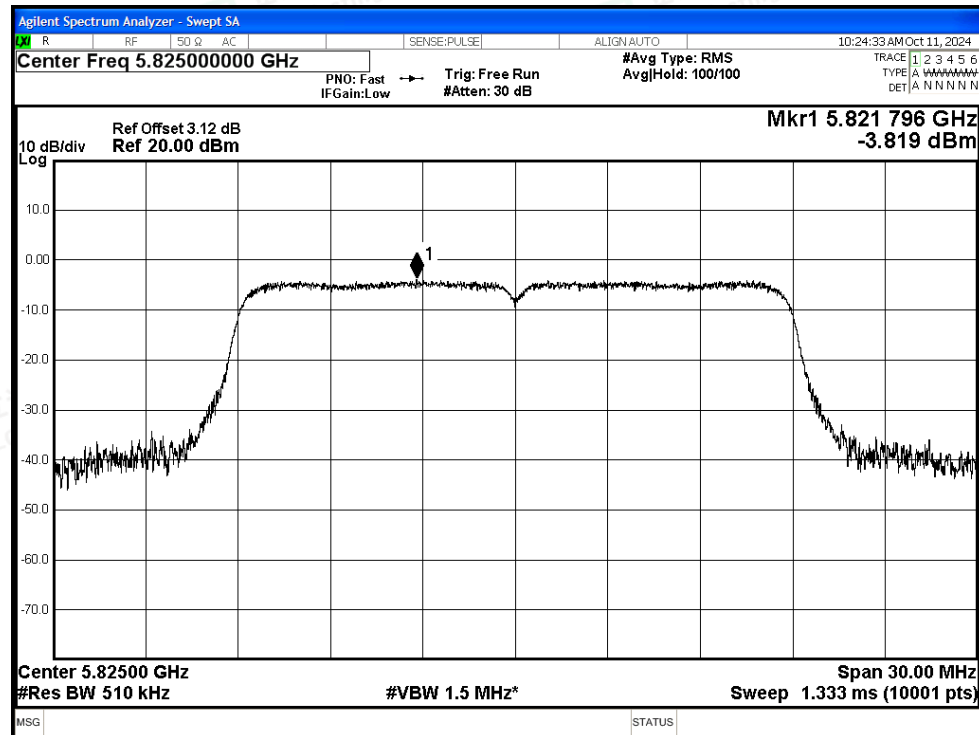


PSD NVNT ac40 5755MHz Ant1

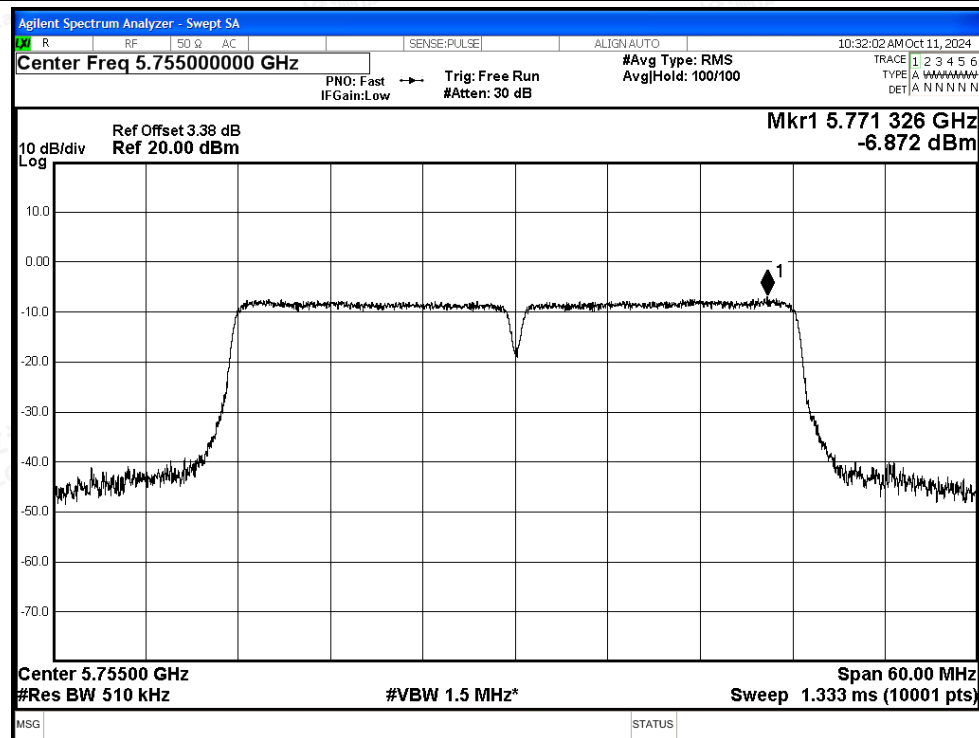




PSD NVNT ac40 5795MHz Ant1

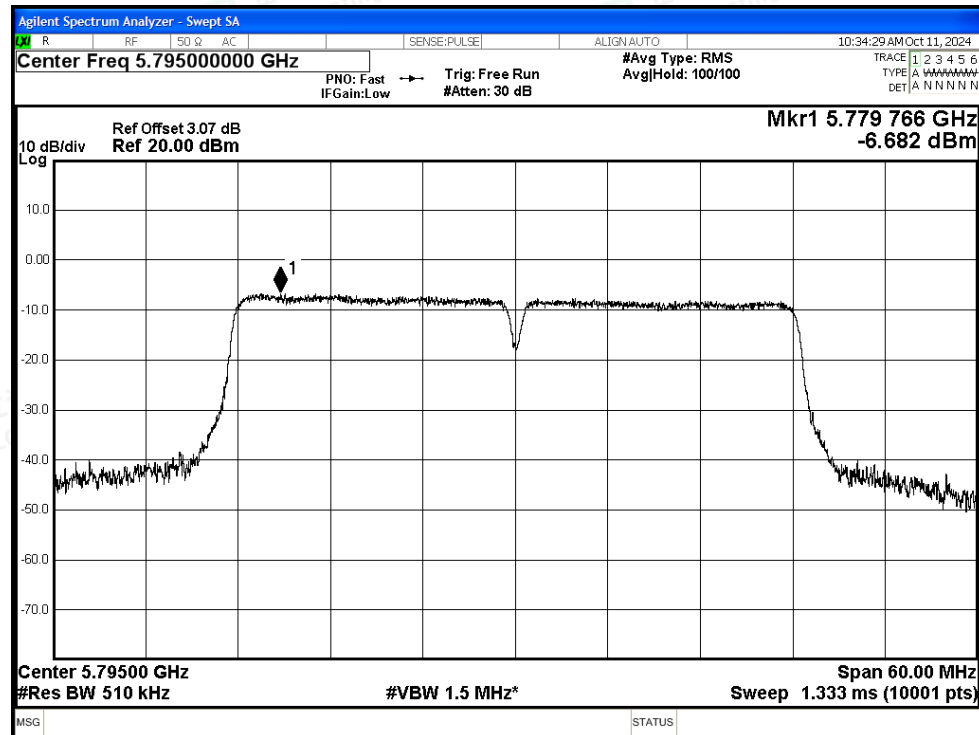


PSD NVNT ac80 5775MHz Ant1

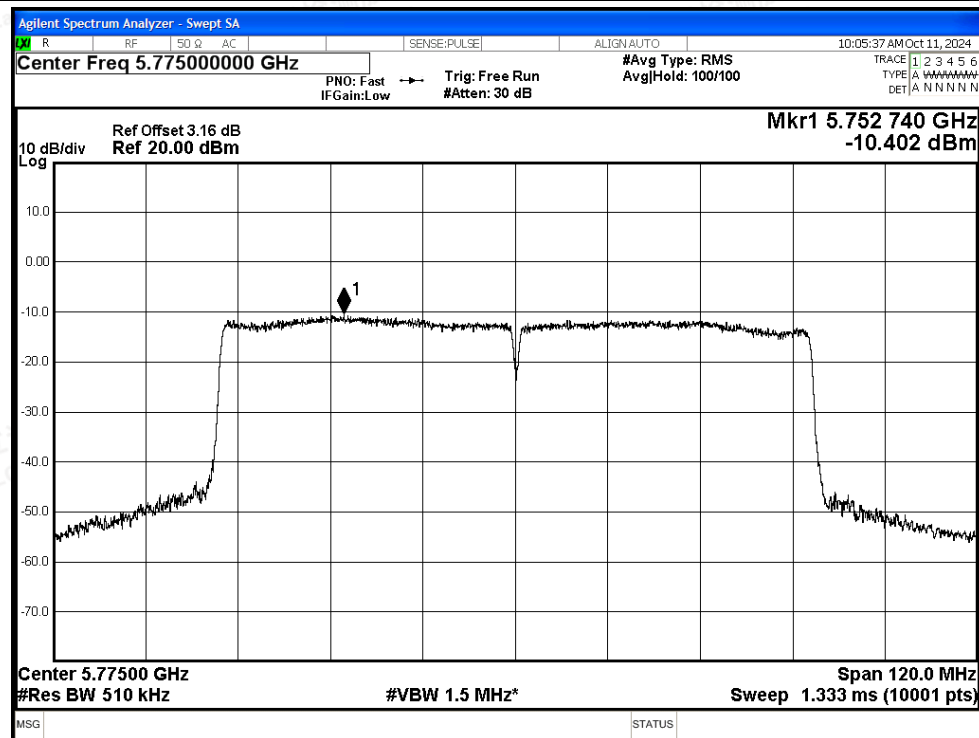




PSD NVNT ax20 5745MHz Ant1

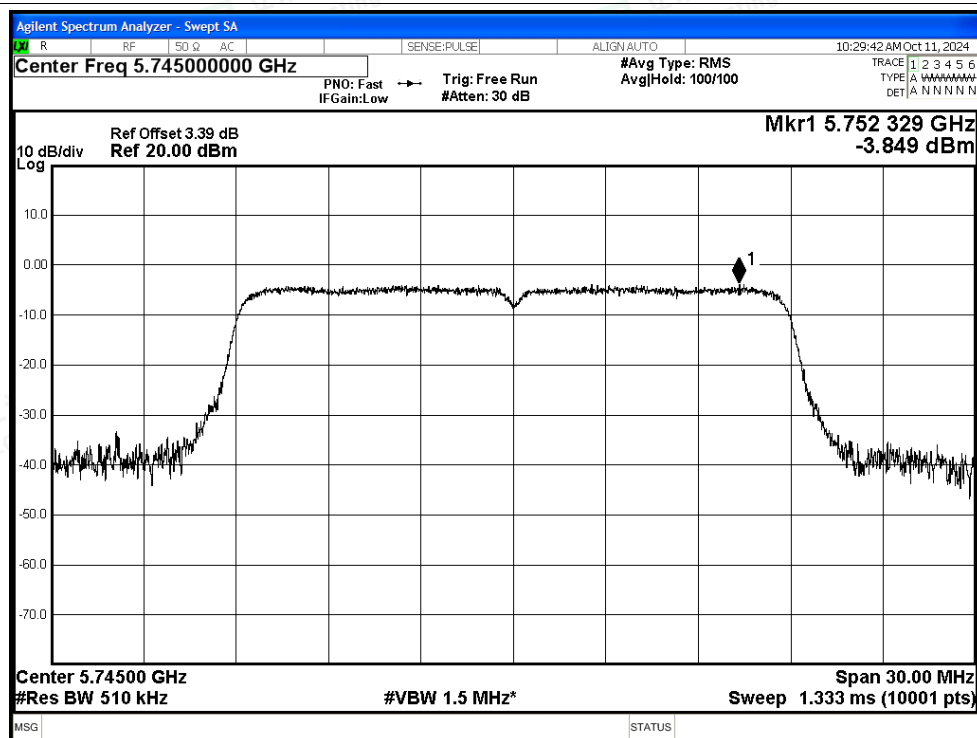


PSD NVNT ax20 5785MHz Ant1

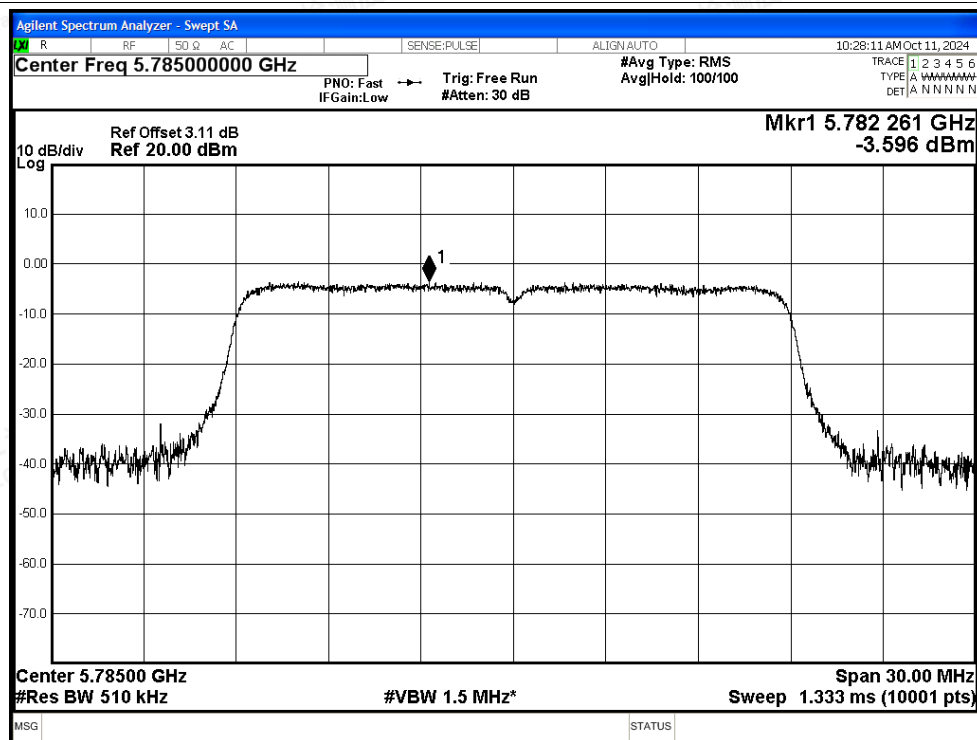




PSD NVNT ax20 5825MHz Ant1

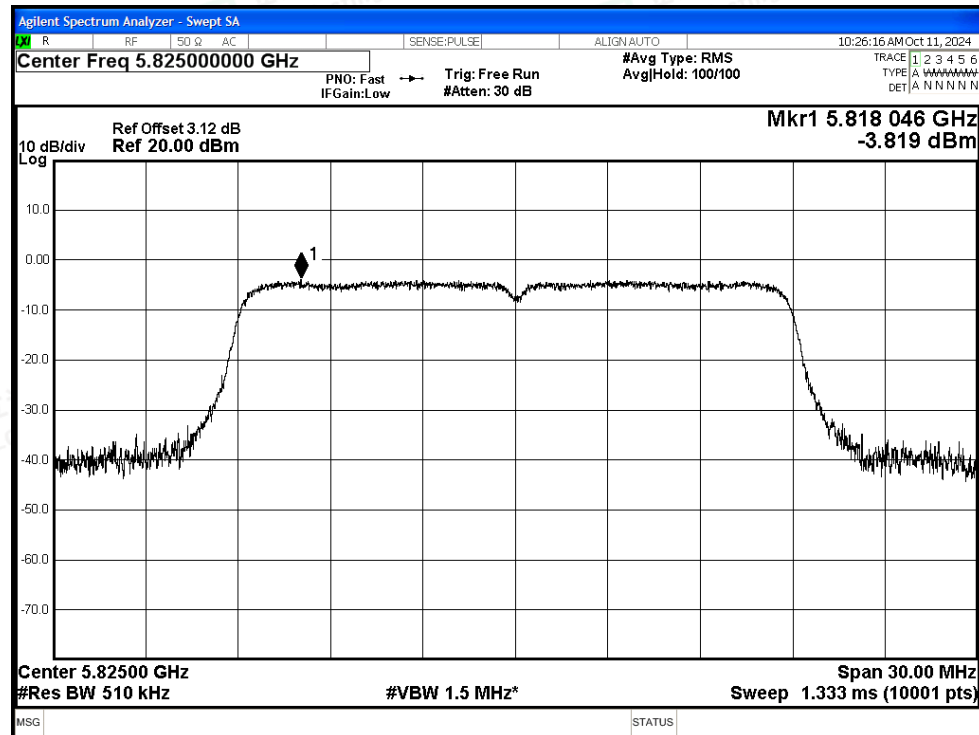


PSD NVNT ax40 5755MHz Ant1

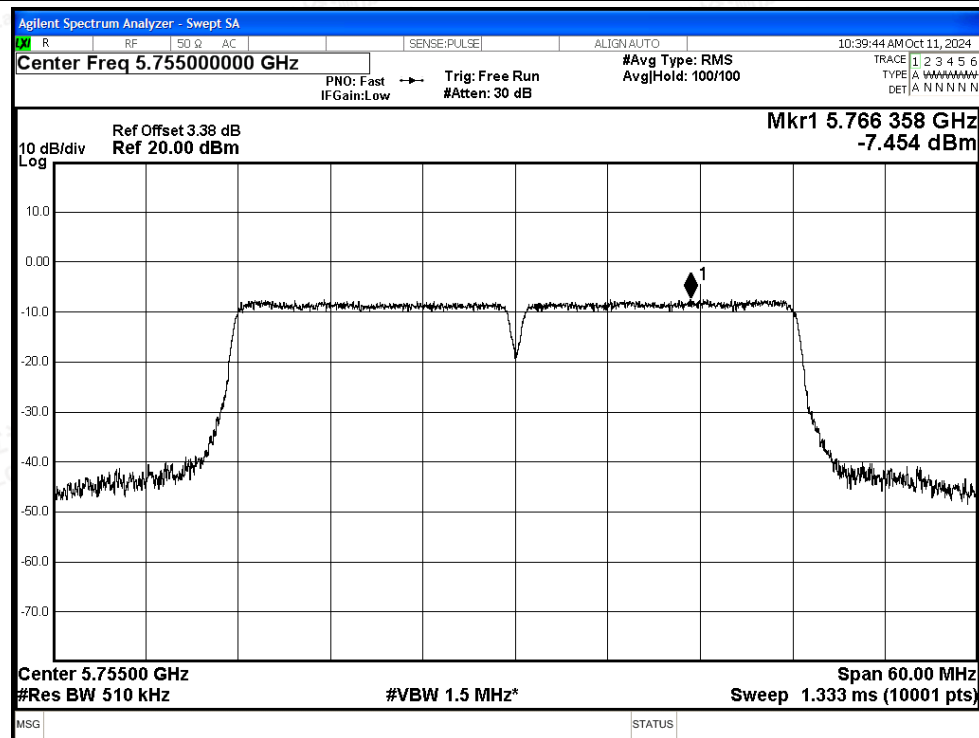




PSD NVNT ax40 5795MHz Ant1

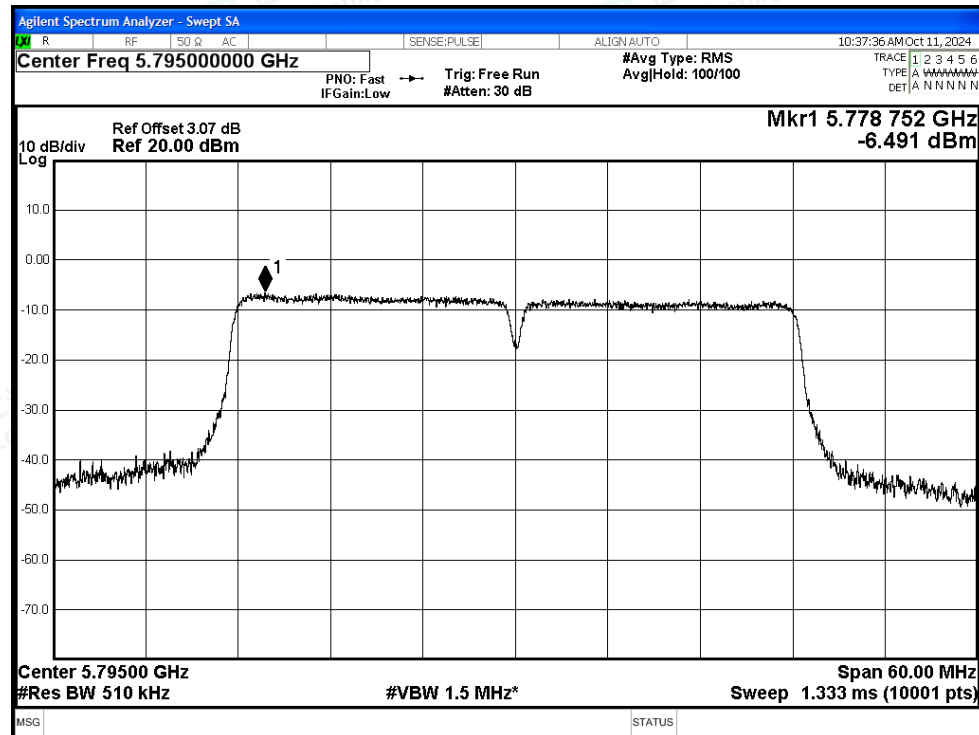


PSD NVNT ax80 5775MHz Ant1

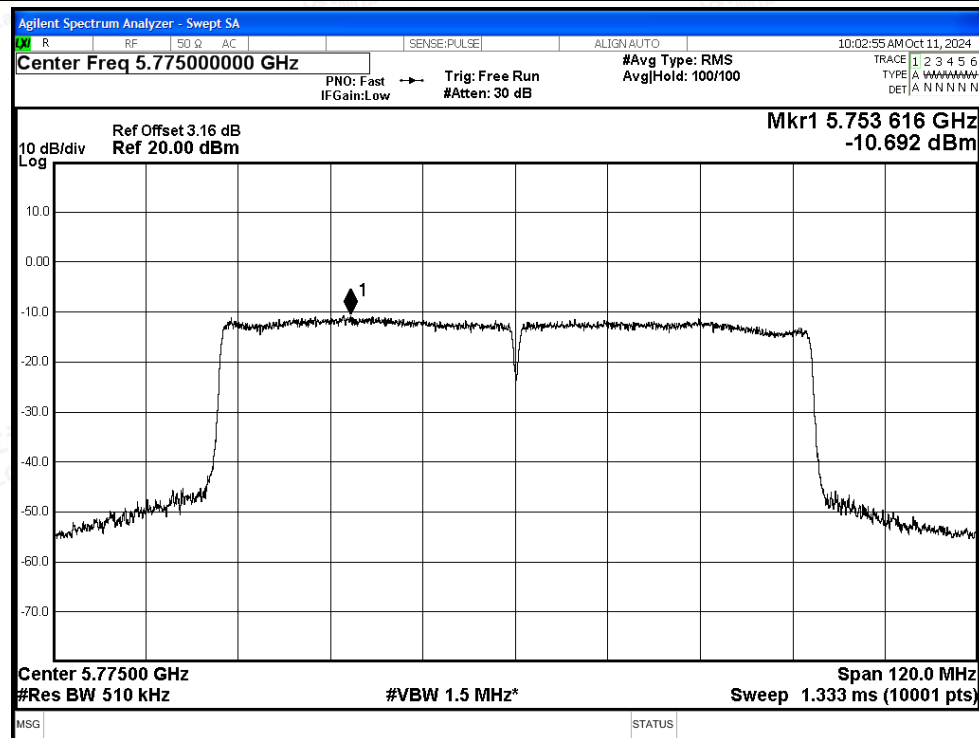




Test Graphs

PSD NVNT a 5745MHz Ant2

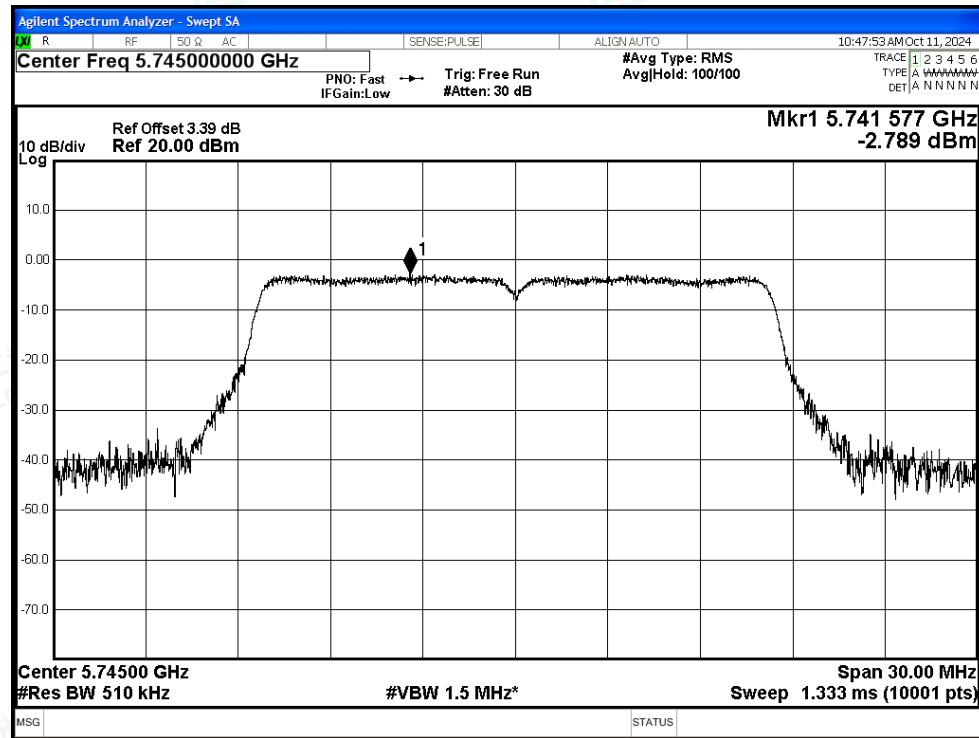


PSD NVNT a 5785MHz Ant2

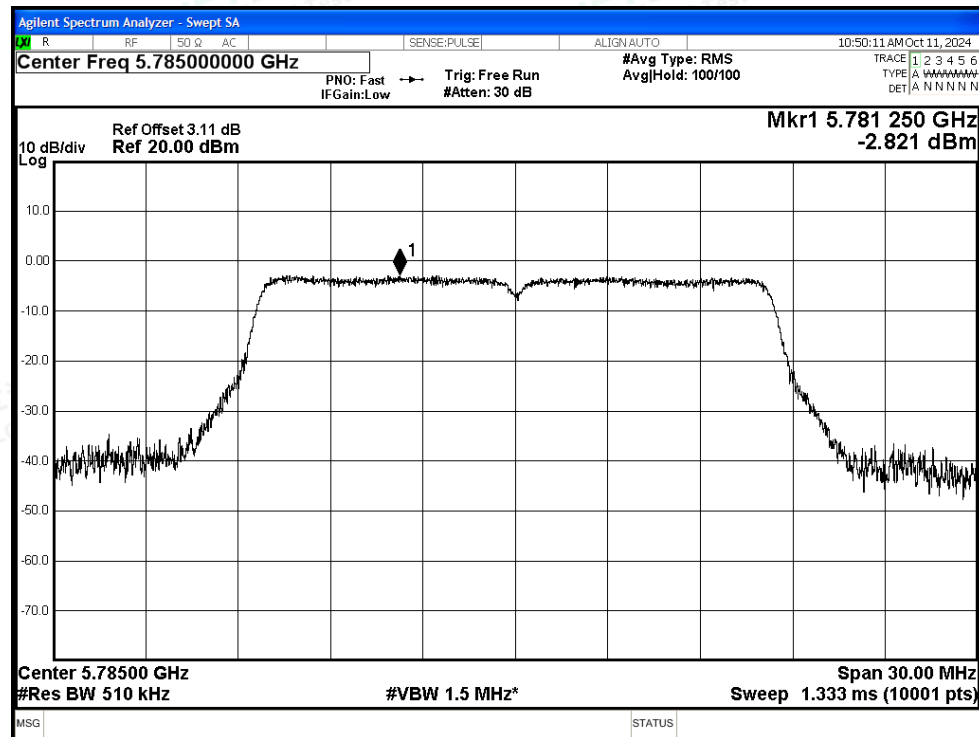








PSD NVNT a 5825MHz Ant2

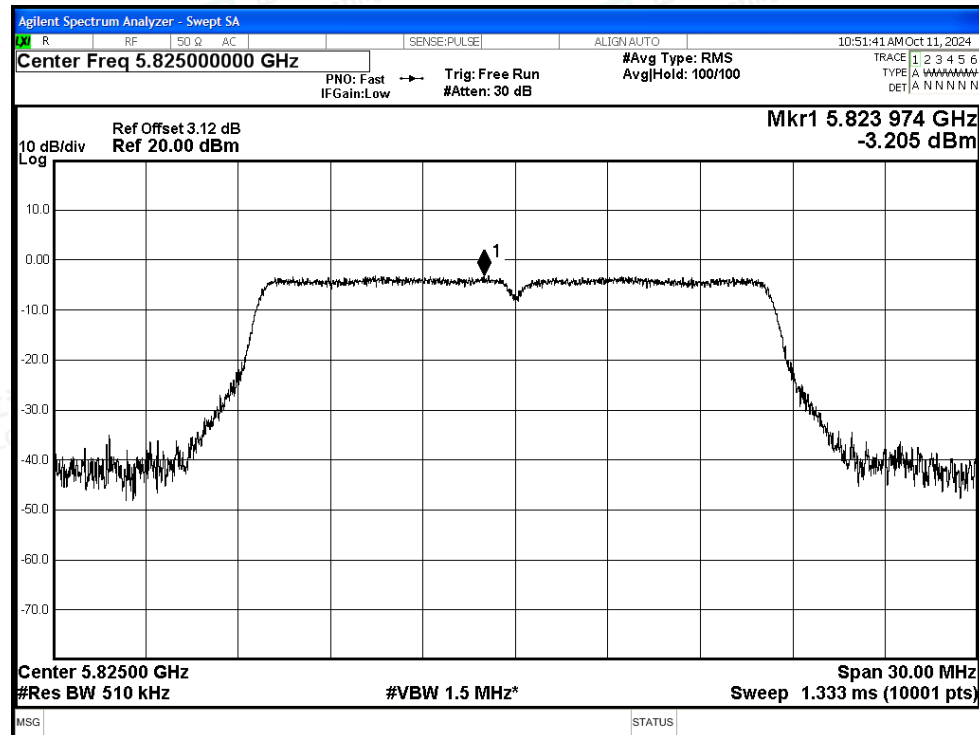

PSD NVNT n20 5745MHz Ant2

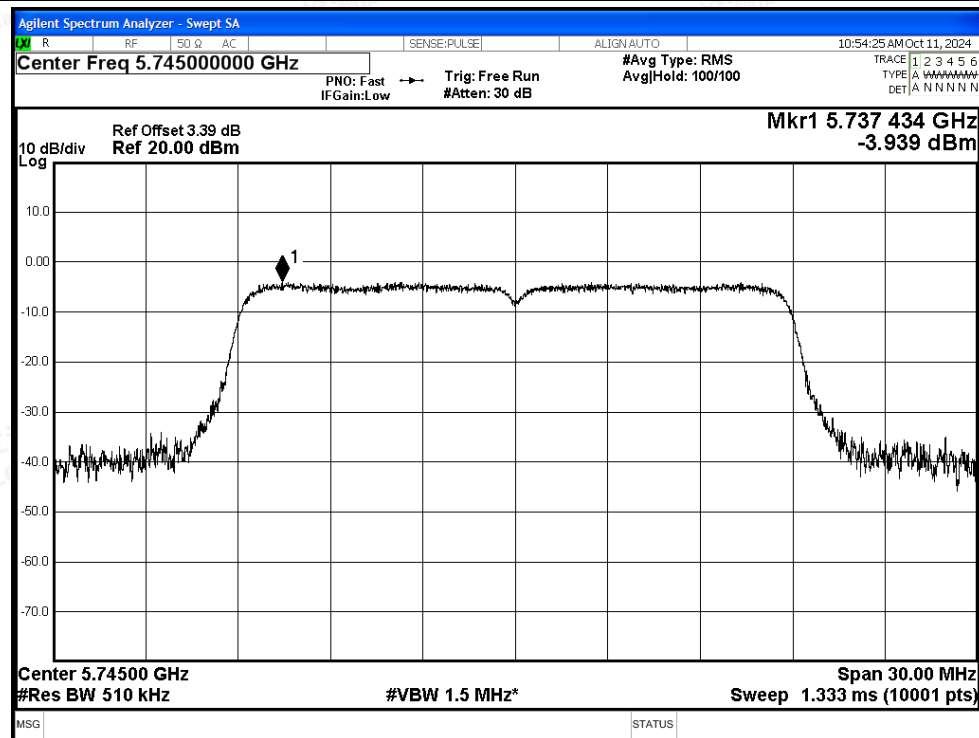


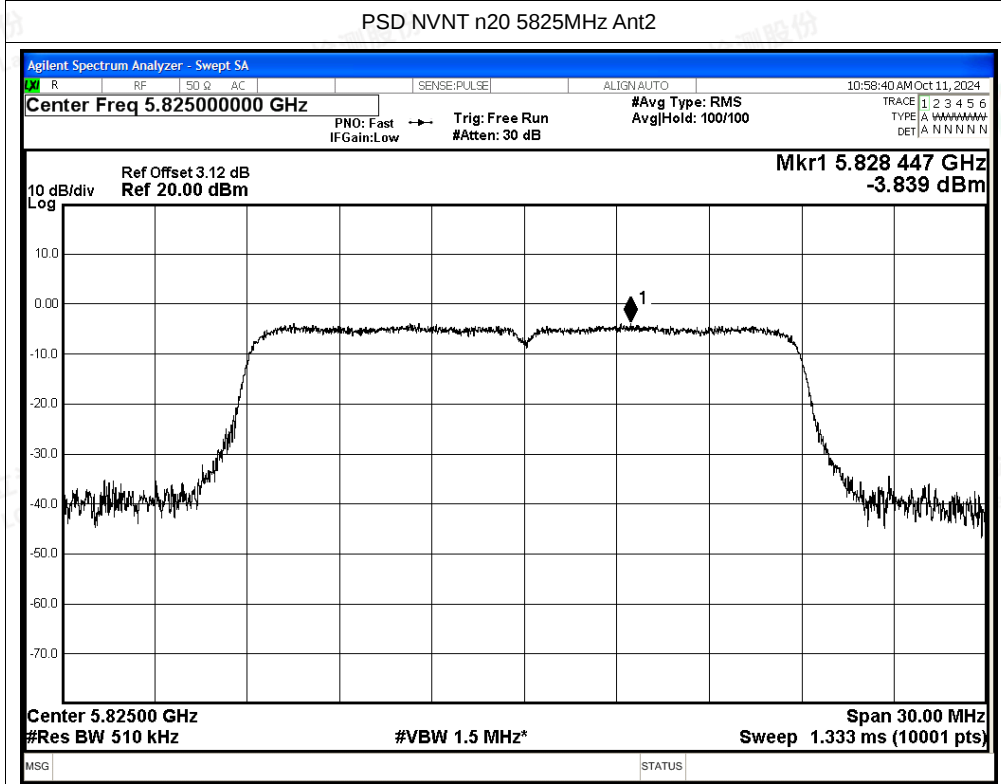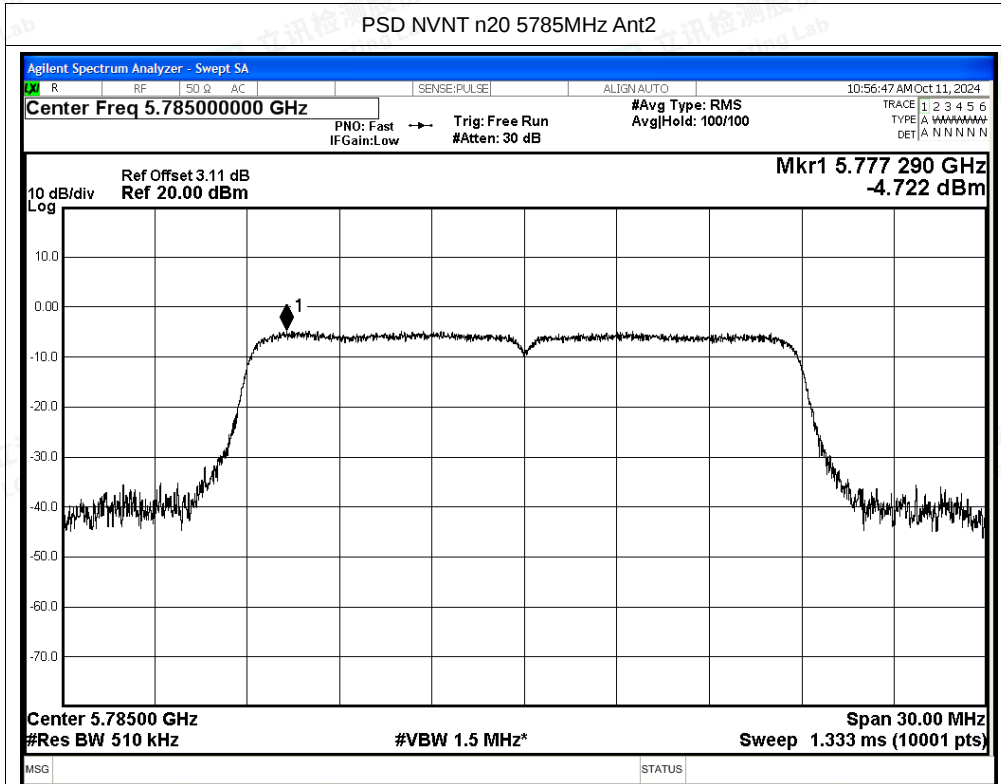

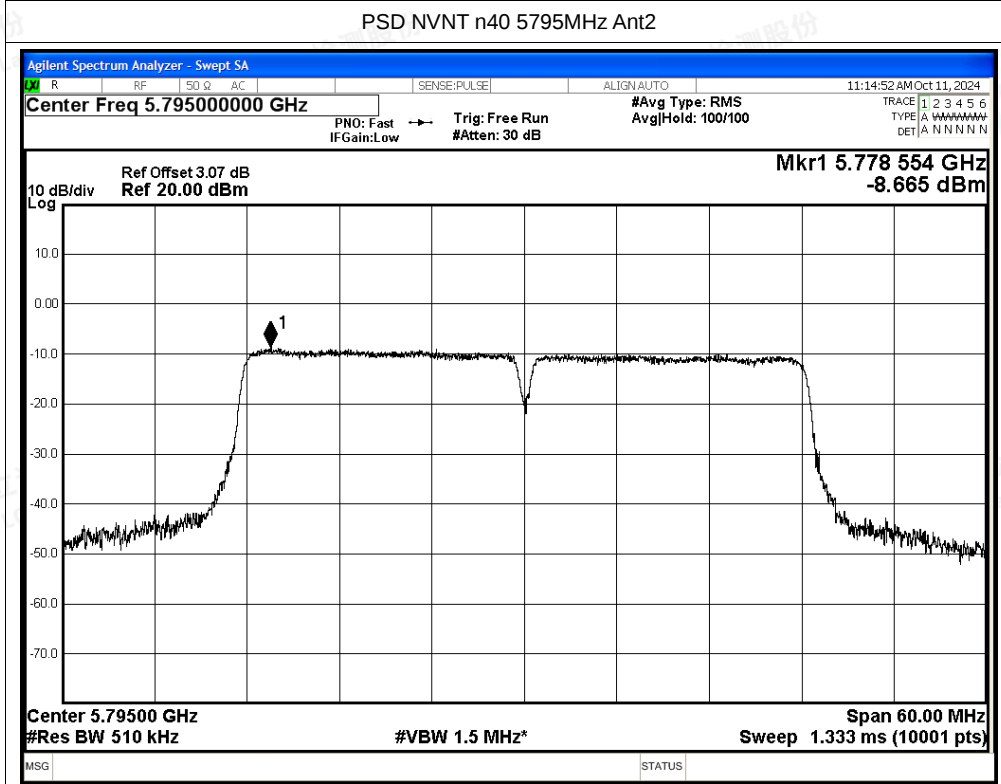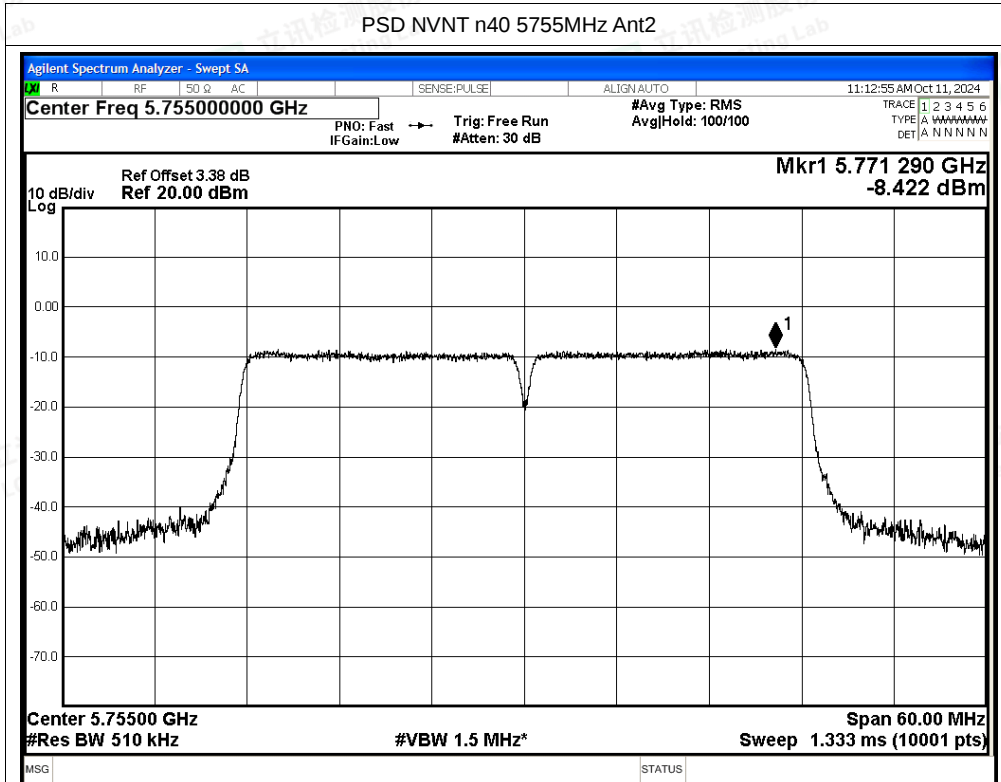




PSD NVNT ac20 5745MHz Ant2

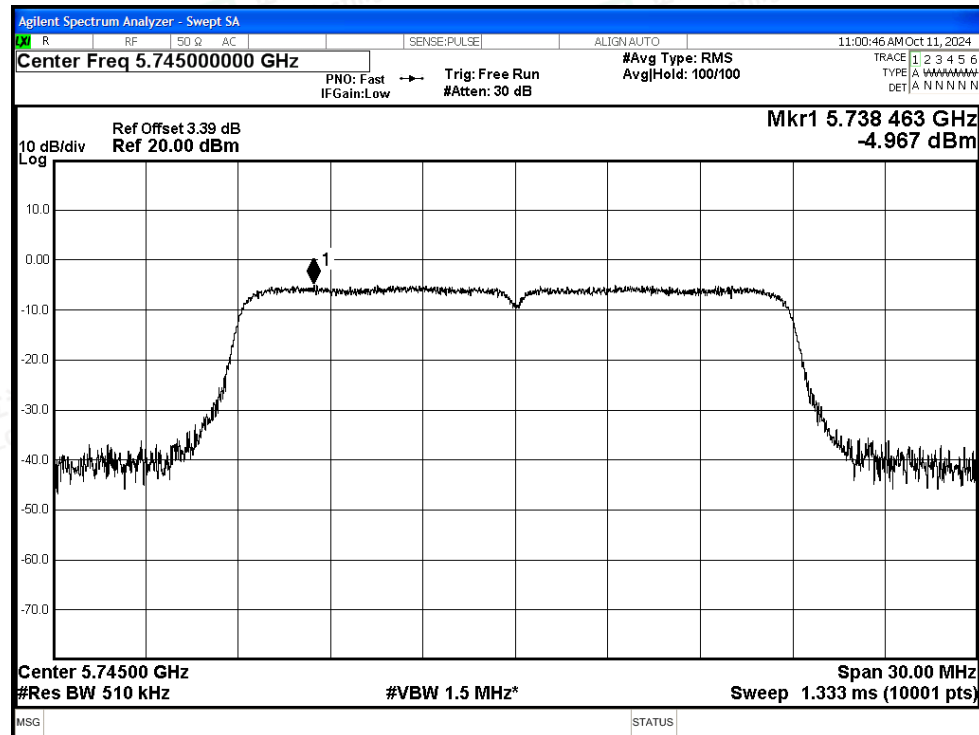


PSD NVNT ac20 5785MHz Ant2

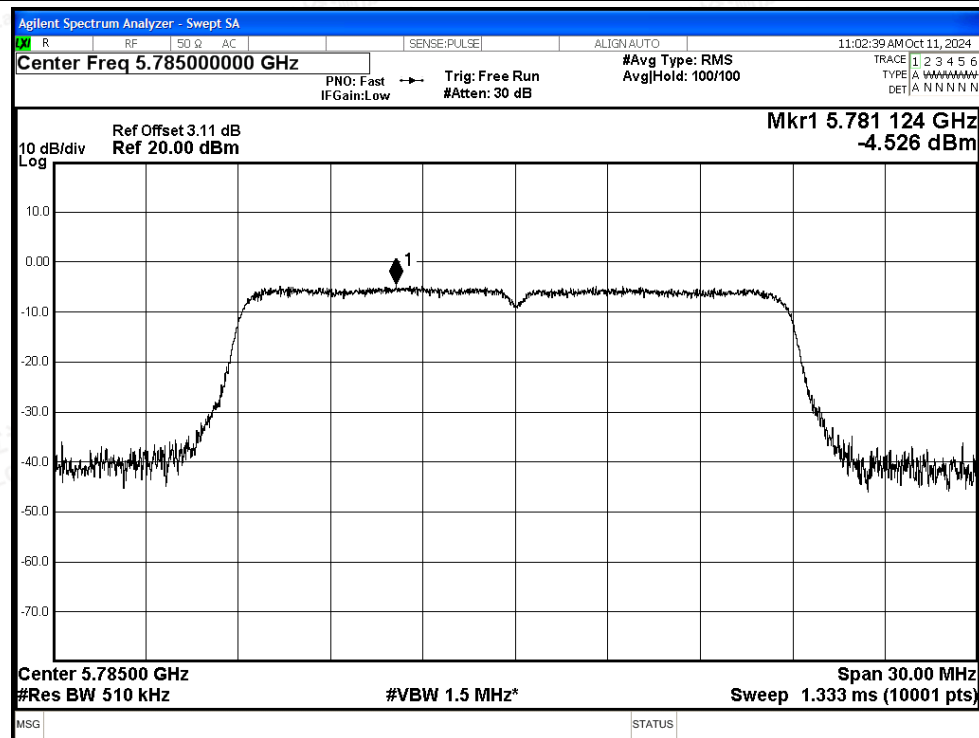




PSD NVNT ac20 5825MHz Ant2

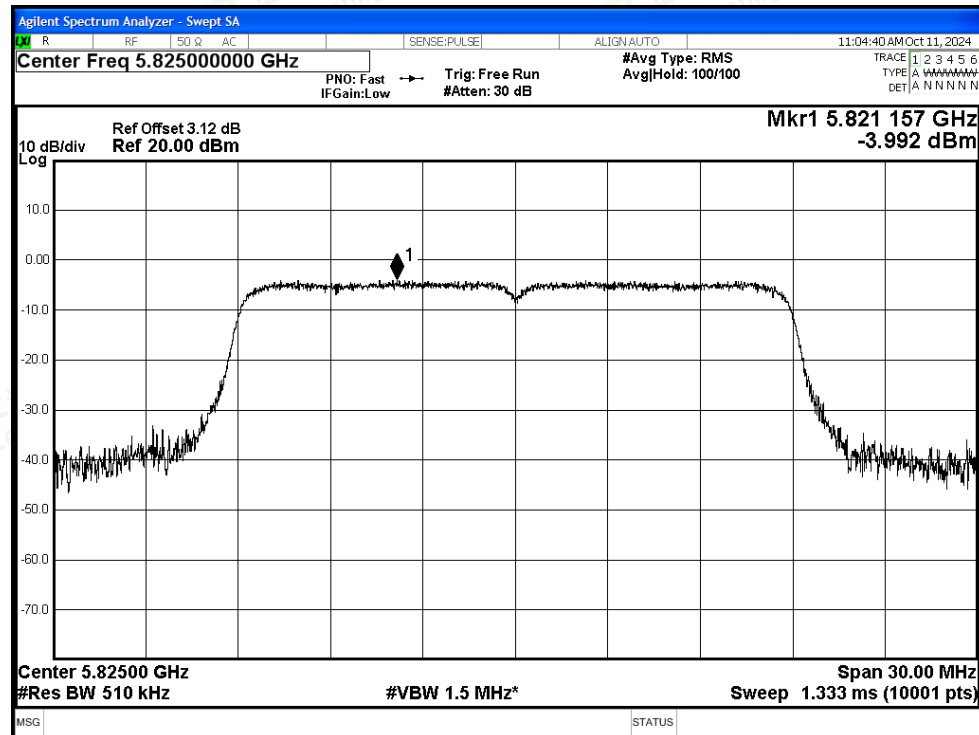


PSD NVNT ac40 5755MHz Ant2

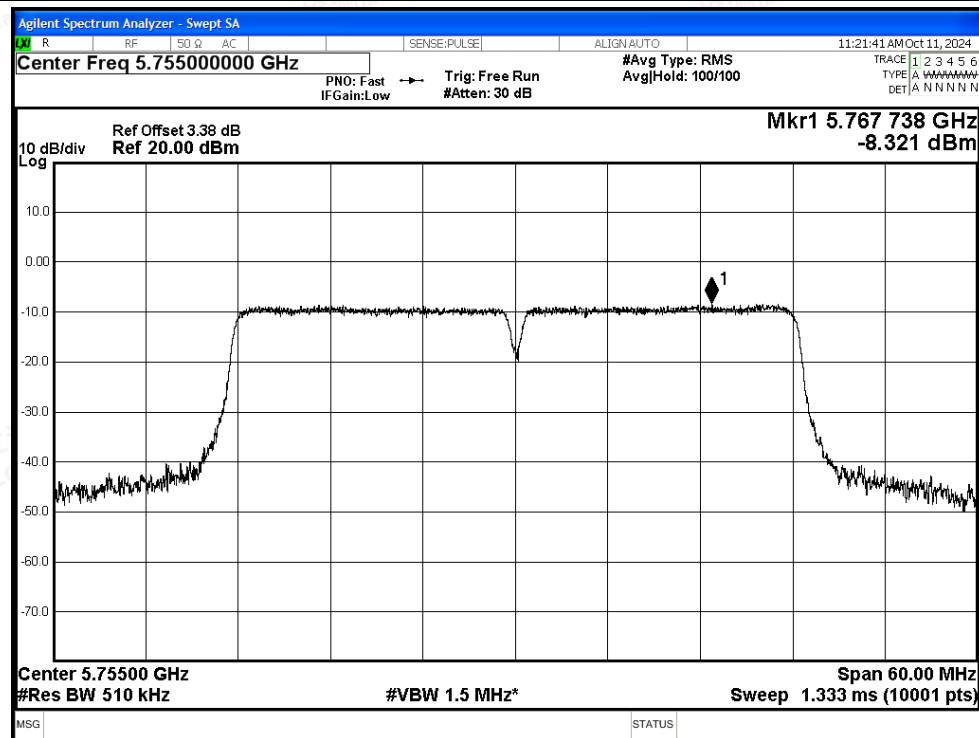




PSD NVNT ac40 5795MHz Ant2

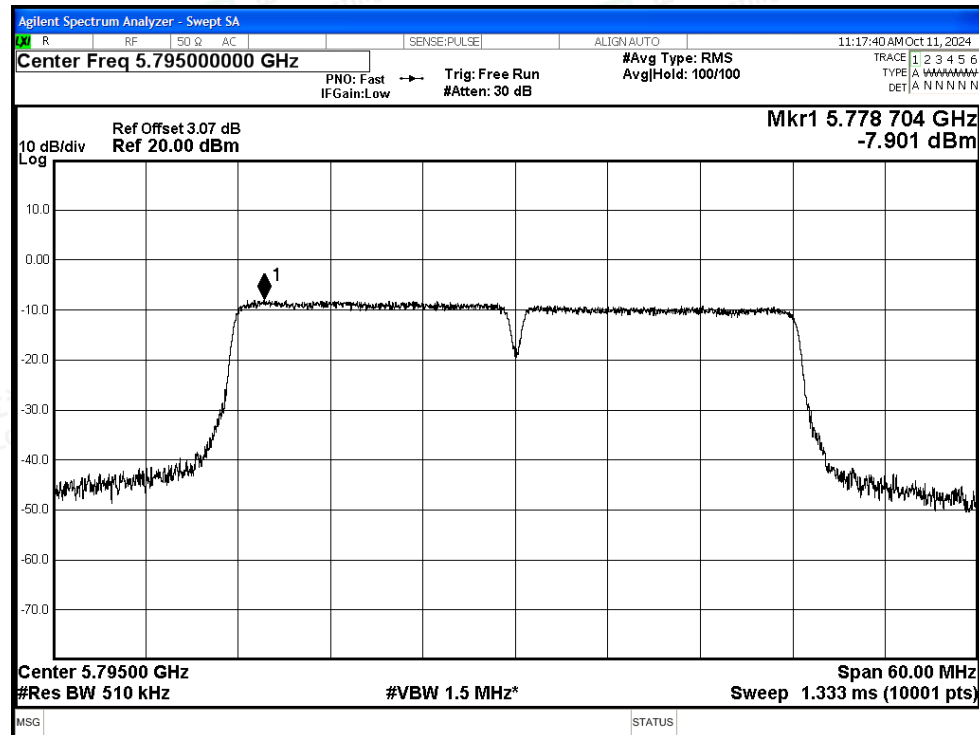


PSD NVNT ac80 5775MHz Ant2

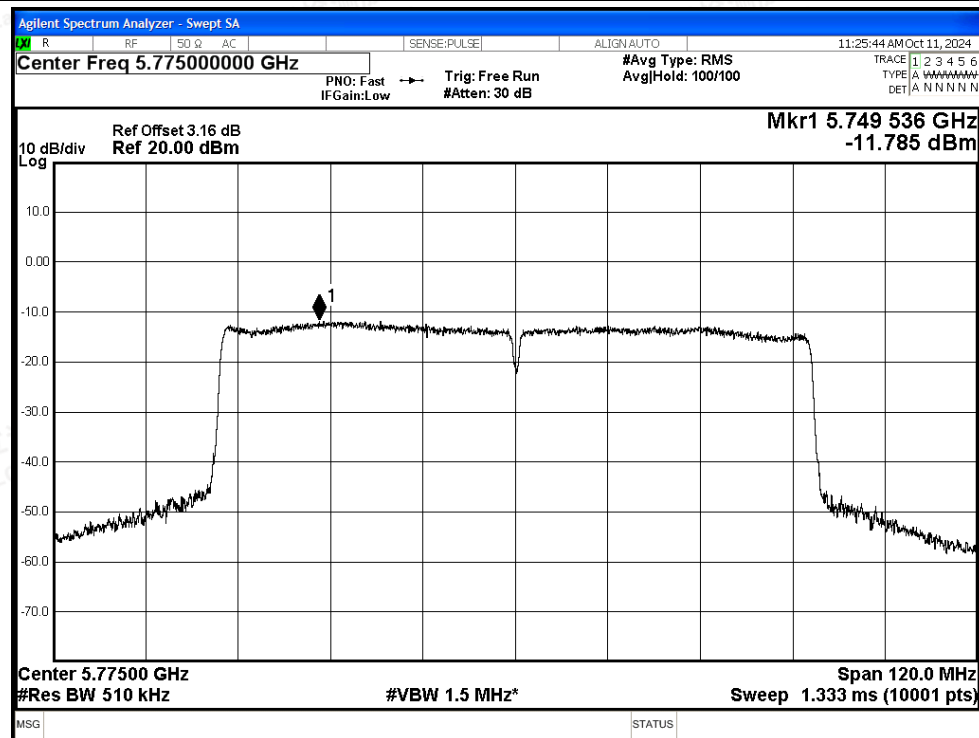




PSD NVNT ax20 5745MHz Ant2

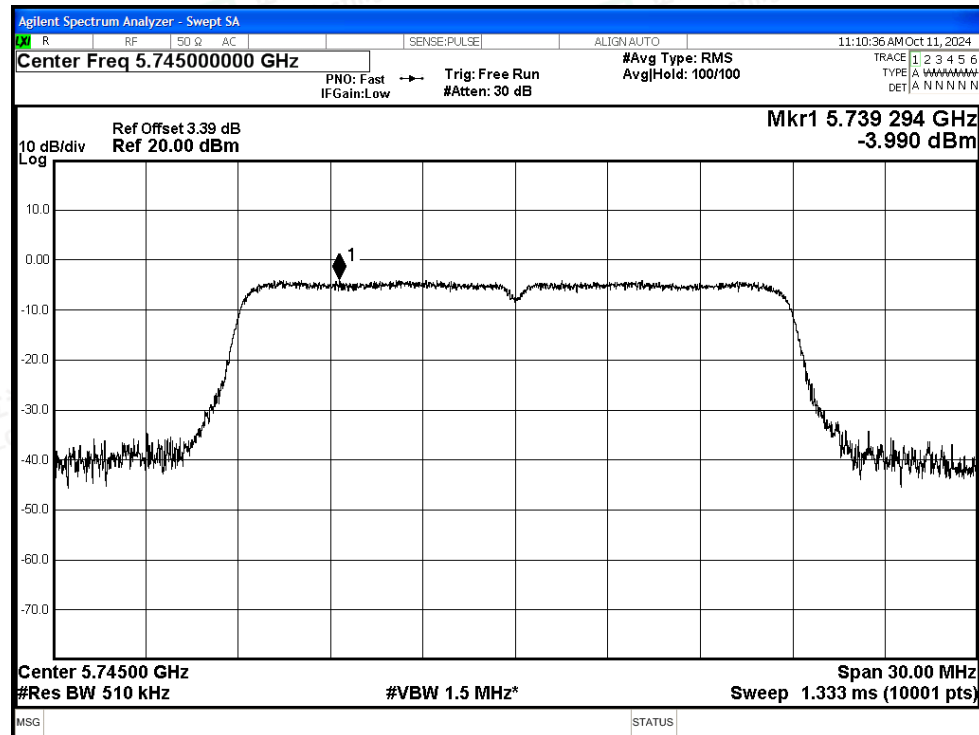


PSD NVNT ax20 5785MHz Ant2

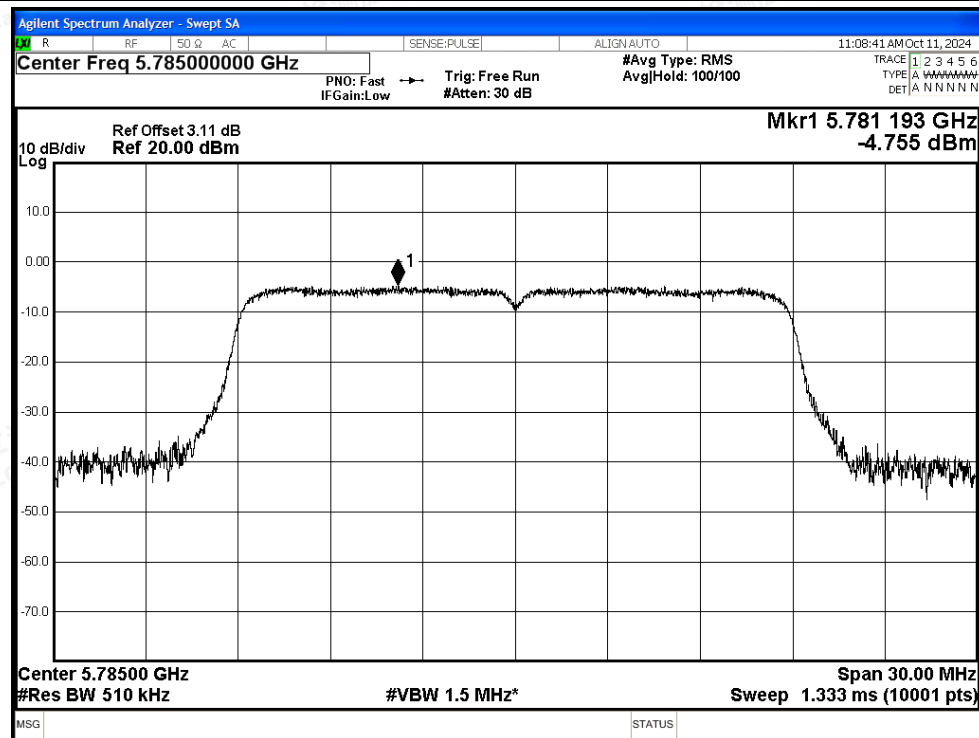




PSD NVNT ax20 5825MHz Ant2

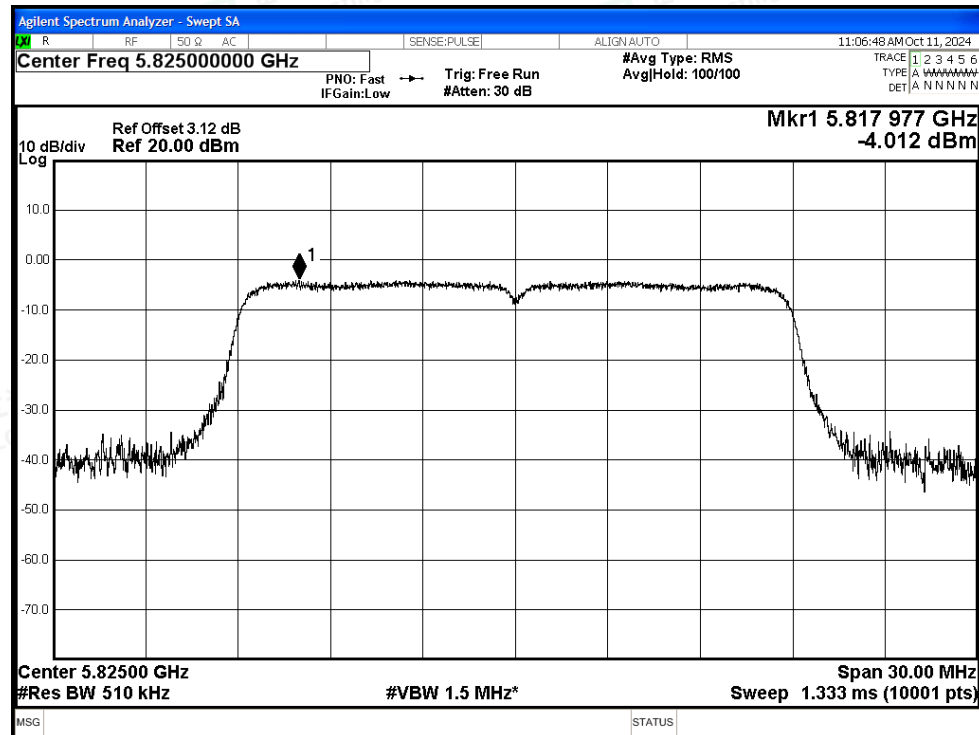


PSD NVNT ax40 5755MHz Ant2

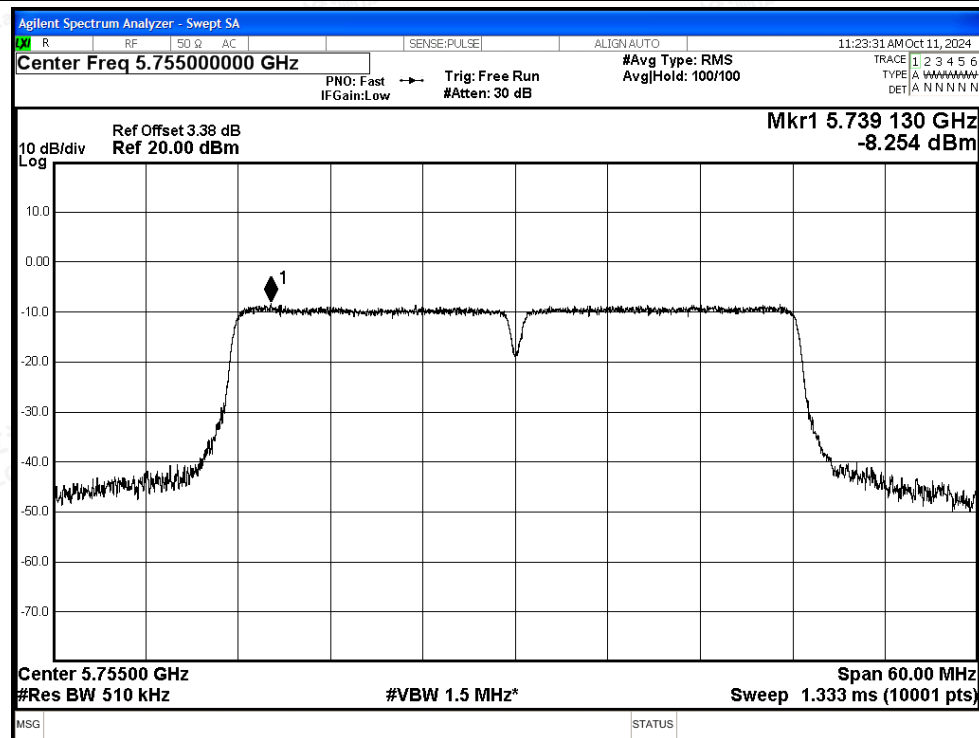




PSD NVNT ax40 5795MHz Ant2

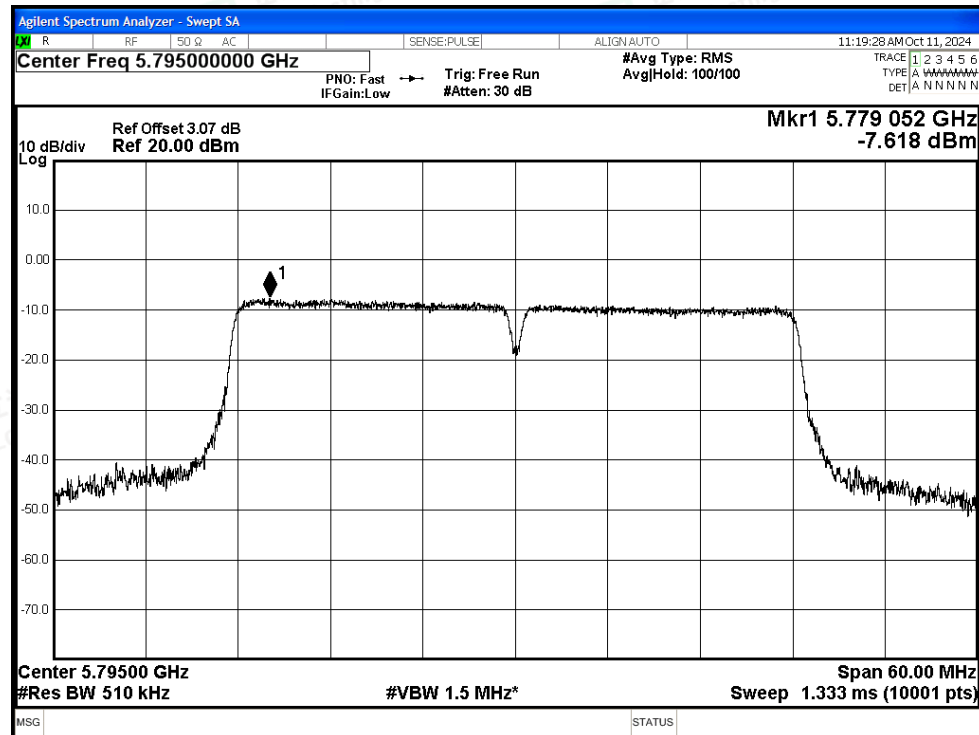

PSD NVNT ax80 5775MHz Ant2

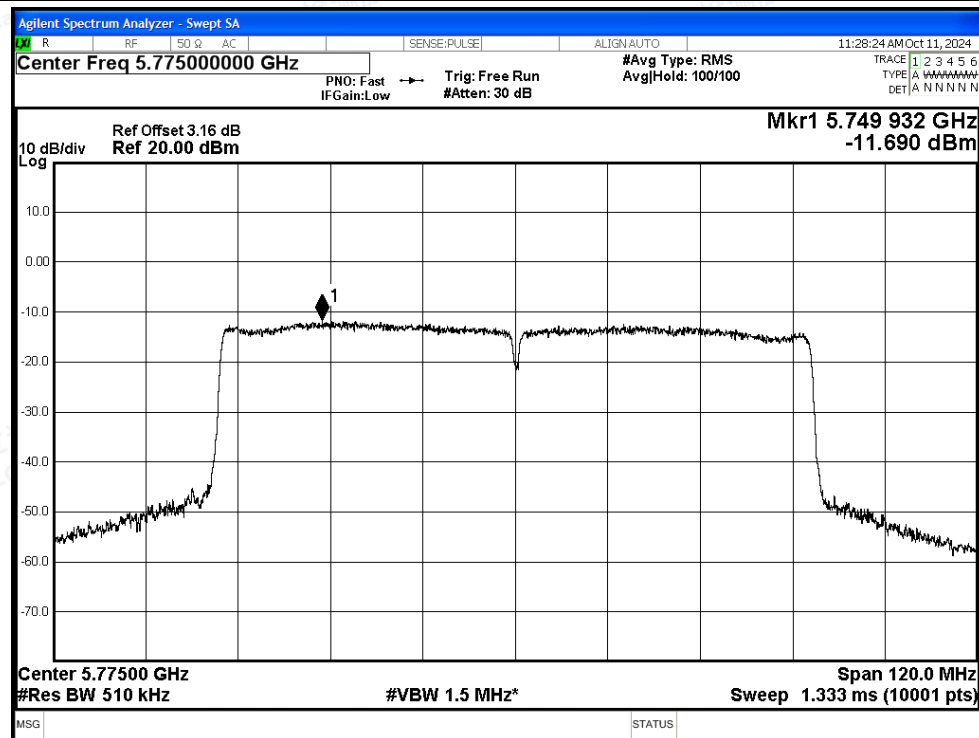



E.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	EIRP Power (dBm)	Detector	Limit (dBm)	Verdict
NVNT	a	5745	Ant0	5650	-49.13	3.09	-	-46.04	Peak	-27	Pass
NVNT	a	5745	Ant0	5650	-56.94	3.09	0.24	-53.61	Average	-27	Pass
NVNT	a	5745	Ant0	5700	-46.55	3.09	-	-43.46	Peak	10	Pass
NVNT	a	5745	Ant0	5700	-54.24	3.09	0.24	-50.91	Average	10	Pass
NVNT	a	5745	Ant0	5720	-32.16	3.09	-	-29.07	Peak	15.6	Pass
NVNT	a	5745	Ant0	5720	-46.93	3.09	0.24	-43.6	Average	15.6	Pass
NVNT	a	5745	Ant0	5725	-28.35	3.09	-	-25.26	Peak	27	Pass
NVNT	a	5745	Ant0	5725	-39.66	3.09	0.24	-36.33	Average	27	Pass
NVNT	a	5825	Ant0	5850	-33.77	3.09	-	-30.68	Peak	27	Pass
NVNT	a	5825	Ant0	5850	-48.47	3.09	0.24	-45.14	Average	27	Pass
NVNT	a	5825	Ant0	5855	-37.35	3.09	-	-34.26	Peak	15.6	Pass
NVNT	a	5825	Ant0	5855	-52.01	3.09	0.24	-48.68	Average	15.6	Pass
NVNT	a	5825	Ant0	5875	-46.86	3.09	-	-43.77	Peak	10	Pass
NVNT	a	5825	Ant0	5875	-55.34	3.09	0.24	-52.01	Average	10	Pass
NVNT	a	5825	Ant0	5925	-48.92	3.09	-	-45.83	Peak	-27	Pass
NVNT	a	5825	Ant0	5925	-56.71	3.09	0.24	-53.38	Average	-27	Pass
NVNT	n20	5745	Ant0	5650	-49.65	3.09	-	-46.56	Peak	-27	Pass
NVNT	n20	5745	Ant0	5650	-57.5	3.09	0.12	-54.29	Average	-27	Pass
NVNT	n20	5745	Ant0	5700	-46.13	3.09	-	-43.04	Peak	10	Pass
NVNT	n20	5745	Ant0	5700	-54.6	3.09	0.12	-51.39	Average	10	Pass
NVNT	n20	5745	Ant0	5720	-29.91	3.09	-	-26.82	Peak	15.6	Pass
NVNT	n20	5745	Ant0	5720	-43.31	3.09	0.12	-40.1	Average	15.6	Pass
NVNT	n20	5745	Ant0	5725	-25.92	3.09	-	-22.83	Peak	27	Pass
NVNT	n20	5745	Ant0	5725	-40.12	3.09	0.12	-36.91	Average	27	Pass
NVNT	n20	5825	Ant0	5850	-34.51	3.09	-	-31.42	Peak	27	Pass
NVNT	n20	5825	Ant0	5850	-46.29	3.09	0.12	-43.08	Average	27	Pass
NVNT	n20	5825	Ant0	5855	-37.92	3.09	-	-34.83	Peak	15.6	Pass
NVNT	n20	5825	Ant0	5855	-51.43	3.09	0.12	-48.22	Average	15.6	Pass
NVNT	n20	5825	Ant0	5875	-46.78	3.09	-	-43.69	Peak	10	Pass
NVNT	n20	5825	Ant0	5875	-55.86	3.09	0.12	-52.65	Average	10	Pass
NVNT	n20	5825	Ant0	5925	-49.56	3.09	-	-46.47	Peak	-27	Pass
NVNT	n20	5825	Ant0	5925	-56.83	3.09	0.12	-53.62	Average	-27	Pass
NVNT	n40	5755	Ant0	5650	-49.82	3.09	-	-46.73	Peak	-27	Pass
NVNT	n40	5755	Ant0	5650	-56.91	3.09	0.12	-53.7	Average	-27	Pass
NVNT	n40	5755	Ant0	5700	-46.24	3.09	-	-43.15	Peak	10	Pass
NVNT	n40	5755	Ant0	5700	-53.53	3.09	0.12	-50.32	Average	10	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	n40	5755	Ant0	5720	-30.18	3.09	-	-27.09	Peak	15.6	Pass
NVNT	n40	5755	Ant0	5720	-45.77	3.09	0.12	-42.56	Average	15.6	Pass
NVNT	n40	5755	Ant0	5725	-26.89	3.09	-	-23.8	Peak	27	Pass
NVNT	n40	5755	Ant0	5725	-42.52	3.09	0.12	-39.31	Average	27	Pass
NVNT	n40	5795	Ant0	5850	-48.25	3.09	-	-45.16	Peak	27	Pass
NVNT	n40	5795	Ant0	5850	-56.41	3.09	0.12	-53.2	Average	27	Pass
NVNT	n40	5795	Ant0	5855	-49.49	3.09	-	-46.4	Peak	15.6	Pass
NVNT	n40	5795	Ant0	5855	-57.22	3.09	0.12	-54.01	Average	15.6	Pass
NVNT	n40	5795	Ant0	5875	-49.21	3.09	-	-46.12	Peak	10	Pass
NVNT	n40	5795	Ant0	5875	-57.3	3.09	0.12	-54.09	Average	10	Pass
NVNT	n40	5795	Ant0	5925	-49.92	3.09	-	-46.83	Peak	-27	Pass
NVNT	n40	5795	Ant0	5925	-57.47	3.09	0.12	-54.26	Average	-27	Pass
NVNT	ac20	5745	Ant0	5650	-48.95	3.09	-	-45.86	Peak	-27	Pass
NVNT	ac20	5745	Ant0	5650	-56.68	3.09	0.12	-53.47	Average	-27	Pass
NVNT	ac20	5745	Ant0	5700	-46.98	3.09	-	-43.89	Peak	10	Pass
NVNT	ac20	5745	Ant0	5700	-55.19	3.09	0.12	-51.98	Average	10	Pass
NVNT	ac20	5745	Ant0	5720	-33.68	3.09	-	-30.59	Peak	15.6	Pass
NVNT	ac20	5745	Ant0	5720	-47.67	3.09	0.12	-44.46	Average	15.6	Pass
NVNT	ac20	5745	Ant0	5725	-24.37	3.09	-	-21.28	Peak	27	Pass
NVNT	ac20	5745	Ant0	5725	-41.43	3.09	0.12	-38.22	Average	27	Pass
NVNT	ac20	5825	Ant0	5850	-30.91	3.09	-	-27.82	Peak	27	Pass
NVNT	ac20	5825	Ant0	5850	-44.51	3.09	0.12	-41.3	Average	27	Pass
NVNT	ac20	5825	Ant0	5855	-37.3	3.09	-	-34.21	Peak	15.6	Pass
NVNT	ac20	5825	Ant0	5855	-49.91	3.09	0.12	-46.7	Average	15.6	Pass
NVNT	ac20	5825	Ant0	5875	-47.44	3.09	-	-44.35	Peak	10	Pass
NVNT	ac20	5825	Ant0	5875	-55.98	3.09	0.12	-52.77	Average	10	Pass
NVNT	ac20	5825	Ant0	5925	-46.59	3.09	-	-43.5	Peak	-27	Pass
NVNT	ac20	5825	Ant0	5925	-56.82	3.09	0.12	-53.61	Average	-27	Pass
NVNT	ac40	5755	Ant0	5650	-49.13	3.09	-	-46.04	Peak	-27	Pass
NVNT	ac40	5755	Ant0	5650	-56.28	3.09	0.12	-53.07	Average	-27	Pass
NVNT	ac40	5755	Ant0	5700	-46.24	3.09	-	-43.15	Peak	10	Pass
NVNT	ac40	5755	Ant0	5700	-54.06	3.09	0.12	-50.85	Average	10	Pass
NVNT	ac40	5755	Ant0	5720	-30.87	3.09	-	-27.78	Peak	15.6	Pass
NVNT	ac40	5755	Ant0	5720	-45.73	3.09	0.12	-42.52	Average	15.6	Pass
NVNT	ac40	5755	Ant0	5725	-29.78	3.09	-	-26.69	Peak	27	Pass
NVNT	ac40	5755	Ant0	5725	-41.44	3.09	0.12	-38.23	Average	27	Pass
NVNT	ac40	5795	Ant0	5850	-48.78	3.09	-	-45.69	Peak	27	Pass
NVNT	ac40	5795	Ant0	5850	-55.87	3.09	0.12	-52.66	Average	27	Pass
NVNT	ac40	5795	Ant0	5855	-48.5	3.09	-	-45.41	Peak	15.6	Pass
NVNT	ac40	5795	Ant0	5855	-56.27	3.09	0.12	-53.06	Average	15.6	Pass



Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity



NVNT	ac40	5795	Ant0	5875	-49.48	3.09	-	-46.39	Peak	10	Pass
NVNT	ac40	5795	Ant0	5875	-57.66	3.09	0.12	-54.45	Average	10	Pass
NVNT	ac40	5795	Ant0	5925	-50.24	3.09	-	-47.15	Peak	-27	Pass
NVNT	ac40	5795	Ant0	5925	-57.91	3.09	0.12	-54.7	Average	-27	Pass
NVNT	ac80	5775	Ant0	5850	-42.54	3.09	-	-39.45	Peak	27	Pass
NVNT	ac80	5775	Ant0	5850	-52.54	3.09	0.25	-49.2	Average	27	Pass
NVNT	ac80	5775	Ant0	5855	-42.32	3.09	-	-39.23	Peak	15.6	Pass
NVNT	ac80	5775	Ant0	5855	-52.26	3.09	0.25	-48.92	Average	15.6	Pass
NVNT	ac80	5775	Ant0	5875	-46.55	3.09	-	-43.46	Peak	10	Pass
NVNT	ac80	5775	Ant0	5875	-55.31	3.09	0.25	-51.97	Average	10	Pass
NVNT	ac80	5775	Ant0	5925	-48.03	3.09	-	-44.94	Peak	-27	Pass
NVNT	ac80	5775	Ant0	5925	-56.93	3.09	0.25	-53.59	Average	-27	Pass
NVNT	ac80	5775	Ant0	5650	-47.03	3.09	-	-43.94	Peak	-27	Pass
NVNT	ac80	5775	Ant0	5650	-56.41	3.09	0.25	-53.07	Average	-27	Pass
NVNT	ac80	5775	Ant0	5700	-42.18	3.09	-	-39.09	Peak	10	Pass
NVNT	ac80	5775	Ant0	5700	-51.33	3.09	0.25	-47.99	Average	10	Pass
NVNT	ac80	5775	Ant0	5720	-35.16	3.09	-	-32.07	Peak	15.6	Pass
NVNT	ac80	5775	Ant0	5720	-47.94	3.09	0.25	-44.6	Average	15.6	Pass
NVNT	ac80	5775	Ant0	5725	-33.54	3.09	-	-30.45	Peak	27	Pass
NVNT	ac80	5775	Ant0	5725	-45.48	3.09	0.25	-42.14	Average	27	Pass
NVNT	ax20	5745	Ant0	5650	-49.3	3.09	-	-46.21	Peak	-27	Pass
NVNT	ax20	5745	Ant0	5650	-56.68	3.09	0.12	-53.47	Average	-27	Pass
NVNT	ax20	5745	Ant0	5700	-46.84	3.09	-	-43.75	Peak	10	Pass
NVNT	ax20	5745	Ant0	5700	-55.16	3.09	0.12	-51.95	Average	10	Pass
NVNT	ax20	5745	Ant0	5720	-31.1	3.09	-	-28.01	Peak	15.6	Pass
NVNT	ax20	5745	Ant0	5720	-45.26	3.09	0.12	-42.05	Average	15.6	Pass
NVNT	ax20	5745	Ant0	5725	-27.8	3.09	-	-24.71	Peak	27	Pass
NVNT	ax20	5745	Ant0	5725	-38.86	3.09	0.12	-35.65	Average	27	Pass
NVNT	ax20	5825	Ant0	5850	-28.07	3.09	-	-24.98	Peak	27	Pass
NVNT	ax20	5825	Ant0	5850	-45.54	3.09	0.12	-42.33	Average	27	Pass
NVNT	ax20	5825	Ant0	5855	-37.72	3.09	-	-34.63	Peak	15.6	Pass
NVNT	ax20	5825	Ant0	5855	-49.8	3.09	0.12	-46.59	Average	15.6	Pass
NVNT	ax20	5825	Ant0	5875	-47.36	3.09	-	-44.27	Peak	10	Pass
NVNT	ax20	5825	Ant0	5875	-55.27	3.09	0.12	-52.06	Average	10	Pass
NVNT	ax20	5825	Ant0	5925	-47.41	3.09	-	-44.32	Peak	-27	Pass
NVNT	ax20	5825	Ant0	5925	-57.29	3.09	0.12	-54.08	Average	-27	Pass
NVNT	ax40	5755	Ant0	5650	-47.95	3.09	-	-44.86	Peak	-27	Pass
NVNT	ax40	5755	Ant0	5650	-57.07	3.09	0.12	-53.86	Average	-27	Pass
NVNT	ax40	5755	Ant0	5700	-43.84	3.09	-	-40.75	Peak	10	Pass
NVNT	ax40	5755	Ant0	5700	-54.27	3.09	0.12	-51.06	Average	10	Pass





NVNT	ax40	5755	Ant0	5720	-31.56	3.09	-	-28.47	Peak	15.6	Pass
NVNT	ax40	5755	Ant0	5720	-43.8	3.09	0.12	-40.59	Average	15.6	Pass
NVNT	ax40	5755	Ant0	5725	-23.92	3.09	-	-20.83	Peak	27	Pass
NVNT	ax40	5755	Ant0	5725	-41.86	3.09	0.12	-38.65	Average	27	Pass
NVNT	ax40	5795	Ant0	5850	-47.7	3.09	-	-44.61	Peak	27	Pass
NVNT	ax40	5795	Ant0	5850	-56.51	3.09	0.12	-53.3	Average	27	Pass
NVNT	ax40	5795	Ant0	5855	-48.59	3.09	-	-45.5	Peak	15.6	Pass
NVNT	ax40	5795	Ant0	5855	-56.28	3.09	0.12	-53.07	Average	15.6	Pass
NVNT	ax40	5795	Ant0	5875	-48.23	3.09	-	-45.14	Peak	10	Pass
NVNT	ax40	5795	Ant0	5875	-57.56	3.09	0.12	-54.35	Average	10	Pass
NVNT	ax40	5795	Ant0	5925	-49.98	3.09	-	-46.89	Peak	-27	Pass
NVNT	ax40	5795	Ant0	5925	-57.6	3.09	0.12	-54.39	Average	-27	Pass
NVNT	ax80	5775	Ant0	5850	-42.44	3.09	-	-39.35	Peak	27	Pass
NVNT	ax80	5775	Ant0	5850	-52.3	3.09	0.25	-48.96	Average	27	Pass
NVNT	ax80	5775	Ant0	5855	-44.14	3.09	-	-41.05	Peak	15.6	Pass
NVNT	ax80	5775	Ant0	5855	-52.37	3.09	0.25	-49.03	Average	15.6	Pass
NVNT	ax80	5775	Ant0	5875	-45.57	3.09	-	-42.48	Peak	10	Pass
NVNT	ax80	5775	Ant0	5875	-55.63	3.09	0.25	-52.29	Average	10	Pass
NVNT	ax80	5775	Ant0	5925	-48.9	3.09	-	-45.81	Peak	-27	Pass
NVNT	ax80	5775	Ant0	5925	-56.97	3.09	0.25	-53.63	Average	-27	Pass
NVNT	ax80	5775	Ant0	5650	-48.53	3.09	-	-45.44	Peak	-27	Pass
NVNT	ax80	5775	Ant0	5650	-56.43	3.09	0.25	-53.09	Average	-27	Pass
NVNT	ax80	5775	Ant0	5700	-42.49	3.09	-	-39.4	Peak	10	Pass
NVNT	ax80	5775	Ant0	5700	-51.1	3.09	0.25	-47.76	Average	10	Pass
NVNT	ax80	5775	Ant0	5720	-36.89	3.09	-	-33.8	Peak	15.6	Pass
NVNT	ax80	5775	Ant0	5720	-48.15	3.09	0.25	-44.81	Average	15.6	Pass
NVNT	ax80	5775	Ant0	5725	-33.09	3.09	-	-30	Peak	27	Pass
NVNT	ax80	5775	Ant0	5725	-45.84	3.09	0.25	-42.5	Average	27	Pass




Shenzhen LCS Compliance Testing Laboratory Ltd.
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street,
Baoan District, Shenzhen, 518000, China
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com
Scan code to check authenticity




Test Graphs

Restrict Band NVNT a 5745MHz Ant0 Peak

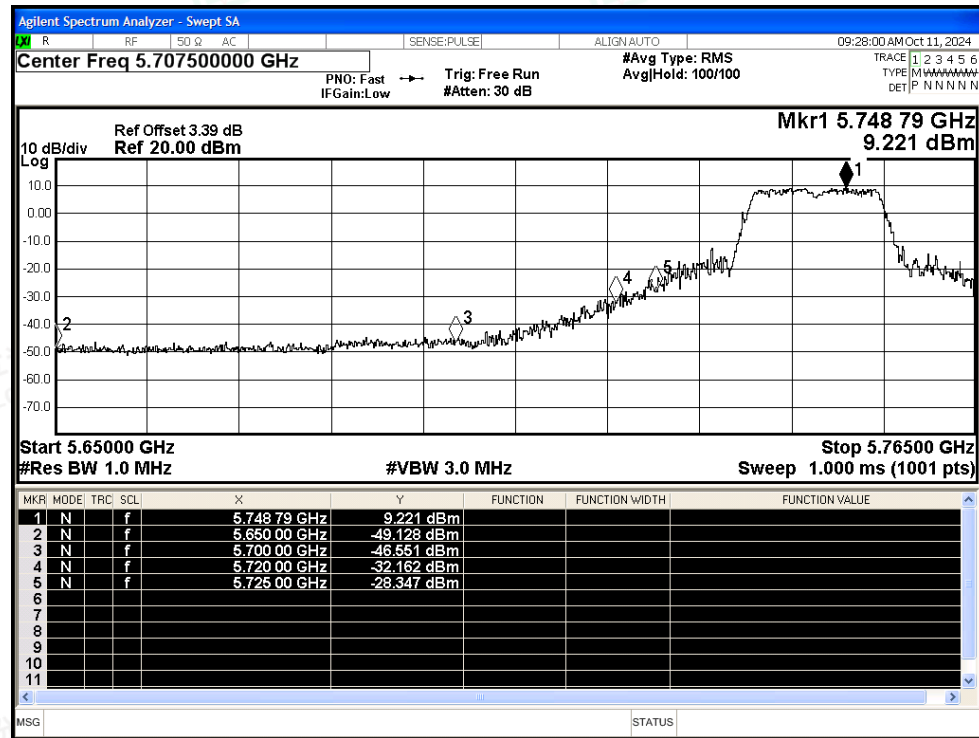


Restrict Band NVNT a 5745MHz Ant0 Average

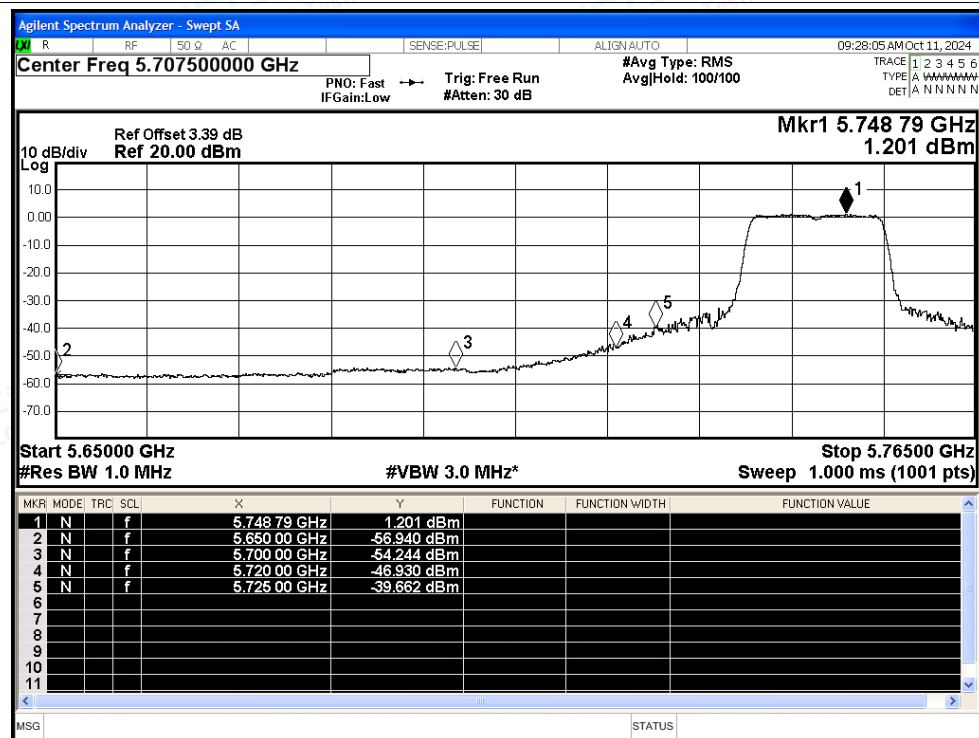




Restrict Band NVNT a 5825MHz Ant0 Peak

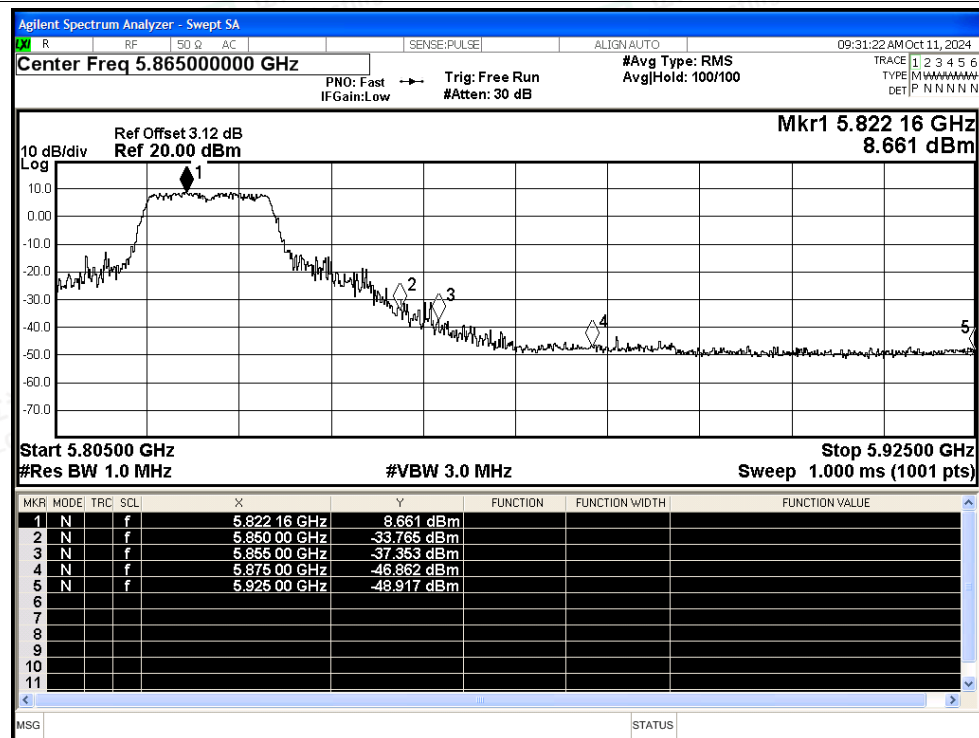


Restrict Band NVNT a 5825MHz Ant0 Average

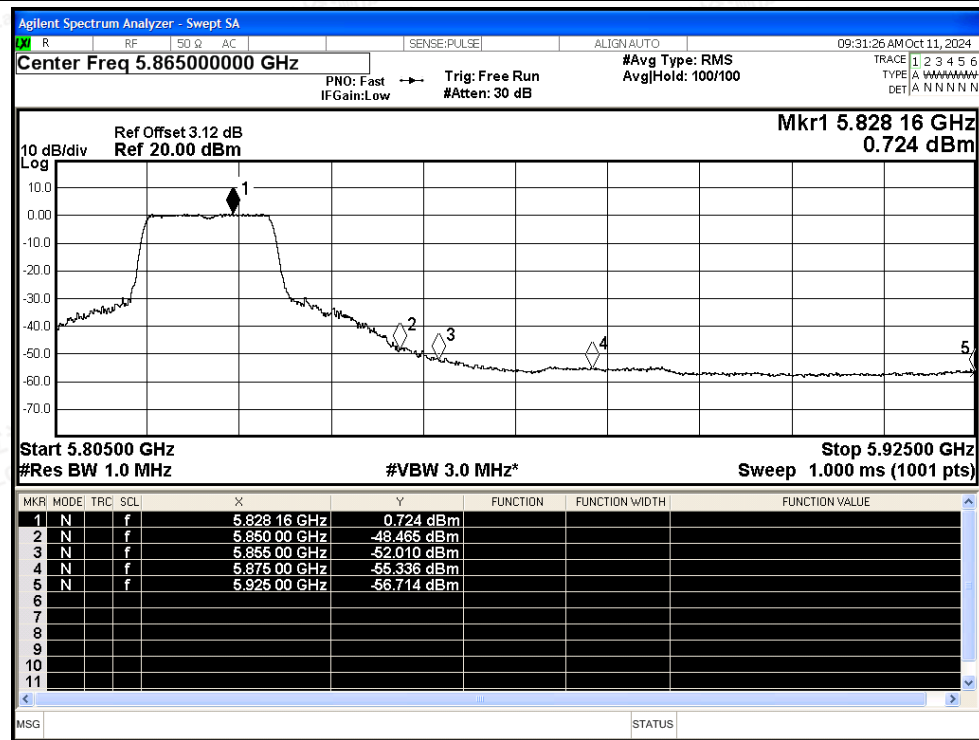




Restrict Band NVNT n20 5745MHz Ant0 Peak

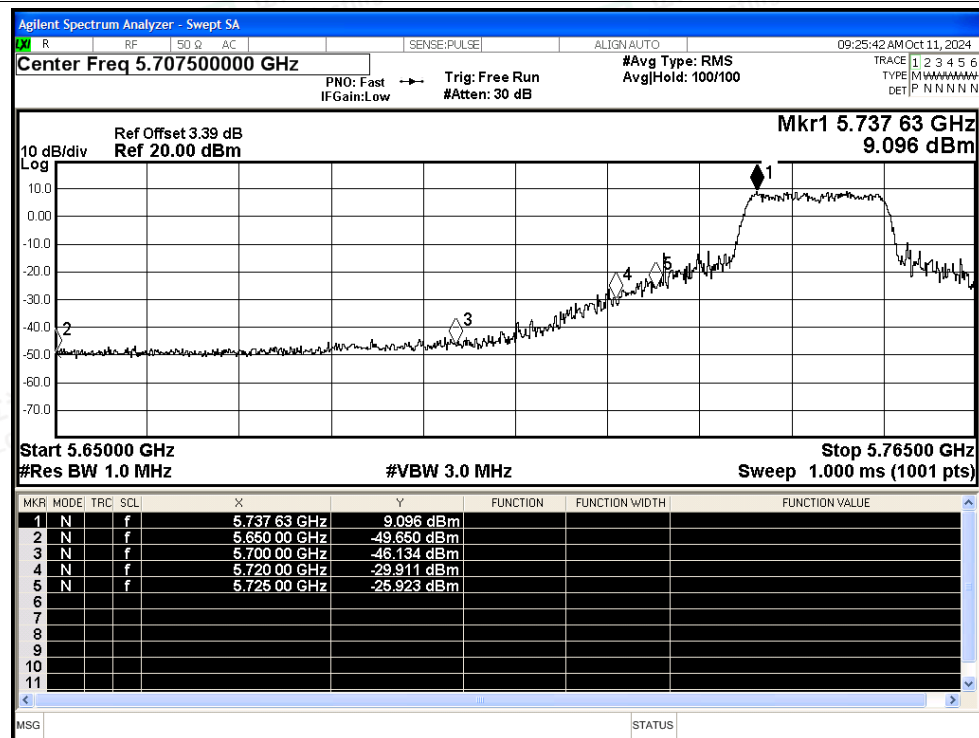


Restrict Band NVNT n20 5745MHz Ant0 Average

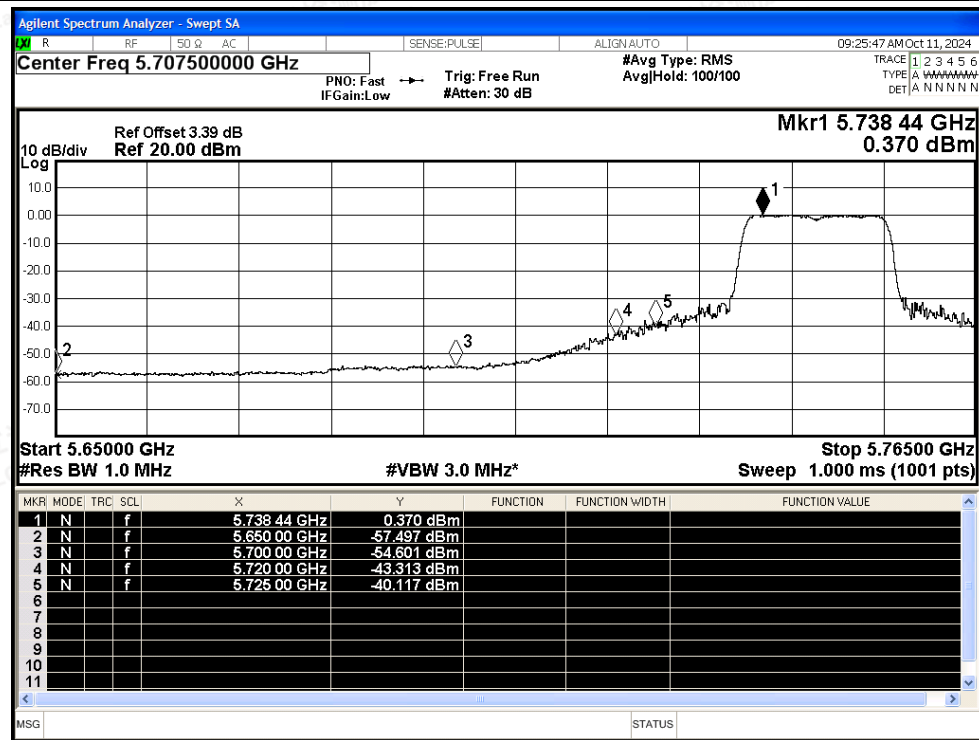



Restrict Band NVNT n20 5825MHz Ant0 Peak

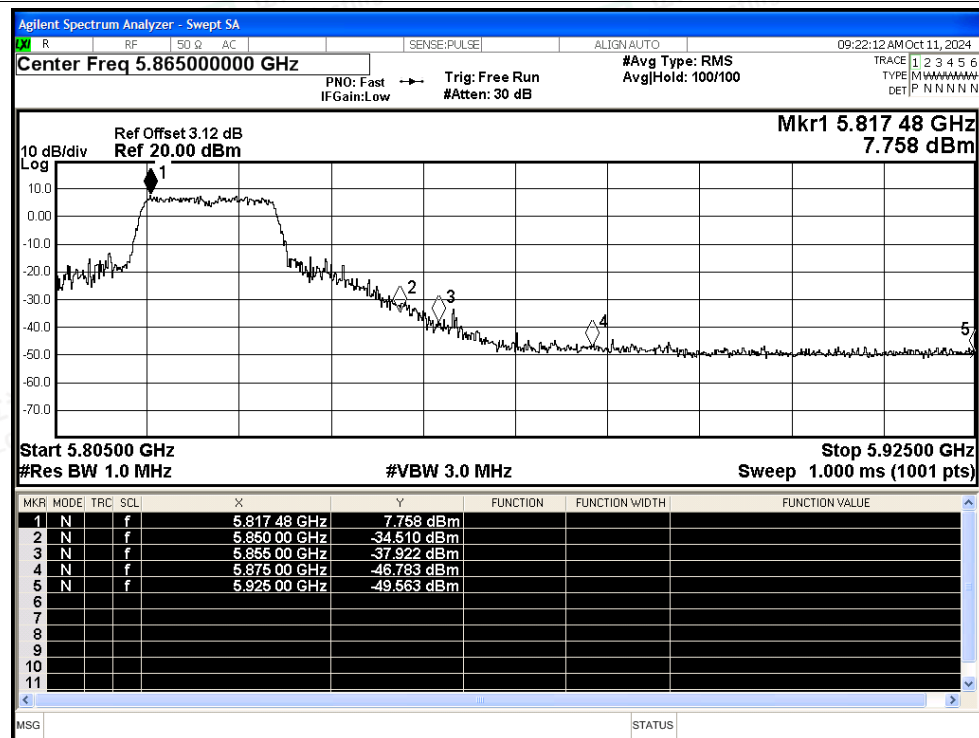

Restrict Band NVNT n20 5825MHz Ant0 Average

