


USE AND CARE GUIDE

LED WHITE COLOR CHANGING TAPE LIGHT WITH REMOTE

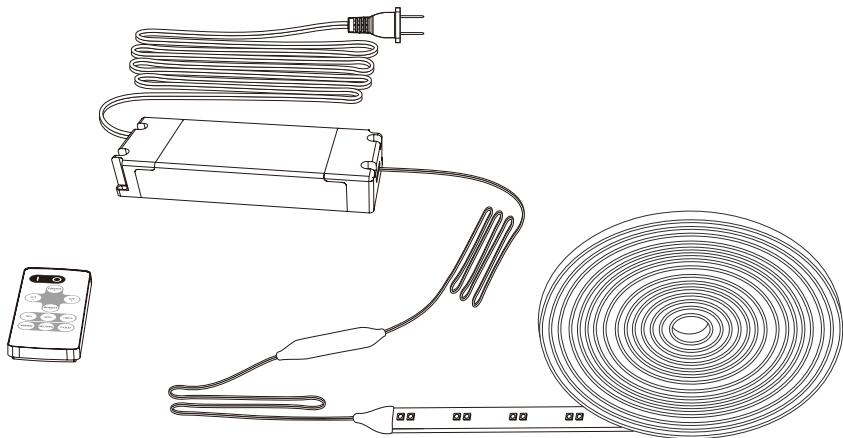

Questions, problems, missing parts? Before returning to the store,
call Commercial Electric Customer Service
8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday

1-877-527-0313

HOMEDEPOT.COM

THANK YOU

We appreciate the trust and confidence you have placed in Commercial Electric through the purchase of this flexible tape light kit. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Commercial Electric!

Table of Contents

Safety Information.....	2
Warranty, Pre-Installation	3
Installation.....	4
Mounting Options	8
Operation.....	9
Care & Cleaning, Troubleshooting, FCC Statement ...	11

Safety Information



WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH OF CHILDREN**.
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



- Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- Even used batteries may cause severe injury or death.
- Call a local poison control center for treatment information.
- Use only CR2025 DC 3V replacement battery.
- Non-rechargeable batteries are not to be recharged.
- Do not force discharge, recharge, disassemble, heat above 113° F or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.
- Ensure the batteries are installed correctly according to polarity (+ and -).
- Do not mix old and new batteries, different brands or types of batteries, such as alkaline, carbon-zinc, or rechargeable batteries.
- Remove and immediately recycle or dispose of batteries from equipment not used for an extended period of time according to local regulations.

- Always completely secure the battery compartment. If the battery compartment does not close securely, stop using the product, remove the batteries, and keep them away from children.

Please read and understand the user manual to ensure proper installation and use. Pay attention to the technical data as well as the troubleshooting section. This guide is subject to change.

- Only use the 24-volt LED lighting power supply adapter which has been provided with this 16 ft. kit, do not connect or add another strip to this single adapter.
- Do not bend, crush or pull the LED tape or cable. Protect from sharp edges, oil and heat.
- For indoor/dry location use only.
- Ensure the connectors are securely fastened before operating the tape.
- Electrical waste should not be disposed of with household waste. Please recycle where facilities exist.
- **WARNING:** Deviation from the assembly instructions may result in a risk of fire or electrical shock.

NOTICE: LED flexible tape lighting rating: 24VDC 1.5A.



DANGER: Danger of eye damage. Do not stare directly at the LED chips of this LED strip.



CAUTION: Do not power LED tape while coiled on reel.



IMPORTANT: Always observe polarity for 24V connections, positive (+) to positive and negative (-) to negative.



IMPORTANT: Do not install Class 2 low voltage wiring in the same runs as AC main power. If AC and low voltage wires cross, keep them at 90-degree angles. Use only insulated staples, plastic ties, or wire support clips to secure cords and wires.

IMPORTANT SAFETY INSTRUCTIONS: This portable luminaire has a polarized plug (one blade is wider than the other) as a feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not alter the plug.

Warranty

THREE (3) YEAR WARRANTY

WHAT IS COVERED

The manufacturer warrants this fixture to be free from defects in materials and workmanship for a period of three (3) years from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use and service. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alteration, neglect, or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, set-up, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship. This warranty shall not apply to the finish on any portion of the product, such as surface and/or weathering, as this is considered normal wear and tear.

WHAT IS NOT COVERED

The manufacturer does not warrant and specifically disclaims any warranty, whether expressed or implied, of fitness for a particular purpose, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to any labor/expense costs involved in the replacement or repair of said product.

Contact the Customer Service Team at 1-877-527-0313 or visit www.HomeDepot.com.

Pre-Installation

PLANNING INSTALLATION

It is important to read these guidelines completely to understand how the LED tape lighting works with the included RF wireless remote.

INSTALLATION CONSIDERATIONS

- Where will you locate your power supply?
- How will you run and conceal the wires to your LED tape lighting?
- What is the best mounting position for the LED tape light to achieve your desired effect?
- See the section titled "Mounting options" on page 8 for cabinet lighting placement tips.

TOOLS REQUIRED



Measuring
tape




Scissors



Power
Drill

Pre-Installation (continued)

PACKAGE CONTENTS

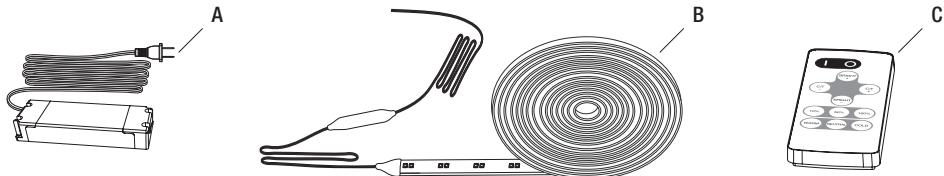

Part	Description	Quantity
A	Plug-in power adapter	1
B	RF receiver and 16 ft. LED flexible strip (pre-assembled)	1
C	RF remote control	1

HARDWARE INCLUDED



NOTE: Hardware not shown to actual size.



Part	Description	Quantity
AA	Wire lead connector (optional use)	2
BB	Wire support clips	2


Installation

1 Cutting the tape light (optional)




IMPORTANT: Make sure to observe polarity when making connections, positive to positive and negative to negative. Check to see that the wire colors and the polarity markings printed on the tape line up.

- This tape light can be cut every 12 LEDs at 125 mm intervals (approx. 5 in.).
- To use the included LED snap connectors (AA), cut the LED tape with scissors in the center of a copper pad (position A) as shown.
- The tape can also be cut at silver solder joints (position B), but this cut point should be used for soldered connections only.

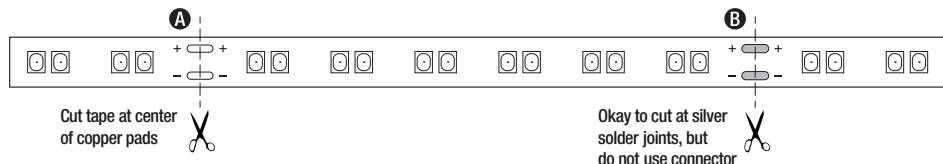

Installation (continued)


- Use the wire lead connectors (AA) to make turns and go around corners. They can also be spliced and extended for gaps of any size. 18-20 AWG wire is recommended for custom lengths (not included).

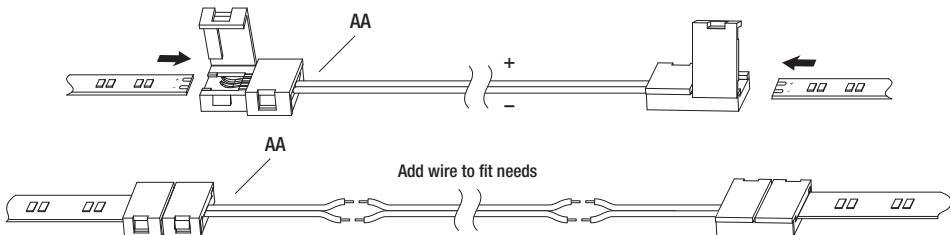

NOTE: Be sure all 24V connections are secure and protected from electrical shorting. Options include electrical tape, small wire nuts, crimp connectors, etc.


2 How to use included connectors

- The wire lead connectors (AA) are used to join two sections of LED tape.
- Open the lid of the connector opposite the wire.
- Peel about $\frac{1}{4}$ inch of the paper from the LED strip adhesive backing at the connection point.
- Use a gentle side-to-side motion to slide the strip into the connector, making sure the tape slides under the internal connector contact points.
- Close the connector door firmly.
- Perform a power test to be sure the connection is secure. If the LEDs flicker or do not light, repeat the steps in this guide.

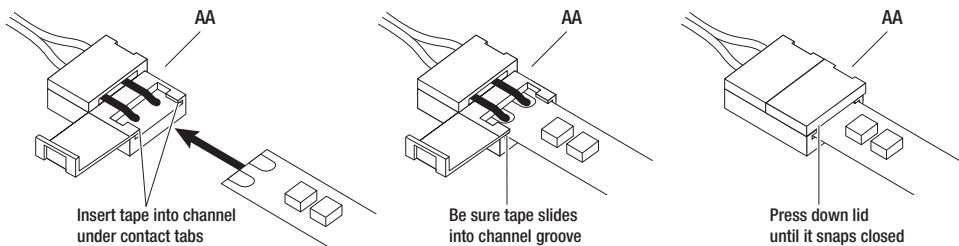


3 Soldering the LED tape (optional)

- Soldering is another method for joining wires to the tape light and joining sections of tape light directly together.

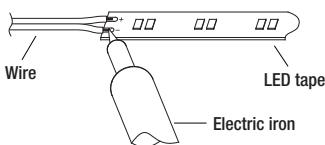

Wire Lead Connection

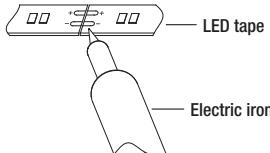

Splice Connection

Installation (continued)

4 Preparing the assembly location



- Power the LED tape lighting and temporarily hold or tape into position with painter's tape or masking tape – do not remove the adhesive paper backing.
- Adjust the lighting to various angles and positions to get the desired level of illumination and lighting appearance. If the LEDs create undesirable light spots on walls, or reflections, reposition the tape light strip farther away from surfaces or try a different mounting angle.
- Once you have determined your final mounting position, remove any dirt and dust present where the tape will be applied. Mounting surfaces should be clean, completely dry, and as dust-free as possible. For best results, install when temperatures are above 60°F (15°C). When installing on painted surfaces, paint should be fully cured based on manufacturer's cure time.

5 Installing the LED strip

- Working from one end to the other, remove the paper backing protecting the adhesive and firmly press the LED tape (B) down with your fingers or a clean cloth, taking care not to press on the individual LEDs.
- Support and secure the power cables leading to the tape light with the included wire support clips.
- A maximum of 5 meters (inclusive) can be connected to one driver.



NOTE: Although the LED tape can be installed in curved and irregular spaces, avoid sharp bends or bending on the solder joints as you could damage the LED tape light. If an LED is inadvertently damaged and fails to light, the remaining LEDs will continue to operate.



6 Installing the power supply



IMPORTANT: Do not power the LED tape while on the reel, as the LEDs will overheat.

- Connect the AC power cord to a live outlet.
- If connected to a switched outlet, be sure the power is switched ON for proper remote operation.

Installation (continued)

7 Direct wiring the power supply (optional)



WARNING: Disconnect power by unplugging the power cord or turning off the circuit breaker before removing the power supply end caps.




WARNING: Do not use standard 120-volt AC dimmers with this power supply. Only use the integrated RF dimmer supplied with this kit.



IMPORTANT: All wiring must be in accordance with national and local electrical codes, low-voltage Class 2 circuit. If you are unclear as to how to install and wire this product, consult a qualified professional.

- When the power supply end caps are removed, the input and output cables can be removed by loosening the screws on the power supply cable connector terminal block.

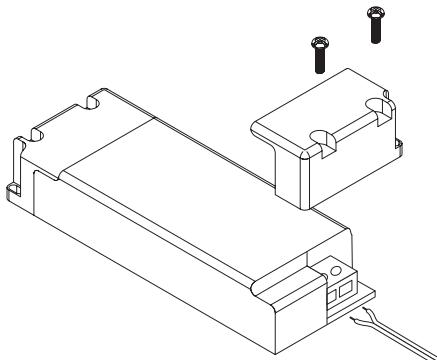


- Removing the low-voltage output cable from the power supply will allow cable runs through cabinets and around any obstacles as needed for a more custom installation. When reinstalling the cables to the power supply, be sure to follow the polarity printed on the case (white wire to +, gray to -).
- To direct wire, remove the AC input cable/plug and connect black live wire from a branch circuit to the line side (L) of the built-in terminal block and connect the white neutral wire to the neutral side of the terminal block (N), as indicated on the case. This LED power supply uses Class II AC inputs with a fully isolated case; ground wire should not be connected.
- Before restoring power, make sure all connections are tight and the endcaps are reinstalled securely.
- The 24-volt power cable to the tape lighting can be shortened or lengthened as needed. 20AWG is recommended when lengthening this cable; keep wire runs as short as possible. Always use suitable wire connectors to meet installation requirements.
- Use the optional screw-tabs for mounting securely when needed, for example, underneath a kitchen cabinet.

Mounting Options


1 Installing under a cabinet

- To surface mount the LED tape light under a set of cabinets in one continuous run, you may need to drill a 1/2 in. hole through any cabinet side lip that may be present. Install LED tape light through the hole and surface mount as a continuous run.
- For maximum light output and to focus light on the work surface, mount the tape light 1-2 inches behind the front cabinet lip. This mounting position works best with dull or matte finished countertops.



The LED tape has a wide beam angle

- To eliminate bright spots from highly reflective countertops, mount the tape light on the inside back of the cabinet lip frame facing towards your backsplash. Because of the wide beam angle of the tape light, this mounting position will still provide ample lighting.




Mount on inside of cabinet lip to reduce reflections

- When mounting under a cabinet or a shelf with no lip to hide the LED tape light strip, create a visual barrier using a piece of quarter round molding or any angle trim to hide the LEDs.






2 Creating above cabinet uplighting

- Most cabinet tops have uneven surfaces. To create indirect uplighting over cabinets, simply mount the LED tape on any rigid strip (e.g., thin lattice or corner guard molding) and place on top of cabinets. Angle the strip position to achieve the desired illumination.

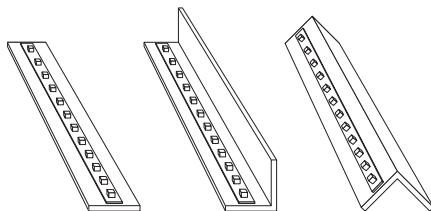


- For a seamless glow and to avoid bright light spots, move the LED tape light strip further from adjacent walls.



1 Functions of the remote

- Pull out the plastic battery barrier sheet from the battery compartment located on the bottom of the remote (C).
- The remote (C) does not require line-of-sight to operate the lights. Range will vary depending on your building structure and where the receiver on the tape light is mounted.
- The remote can operate up to 50 feet in optimal conditions, but each installation has unique variables that may affect range.

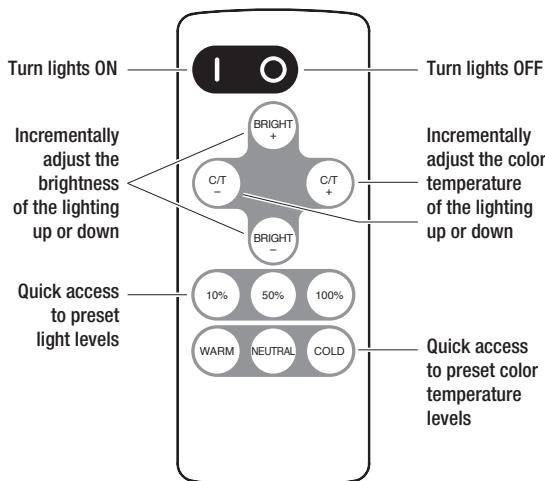

Operation (continued)


1 Pairing Multiple Kits

The remote (C) in each kit comes paired with the tape light (B). For larger installations, multiple kits can be paired together for control by a single remote (C).

PAIRING

- Unplug the power adapter (A) for the kit that is to be paired. Wait 5 seconds.
- Restore power to the adapter (A), then within 10 seconds press and hold the 10% and the 100% buttons on the remote (C) at the same time.
- The lights will flash to indicate a successful pairing.

This kit will now operate with the remote used in this procedure. Repeat as desired with other kits and remotes.

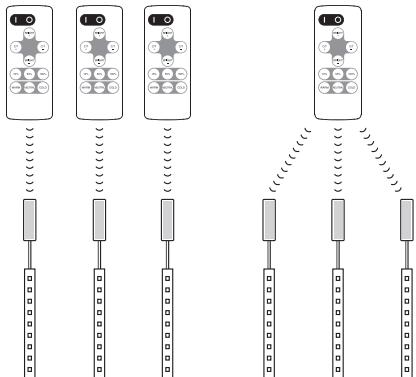

Each remote uniquely paired to a kit

One Remote paired to multiple kits



NOTE: Dynamic effects will not stay synchronized when one remote is paired to multiple kits.

TO RETURN TO SINGLE-REMOTE OPERATION


For each kit, perform the following steps using a unique remote (C):

- Unplug the power adapter (A) for the kit that is to be returned to single-remote operation.
- Restore power to the adapter (A), then within 10 seconds press and hold the 10% and the 100% buttons at the same time. (The lights will flash to indicate the signal has been received.)
- Perform the two steps above a second time to complete the process.

This kit will now operate only using the remote used in this procedure. Repeat as desired with other kits and remotes.

2 Changing the Battery

- To replace the battery, insert a paper clip into hole A above the battery tray on the back of the remote and push, then push in tab B on the side of the battery tray and pull the tray out of the remote.

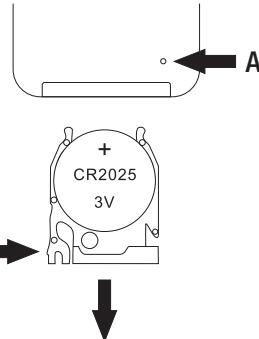

- Always purchase the correct size and grade of battery that is most suitable for the intended use.
- Ensure the battery is installed correctly with regard to polarity (+ and -).
- Remove battery from the equipment when it is not being used for an extended period of time.
- Remove used batteries promptly.



WARNING: The remote contains a CR2025 DC 3V button battery. If swallowed, it could cause severe injury or death within 2 hours. Seek medical attention immediately.

Care and Cleaning

- To clean the light, use a clean, dry or slightly damp cloth.
- Do not use cleaners with chemicals, solvents or harsh abrasives as damage to the light strip may occur.

Troubleshooting

Problem	Possible Cause	Solution
The LED strip will not light.	The power supply does not have power.	Make sure the plug is fully inserted into a live 120 V outlet. Check connections and circuit breaker if direct wiring.
	The power supply output cable is not properly secured.	If direct wiring, make sure that the DC output cable is wired securely to the output of the power supply.
	The polarity is incorrect.	When direct wiring, check that the orientation of the input and output match the markings on the case.
	Batteries in the remote are dead, improperly installed, or the battery protector has not been removed.	Make sure the battery protective strip is removed. Check that the orientation and type of battery are correct and that the battery is not depleted.
	The remote is too far from the receiver.	The remote can operate up to 50 ft. in optimal conditions, but each installation has unique variables that may affect range.
Only part of the LED strip lights.	A connection point is faulty.	Check for secure connections at the point that is not lit. Confirm that polarity is the same between the lit and unlit segments.
The fuse blows or a circuit breaker trips when the light is turned on.	A wire is exposed.	<ul style="list-style-type: none"><input type="checkbox"/> Discontinue use of the lamp.<input type="checkbox"/> Unplug the unit from the wall.<input type="checkbox"/> Contact a qualified electrician or call the Customer Care Service Team at 1-877-527-0313, 8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST, Saturday.

FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Responsible Party: Company: Armacost Lighting | Address: 140 Baltic Ave., Baltimore, MD 21225

Telephone: 410-354-6000



CAUTION: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.



Questions, problems, missing parts? Before returning to the store,
call Commercial Electric Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-877-527-0313

HOMEDEPOT.COM

Retain this manual for future use.