

Prüfbericht-Nr.: <i>Test report no.:</i>	CN215G43 001	Auftrags-Nr.: <i>Order no.:</i>	168319288	Seite 1 von 62 Page 1 of 62
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2021-05-20	
Auftraggeber: <i>Client:</i>	Xiamen Linktop Technology Co., Ltd. Room 501-2,502,503, North Building, Torch Hi-Tech Zone, No.56-58 Huoju Road, Xiamen, 361000, Fujian, P.R. China.			
Prüfgegenstand: <i>Test item:</i>	Electronic Stethoscope			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	HC-21 (Trademark: LINKTOP)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	FCC CFR Title 47, Part 15, Subpart C, Section 15.247			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2021-05-20	Please refer to Photo Document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A003053843-009,010			
Prüfzeitraum: <i>Testing period:</i>	2021-05-20 – 2021-06-15			
Ort der Prüfung: <i>Place of testing:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>			genehmigt von: <i>authorized by:</i>	
Datum: <i>Date:</i> 2022-02-10	Signed by: Chris Chen		Ausstellungsdatum: <i>Issue date:</i> 2022-02-10	Signed by: Lin Lin
Stellung / Position:	Section Manager		Stellung / Position:	Reviewer
Sonstiges / Other:	FCC ID: 2A2J3-HC21			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet * Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht - Nr.: CN215G43 001
Test Report No.

Seite 2 von 62
Page 2 of 62

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 CONDUCTED POWER SPECTRAL DENSITY

RESULT: Pass

5.1.4 6dB BANDWIDTH

RESULT: Pass

5.1.5 99% BANDWIDTH

RESULT: Pass

5.1.6 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.7 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1	General Remarks	4
1.1	Complementary Materials	4
2	Test Sites	5
2.1	Test Facilities	5
2.2	List of Test and Measurement Instruments	5
2.3	Traceability	6
2.4	Calibration	6
2.5	Measurement Uncertainty.....	6
2.6	Location of Original Data.....	7
2.7	Status of Facility Used for Testing	7
3	General Product Information.....	8
3.1	Product Function and Intended Use.....	8
3.2	Ratings and System Details	8
3.3	Independent Operation Modes	8
3.4	Noise Generating and Noise Suppressing Parts.....	9
3.5	Submitted Documents	9
4	Test Set-up and Operation Modes	10
4.1	Principle of Configuration Selection	10
4.2	Test Operation and Test Software	10
4.3	Special Accessories and Auxiliary Equipment	10
4.4	Countermeasures to Achieve EMC Compliance	10
4.5	Test Setup Diagram	11
5	Test Results	12
5.1	Transmitter Requirement & Test Suites	12
5.1.1	Antenna Requirement	12
5.1.2	Maximum Peak Conducted Output Power	13
5.1.3	Conducted Power Spectral Density	14
5.1.4	6dB Bandwidth	18
5.1.5	99% Bandwidth	25
5.1.6	Conducted Spurious Emissions Measured in 100 kHz Bandwidth	32
5.1.7	Radiated Spurious Emission	41
6	Photographs of the Test Set-Up.....	62

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China

FCC Registration No.: 694916

ISED wireless device testing laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Radio Spectrum Testing (TS8997)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
Signal Analyzer	R&S	FSV 40	101441	2021-08-10
OSP	R&S	OSP 150	101017	2021-12-10
Control PC	DELL	OptiPlex 7050	FTJZ9P2	N/A
Test Software	R&S	WMS32 (V11.00.00)	N/A	N/A
Power Meter	R&S	NRP2	107105	2021-12-10
Wideband Power Sensor	R&S	NRP-Z81	105677	2021-09-10
Shielding Room 8#	Albatross	SR8	APC17151-SR8	2021-07-23
Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	2021-08-11
Signal Analyzer	R&S	FSV 40	101439	2021-08-10
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	2021-08-10
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2021-08-10
Amplifier	R&S	SCU-18F	180070	2021-08-10
Amplifier	R&S	SCU40A	100475	2021-09-10
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2022-08-08
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2022-08-08
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2022-08-08
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2022-09-13

Wideband Ridged Horn Antenna (12-18 GHz)	Steatite	QMS-00208	18313	2021-09-02
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2021-07-06

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102428	2021-08-16
Artificial Mains Network	R&S	ENV216	102333	2021-08-16
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-7}$
RF Power (conducted)	± 2.5 dB
Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB
Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
Temperature	± 1 °C
Humidity	± 5 %
Voltage (DC)	± 1 %
Voltage (AC, <10kHz)	± 2 %

Prüfbericht - Nr.: CN215G43 001
*Test Report No.*Seite 7 von 62
Page 7 of 62

2.6 Location of Original Data

The original copies of all test data taken during actual testing were showed in this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3 General Product Information

3.1 Product Function and Intended Use

The EUT is **Electronic Stethoscope** and it supports 2.4GHz BT LE wireless technologies (Version 5.0). While product charging by USB port, Bluetooth function can't work.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

General Information of EUT	Value
Kind of Equipment:	Electronic Stethoscope
Type Designation:	HC-21
Trademark:	LINKTOP
FCC ID	2A2J3-HC21
Input Voltage	Powered by USB Host Unit
Testing Voltage	AC 120V, 60Hz
Support cable	USB Cable: Unshielded, Detachable, 0.9m
Technical Specification of Bluetooth LE	
Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Channel Number:	40 channels
Data Rate:	1 Mbps, 2Mbps
Channel Separation:	2 MHz
Antenna Type:	PCB Antenna
Antenna Gain:	0 dBi

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, Bluetooth LE transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Normal operation mode
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- | | |
|----------------------|------------------------------|
| - Application Form | - ID Label and Location Info |
| - Instruction Manual | - Schematics |
| - Block Diagram | - Operation Description |

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

Table 3: Test environments

Environment Parameter	Values During Tests		
	Temperature	Voltage (Battery operated)	Relative Humidity
NTNV	25°C±2°C	5.0Vdc	Ambient

Table 4: Test channel and frequency

Mode	Test Channels (MHz)	Remark
Transmitting	L/M/H: 2402MHz, 2440MHz, 2480MHz	--

4.3 Special Accessories and Auxiliary Equipment

Table 5: Auxiliary Equipment Used during Test

Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8
AC/DC Adapter	FUHUA	DYS865-050100W	N/A

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

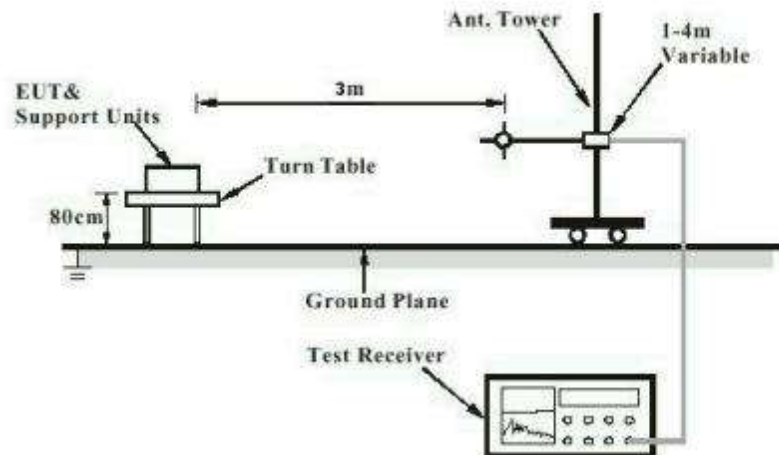


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)


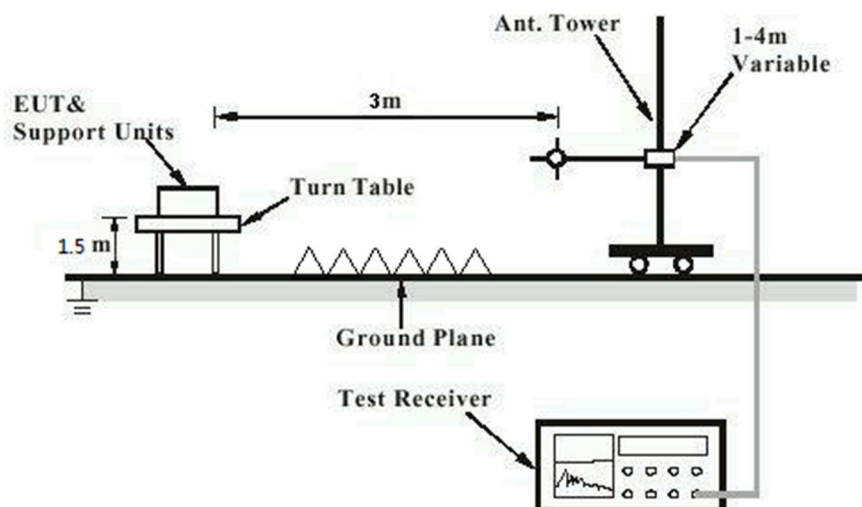


Diagram of Measurement Configuration for Conducted Transmitter Measurement

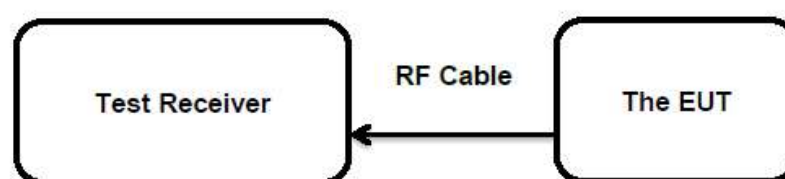

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203

According to the manufacturer declared, the EUT has a PCB antenna, the gain of antenna is 0 dBi, which that permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Maximum Peak Conducted Output Power

RESULT:
Pass
Test Specification

Test standard : FCC Part 15.247(b)(3)
 Basic standard : ANSI C63.10: 2013
 Limits : 1.0 Watts
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2021-06-08
 Input voltage : DC 5V
 Operation mode : A
 Test channel : Low / Middle / High
 Ambient temperature : 25.6 °C
 Relative humidity : 46 %
 Atmospheric pressure : 101 kPa

Table 6: Test Result of Maximum Peak Conducted Output Power, BLE

Test Mode	Data Rate	Test Channel (MHz)	Measured Peak Power		Limit (W)
			(dBm)	(W)	
GFSK (BLE)	1 Mbps	2402	2.80	0.001905	< 1.0
		2440	2.20	0.001660	
		2480	2.40	0.001738	
	2 Mbps	2402	3.00	0.001995	
		2440	2.40	0.001738	
		2480	2.60	0.001820	
Maximum Measured Value			3.00	0.001995	

Note:

- 1) The cable loss is taken into account in results.
- 2) Antenna gain(G): 0 dBi

Prüfbericht - Nr.: CN215G43 001

Test Report No.

Seite 14 von 62

Page 14 of 62

5.1.3 Conducted Power Spectral Density

RESULT:

Pass

Test Specification



Test standard	: FCC Part 15.247(e)
Basic standard	: ANSI C63.10: 2013
Limits	: < 8 dBm / 3kHz
Kind of test site	: Shielded Room


Test Setup

Date of testing	: 2021-06-08
Input voltage	: DC 5V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.6 °C
Relative humidity	: 46 %
Atmospheric pressure	: 101 kPa


Test Results of Conducted Power Spectral Density



1 Mbps

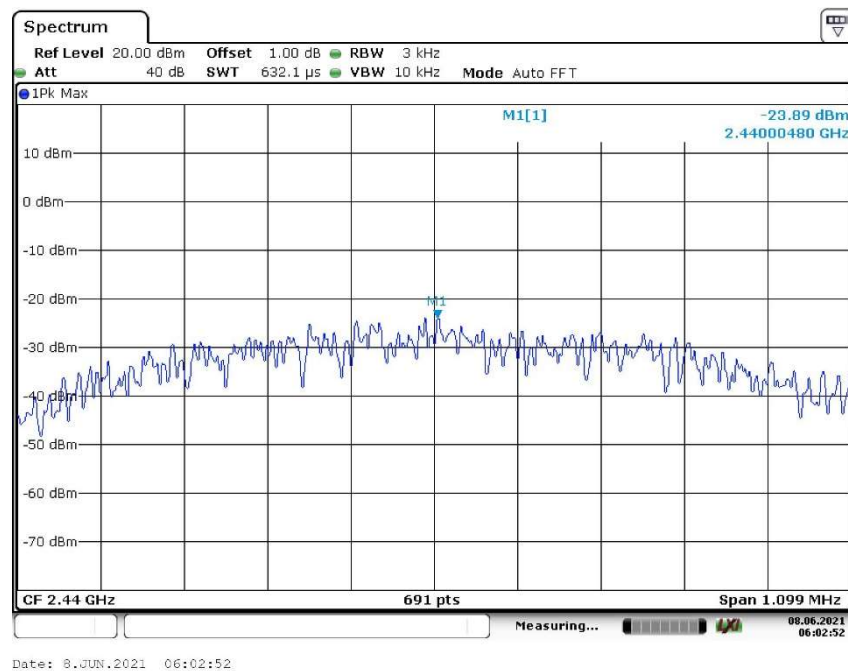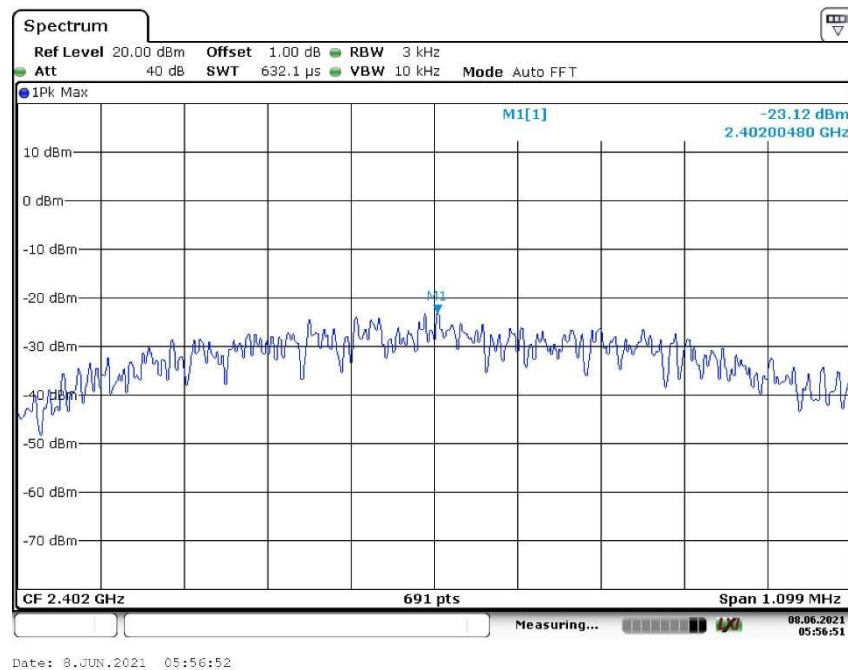

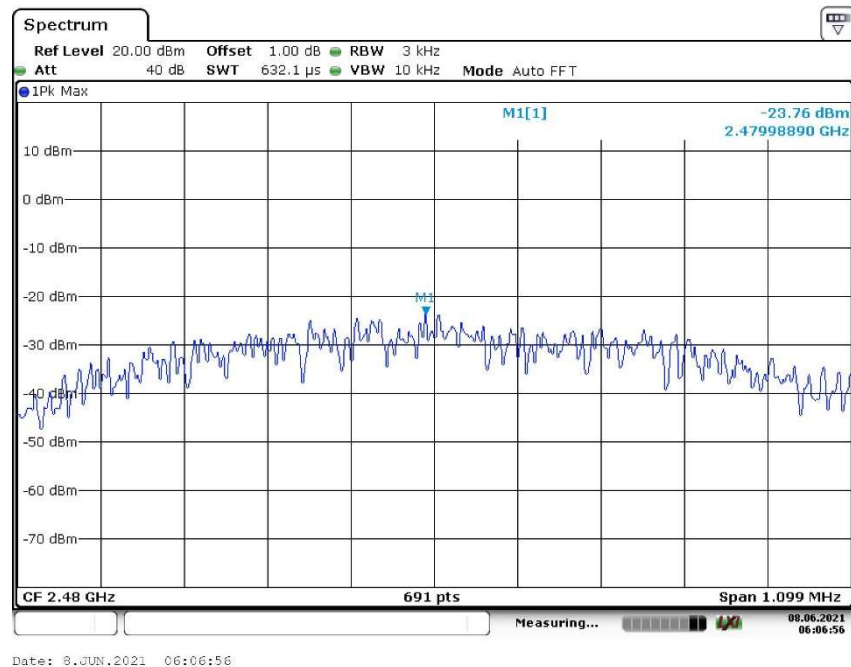

2 Mbps

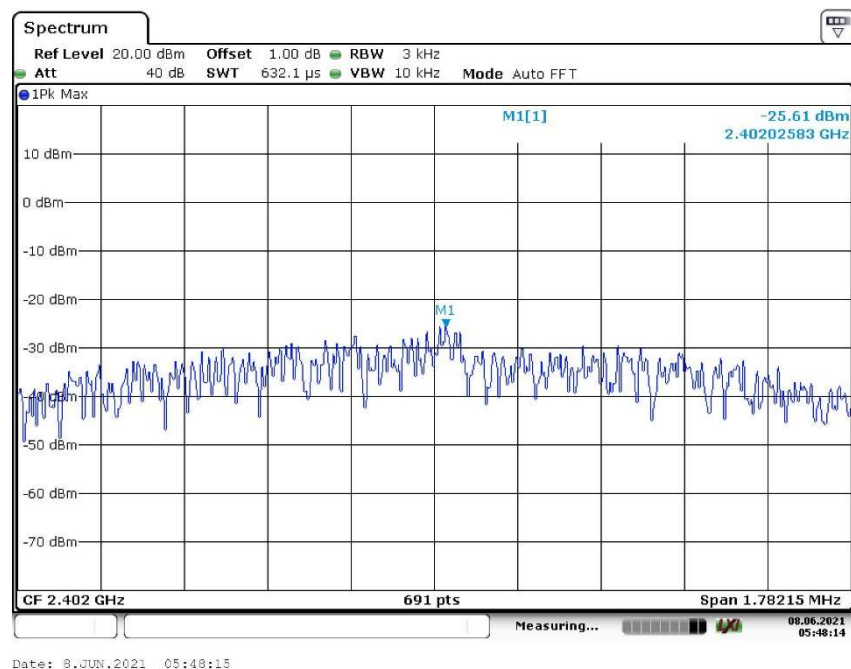

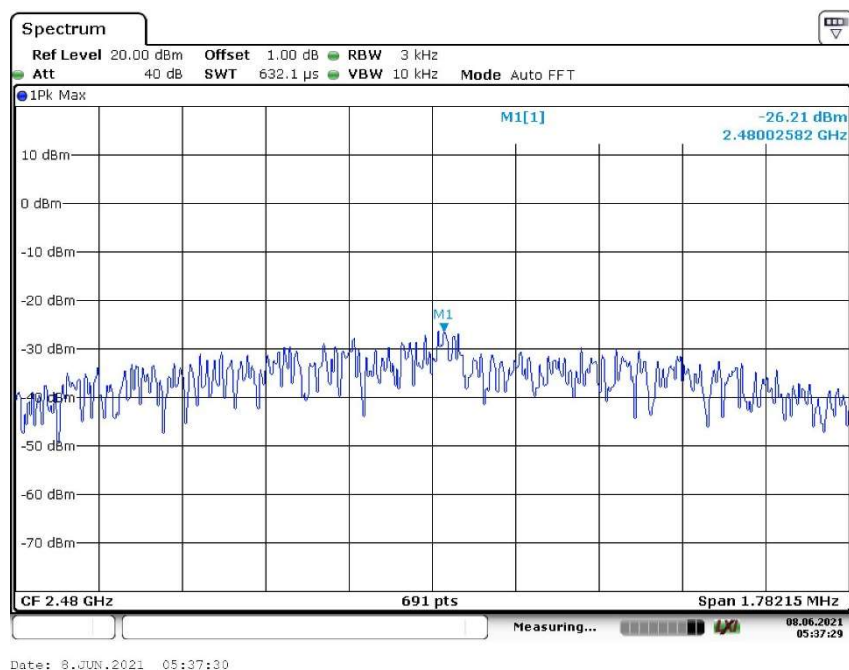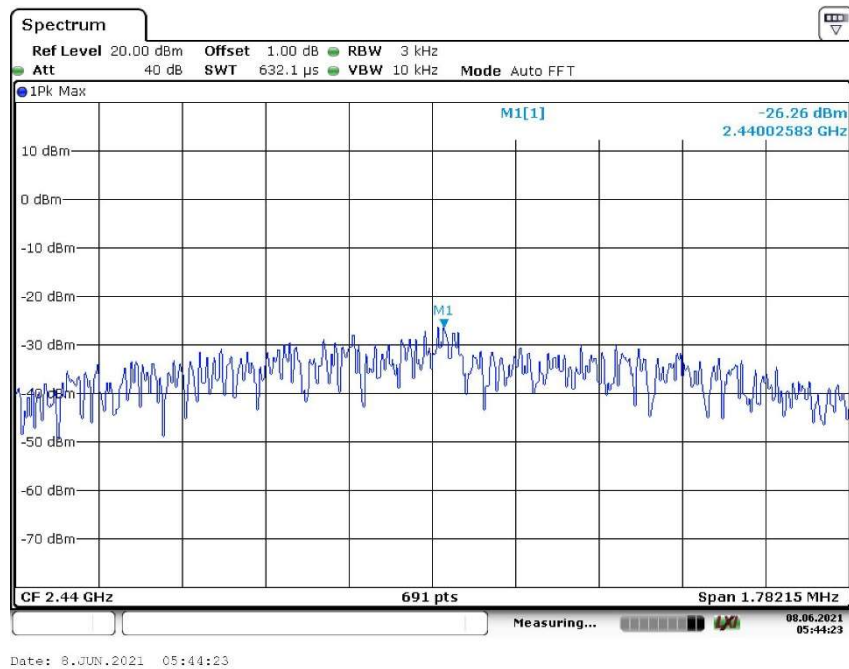

Prüfbericht - Nr.: CN215G43 001

Test Report No.

Seite 18 von 62

Page 18 of 62

5.1.4 6dB Bandwidth

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(a)(2)
Basic standard	: ANSI C63.10: 2013
Limits	: > 500 KHz
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2021-06-08
Input voltage	: DC 5V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.6 °C
Relative humidity	: 46 %
Atmospheric pressure	: 101 kPa

Test Results of 6dB Bandwidth(1 Mbps)

Minimum Emission Bandwidth 6 dB (2402 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	---	2401.663366	2402.396040

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	2.6	PASS

6 dB Bandwidth

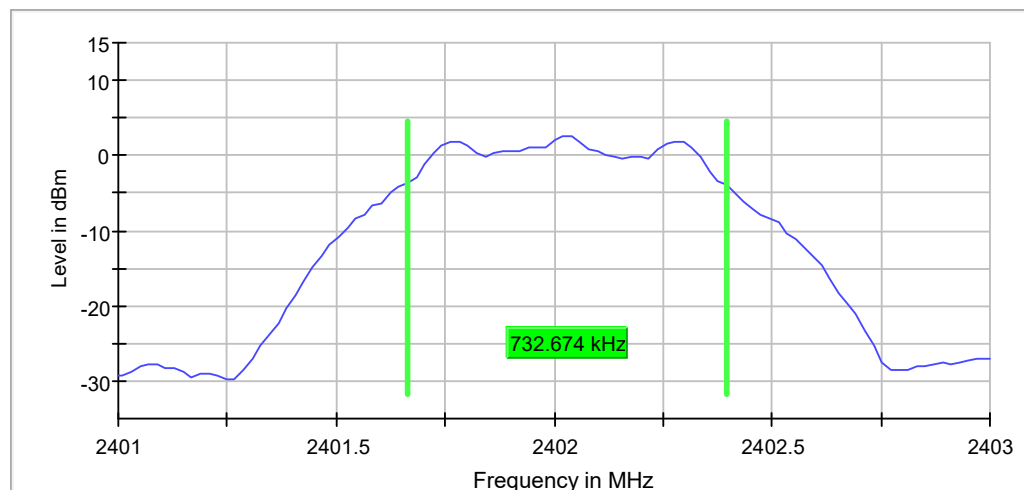

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweptime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	---	2439.643564	2440.376238

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	1.9	PASS

6 dB Bandwidth

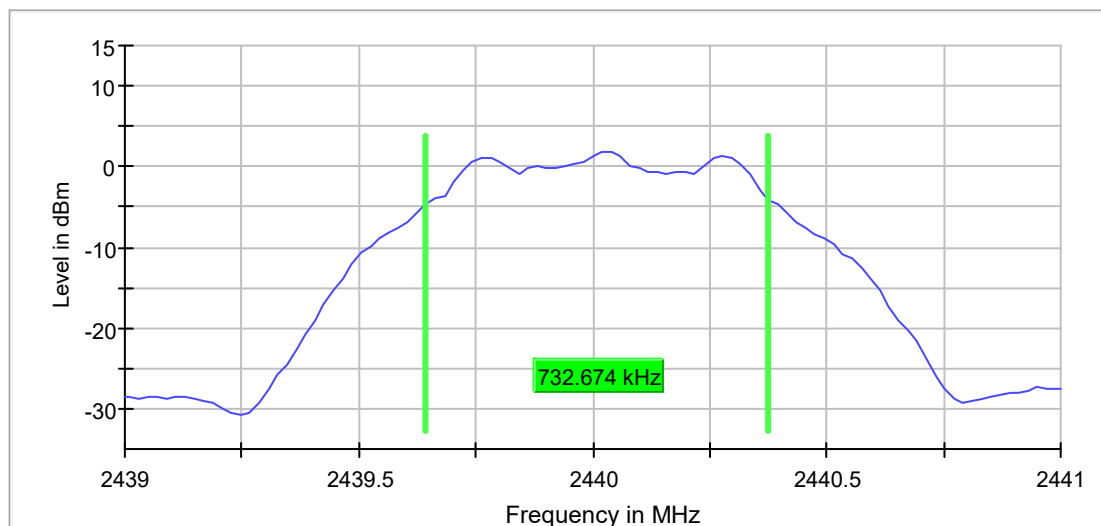

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	11 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.04 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.732674	0.500000	---	2479.663366	2480.396040

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	2.2	PASS

6 dB Bandwidth

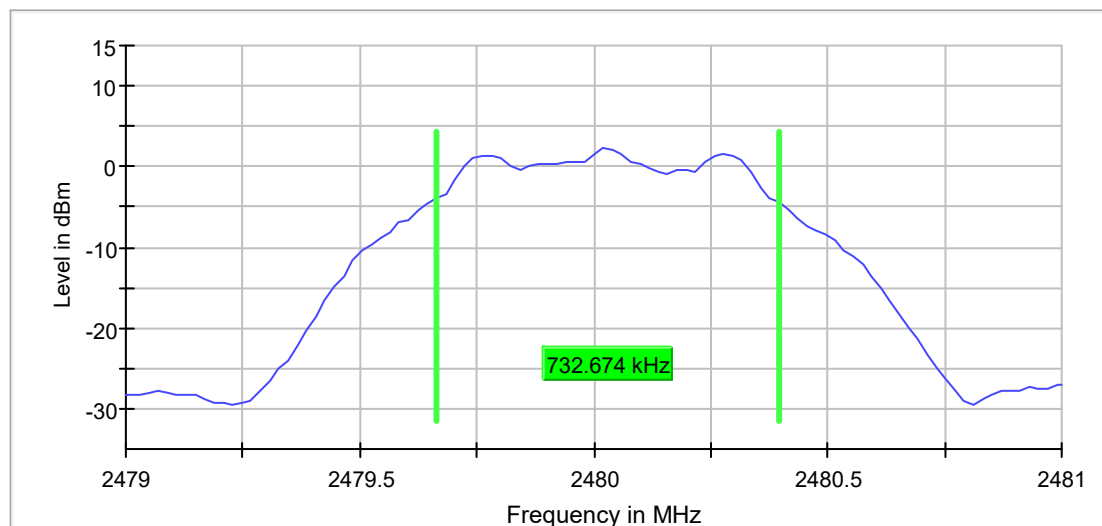

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

Test Results of 6dB Bandwidth(2 Mbps)

Minimum Emission Bandwidth 6 dB (2402 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.188118	0.500000	---	2401.445545	2402.633663

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	2.7	PASS

6 dB Bandwidth

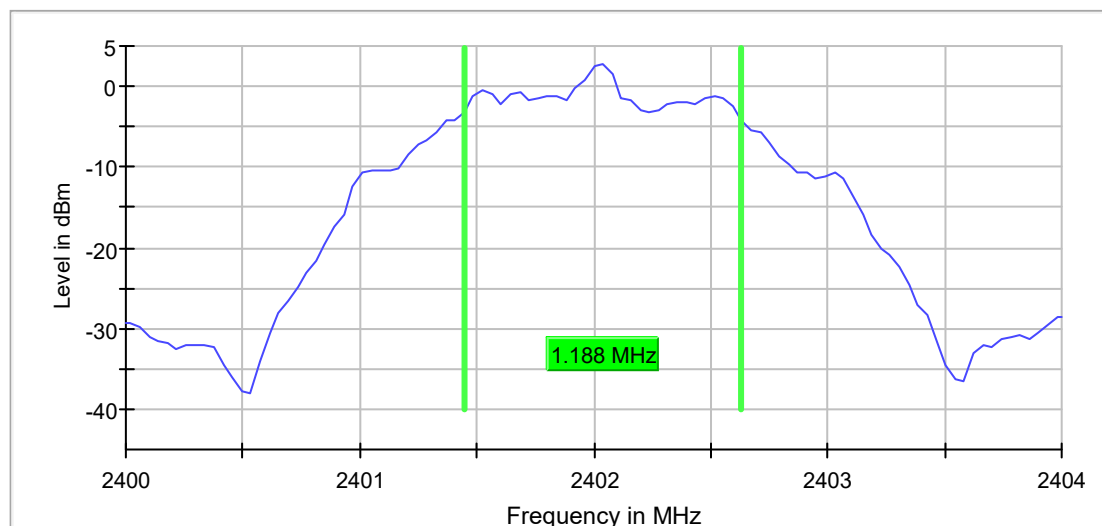

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.27 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.188118	0.500000	---	2439.445545	2440.633663

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	2.1	PASS

6 dB Bandwidth

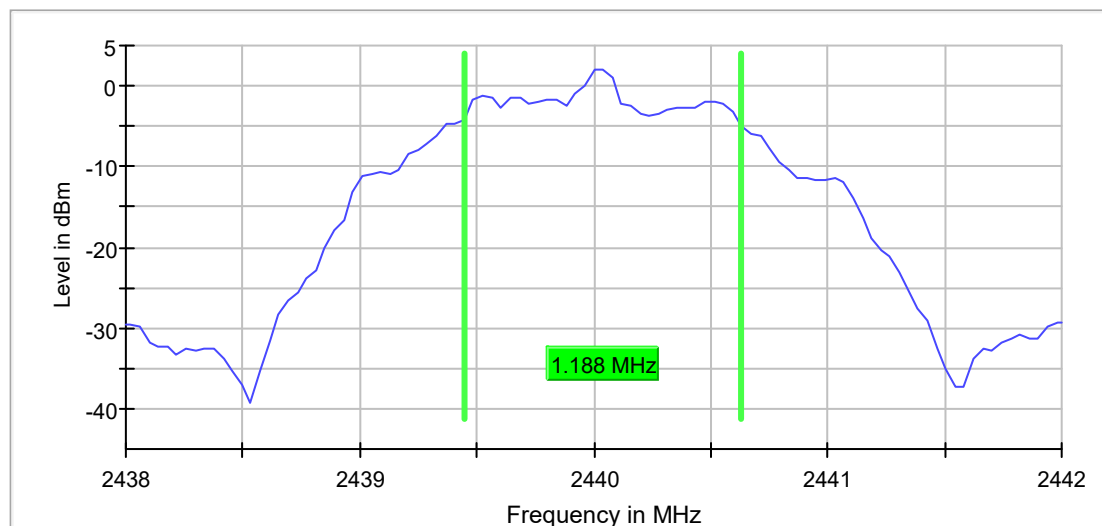

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.02 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.188118	0.500000	---	2479.445545	2480.633663

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	2.3	PASS

6 dB Bandwidth

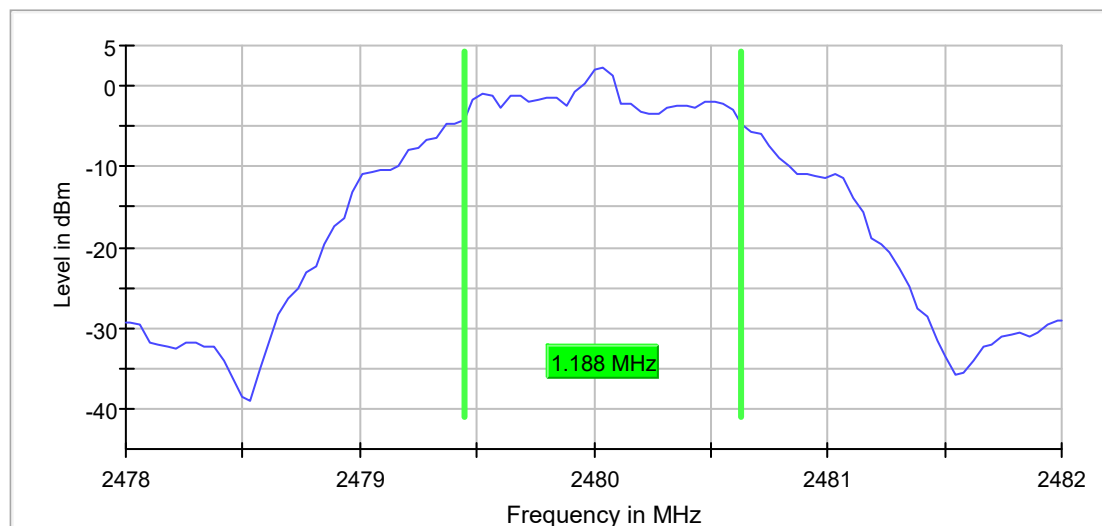

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.18 dB	0.50 dB

Prüfbericht - Nr.: CN215G43 001

Test Report No.

Seite 25 von 62

Page 25 of 62

5.1.5 99% Bandwidth**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.247(a)
Basic standard	: ANSI C63.10: 2013
Kind of test site	: Shielded Room

Test Setup

Date of testing	: 2021-06-08
Input voltage	: DC 5V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.6 °C
Relative humidity	: 46 %
Atmospheric pressure	: 101 kPa

Test Results of 99% Bandwidth(1 Mbps)

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.045000	---	---	2401.512500	2402.557500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

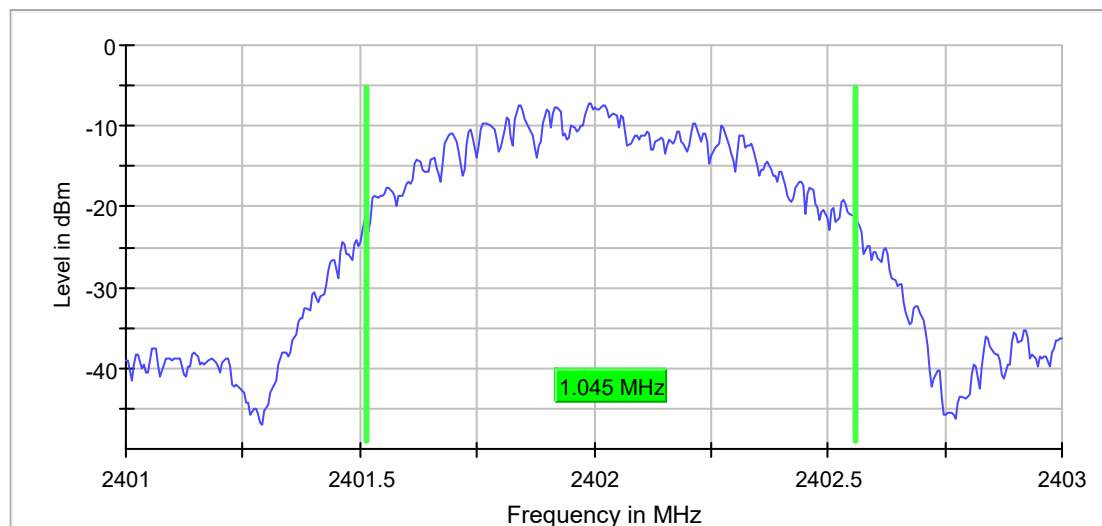

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.050000	---	---	2439.512500	2440.562500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

99 % Bandwidth

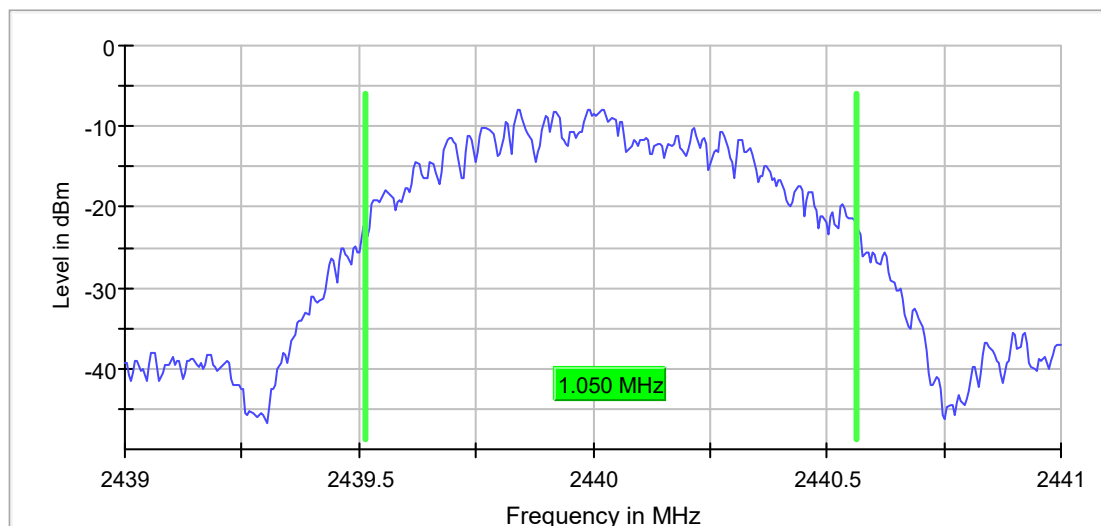

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.055000	---	---	2479.507500	2480.562500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

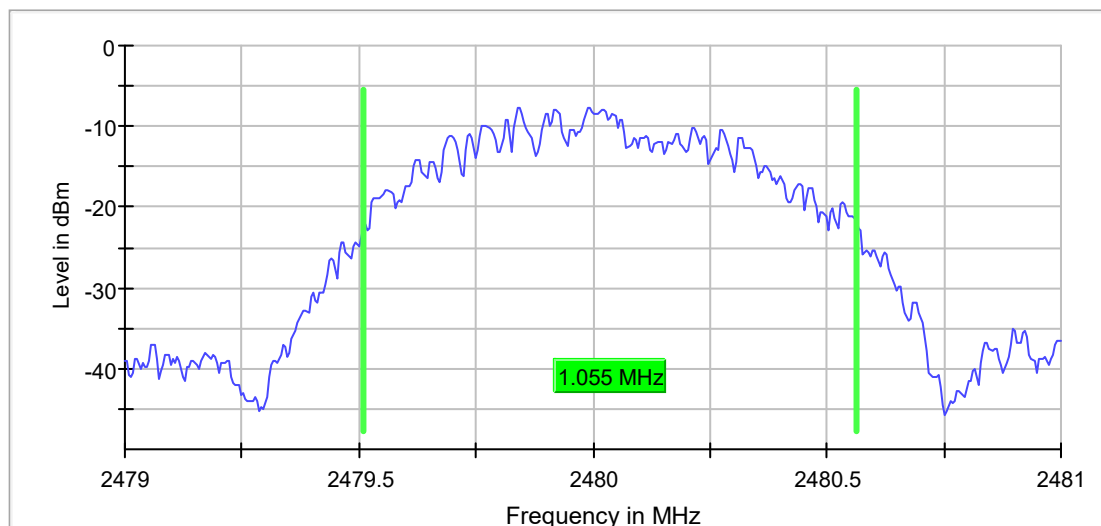

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.30 dB

Test Results of 99% Bandwidth(2 Mbps)

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	2.050000	---	---	2401.025000	2403.075000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

99 % Bandwidth

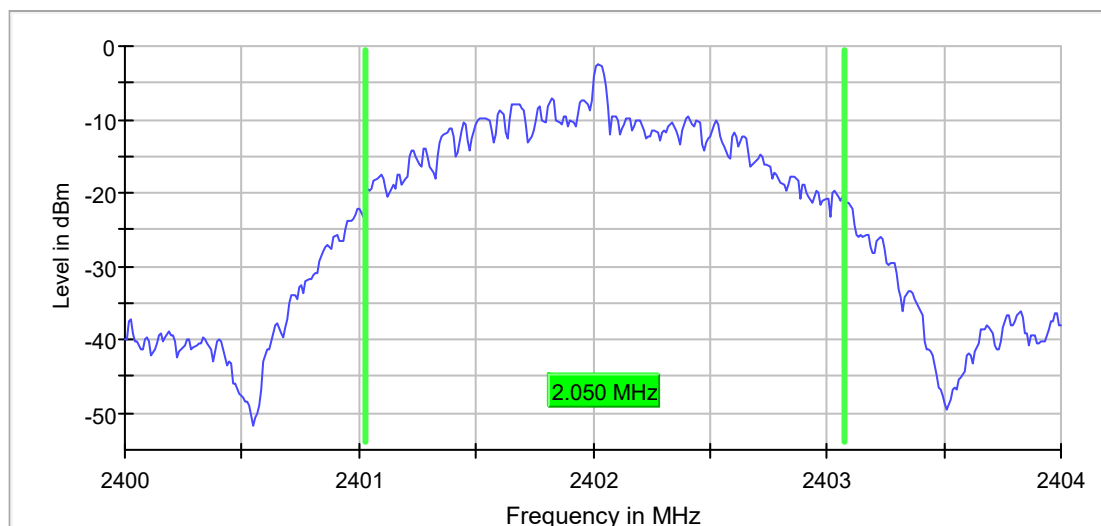

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweptime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	2.050000	---	---	2439.025000	2441.075000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

99 % Bandwidth

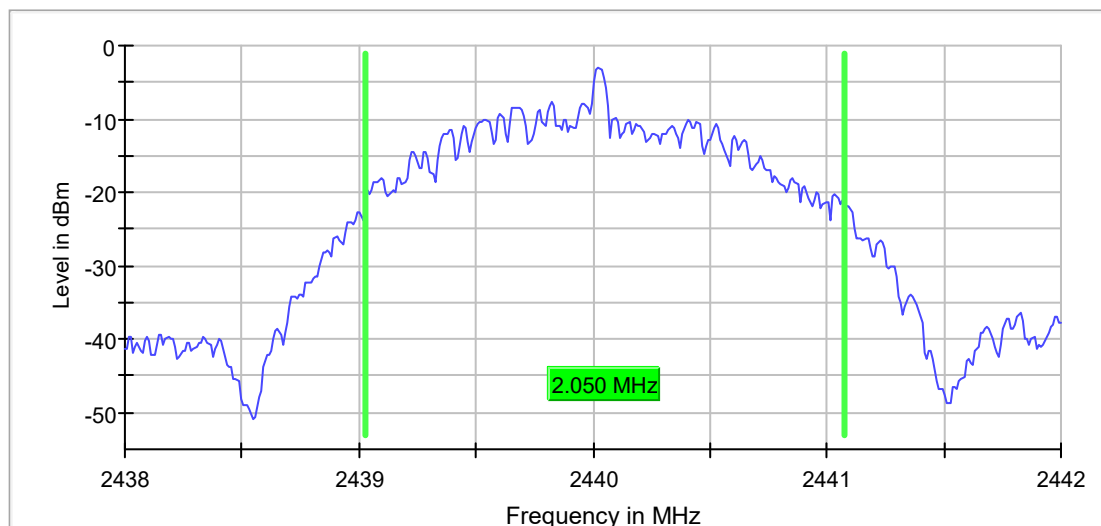

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	2.050000	---	---	2479.025000	2481.075000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

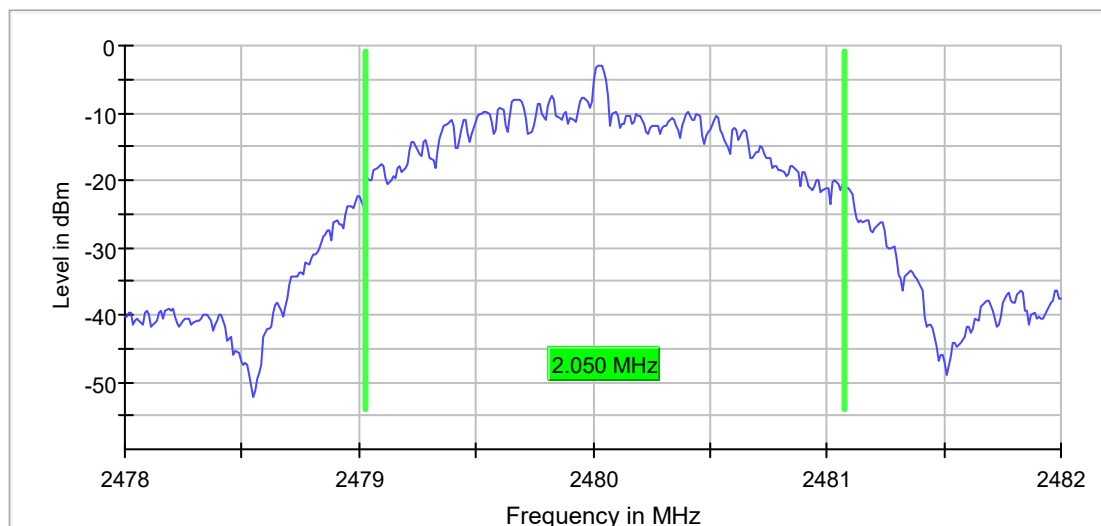

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.23 dB	0.30 dB

Prüfbericht - Nr.: CN215G43 001

Test Report No.

Seite 32 von 62

Page 32 of 62

5.1.6 Conducted Spurious Emissions Measured in 100 kHz Bandwidth**RESULT:****Pass****Test Specification**



Test standard	: FCC Part 15.247(d)
Basic standard	: ANSI C63.10: 2013
Limits	: 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power); In addition, radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified in 15.209(a)
Kind of test site	: Shielded Room



Test Setup



Date of testing	: 2021-06-08
Input voltage	: DC 5V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25.6 °C
Relative humidity	: 46 %
Atmospheric pressure	: 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to test plots, and compliance is achieved as well.

Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth (1 Mbps)

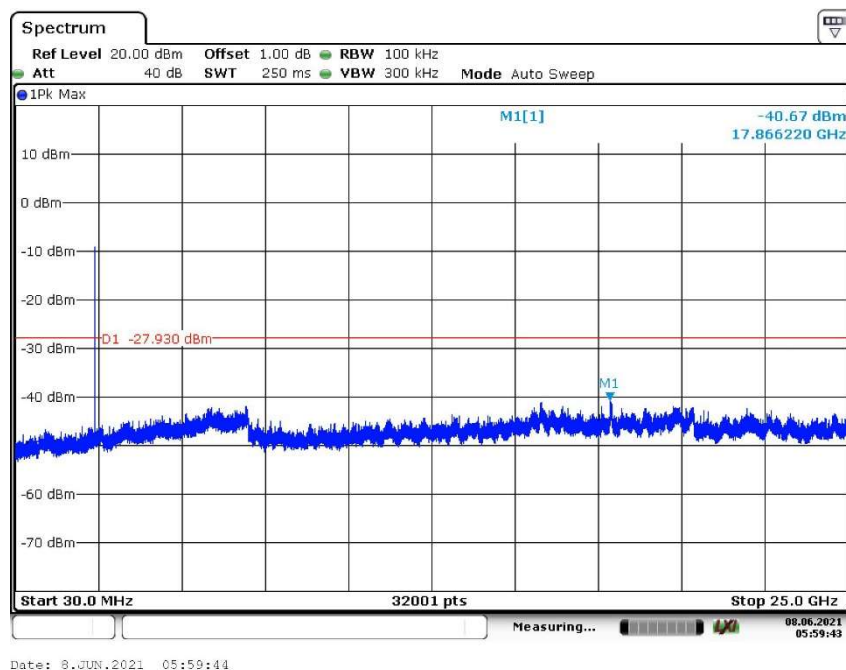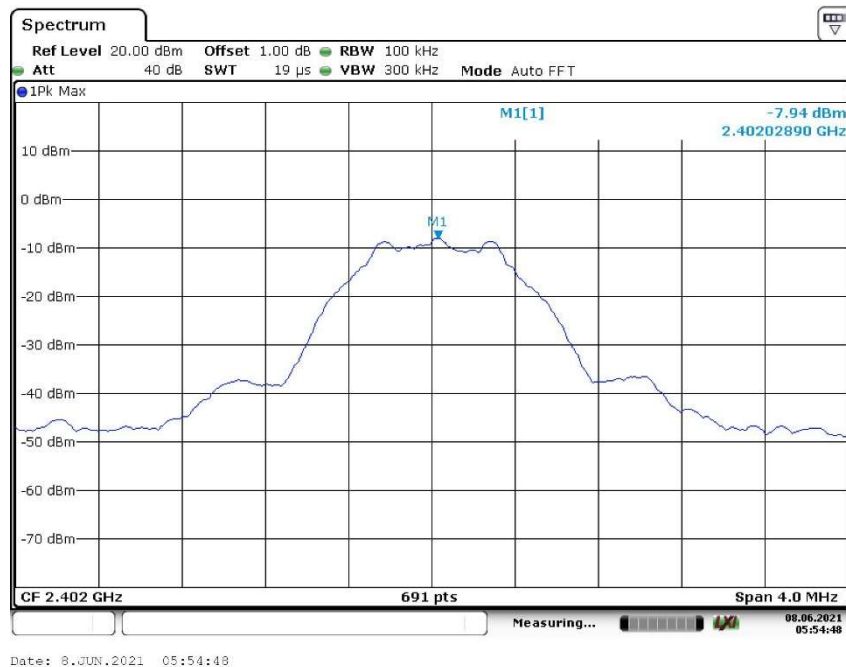

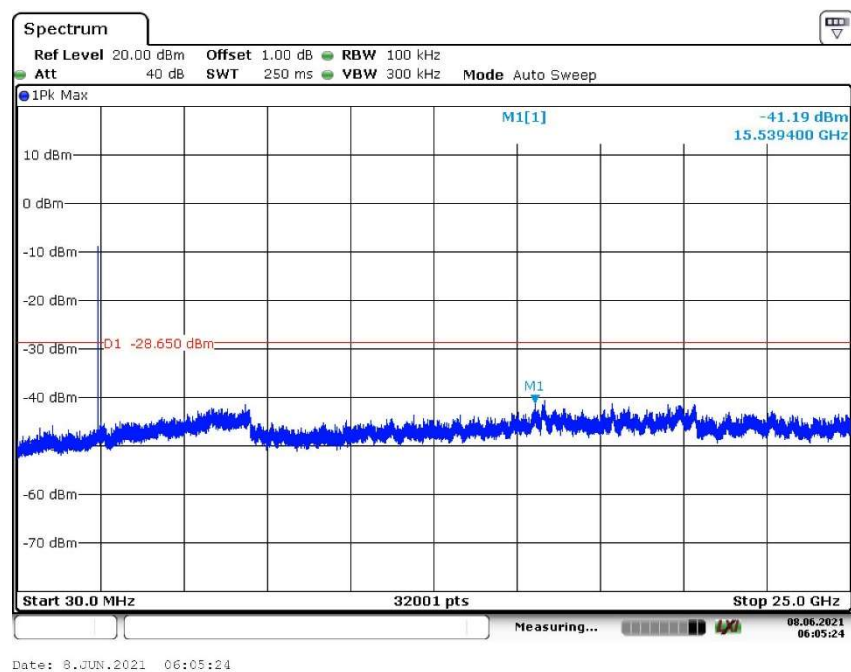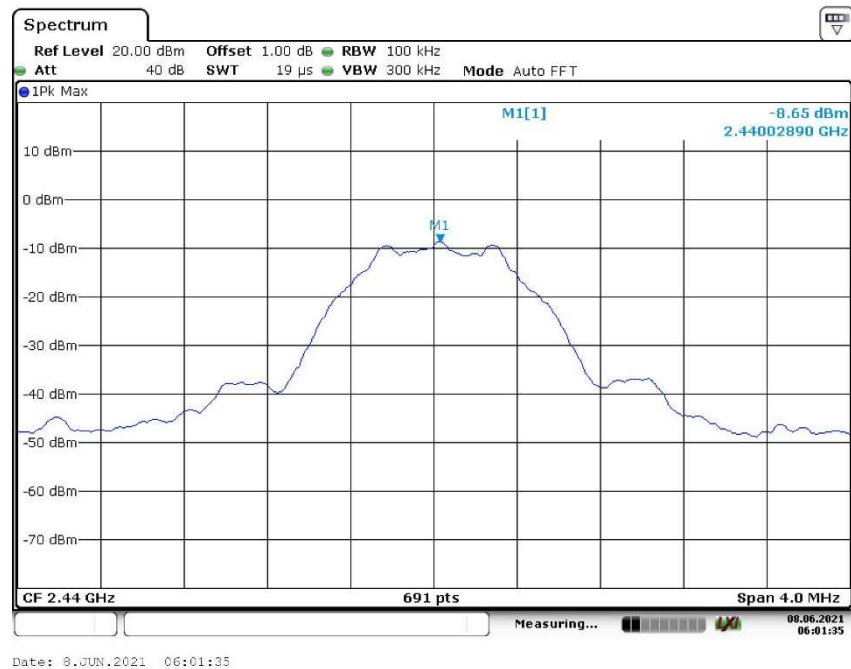


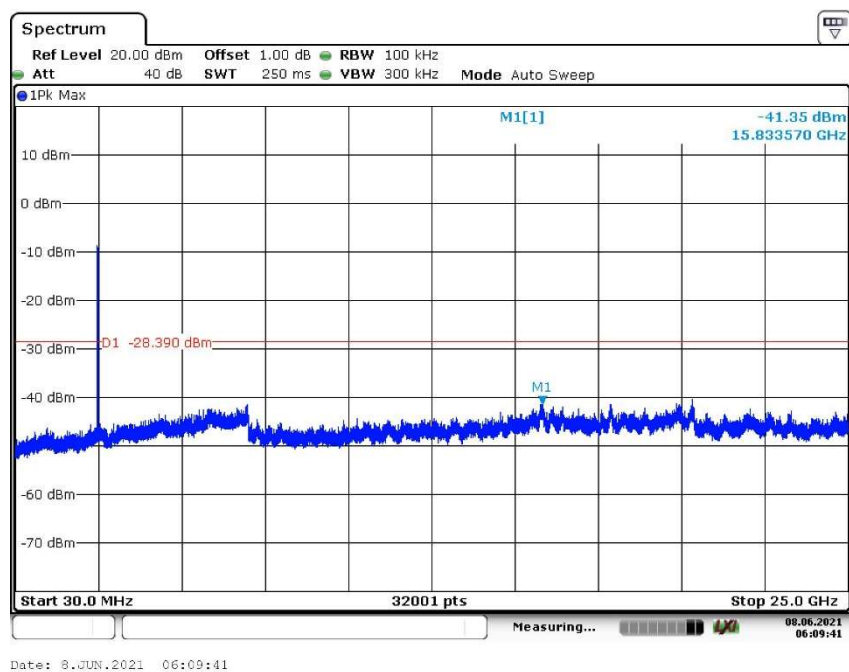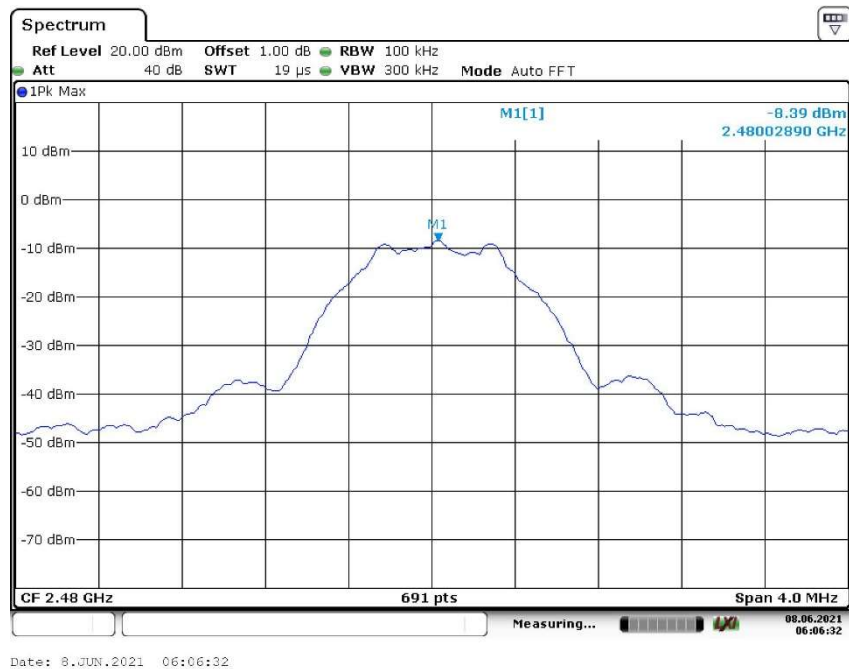



2 Mbps




Date: 8.JUN.2021 05:46:48

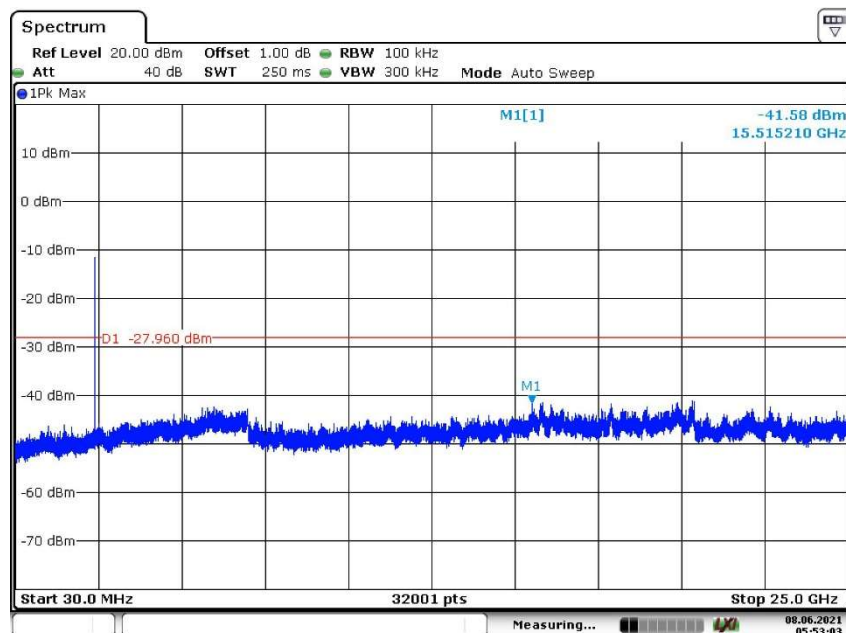


Date: 8.JUN.2021 05:53:04

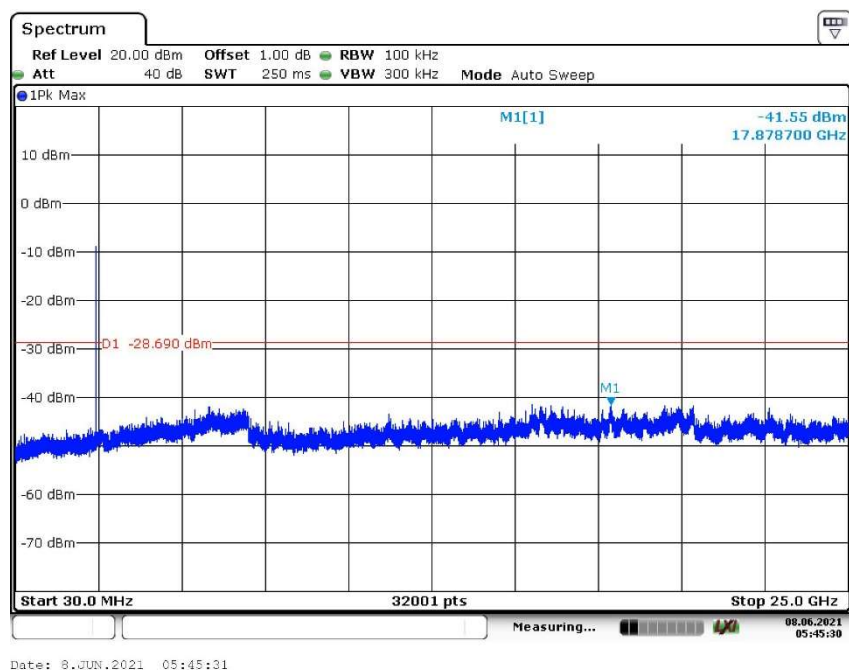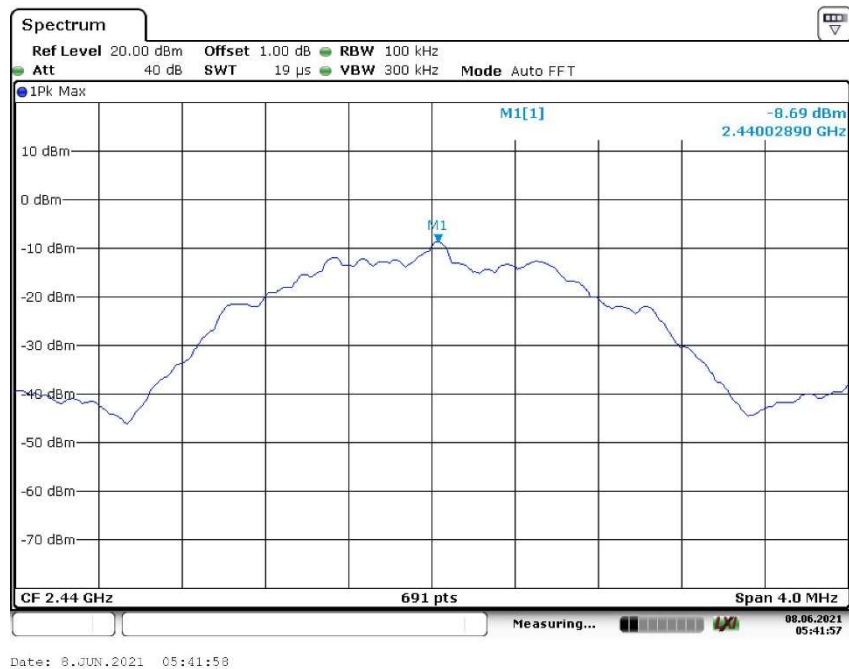


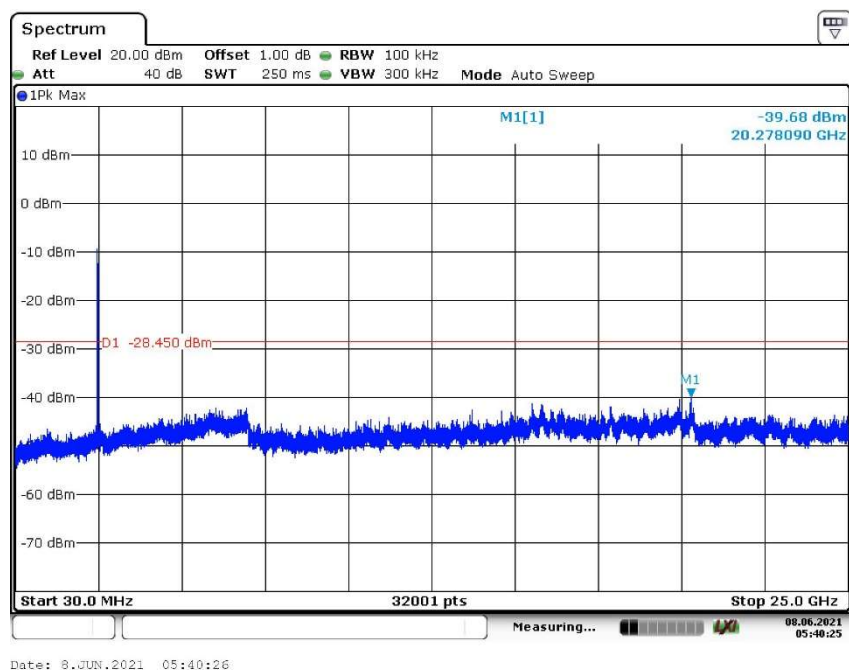

Band Edge 1 Mbps

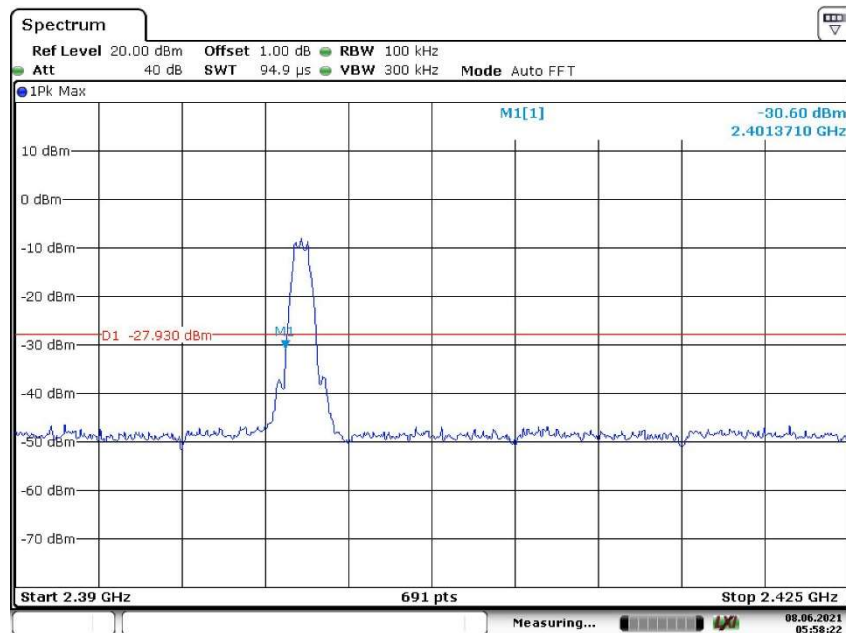


Date: 8.JUN.2021 05:58:23

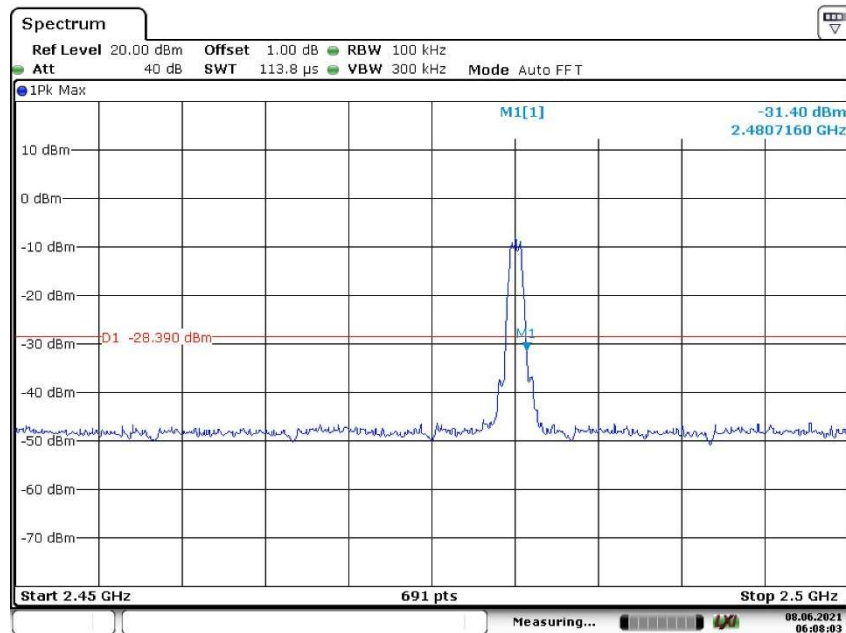


Date: 8.JUN.2021 06:08:03

2 Mbps

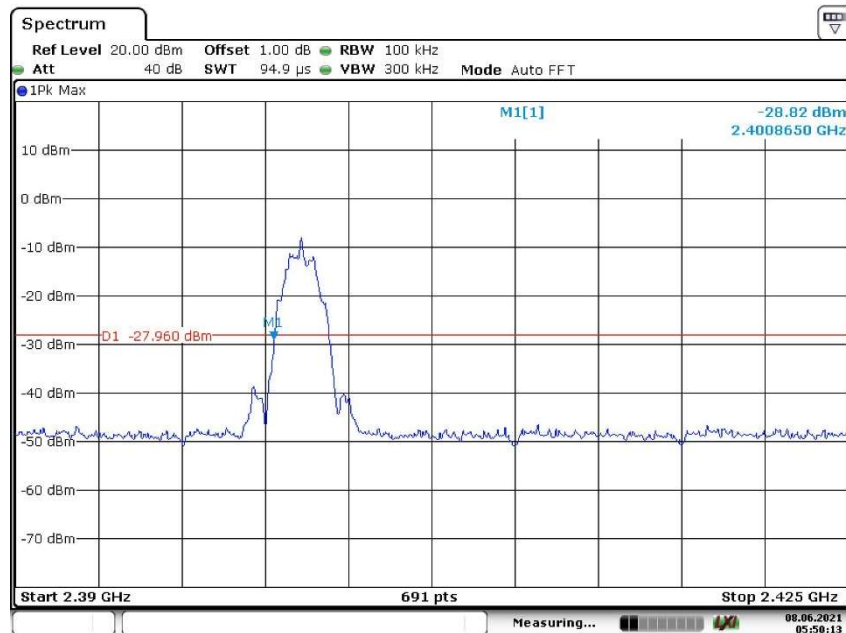

Date: 8.JUN.2021 05:50:14

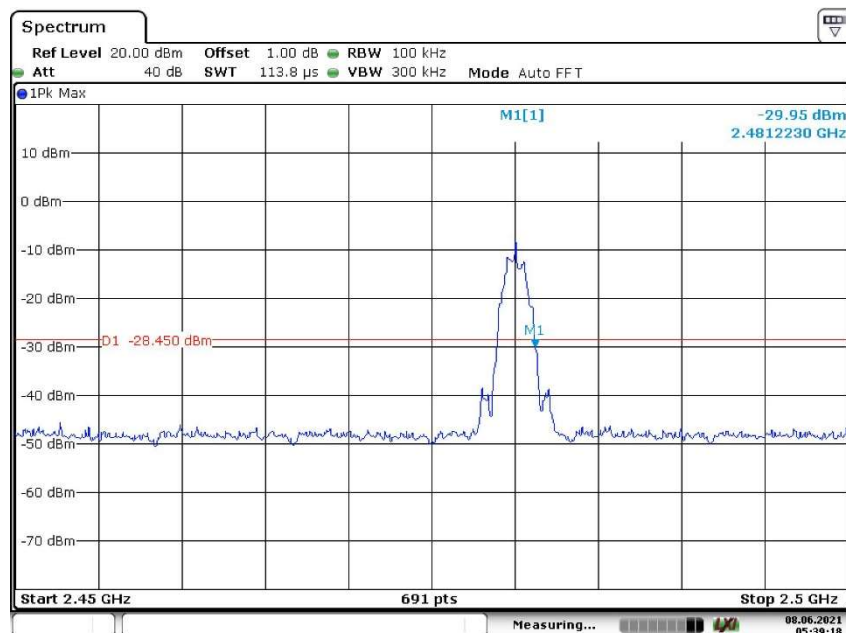

Date: 8.JUN.2021 05:59:18

Prüfbericht - Nr.: CN215G43 001

Test Report No.

Seite 41 von 62

Page 41 of 62

5.1.7 Radiated Spurious Emission

RESULT:**Pass****Test Specification**

Test standard	: FCC Part 15.247(d) & FCC Part 15.205
Basic standard	: ANSI C63.10: 2013
Limits	: Refer to 15.209(a) of FCC part 15.247(d)
Kind of test site	: 3m Semi-anechoic Chamber

Test Setup

Date of testing	: 2021-05-26~ 2021-06-15
Input voltage	: DC 5V
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: Refer to test result
Relative humidity	: Refer to test result
Atmospheric pressure	: 101 kPa

Remark:

- 1) This testing was carried out on different modulations, but only the worst case was presented in this report.
- 2) Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.


Test Results of Radiated Spurious Emissions

30 MHz – 1 GHz

Test Report

EUT Information

EUT Name:	Electronic Stethoscope
Model:	HC-21
Test Mode:	BLE Low channel
Test Voltage::	DC 5V from USB
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

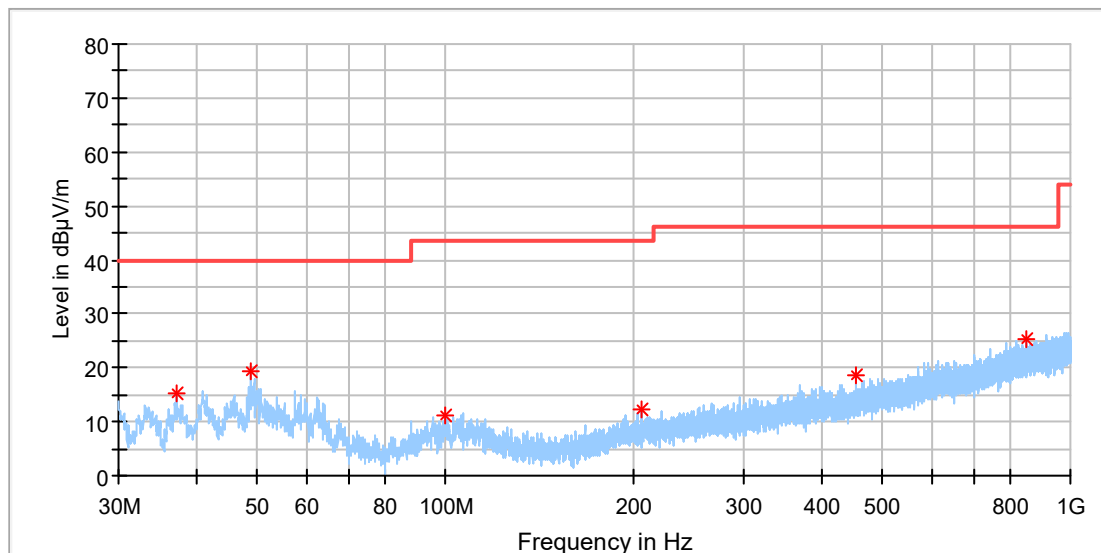

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.226500	15.17	40.00	24.83	100.0	H	249.0	-21.1
48.818000	19.39	40.00	20.61	100.0	H	249.0	-18.4
100.034000	11.33	43.50	32.17	100.0	H	190.0	-19.0
205.521500	12.27	43.50	31.23	100.0	H	148.0	-18.9
455.005500	18.48	46.00	27.52	100.0	H	265.0	-12.8
847.952500	25.15	46.00	20.85	100.0	H	38.0	-5.5


Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Low channel
Test Voltage: DC 5V from USB
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

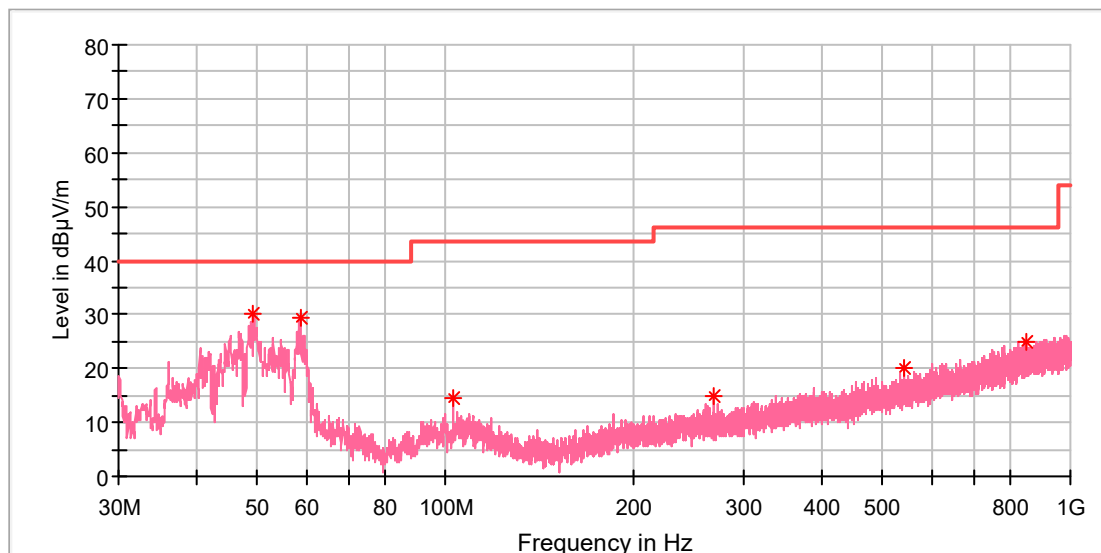

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.351500	30.27	40.00	9.73	100.0	V	9.0	-18.3
58.712000	29.38	40.00	10.62	100.0	V	229.0	-18.8
103.089500	14.42	43.50	29.08	100.0	V	35.0	-18.8
268.765500	15.02	46.00	30.98	100.0	V	149.0	-17.0
540.026000	20.20	46.00	25.80	100.0	V	356.0	-11.2
851.735500	24.99	46.00	21.01	100.0	V	45.0	-5.5


Final Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage: DC 5V from USB
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

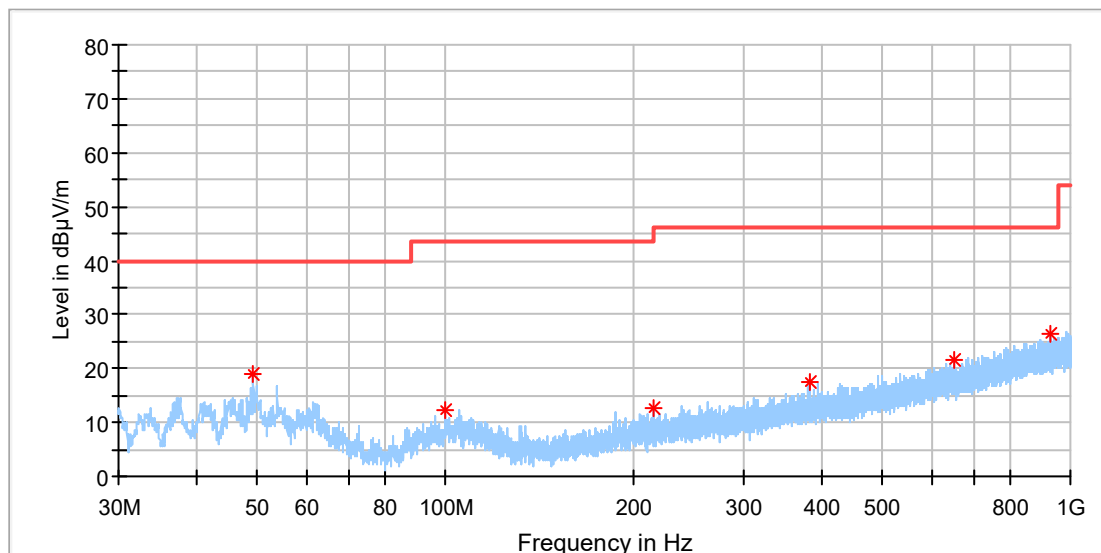

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.254500	18.80	40.00	21.20	100.0	H	241.0	-18.3
99.985500	12.17	43.50	31.33	100.0	H	197.0	-19.0
214.979000	12.83	43.50	30.67	100.0	H	101.0	-18.7
382.401000	17.45	46.00	28.56	100.0	H	23.0	-14.2
652.934000	21.67	46.00	24.33	100.0	H	197.0	-9.0
931.081500	26.46	46.00	19.54	100.0	H	101.0	-4.7


Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
 Model: HC-21
 Test Mode: BLE High channel
 Test Voltage: DC 5V from USB
 Remark: Temp 22 Humi:50%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

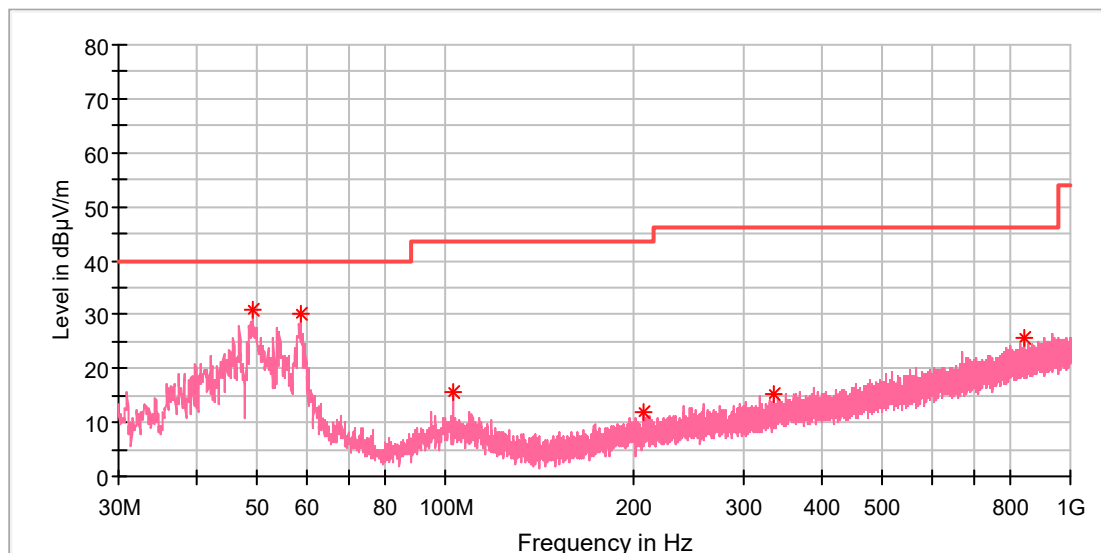

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.206000	30.78	40.00	9.22	100.0	V	0.0	-18.3
58.712000	30.22	40.00	9.78	100.0	V	359.0	-18.8
103.138000	15.74	43.50	27.76	100.0	V	326.0	-18.8
207.995000	11.89	43.50	31.61	100.0	V	90.0	-18.9
336.374500	15.35	46.00	30.65	100.0	V	292.0	-15.1
841.841500	25.52	46.00	20.48	100.0	V	170.0	-5.6

Final Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Above 1 GHz

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Low channel
Test Voltage: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

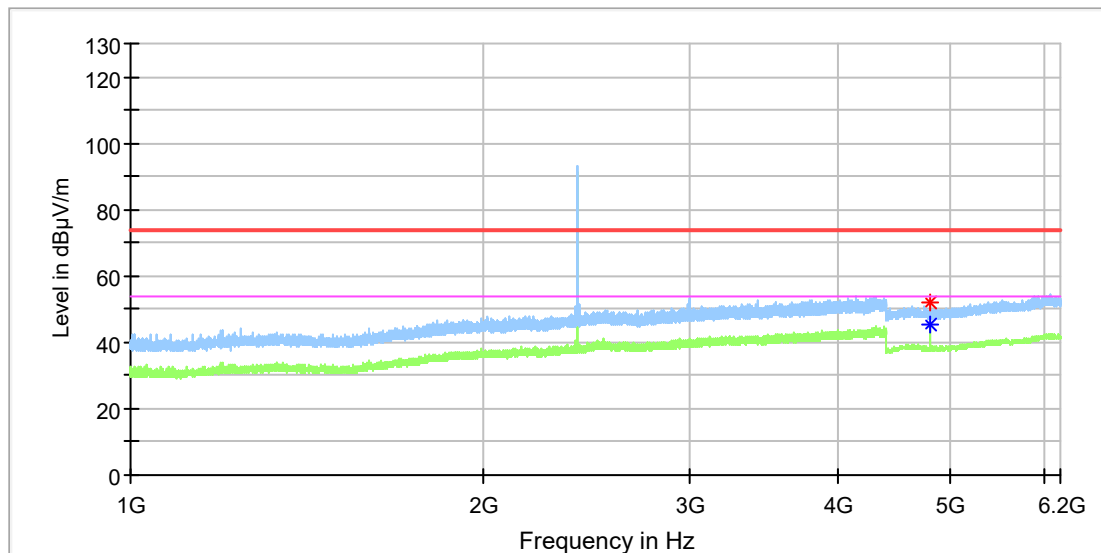

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.500000	51.86	---	74.00	22.14	100.0	H	241.0	11.8
4804.000000	---	45.21	54.00	8.79	100.0	H	234.0	11.8


Final_Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name:	Electronic Stethoscope
Model:	HC-21
Test Mode:	BLE Low channel
Test Voltage::	DC 5V from USB
Remark:	Temp 24 Humi:47%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

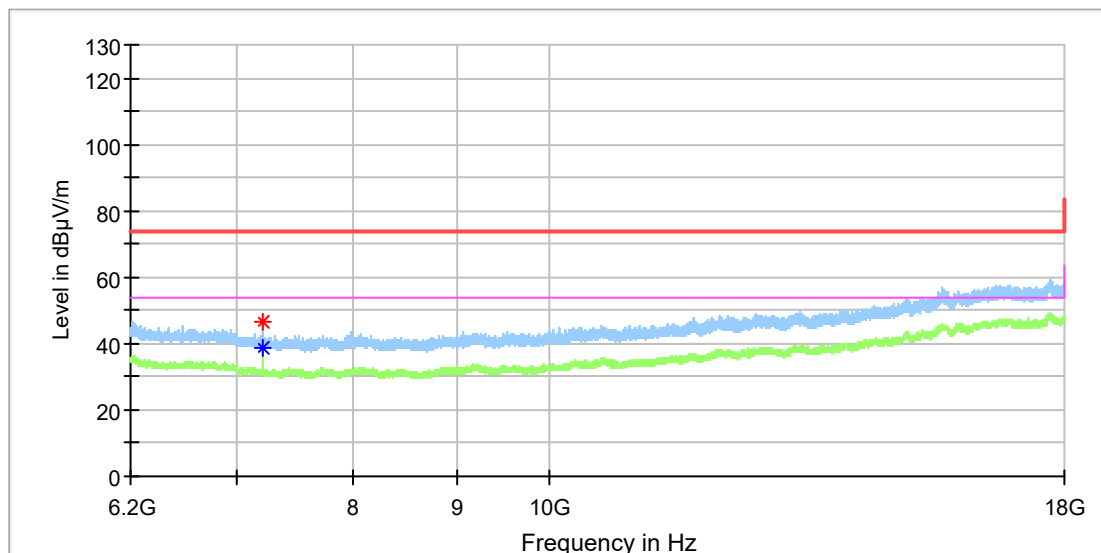

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	---	38.92	54.00	15.08	100.0	H	301.0	8.8
7206.441667	46.58	---	74.00	27.43	100.0	H	286.0	8.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Low channel
Test Voltage: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

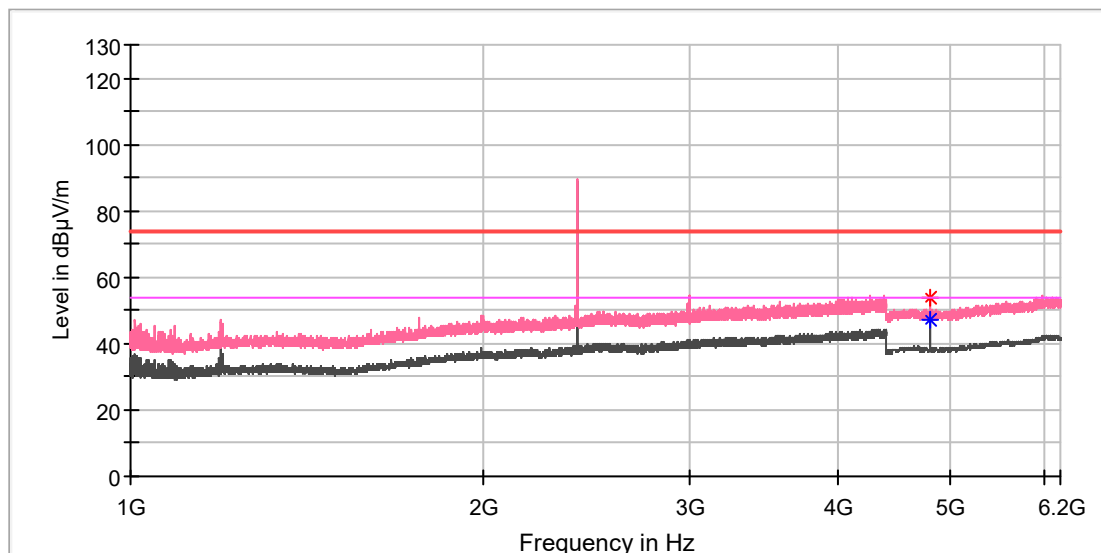

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	54.00	---	74.00	20.00	100.0	V	265.0	11.8
4804.000000	---	47.25	54.00	6.75	100.0	V	78.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Low channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

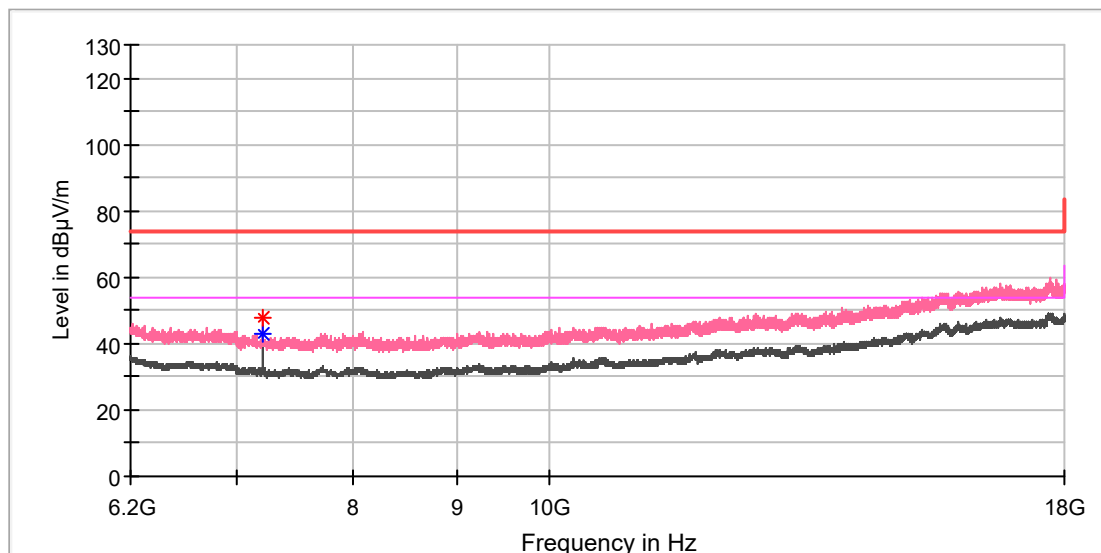

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7205.458333	47.47	---	74.00	26.53	100.0	V	176.0	8.8
7205.458333	---	42.65	54.00	11.35	100.0	V	176.0	8.8


Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Low channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

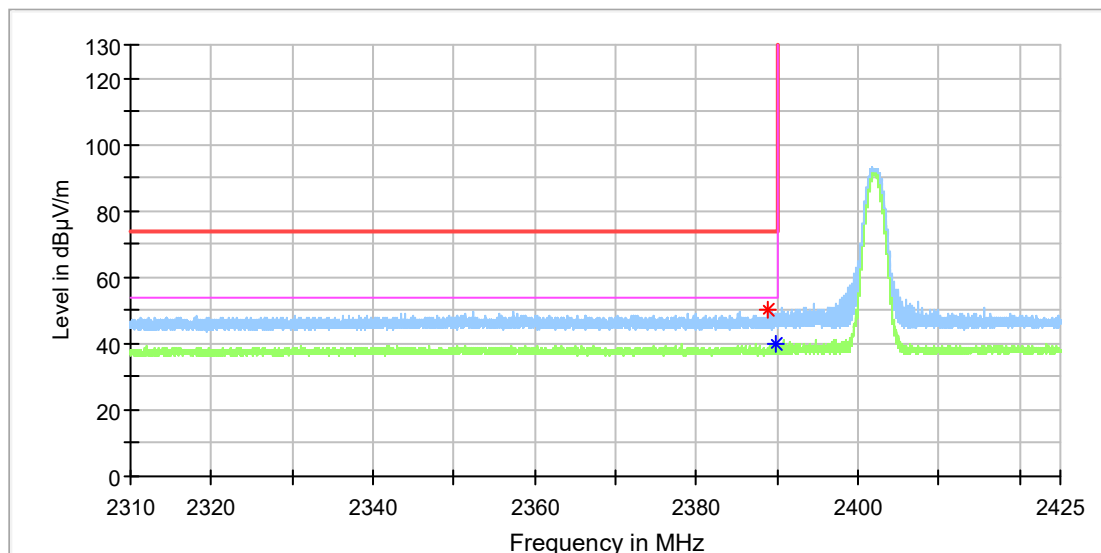

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2388.918750	50.41	---	74.00	23.59	100.0	H	127.0	7.0
2389.798500	---	39.89	54.00	14.11	100.0	H	170.0	7.0


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Low channel
Test Voltage: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

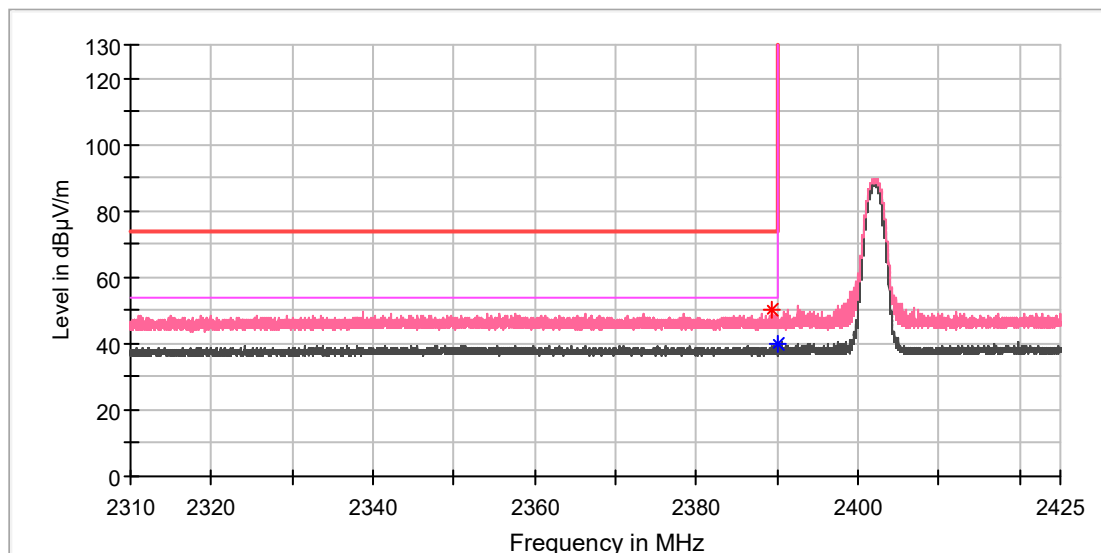

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.430500	50.00	---	74.00	24.00	100.0	V	211.0	7.0
2389.959500	---	39.66	54.00	14.34	100.0	V	211.0	7.0


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
 Model: HC-21
 Test Mode: BLE Mid channel
 Test Voltage:: DC 5V from USB
 Remark: Temp 24 Humi:47%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

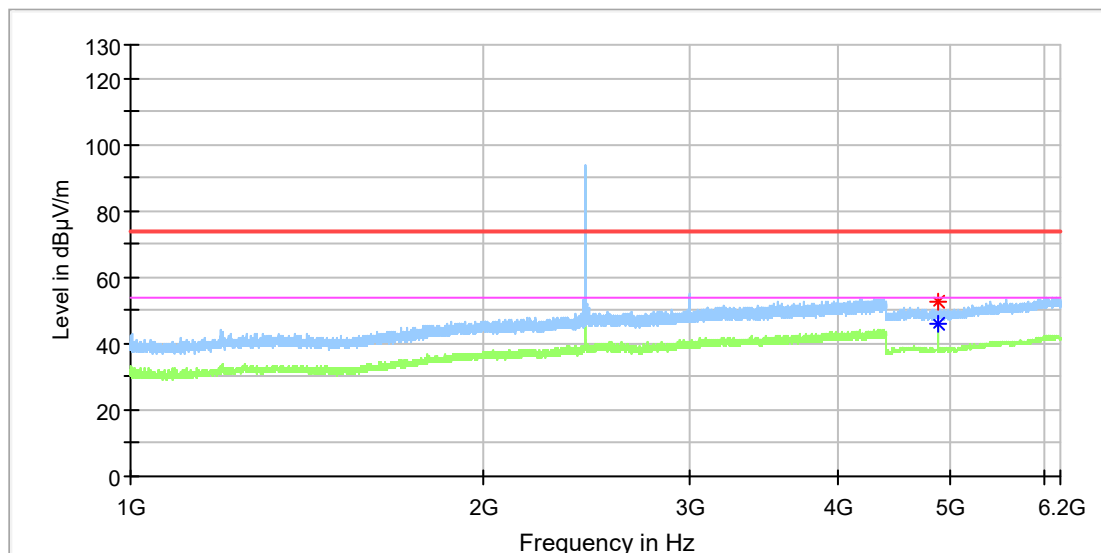

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4880.000000	---	45.95	54.00	8.05	100.0	H	25.0	11.8
4880.500000	52.32	---	74.00	21.68	100.0	H	283.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Mid channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

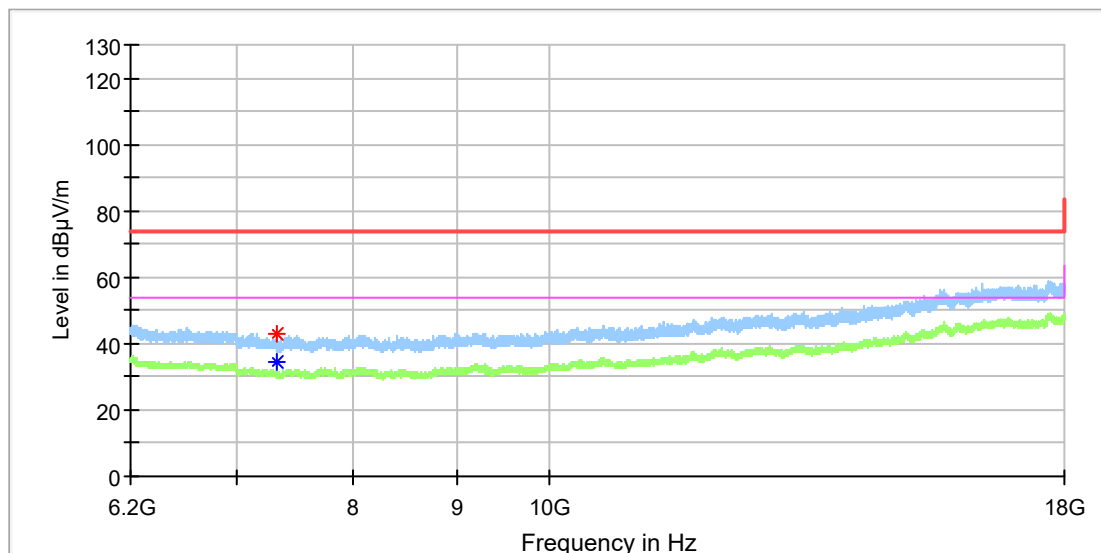

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.033333	42.83	---	74.00	31.17	100.0	H	323.0	8.2
7319.033333	---	34.21	54.00	19.79	100.0	H	323.0	8.2


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Mid channel
Test Voltage: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

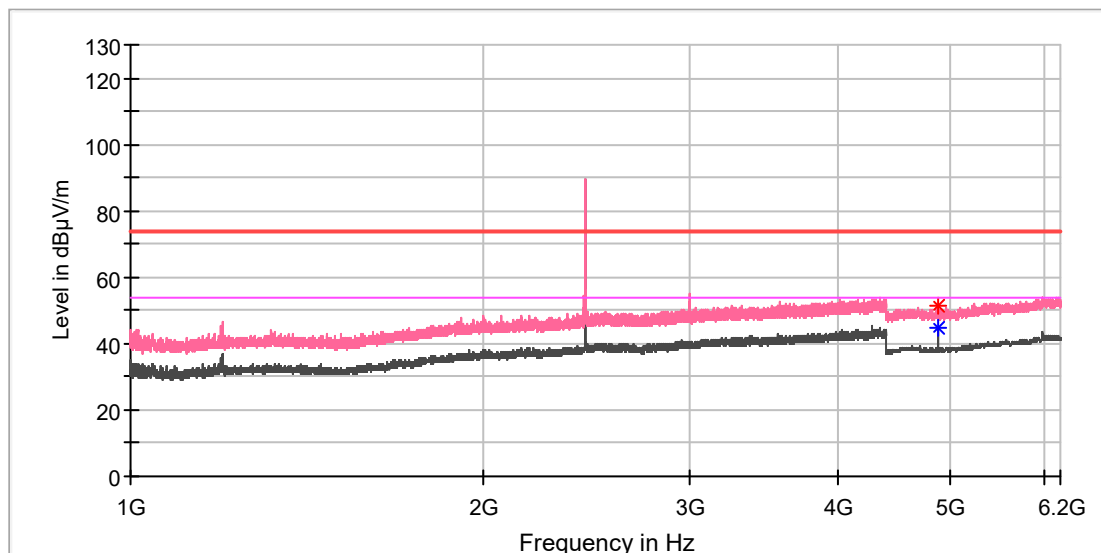

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	51.53	---	74.00	22.47	100.0	V	152.0	11.8
4880.000000	---	44.82	54.00	9.18	100.0	V	244.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE Mid channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

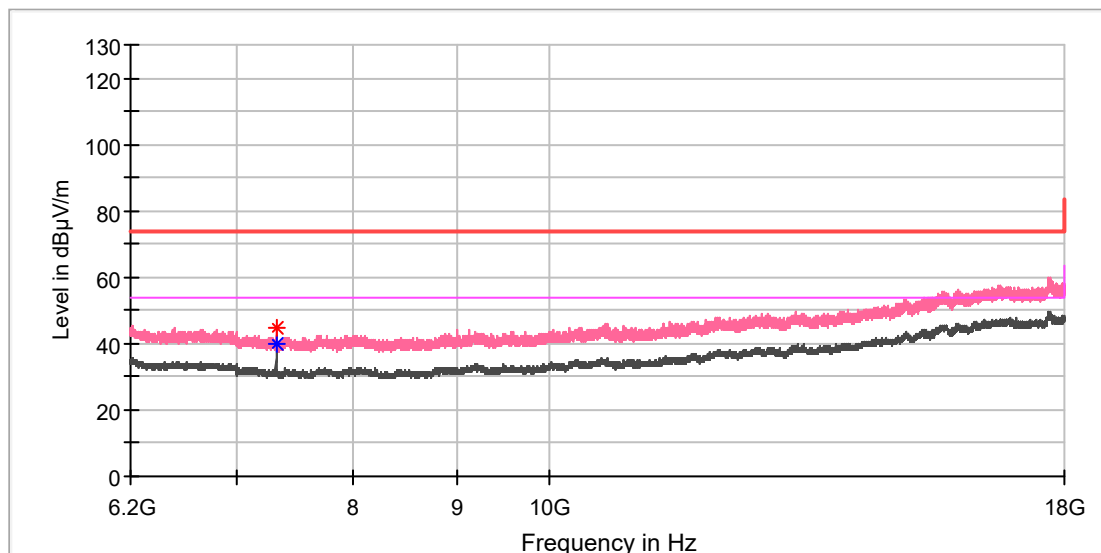

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7319.033333	44.84	---	74.00	29.16	100.0	V	178.0	8.2
7319.525000	---	39.92	54.00	14.08	100.0	V	192.0	8.2


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

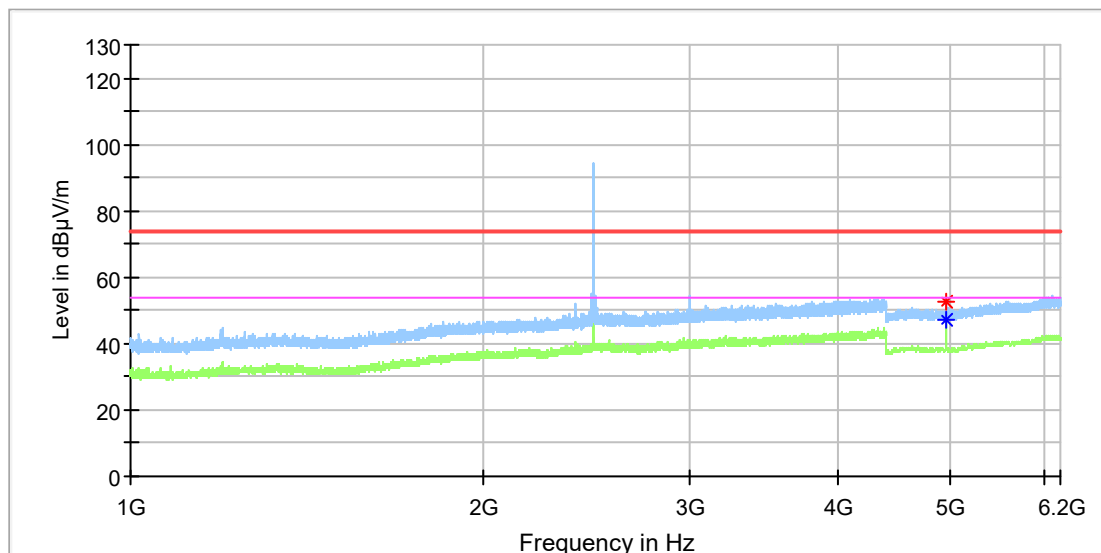

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	52.65	---	74.00	21.35	100.0	H	49.0	11.8
4960.000000	---	46.94	54.00	7.06	100.0	H	0.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

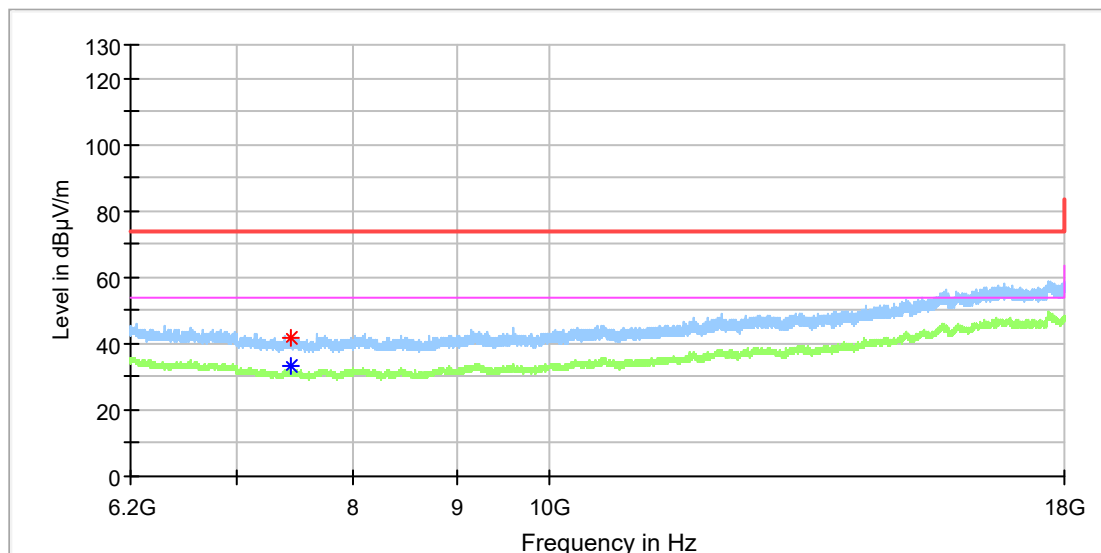

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.000000	41.60	---	74.00	32.40	100.0	H	279.0	8.4
7439.000000	---	33.31	54.00	20.69	100.0	H	279.0	8.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

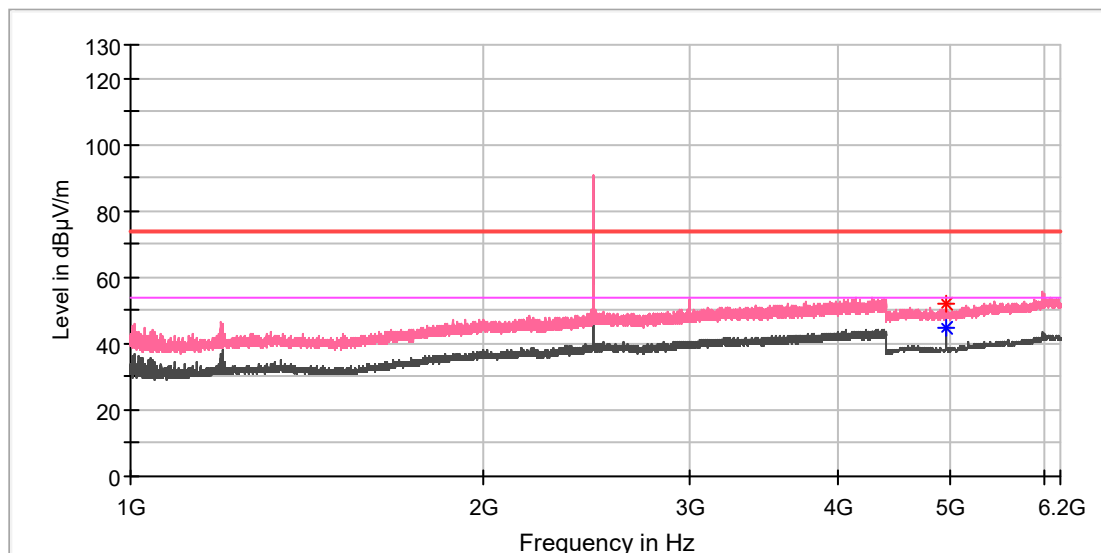

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.500000	51.77	---	74.00	22.23	100.0	V	247.0	11.8
4960.000000	---	44.76	54.00	9.24	100.0	V	247.0	11.8


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

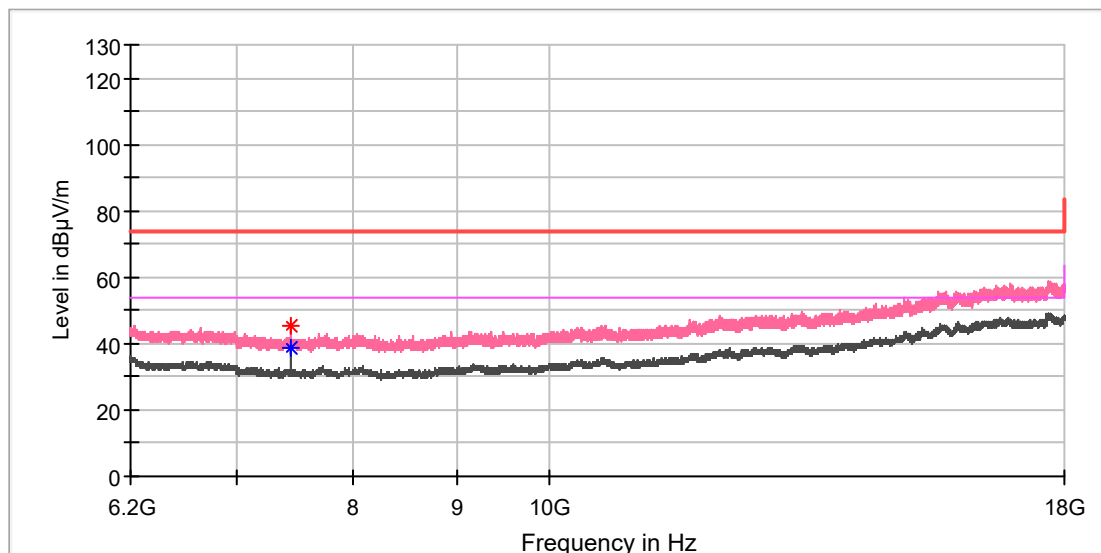

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7439.000000	45.31	---	74.00	28.69	100.0	V	191.0	8.4
7440.475000	---	38.58	54.00	15.42	100.0	V	191.0	8.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage:: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

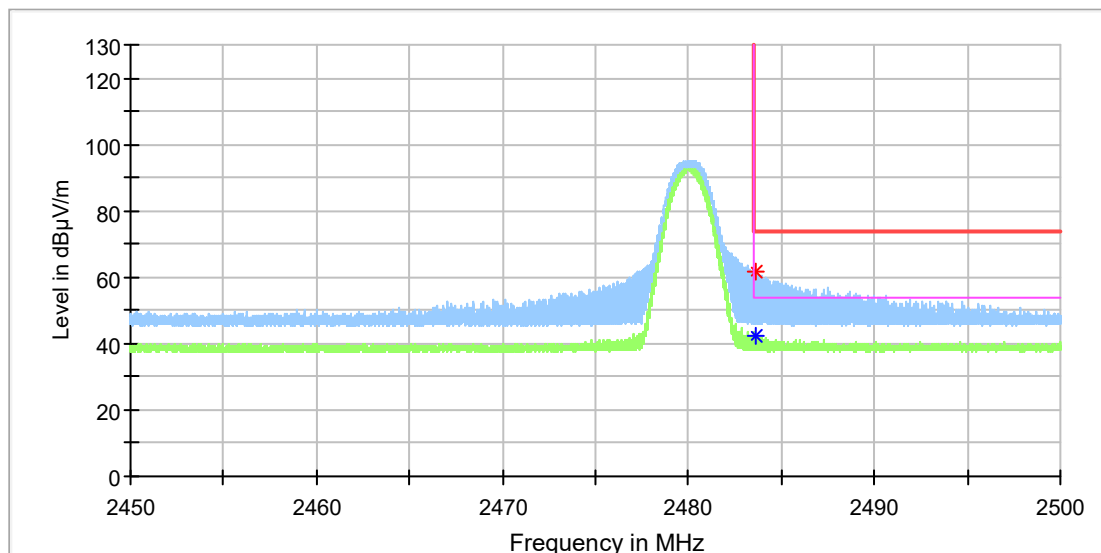

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.595000	61.75	---	74.00	12.25	100.0	H	148.0	7.4
2483.620000	---	42.25	54.00	11.75	100.0	H	129.0	7.4


Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Test Report

EUT Information

EUT Name: Electronic Stethoscope
Model: HC-21
Test Mode: BLE High channel
Test Voltage: DC 5V from USB
Remark: Temp 24 Humi:47%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

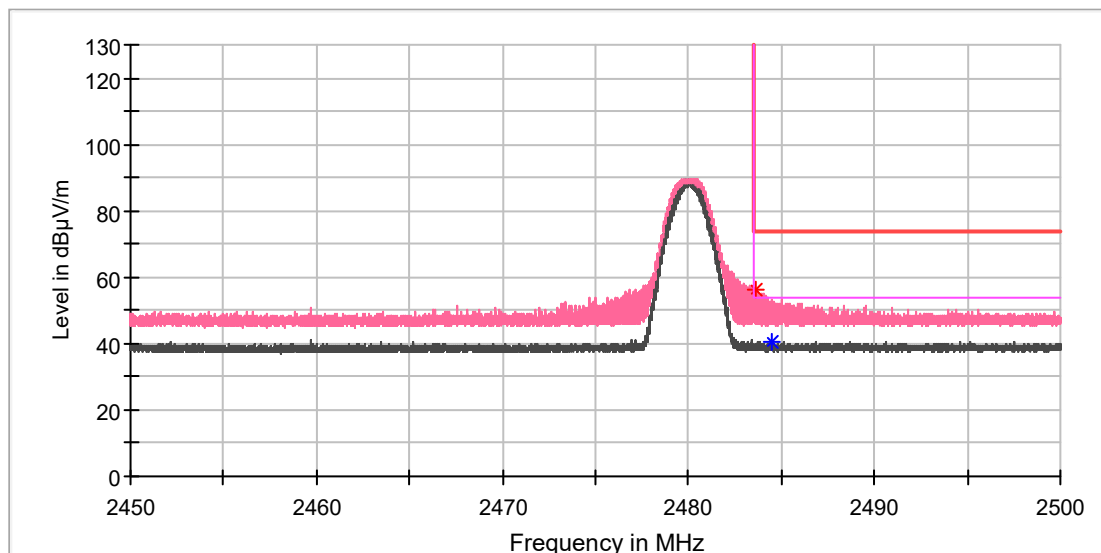

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.595000	56.44	---	74.00	17.56	100.0	V	138.0	7.4
2484.502500	---	40.76	54.00	13.24	100.0	V	138.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Prüfbericht - Nr.: CN215G43 001
Test Report No.

Seite 62 von 62
Page 62 of 62

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.