



Video Intercom Access Control

Tuya App Manual

Mobile phone remote function

- 1 Scan QR code to download Tuya APP or Search Tuya on App store to download it.



Scan QR code



Search Tuya Smart to download APP





- 2 Open Tuya App to add new equipment


Note: When searching for devices, firstly turn on the WIFI, Bluetooth and Location on your phone.

Press  **Master code**  **08** on the access control Keypad for WIFI matching.


- 3 Choose Wi-Fi and enter password, click "Next".

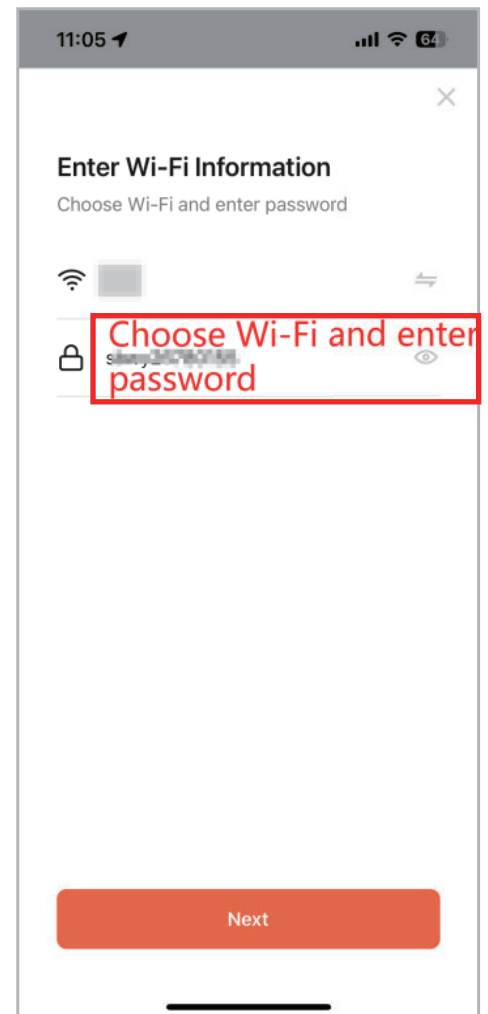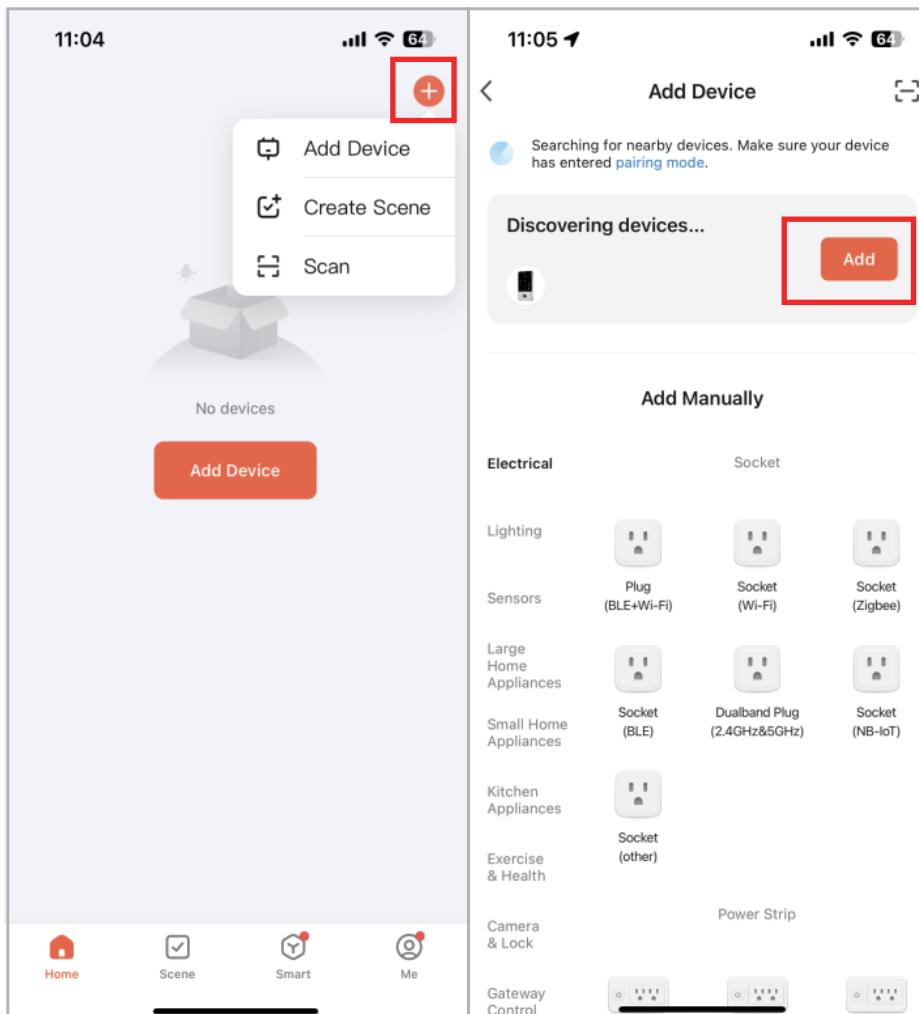

- 4 Connecting, Added successfully, click "Done".

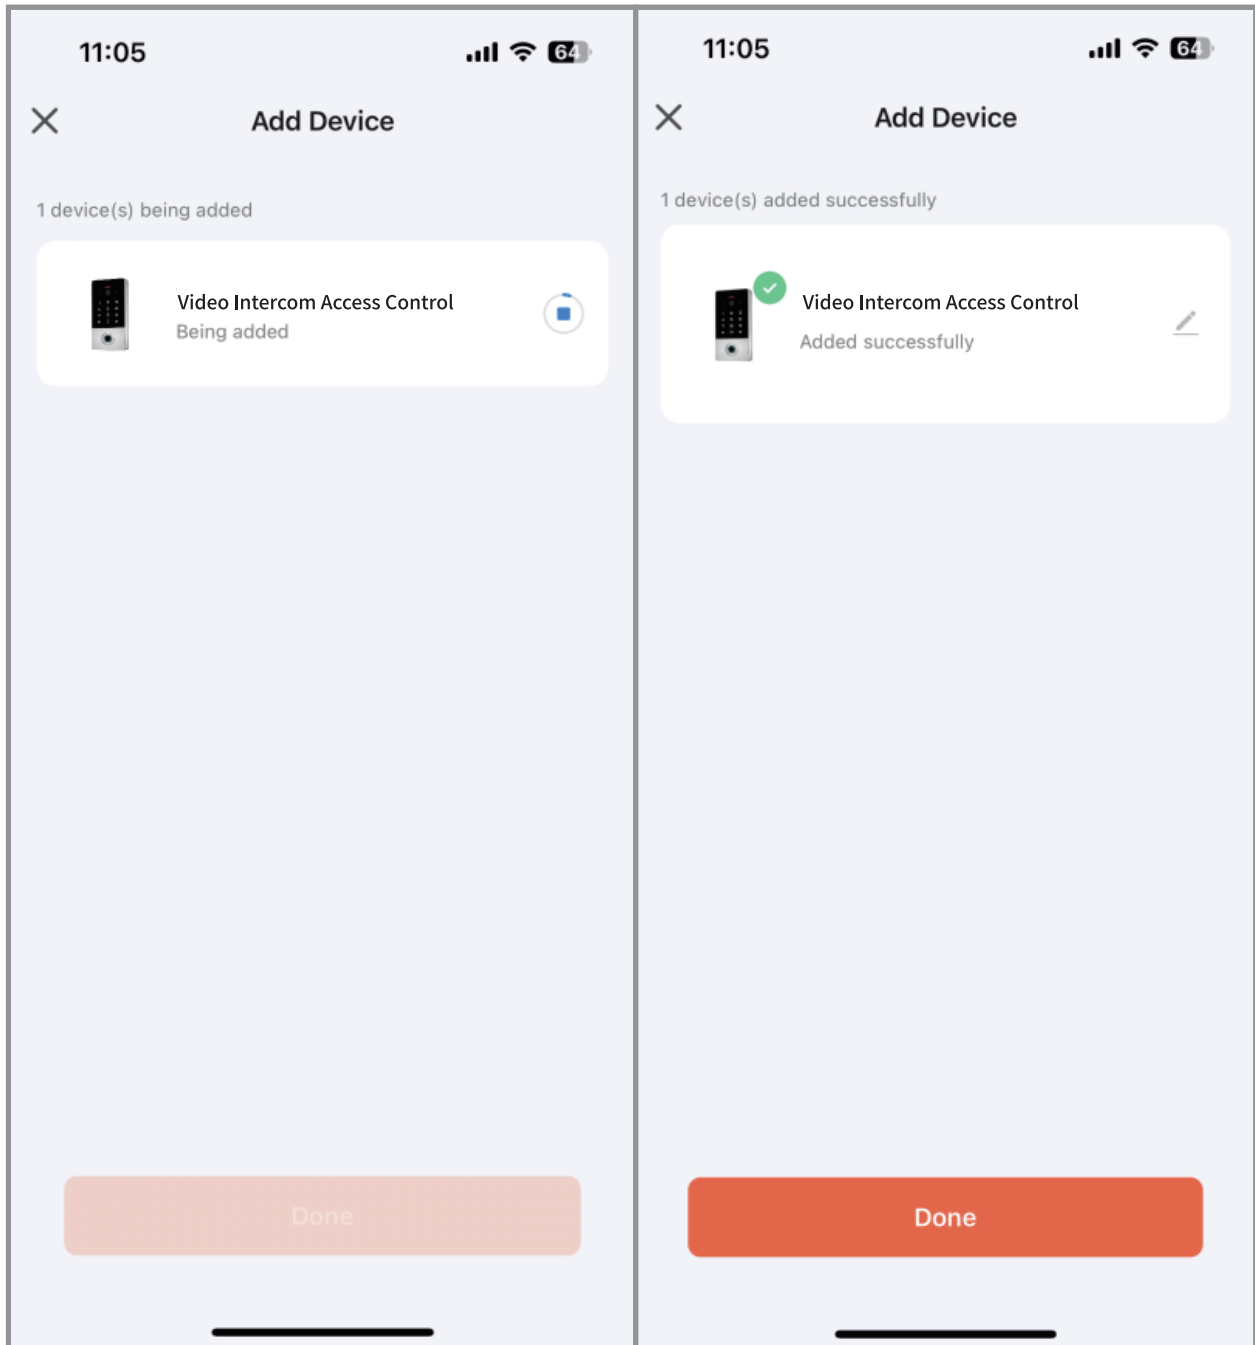


- 5 Click setting, open remote unlock setting.

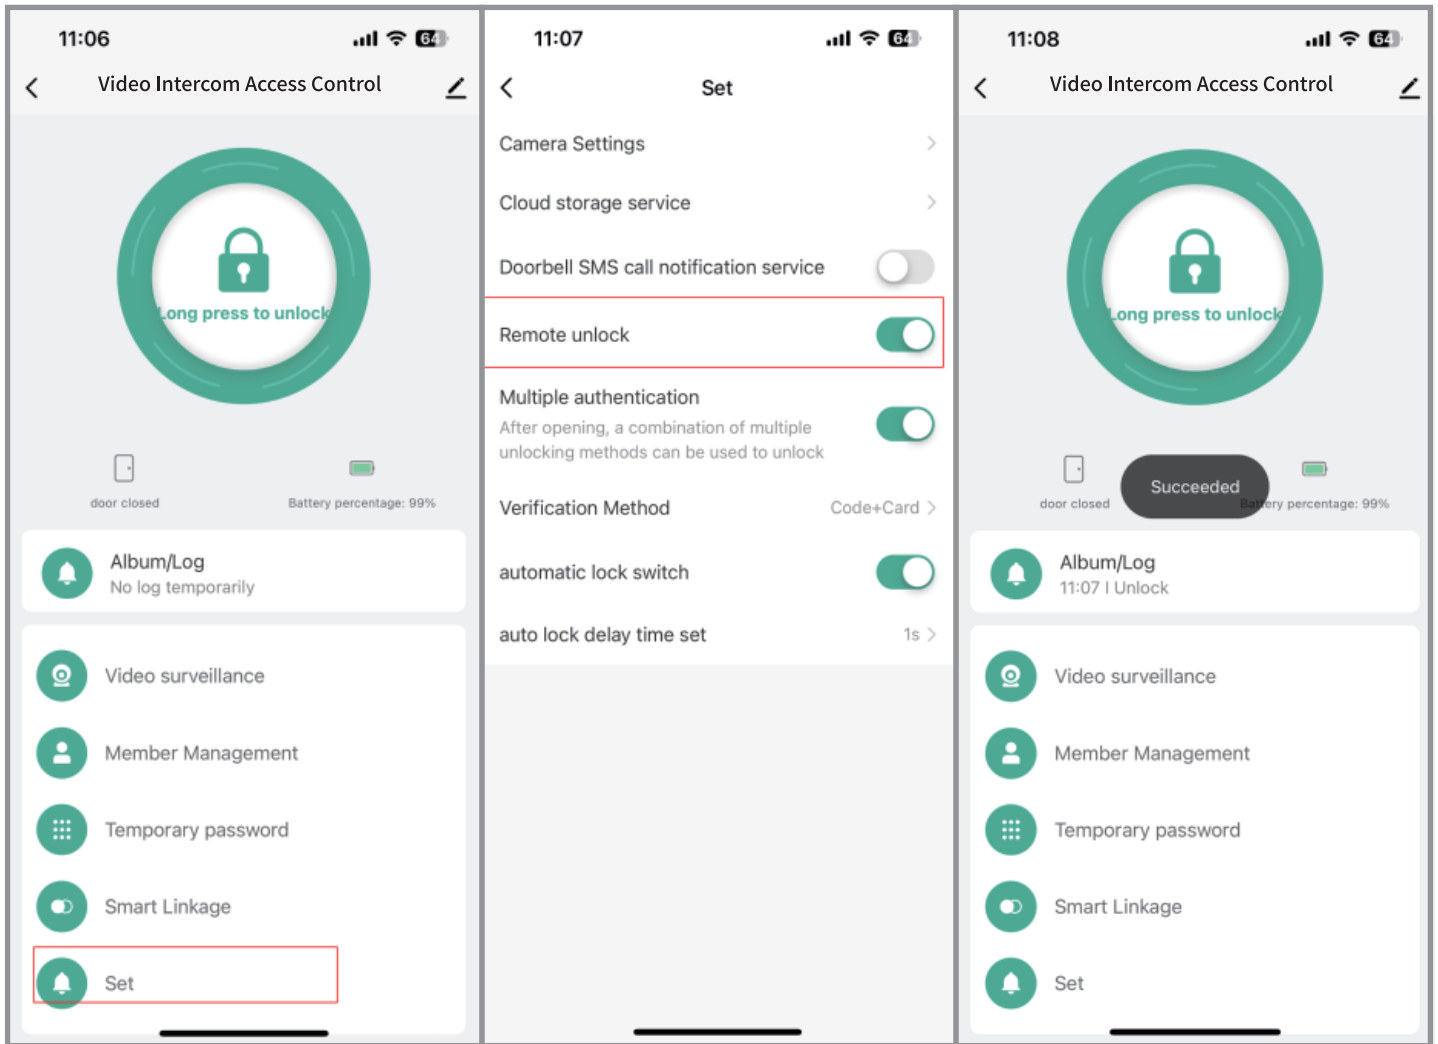

- 6 **Video Surveillance** : View visitors via mobile phone monitoring. Can set the sound turn on or off, take pictures, record videos, support intercom, and remote unlock.

- 7 Press to unlock

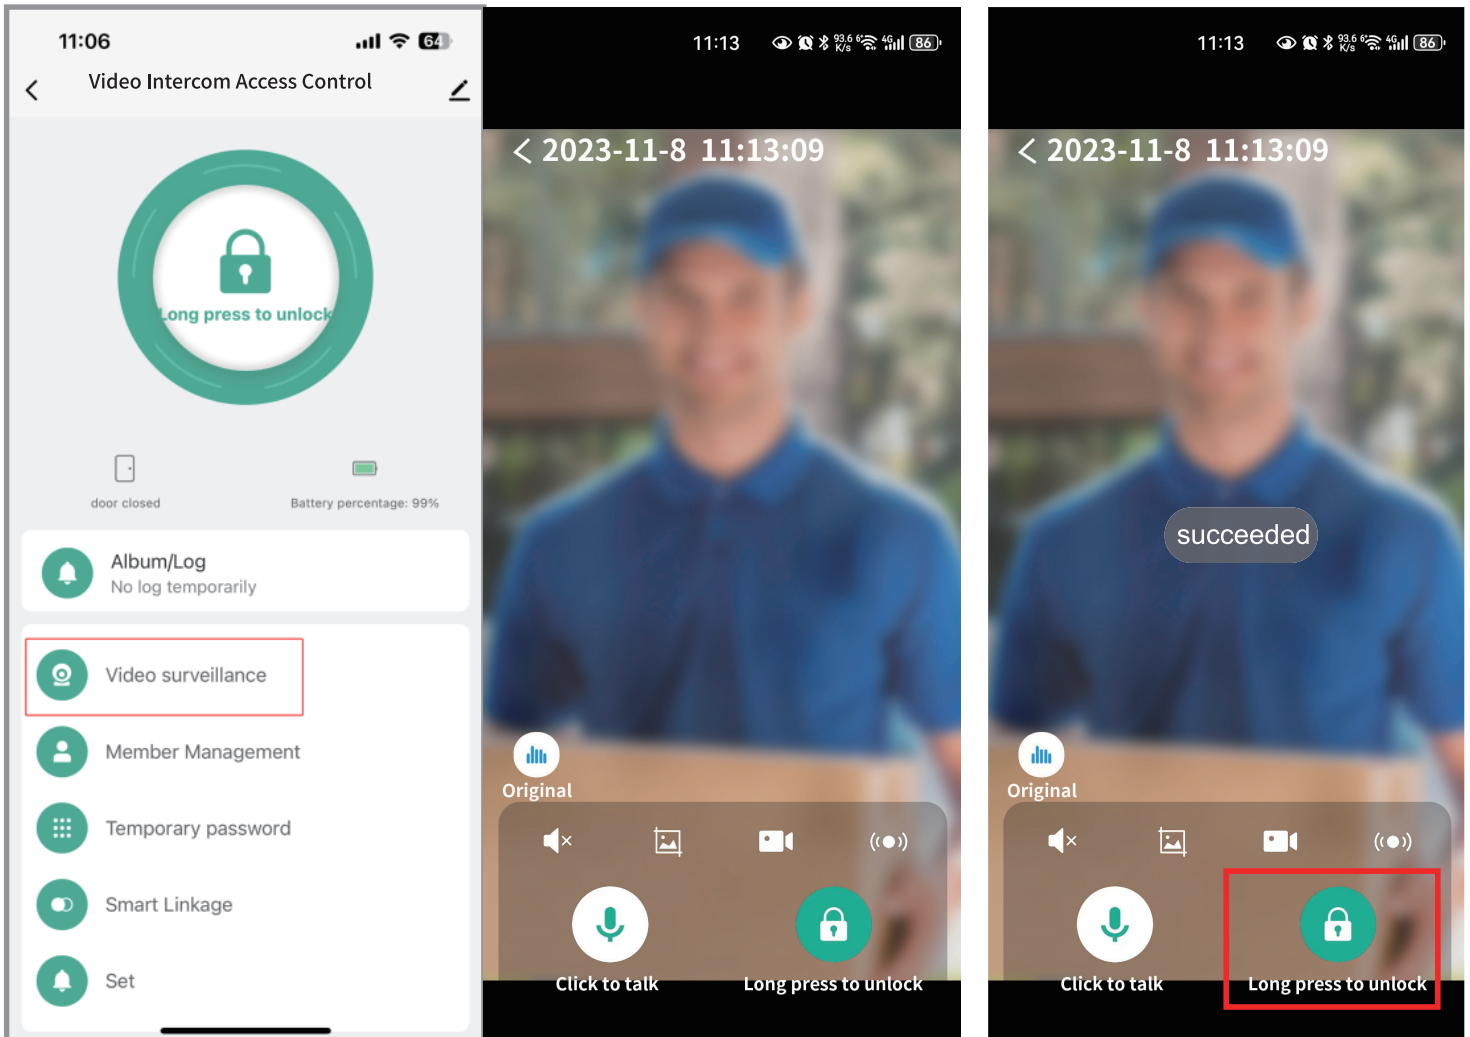

Icon function notes:

🔊× Sound turn on/off

📷 Photograph

📹 Video record


🔊 Set the sound mode (multiple sound modes are available: Original, Robot, Miss, Boy, Uncle)

8


Member Management → Click User → click “Add” to add fingerprint

→ Start to add → register fingerprint twice


Add successfully, fill in name, click “Done”.

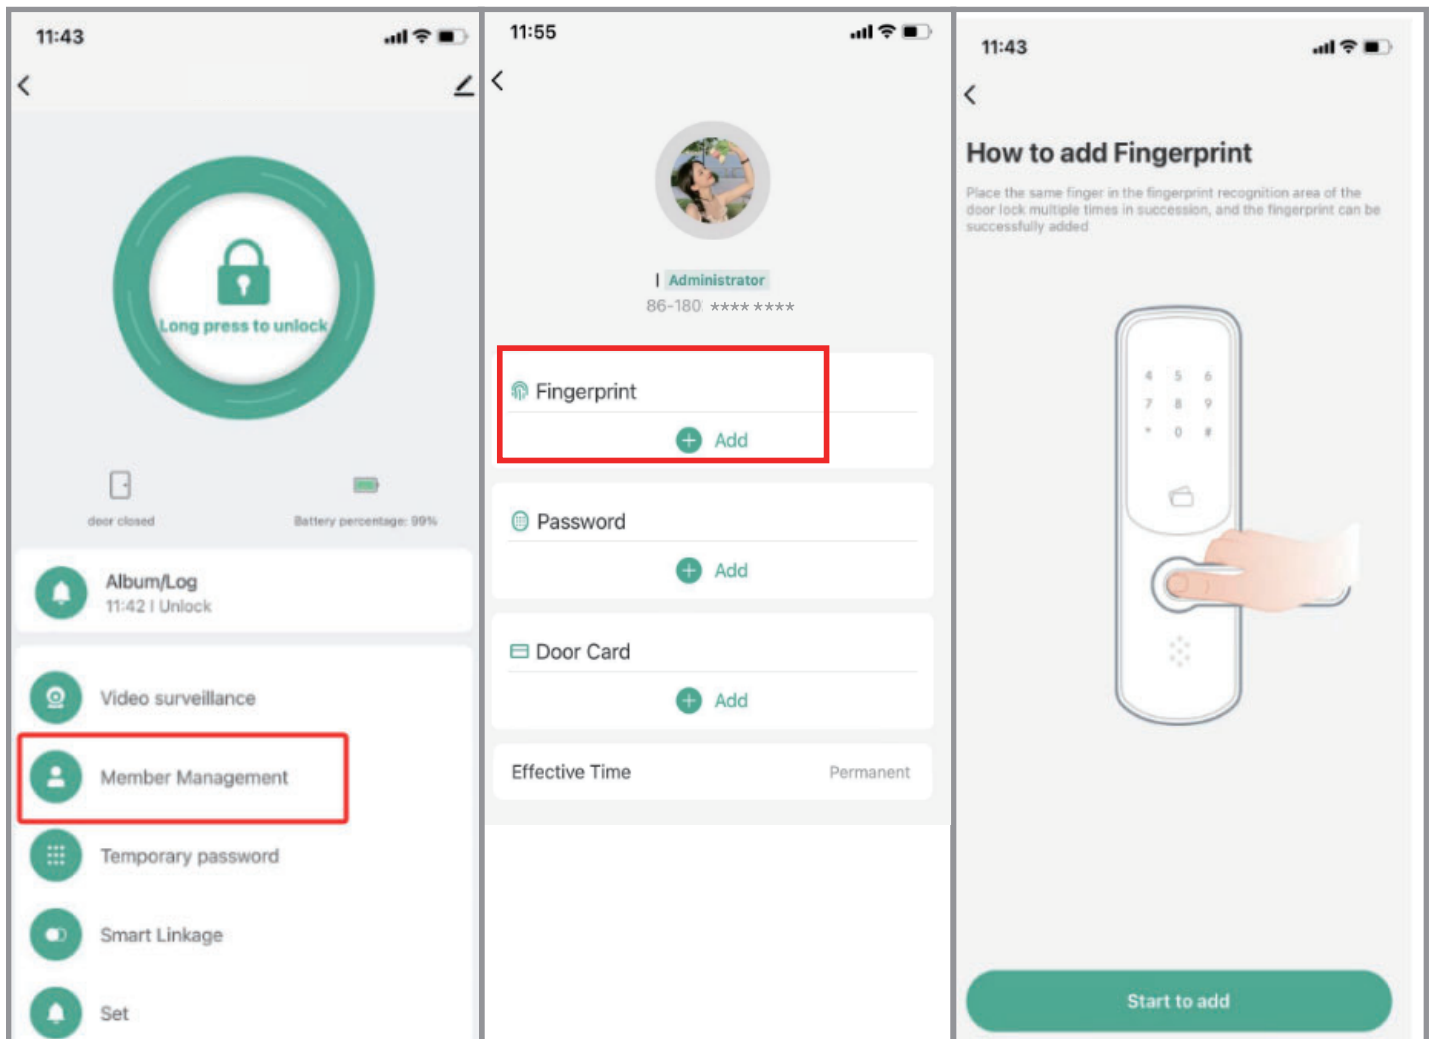

- 9 Add password by inputting 6 digits code or clicking generated code randomly, and fill in code name, then click “Save”.
- 10 Add card by clicking start to add, swip one card within 60 seconds, add card successfully, then fill in card name and click “Done”.

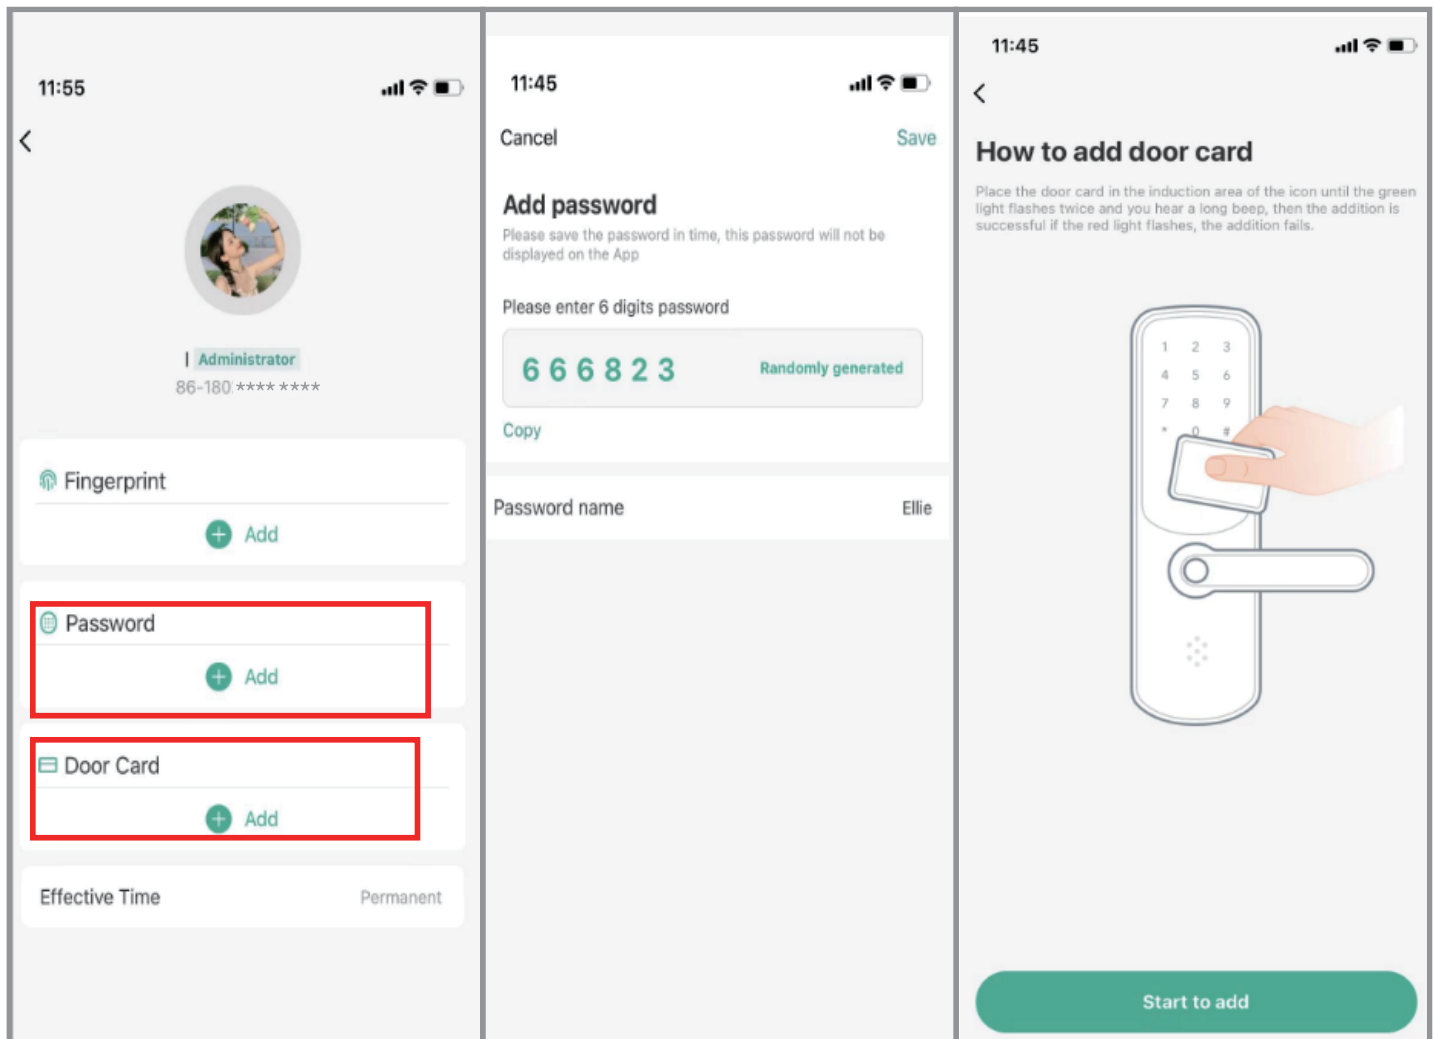

- 11 Add Other Member by clicking “+”, then choose “Other members”, then input the related information and click “Next step”.

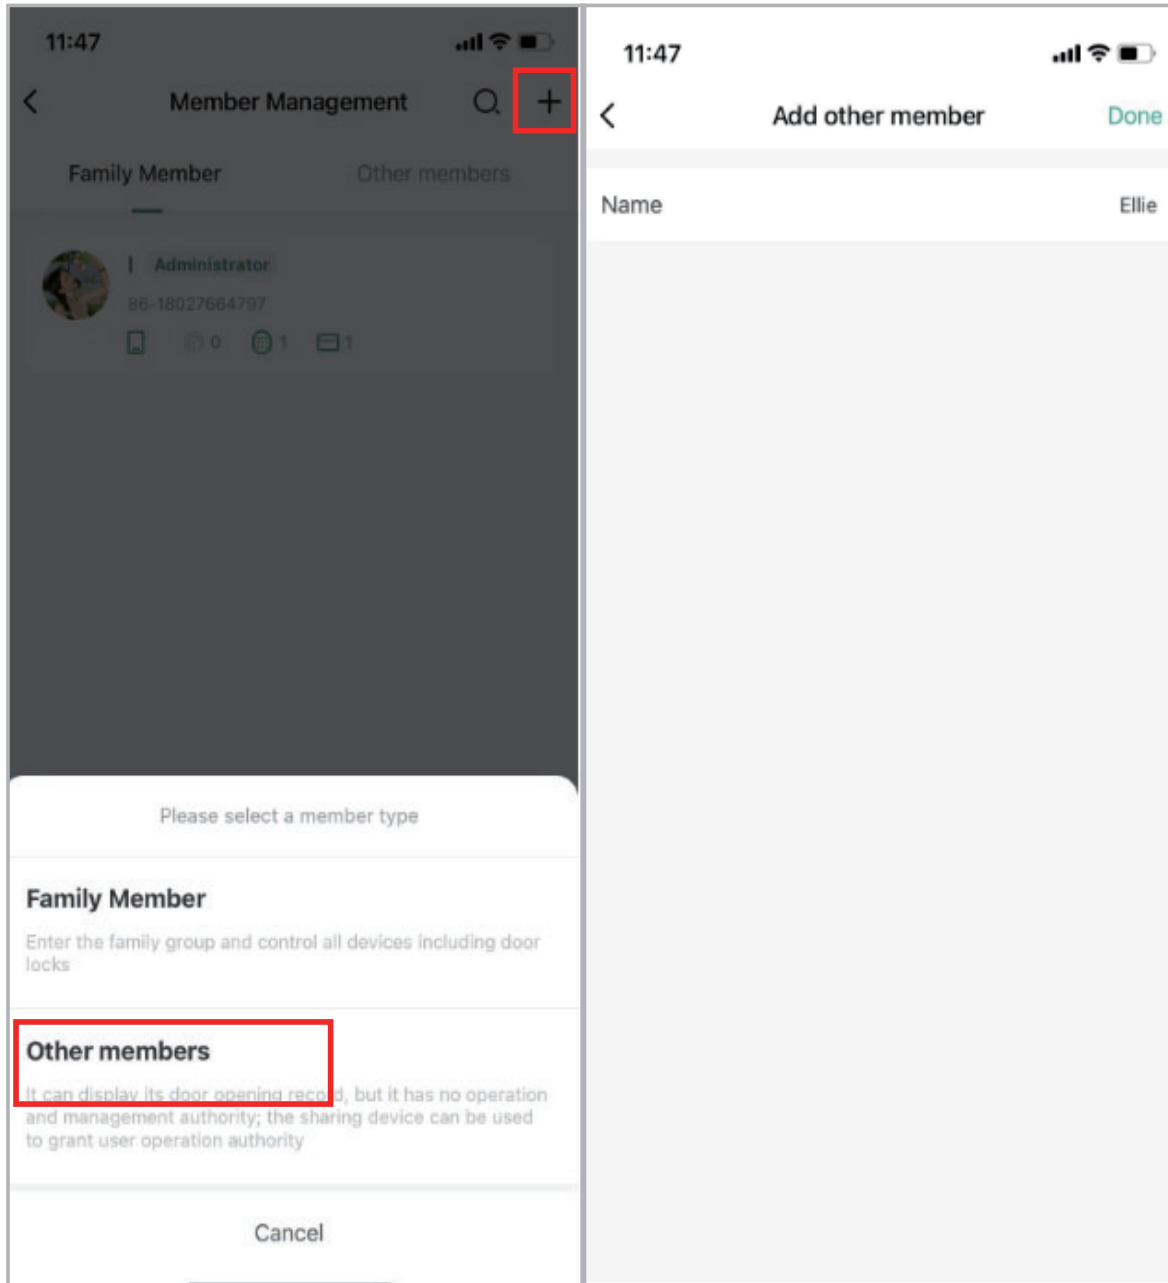

- 12 Add Temporary code by clicking Add Temporary Password “Limited time”, add effective time,invalid time and password name, then click “Get Password”, then click “Done”.

The image shows two side-by-side screenshots of a mobile application interface for adding a temporary password.

Left Screenshot: The screen is titled "Add temporary password" with a back arrow and a "Record" button. Under "Password Type", the "Limited time" option is selected (highlighted with a red box), with "single time" and "Empty" as other options. Below this, there are fields for "effective time" (2023/11/30 11:00 >), "Invalid Time" (2023/11/30 12:00 >), and "Password name" (Ellie). A large grey rectangular area is below these fields. At the bottom, a green button labeled "Get password" is visible. A note at the bottom states: "Use at least once within 24 hours after it takes effect, otherwise it will be invalid".

Right Screenshot: The screen is titled "Add temporary password" with a back arrow and a "Record" button. The generated password "9394683545" is displayed in a large box with a "Copy" link below it. Below the password box, the "effective time" is 2023-11-30 11:00, the "Invalid Time" is 2023-11-30 12:00, and the "Password name" is Ellie. A note below states: "Use at least once within 24 hours after it takes effect, otherwise it will be invalid". A green button labeled "Done" is at the bottom.

Notice: “Custom” password type can set Password Name, Effective Time and Repeat Valid Time.

- 13 Add a guest password, select Custom, fill in password name, click Get Password, and done.

The image displays two screenshots of a mobile application interface for adding a temporary password.

Left Screenshot: Add temporary password


- Time: 11:49
- Back arrow, Title: Add temporary password, Record
- Section: Password Type
 - Limited time
 - single time
 - Empty
 - Custom** (highlighted with a red box)
- Text: Please enter 6 digits password
- Input field: 6 5 6 4 3 0 (Randomly generated)
- Text: Copy
- effective time: 2023/12/01 16:31 >
- Invalid Time: 2023/12/31 16:31 >
- Password name: Liu
- Repeat: ☒
- Start Time: 16:34 ↻ 08:00 >
- End Time: 18:00 >
- Days: Sunday, Monday, Tuesday, Wednesday, Thursday, Friday, Saturday (all selected)
- Save button

Right Screenshot: Add temporary password

- Time: 11:49
- Back arrow, Title: Add temporary password, Record
- Generated password: 656430
- effective time: 2023-12-01 16:31
- Invalid Time: 2023-12-31 16:31
- Password name: Liu
- Repeat: Monday, Tuesday, Wednesday, Thursday, Friday 08:00 18:00
- Done button


Note: Guest password can only be used once and is valid for 6 hours.

14 Smart Linkage

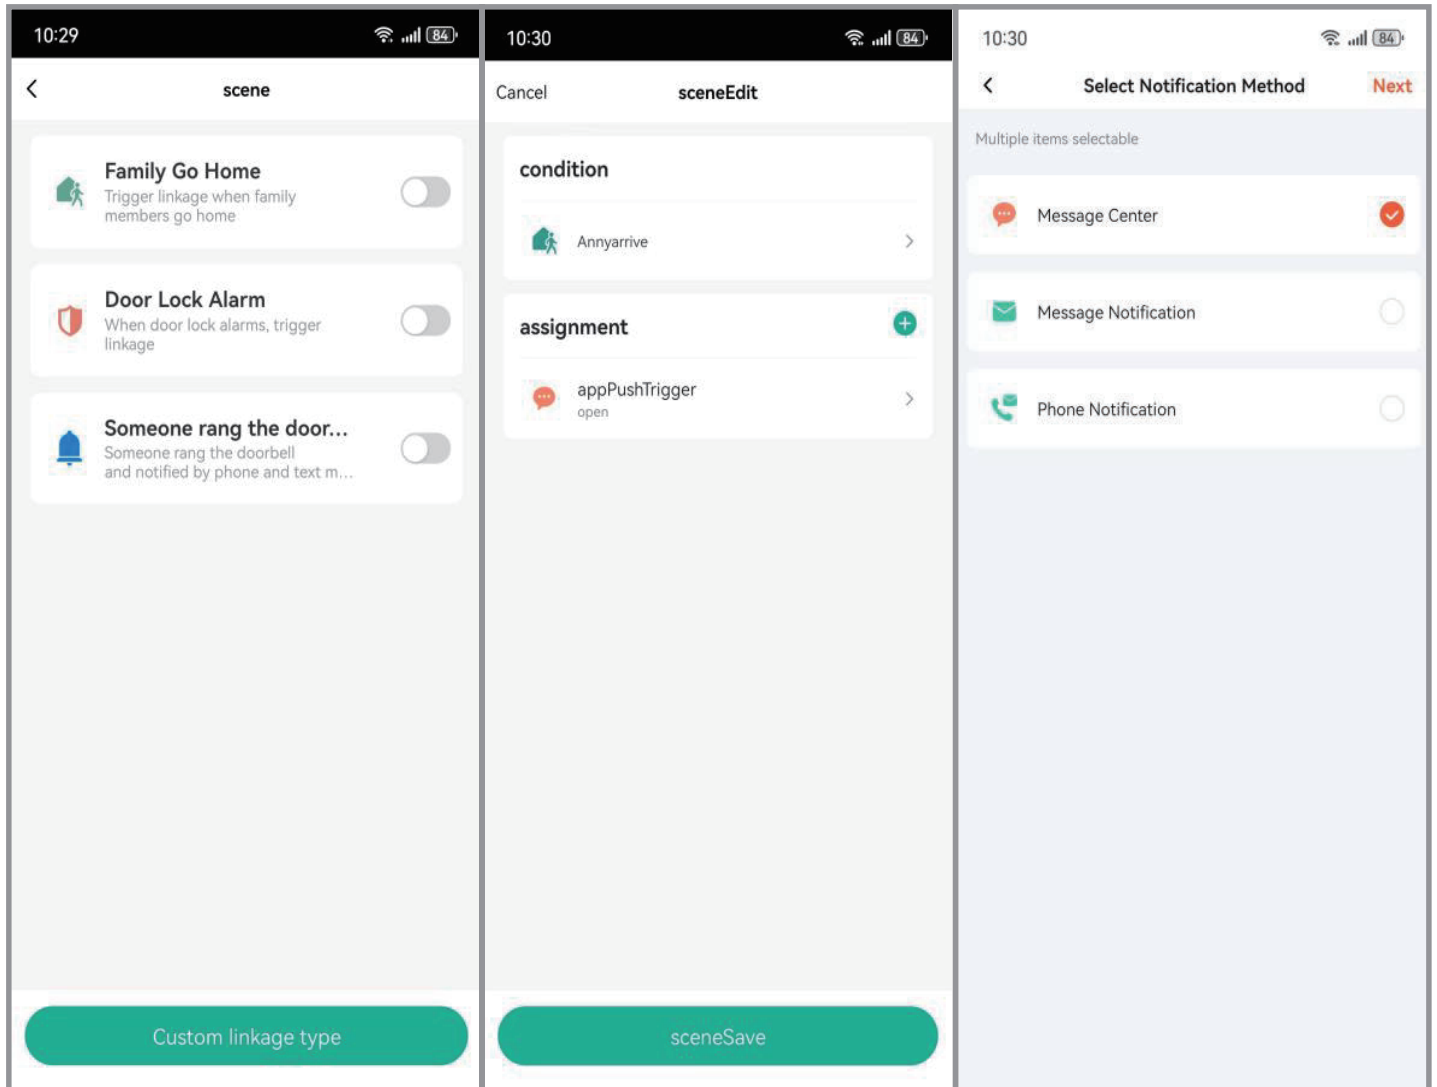


Note: SMS Notification and PhoneNotification will be charged

- 15 Open door record query: click on the Album/Log, click log, click door opening record

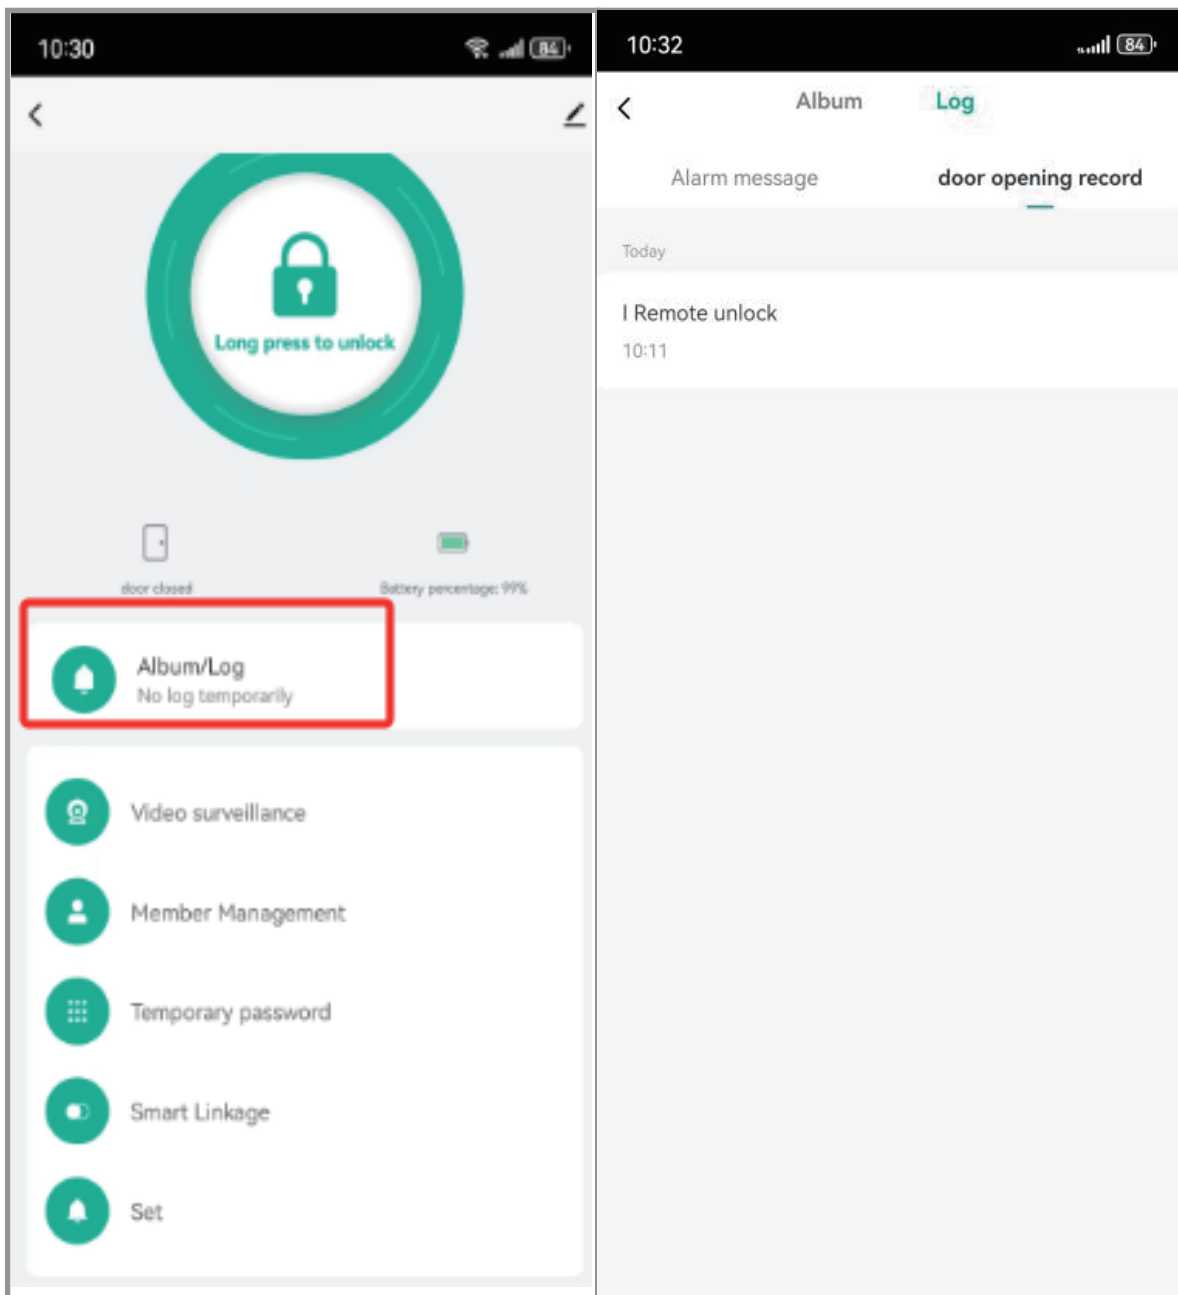

16 Settings: Intercom mode, Remote unlock, Auto lock delay time set.

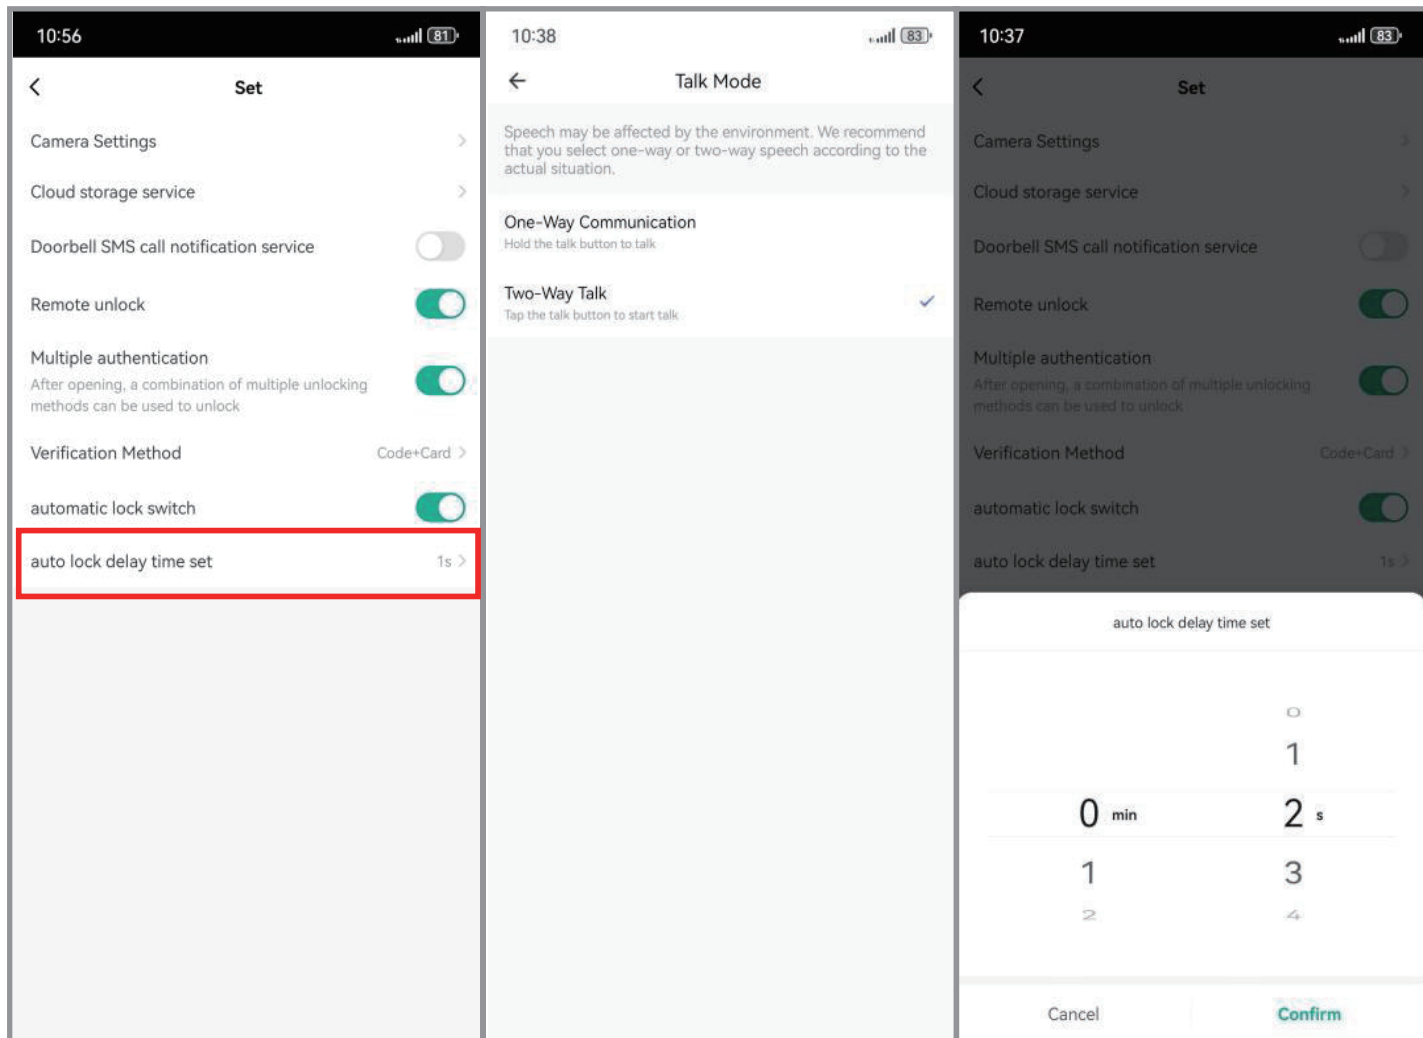

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception

, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum 20cm distance between the radiator and your body: Use only the supplied antenna.