



## Specification

Connection: USB/2.4G/BT

Color: Black/Grey

USB-C Length: 1.5m

Switch: Membrane Keyboard


Number of Keys: 108 Keys

Special Feature: 26 Keys Anti-Ghosting, RGB Backlit

Compatibility: Windows 98/2000/ME/XP/Vista/7/8/9/10/11

Dimensions: Keyboard 385\*140\*25mm Mouse 125\*65\*35mm

### Model: K920SM

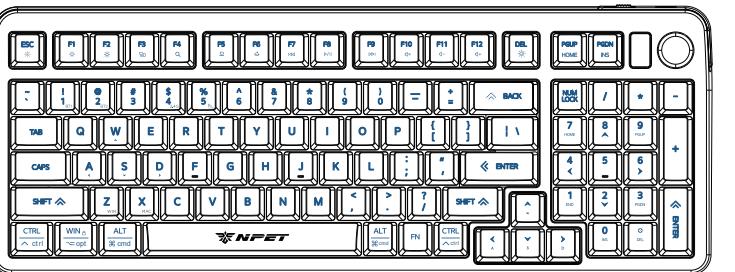

#### Keyboard

##### Keyboard and Mouse Pairing:

(1) Keyboard: ON/OFF button switches to ON. Long press Fn+1 for two seconds to enter "K920-KB1" pairing mode.

Mouse: "2.4G/USB OFF/BT" Button switches to BT. Press "BT" to enter "M500HF1" pairing mode.

(2) Keyboard: ON/OFF button switch to ON. Long press Fn+2 for two seconds to enter "K920-KB2" pairing mode.

Mouse: "2.4G/USB OFF/BT" Button switch to BT. Press "BT" to enter "M500HF2" pairing mode.

(3) Take out the USB receiver, plug the USB receiver into the computer. ON/OFF button switches to ON. Keyboard: Long press Fn+4 for two seconds to enter 2.4G pairing mode. Mouse:

"2.4G/USB OFF/BT" Button switch to 2.4G.

(4) Keyboard: Short press Fn+5 to enter USB mode, the purple backlight will flash slowly until a TYPE C data cable is plugged into the computer.

Mouse: "2.4G/USB OFF/BT" Button switch to OFF. Plug the Type-C cable into the computer.

When entering the above mode, the keyboard LED status light will light up as a prompt, and then turn off after 3 seconds. When pairing, it will flash quickly as a prompt.

At the same time, when pairing and reconnecting, the backlight has blue (BT1), cyan (BT2), and green (2.4G) corresponding synchronous prompts.

Note: In BT mode, the pairing setting time is 60 seconds, and the mode light flashes to indicate that the pairing is not successful for more than 60 seconds, and the device will automatically shut down.

In 2.4G mode, the pairing setting time is 30 seconds, and the mode light flashes to indicate that the pairing is not successful for more than 10 seconds, and the device will automatically shut down.

##### Fn + Delete: Switch lighting effects, currently there are seven settings:

① Static color: (red, yellow, green, indigo, blue, purple, white, color) - the speed cannot be adjusted in this mode.

② Breathing ③ Colorful ④ Running Horse ⑤ Open Window



⑥ Colorful Streaming ⑦ Monochrome Streaming

### Function Adjustment

Fn+F1	Brightness down
Fn+F2	Brightness up
Fn+F3	Show multitasking window(Win+Tab)
Fn+F4	Search
Fn+F5	My computer
Fn+F6	Home
Fn+F7	Previous song
Fn+F8	Pause
Fn+F9	Next song
Fn+F10	Mute
Fn+F11	Volume down
Fn+F12	Volume up

Fn+↑	Brightness +
Fn+↓	Brightness -
Fn+←	Speed -
Fn+→	Speed +
Fn+W	Directional key swap
Fn+Win	Win Lock
Fn+ESC	Light switch
Fn + Delete	Lighting effect switch
Fn+PGUP	Home
Fn+PGDN	INS
Fn + CTRL_R+Shift_R	Light reset

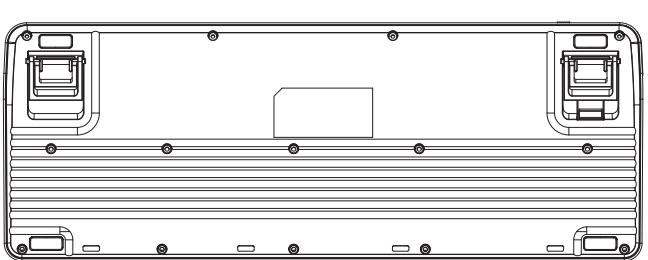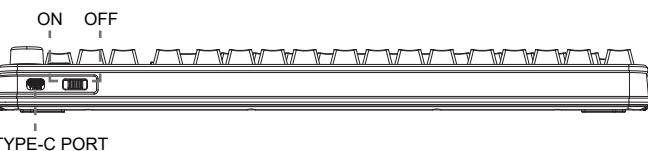

When switching brightness or speed, if it has been adjusted to the lowest or highest level, the keyboard LED status light will flash quickly to prompt.

Fn+W: The four aswd keys and the direction keys (up, down, left, and right) are interchanged to enable/disable.

Fn+Left/Win: Win&app function lock/unlock, this function is limited to Windows system.

Fn+PageUp = home

Fn+PageDown = Insert

Fn+CTRL (right) + shift (right): Quickly restore the default lighting settings.

Fn+z: Switch the key surface function key to the Windows system

Fn+x: Switch the key surface function key to the MAC system

Fn+Knob key: Switch between the following two functions:

(1) Knob: Adjust the volume of multimedia. Knob key: Select music multimedia.

(2) Knob: Adjust the light brightness. Knob key: Switch the lighting effect.

Press Fn+F11 to power on and enter EMI test mode. After entering EMI mode:

① FN+Z to switch EMI test mode

② FN+C to switch EMI test channel

③ FN+Q to restore factory settings

The red light is on when charging and the full light is off.

### FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

