



TEST REPORT

Product Name: Simultaneous instant translation machine
FCC ID: 2BOWC-T19
Trademark: N/A
Model Number: T19
Prepared For: Shenzhen Lingyun Pioneer Technology Co., Ltd
Address: 4th Floor, Building A, No. 2, Road 1, Shangxue Science and Technology Park, Bantian Street, Longgang District, Shenzhen City, Guangdong Province
Manufacturer: Shenzhen Lingyun Pioneer Technology Co., Ltd
Address: 4th Floor, Building A, No. 2, Road 1, Shangxue Science and Technology Park, Bantian Street, Longgang District, Shenzhen City, Guangdong Province
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 20, 2025
Sample tested Date: Mar. 20, 2025 to Apr. 22, 2025
Issue Date: Apr. 22, 2025
Report No.: CTB25032002802RF02
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou KuiArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	61
8.1 Block Diagram Of Test Setup	61
8.2 Limit	61
8.3 Test procedure	61
8.4 Test Result	62
9. CONDUCTED OUTPUT POWER	78
9.1 Block Diagram Of Test Setup	78
9.2 Limit	78
9.3 Test procedure	78
9.4 Test Result	78
10. 6DB OCCUPIED BANDWIDTH	83
10.1 Block Diagram Of Test Setup	83
10.2 Limit	83
10.3 Test procedure	83
10.4 Test Result	84
11. POWER SPECTRAL DENSITY	93
11.1 Block Diagram Of Test Setup	93
11.2 Limit	93
11.3 Test procedure	93
11.4 Test Result	94
12. ANTENNA REQUIREMENT	103
13. EUT TEST SETUP PHOTOGRAPHS	104
(NOTE: N/A MEANS NOT APPLICABLE)	

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB25032002802RF02	Apr. 22, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	$U=\pm 54.3\text{Hz}$
Conducted output power Above 1G	$U=\pm 1.0\text{dB}$
Conducted output power below 1G	$U=\pm 0.9\text{dB}$
Power Spectral Density , Conduction	$U=\pm 1.0\text{dB}$
Conduction spurious emissions	$U=\pm 2.8\text{dB}$
Out of band emission	$U=\pm 54\text{Hz}$
3m chamber Radiated spurious emission(9KHz-30MHz)	$U=\pm 4.8\text{dB}$
3m chamber Radiated spurious emission(30MHz-1GHz)	$U=\pm 4.3\text{dB}$
3m chamber Radiated spurious emission(1GHz-18GHz)	$U=\pm 4.5\text{dB}$
3m chamber Radiated spurious emission(18GHz-40GHz)	$U=\pm 3.4\text{dB}$
humidity uncertainty	$U=\pm 5.3\%$
Temperature uncertainty	$U=\pm 0.59^{\circ}\text{C}$
Supply voltages	$U=\pm 3\%$
Time	$U=\pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	T19
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	J22-MB-V2.1
Software Version:	LYFYF6YUE-6582-V1.05
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) Left ear: 8.964dBm WiFi (2.4G) Right ear: 8.701dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Chip antenna
Antenna Gain:	WiFi (2.4G): 2.67dBi
Ratings:	DC 5V, 0.6A DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	AE
2	Charging box	Shenzhen Lingyun Pioneer Technology Co., Ltd	/	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2025/10/25
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28


Radiated emission(No.2 Chamber)

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2025/10/25

10	Coaxial cable	Times	2m	/	/	2025/10/25
11	Coaxial cable	Times	2m	/	/	2025/10/25
12	Coaxial cable	Times	1m	/	/	2025/10/25
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

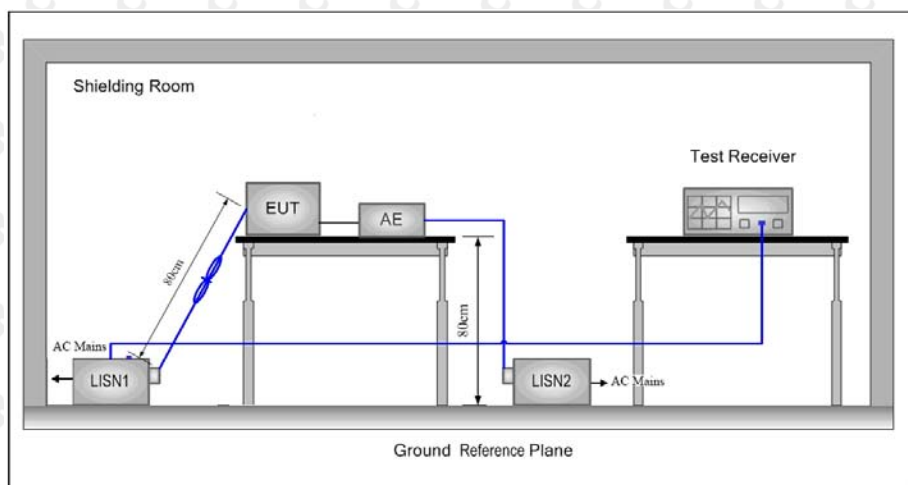

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

Charging mode

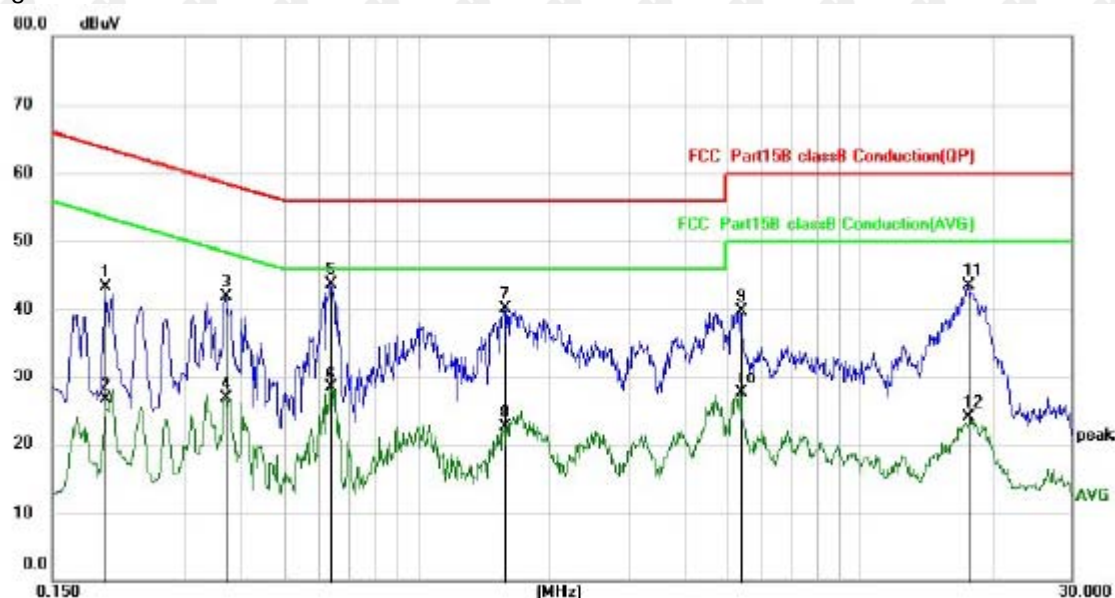


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1980	32.59	10.72	43.31	63.69	-20.38	QP
2		0.1980	15.70	10.72	26.42	53.69	-27.27	AVG
3		0.3700	31.36	10.59	41.95	58.50	-16.55	QP
4		0.3700	16.14	10.59	26.73	48.50	-21.77	AVG
5	*	0.6380	33.07	10.65	43.72	56.00	-12.28	QP
6		0.6380	17.58	10.65	28.23	46.00	-17.77	AVG
7		1.5700	28.85	11.31	40.16	56.00	-15.84	QP
8		1.5700	11.26	11.31	22.57	46.00	-23.43	AVG
9		5.3658	27.42	12.37	39.79	60.00	-20.21	QP
10		5.3658	15.08	12.37	27.45	50.00	-22.55	AVG
11		17.5100	29.96	13.47	43.43	60.00	-16.57	QP
12		17.5100	10.49	13.47	23.96	50.00	-26.04	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
Charging mode

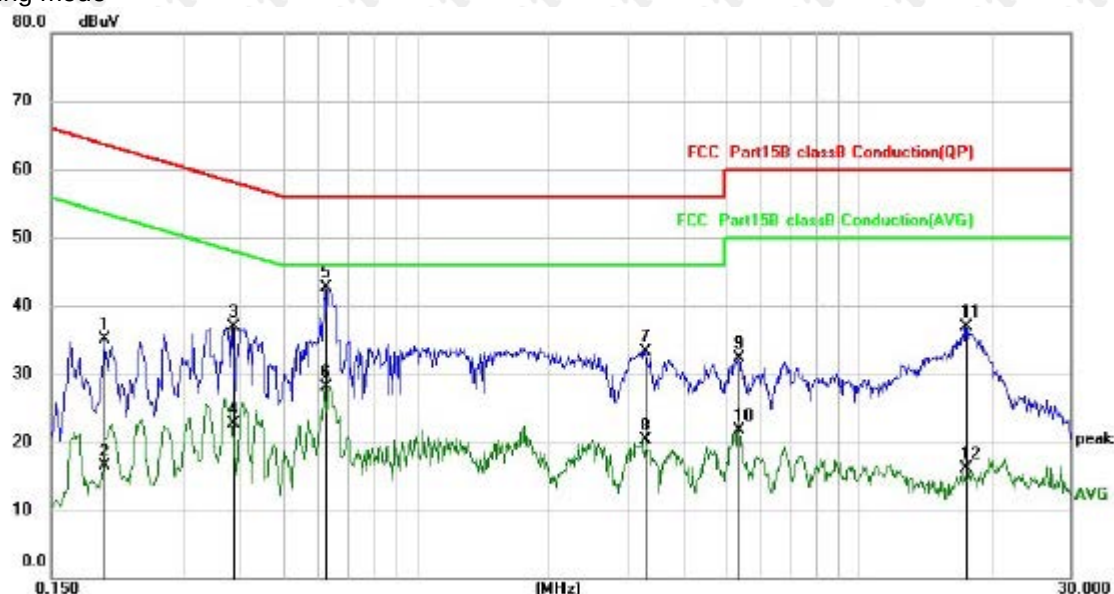

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1980	24.37	10.72	35.09	63.69	-28.60	QP
2		0.1980	5.72	10.72	16.44	53.69	-37.25	AVG
3		0.3860	26.34	10.58	36.92	58.15	-21.23	QP
4		0.3860	12.14	10.58	22.72	48.15	-25.43	AVG
5	*	0.6260	32.03	10.64	42.67	56.00	-13.33	QP
6		0.6260	17.56	10.64	28.20	46.00	-17.80	AVG
7		3.2860	21.52	11.86	33.38	56.00	-22.62	QP
8		3.2860	8.35	11.86	20.21	46.00	-25.79	AVG
9		5.3338	19.97	12.36	32.33	60.00	-27.67	QP
10		5.3338	9.31	12.36	21.67	50.00	-28.33	AVG
11		17.4258	23.35	13.46	36.81	60.00	-23.19	QP
12		17.4258	2.71	13.46	16.17	50.00	-33.83	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

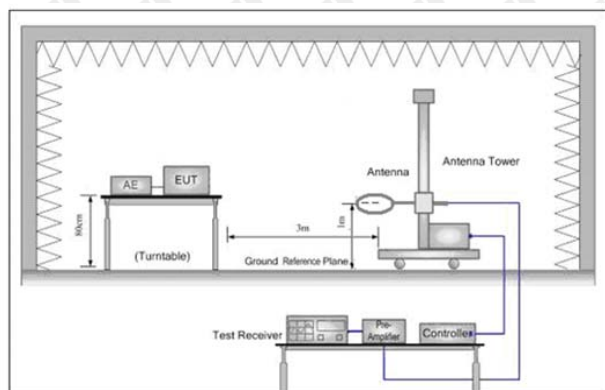


Figure 1. Below 30MHz

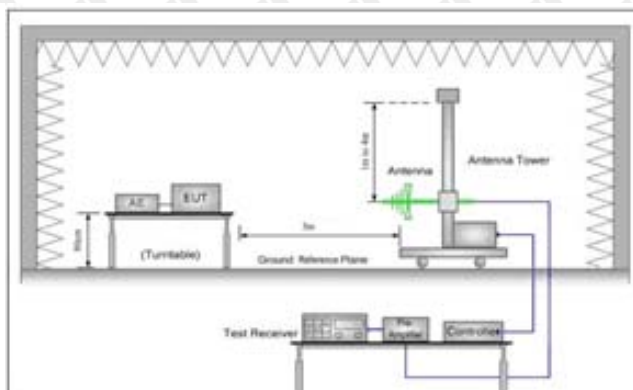


Figure 2. 30MHz to 1GHz

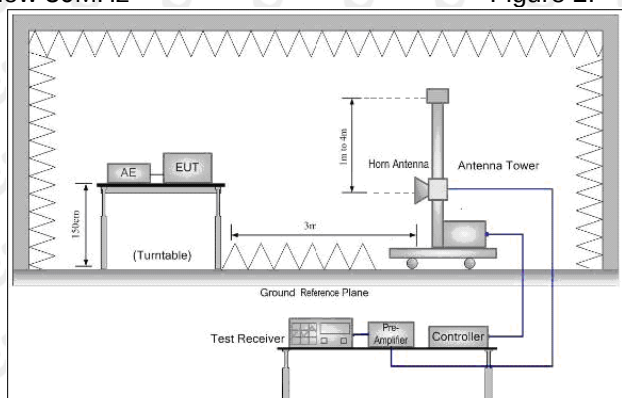


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:


- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Left ear:
LOW CH1 (802.11b Mode)/2412
Below 1GHz Test Results:
Antenna polarity: H

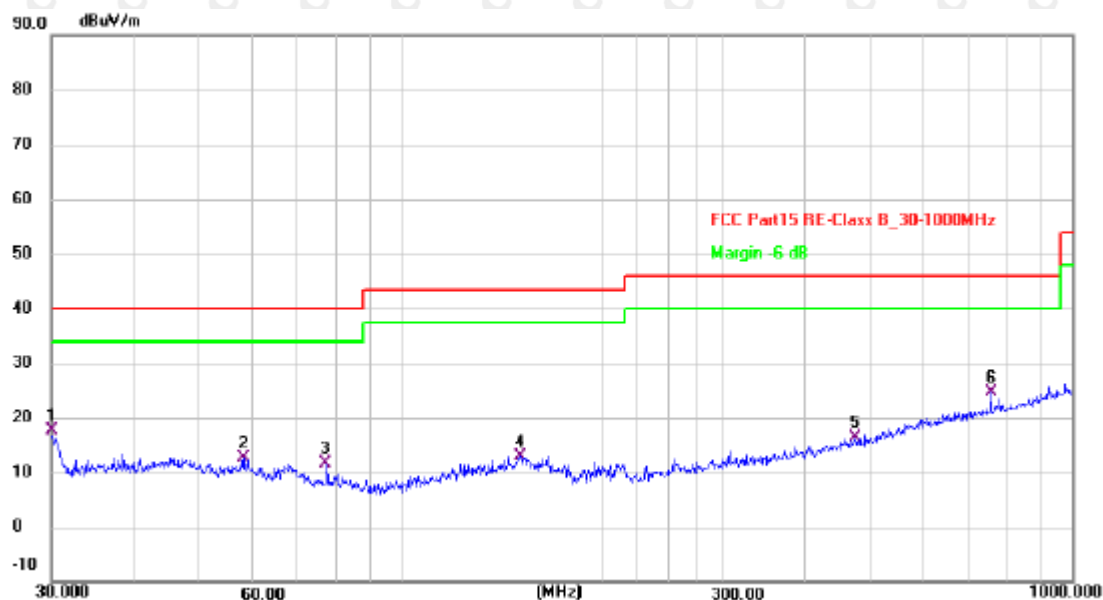


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.0000	31.33	-13.75	17.58	40.00	-22.42	QP
2	57.9992	27.31	-14.57	12.74	40.00	-27.26	QP
3	77.3210	29.43	-17.74	11.69	40.00	-28.31	QP
4	150.0108	25.66	-12.74	12.92	43.50	-30.58	QP
5	473.8346	25.89	-9.48	16.41	46.00	-29.59	QP
6 *	755.3873	28.08	-3.49	24.59	46.00	-21.41	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

LOW CH1 (802.11b Mode)/2412

Antenna polarity: V

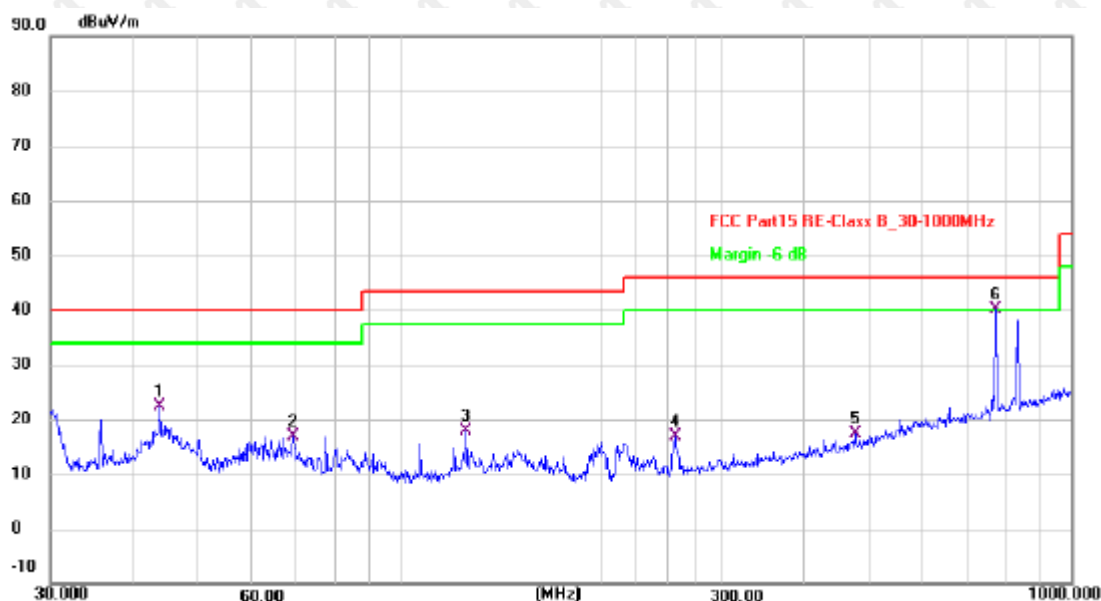


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	43.6584	35.76	-13.45	22.31	40.00	-17.69	QP
2	69.1140	33.64	-16.78	16.86	40.00	-23.14	QP
3	125.0065	32.88	-14.94	17.94	43.50	-25.56	QP
4	256.5210	31.37	-14.53	16.84	46.00	-29.16	QP
5	475.4991	26.92	-9.43	17.49	46.00	-28.51	QP
6 *	771.4485	43.31	-3.23	40.08	46.00	-5.92	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Right ear:
LOW CH1 (802.11b Mode)/2412
Below 1GHz Test Results:
Antenna polarity: H

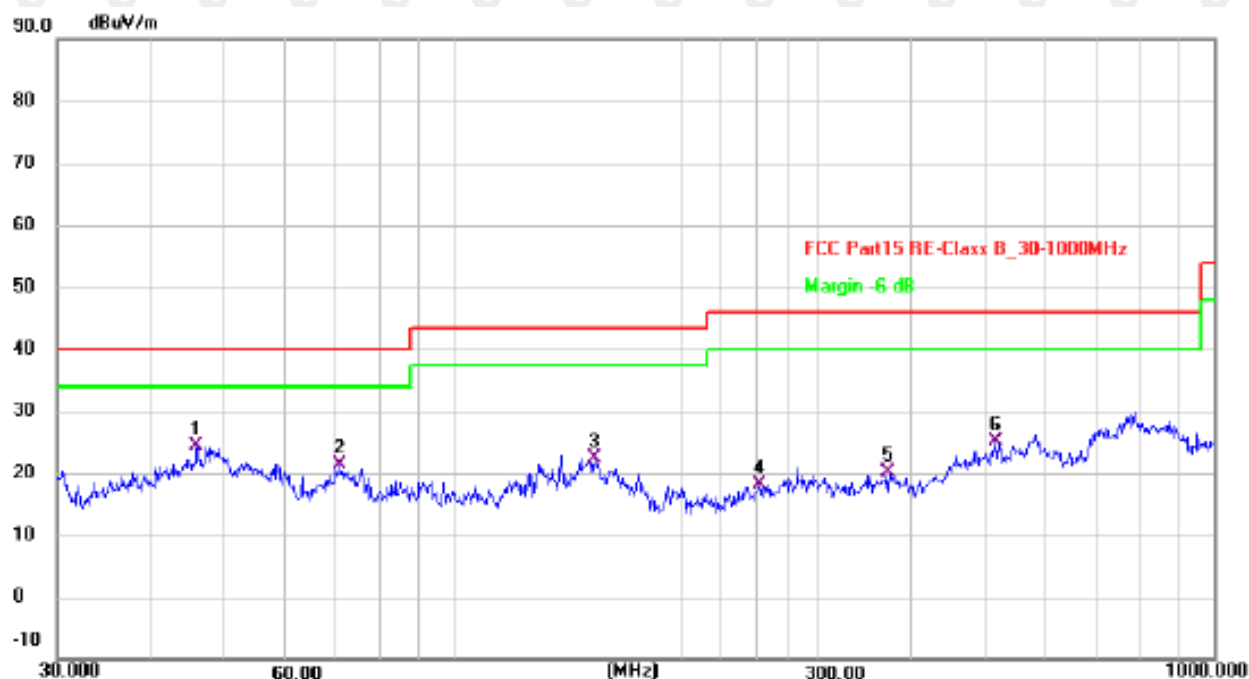


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	46.0162	37.76	-13.49	24.27	40.00	-15.73	QP
2	70.8315	38.54	-17.06	21.48	40.00	-18.52	QP
3	152.6640	35.34	-12.89	22.45	43.50	-21.05	QP
4	252.0627	32.71	-14.64	18.07	46.00	-27.93	QP
5	373.3110	31.91	-11.82	20.09	46.00	-25.91	QP
6	515.4373	33.57	-8.39	25.18	46.00	-20.82	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

LOW CH1 (802.11b Mode)/2412

Antenna polarity: V

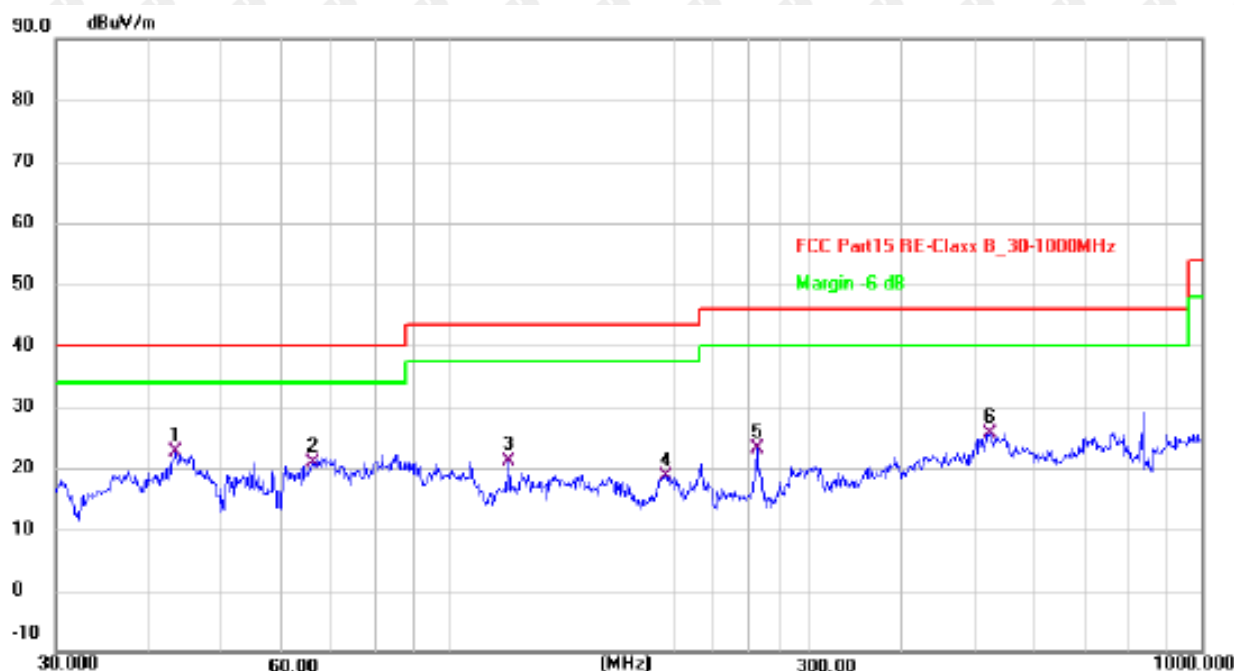

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	43.3534	36.05	-13.43	22.62	40.00	-17.38	QP
2	65.8030	37.02	-16.07	20.95	40.00	-19.05	QP
3	119.8555	36.30	-15.29	21.01	43.50	-22.49	QP
4	194.4533	35.07	-16.34	18.73	43.50	-24.77	QP
5	256.5210	37.56	-14.53	23.03	46.00	-22.97	QP
6	522.7180	33.74	-8.17	25.57	46.00	-20.43	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Left ear:

Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.58	-3.64	61.94	74	-12.06	peak
4824	49.42	-3.64	45.78	54	-8.22	AVG
7236	57.45	-0.95	56.50	74	-17.50	peak
7236	45.32	-0.95	44.37	54	-9.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.47	-3.64	61.83	74	-12.17	peak
4824	47.59	-3.64	43.95	54	-10.05	AVG
7236	58.90	-0.95	57.95	74	-16.05	peak
7236	45.30	-0.95	44.35	54	-9.65	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.83	-3.51	61.32	74	-12.68	peak
4874	49.64	-3.51	46.13	54	-7.87	AVG
7311	57.62	-0.82	56.80	74	-17.20	peak
7311	44.56	-0.82	43.74	54	-10.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.54	-3.51	60.03	74	-13.97	peak
4874	47.92	-3.51	44.41	54	-9.59	AVG
7311	60.11	-0.82	59.29	74	-14.71	peak
7311	44.46	-0.82	43.64	54	-10.36	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.16	-3.43	59.73	74	-14.27	peak
4924	46.89	-3.43	43.46	54	-10.54	AVG
7386	57.74	-0.75	56.99	74	-17.01	peak
7386	44.51	-0.75	43.76	54	-10.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.52	-3.43	61.09	74	-12.91	peak
4924	47.31	-3.43	43.88	54	-10.12	AVG
7386	59.13	-0.75	58.38	74	-15.62	peak
7386	42.55	-0.75	41.80	54	-12.20	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.53	-3.64	60.89	74	-13.11	peak
4824	49.84	-3.64	46.20	54	-7.80	AVG
7236	57.43	-0.95	56.48	74	-17.52	peak
7236	46.80	-0.95	45.85	54	-8.15	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.93	-3.64	60.29	74	-13.71	peak
4824	48.02	-3.64	44.38	54	-9.62	AVG
7236	58.10	-0.95	57.15	74	-16.85	peak
7236	43.58	-0.95	42.63	54	-11.37	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.63	-3.51	59.12	74	-14.88	peak
4874	47.76	-3.51	44.25	54	-9.75	AVG
7311	58.96	-0.82	58.14	74	-15.86	peak
7311	43.52	-0.82	42.70	54	-11.30	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.02	-3.51	60.51	74	-13.49	peak
4874	48.38	-3.51	44.87	54	-9.13	AVG
7311	57.67	-0.82	56.85	74	-17.15	peak
7311	42.02	-0.82	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.95	-3.43	59.52	74	-14.48	peak
4924	48.18	-3.43	44.75	54	-9.25	AVG
7386	57.88	-0.75	57.13	74	-16.87	peak
7386	42.73	-0.75	41.98	54	-12.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.72	-3.43	60.29	74	-13.71	peak
4924	46.80	-3.43	43.37	54	-10.63	AVG
7386	57.65	-0.75	56.90	74	-17.10	peak
7386	42.97	-0.75	42.22	54	-11.78	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to be completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.58	-3.64	59.94	74	-14.06	peak
4824	49.16	-3.64	45.52	54	-8.48	AVG
7236	59.26	-0.95	58.31	74	-15.69	peak
7236	43.74	-0.95	42.79	54	-11.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.14	-3.64	60.50	74	-13.50	peak
4824	50.14	-3.64	46.50	54	-7.50	AVG
7236	58.87	-0.95	57.92	74	-16.08	peak
7236	42.52	-0.95	41.57	54	-12.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	65.19	-3.51	61.68	74.00	-12.32	peak
4874.00	48.31	-3.51	44.80	54.00	-9.20	AVG
7311.00	56.49	-0.82	55.67	74.00	-18.33	peak
7311.00	46.24	-0.82	45.42	54.00	-8.58	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	62.82	-3.51	59.31	74.00	-14.69	peak
4874.00	47.46	-3.51	43.95	54.00	-10.05	AVG
7311.00	57.88	-0.82	57.06	74.00	-16.94	peak
7311.00	41.70	-0.82	40.88	54.00	-13.12	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	61.53	-3.43	58.10	74	-15.90	peak
4924	47.77	-3.43	44.34	54	-9.66	AVG
7386	58.98	-0.75	58.23	74	-15.77	peak
7386	43.14	-0.75	42.39	54	-11.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.82	-3.43	60.39	74	-13.61	peak
4924	46.70	-3.43	43.27	54	-10.73	AVG
7386	58.54	-0.75	57.79	74	-16.21	peak
7386	41.14	-0.75	40.39	54	-13.61	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.24	-3.63	60.61	74	-13.39	peak
4844	48.98	-3.63	45.35	54	-8.65	AVG
7266	57.70	-0.94	56.76	74	-17.24	peak
7266	45.39	-0.94	44.45	54	-9.55	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.03	-3.63	60.40	74	-13.60	peak
4844	48.48	-3.63	44.85	54	-9.15	AVG
7266	58.04	-0.94	57.10	74	-16.90	peak
7266	45.87	-0.94	44.93	54	-9.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.80	-3.51	61.29	74	-12.71	peak
4874	49.57	-3.51	46.06	54	-7.94	AVG
7311	59.18	-0.82	58.36	74	-15.64	peak
7311	43.68	-0.82	42.86	54	-11.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.25	-3.51	58.74	74	-15.26	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.62	-0.82	55.80	74	-18.20	peak
7311	43.34	-0.82	42.52	54	-11.48	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.54	-3.43	61.11	74	-12.89	peak
4904	47.70	-3.43	44.27	54	-9.73	AVG
7356	56.12	-0.75	55.37	74	-18.63	peak
7356	41.81	-0.75	41.06	54	-12.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.87	-3.43	60.44	74	-13.56	peak
4904	47.87	-3.43	44.44	54	-9.56	AVG
7356	57.95	-0.75	57.20	74	-16.80	peak
7356	44.93	-0.75	44.18	54	-9.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

- (1) Measuring frequencies from 1 GHz to the 25 GHz .
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed
- (5) Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.94	-5.81	52.13	74	-21.87	peak
2310	/	-5.81	/	54	/	AVG
2390	63.88	-5.84	58.04	74	-15.96	peak
2390	48.84	-5.84	43.00	54	-11.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.72	-5.81	51.91	74	-22.09	peak
2310	/	-5.81	/	54	/	AVG
2390	62.20	-5.84	56.36	74	-17.64	peak
2390	47.04	-5.84	41.20	54	-12.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.29	-5.65	51.64	74	-22.36	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.37	-5.65	50.72	74	-23.28	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	58.82	-5.81	53.01	74	-20.99	peak
2310	/	-5.81	/	54	/	AVG
2390	62.41	-5.84	56.57	74	-17.43	peak
2390	45.62	-5.84	39.78	54	-14.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.71	-5.81	50.90	74	-23.10	peak
2310	/	-5.81	/	54	/	AVG
2390	62.25	-5.84	56.41	74	-17.59	peak
2390	46.41	-5.84	40.57	54	-13.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.69	-5.65	52.04	74	-21.96	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.39	-5.81	50.58	74	-23.42	peak
2310	/	-5.81	/	54	/	AVG
2390	63.56	-5.84	57.72	74	-16.28	peak
2390	47.79	-5.84	41.95	54	-12.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.59	-5.81	51.78	74	-22.22	peak
2310	/	-5.81	/	54	/	AVG
2390	60.35	-5.84	54.51	74	-19.49	peak
2390	47.63	-5.84	41.79	54	-12.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.57	-5.65	50.92	74	-23.08	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.83	-5.65	51.18	74	-22.82	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.49	-5.81	52.68	74	-21.32	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.84	-5.81	53.03	74	-20.97	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.29	-5.65	51.64	74	-22.36	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.32	-5.65	50.67	74	-23.33	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Right ear:
Above 1 GHz Test Results:

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.50	-3.64	62.86	74	-11.14	peak
4824	48.19	-3.64	44.55	54	-9.45	AVG
7236	57.22	-0.95	56.27	74	-17.73	peak
7236	46.12	-0.95	45.17	54	-8.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.64	-3.64	62.00	74	-12.00	peak
4824	48.70	-3.64	45.06	54	-8.94	AVG
7236	57.75	-0.95	56.80	74	-17.20	peak
7236	43.90	-0.95	42.95	54	-11.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.58	-3.51	61.07	74	-12.93	peak
4874	49.54	-3.51	46.03	54	-7.97	AVG
7311	59.08	-0.82	58.26	74	-15.74	peak
7311	43.03	-0.82	42.21	54	-11.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.58	-3.51	61.07	74	-12.93	peak
4874	46.72	-3.51	43.21	54	-10.79	AVG
7311	59.51	-0.82	58.69	74	-15.31	peak
7311	42.42	-0.82	41.60	54	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	64.45	-3.43	61.02	74	-12.98	peak
4924	47.08	-3.43	43.65	54	-10.35	AVG
7386	59.70	-0.75	58.95	74	-15.05	peak
7386	44.44	-0.75	43.69	54	-10.31	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	63.29	-3.43	59.86	74	-14.14	peak
4924	46.72	-3.43	43.29	54	-10.71	AVG
7386	57.68	-0.75	56.93	74	-17.07	peak
7386	41.68	-0.75	40.93	54	-13.07	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.15	-3.64	61.51	74	-12.49	peak
4824	50.22	-3.64	46.58	54	-7.42	AVG
7236	58.54	-0.95	57.59	74	-16.41	peak
7236	45.91	-0.95	44.96	54	-9.04	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.20	-3.64	59.56	74	-14.44	peak
4824	46.51	-3.64	42.87	54	-11.13	AVG
7236	58.79	-0.95	57.84	74	-16.16	peak
7236	42.87	-0.95	41.92	54	-12.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.68	-3.51	59.17	74	-14.83	peak
4874	48.90	-3.51	45.39	54	-8.61	AVG
7311	57.90	-0.82	57.08	74	-16.92	peak
7311	44.58	-0.82	43.76	54	-10.24	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.71	-3.51	61.20	74	-12.80	peak
4874	47.42	-3.51	43.91	54	-10.09	AVG
7311	56.95	-0.82	56.13	74	-17.87	peak
7311	42.95	-0.82	42.13	54	-11.87	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.90	-3.43	59.47	74	-14.53	peak
4924	50.08	-3.43	46.65	54	-7.35	AVG
7386	55.98	-0.75	55.23	74	-18.77	peak
7386	41.84	-0.75	41.09	54	-12.91	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.21	-3.43	58.78	74	-15.22	peak
4924	47.63	-3.43	44.20	54	-9.80	AVG
7386	57.81	-0.75	57.06	74	-16.94	peak
7386	42.35	-0.75	41.60	54	-12.40	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

(1) Measuring frequencies from 1 GHz to the 25 GHz.

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.23	-3.64	61.59	74	-12.41	peak
4824	47.13	-3.64	43.49	54	-10.51	AVG
7236	57.27	-0.95	56.32	74	-17.68	peak
7236	44.68	-0.95	43.73	54	-10.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	62.31	-3.64	58.67	74	-15.33	peak
4824	47.12	-3.64	43.48	54	-10.52	AVG
7236	57.25	-0.95	56.30	74	-17.70	peak
7236	45.27	-0.95	44.32	54	-9.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	65.66	-3.51	62.15	74.00	-11.85	peak
4874.00	46.85	-3.51	43.34	54.00	-10.66	AVG
7311.00	58.61	-0.82	57.79	74.00	-16.21	peak
7311.00	44.71	-0.82	43.89	54.00	-10.11	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874.00	63.39	-3.51	59.88	74.00	-14.12	peak
4874.00	46.74	-3.51	43.23	54.00	-10.77	AVG
7311.00	58.17	-0.82	57.35	74.00	-16.65	peak
7311.00	42.59	-0.82	41.77	54.00	-12.23	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.32	-3.43	59.89	74	-14.11	peak
4924	45.56	-3.43	42.13	54	-11.87	AVG
7386	58.08	-0.75	57.33	74	-16.67	peak
7386	42.28	-0.75	41.53	54	-12.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.34	-3.43	60.91	74	-13.09	peak
4924	47.38	-3.43	43.95	54	-10.05	AVG
7386	58.14	-0.75	57.39	74	-16.61	peak
7386	41.70	-0.75	40.95	54	-13.05	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.69	-3.63	61.06	74	-12.94	peak
4844	48.20	-3.63	44.57	54	-9.43	AVG
7266	58.66	-0.94	57.72	74	-16.28	peak
7266	45.15	-0.94	44.21	54	-9.79	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.47	-3.63	61.84	74	-12.16	peak
4844	49.46	-3.63	45.83	54	-8.17	AVG
7266	59.12	-0.94	58.18	74	-15.82	peak
7266	44.80	-0.94	43.86	54	-10.14	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.85	-3.51	61.34	74	-12.66	peak
4874	47.46	-3.51	43.95	54	-10.05	AVG
7311	58.51	-0.82	57.69	74	-16.31	peak
7311	46.19	-0.82	45.37	54	-8.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.27	-3.51	58.76	74	-15.24	peak
4874	46.49	-3.51	42.98	54	-11.02	AVG
7311	56.70	-0.82	55.88	74	-18.12	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	64.65	-3.43	61.22	74	-12.78	peak
4904	46.70	-3.43	43.27	54	-10.73	AVG
7356	56.66	-0.75	55.91	74	-18.09	peak
7356	43.51	-0.75	42.76	54	-11.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.83	-3.43	59.40	74	-14.60	peak
4904	46.01	-3.43	42.58	54	-11.42	AVG
7356	57.24	-0.75	56.49	74	-17.51	peak
7356	44.68	-0.75	43.93	54	-10.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

(1) Measuring frequencies from 1 GHz to the 25 GHz .

(2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed

(5)Have tested in three orientations for radiated emissions, Only The worst record is in this report

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.75	-5.81	51.94	74	-22.06	peak
2310	/	-5.81	/	54	/	AVG
2390	65.04	-5.84	59.20	74	-14.80	peak
2390	49.30	-5.84	43.46	54	-10.54	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.66	-5.81	50.85	74	-23.15	peak
2310	/	-5.81	/	54	/	AVG
2390	62.62	-5.84	56.78	74	-17.22	peak
2390	47.71	-5.84	41.87	54	-12.13	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.78	-5.65	52.13	74	-21.87	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.24	-5.65	50.59	74	-23.41	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	59.67	-5.81	53.86	74	-20.14	peak
2310	/	-5.81	/	54	/	AVG
2390	61.88	-5.84	56.04	74	-17.96	peak
2390	47.22	-5.84	41.38	54	-12.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	56.60	-5.81	50.79	74	-23.21	peak
2310	/	-5.81	/	54	/	AVG
2390	62.71	-5.84	56.87	74	-17.13	peak
2390	45.47	-5.84	39.63	54	-14.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.99	-5.65	51.34	74	-22.66	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.90	-5.65	51.25	74	-22.75	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	57.09	-5.81	51.28	74	-22.72	peak
2310	/	-5.81	/	54	/	AVG
2390	62.09	-5.84	56.25	74	-17.75	peak
2390	48.78	-5.84	42.94	54	-11.06	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310	55.82	-5.81	50.01	74	-23.99	peak
2310	/	-5.81	/	54	/	AVG
2390	61.35	-5.84	55.51	74	-18.49	peak
2390	46.34	-5.84	40.50	54	-13.50	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.60	-5.65	51.95	74	-22.05	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.34	-5.65	50.69	74	-23.31	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.25	-5.81	52.44	74	-21.56	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.27	-5.81	52.46	74	-21.54	peak
2390	/	-5.81	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.28	-5.65	51.63	74	-22.37	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.01	-5.65	50.36	74	-23.64	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

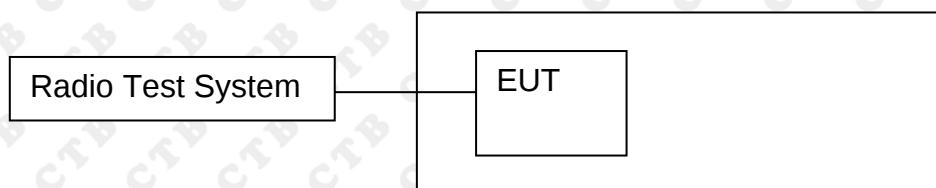

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold


8.4 Test Result

Left ear:





BAND EDGE Graphs

802.11g/LCH

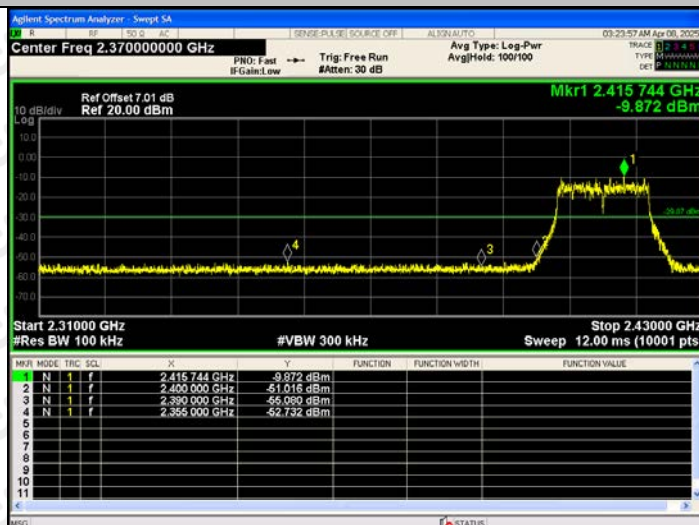

802.11g/HCH

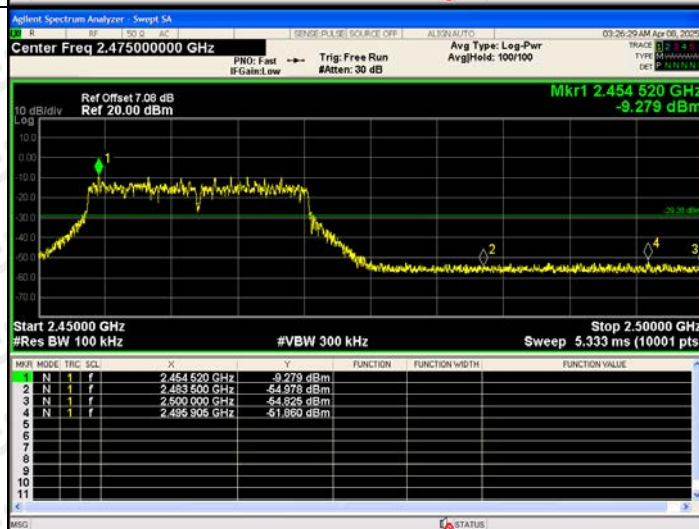


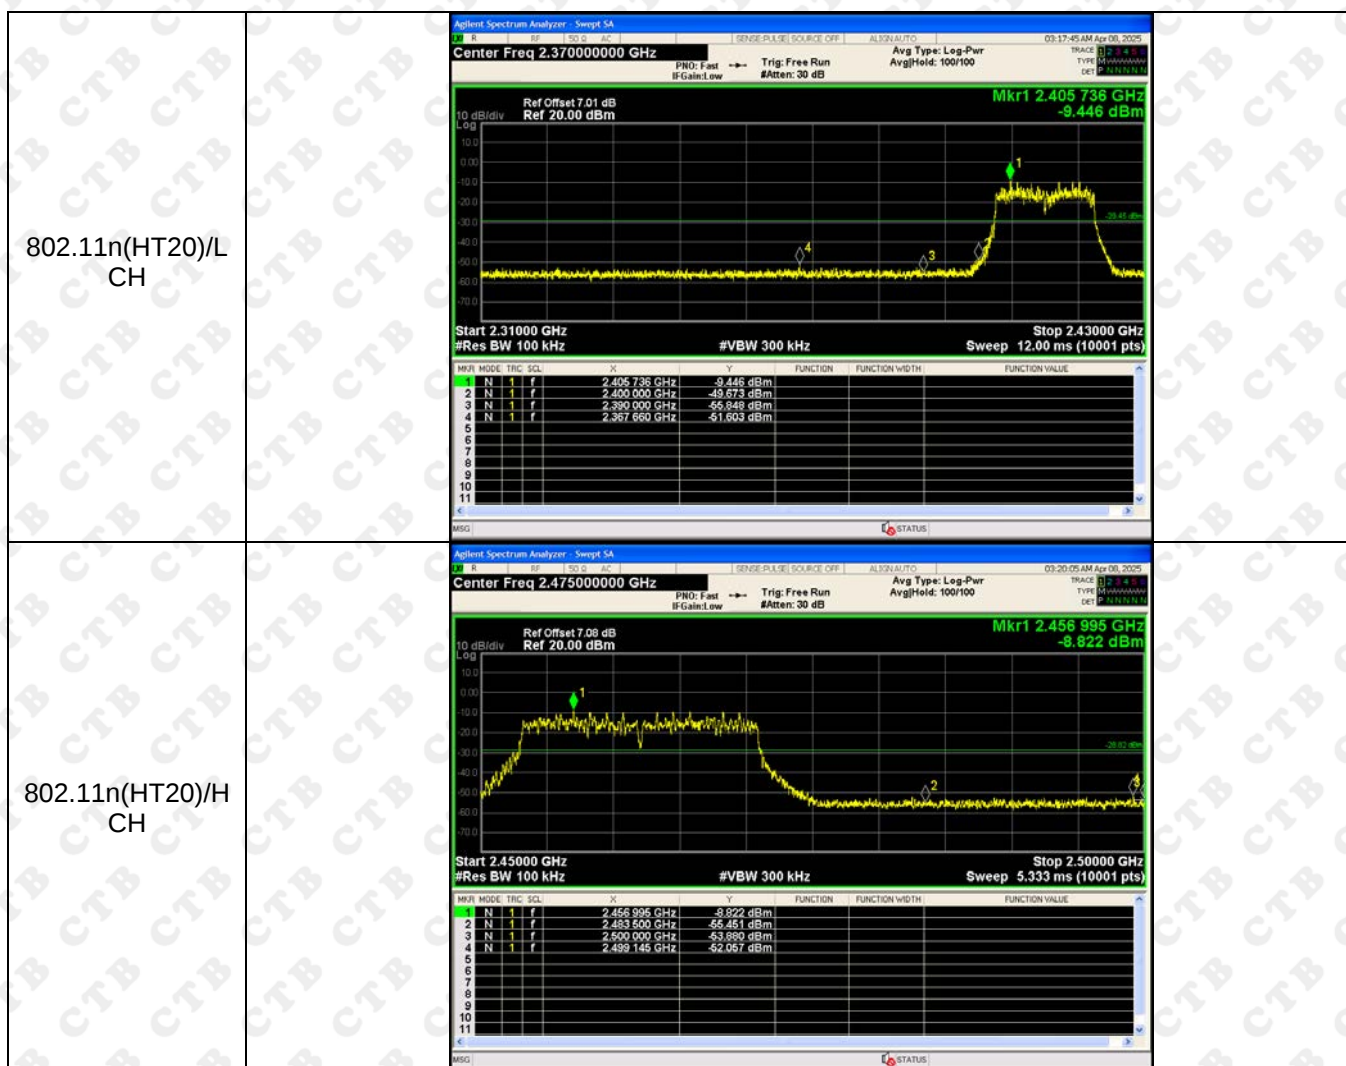




RF Conducted Spurious Emissions Graphs


802.11b/LCH

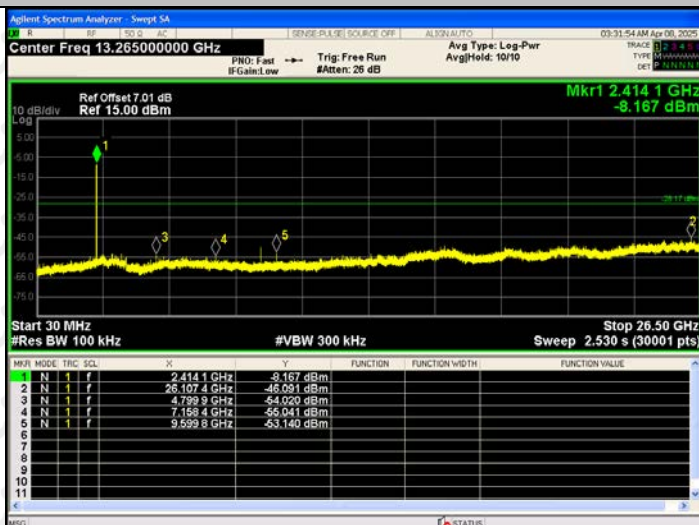

802.11b/MCH

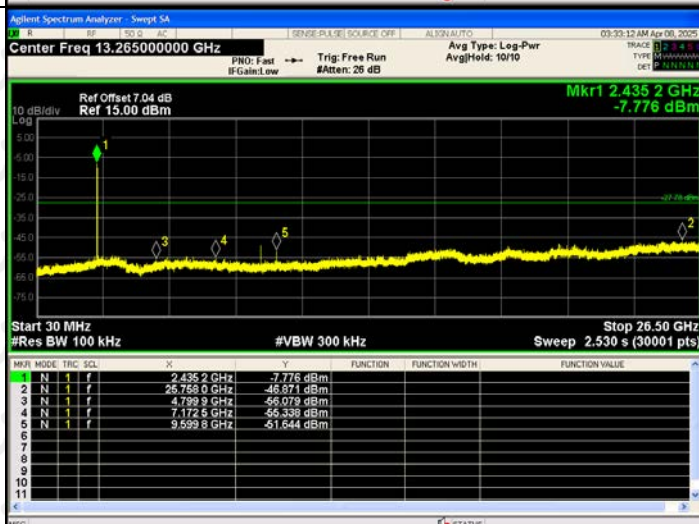


802.11b/HCH

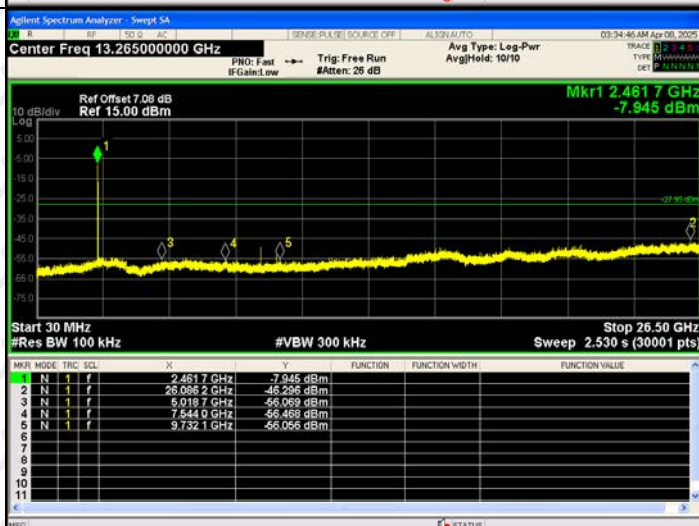


RF Conducted Spurious Emissions Graphs


802.11g/LCH

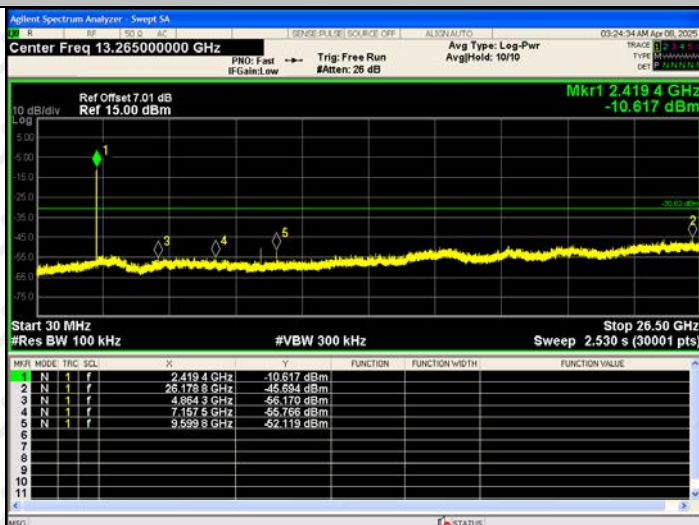

802.11g/MCH

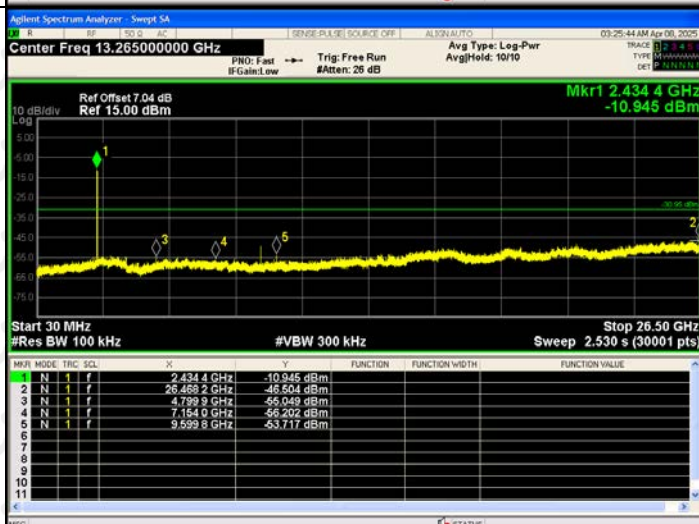


802.11g/HCH

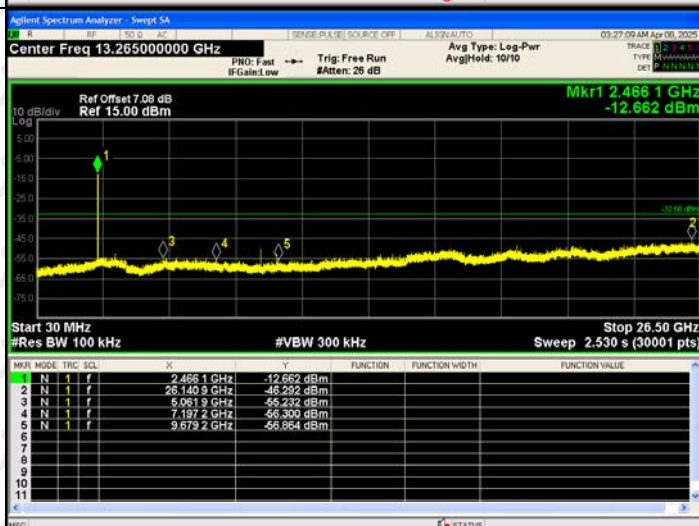


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

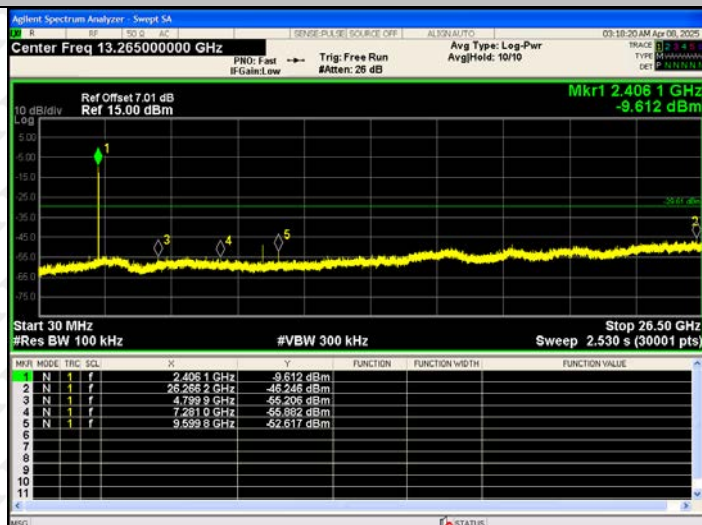


802.11 n(HT20)/MCH

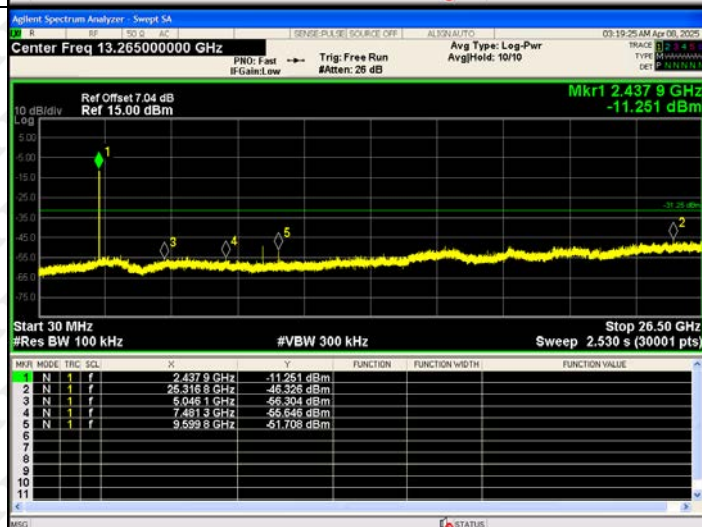


802.11 n(HT20)/HCH

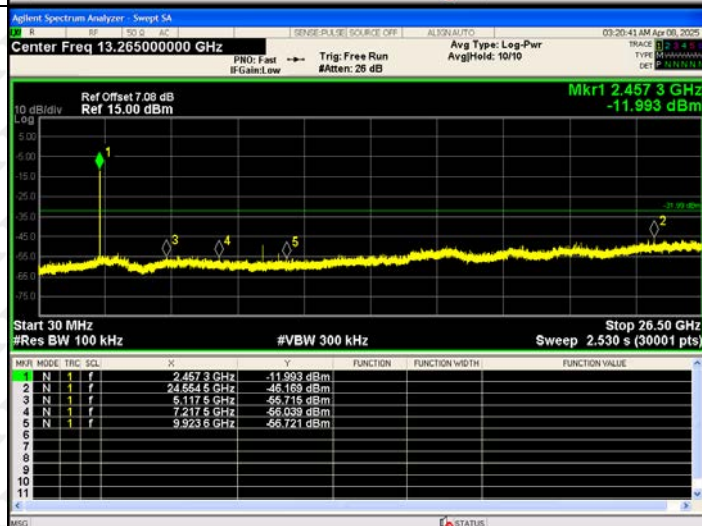


802.11n(HT40)/LCH

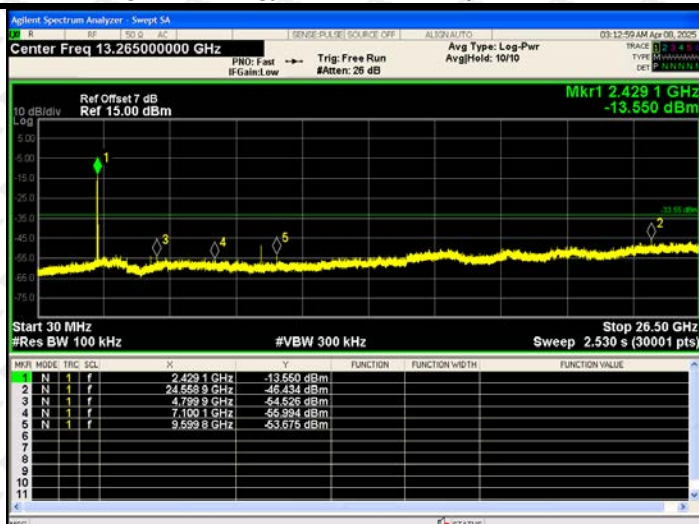

802.11 n(HT40)/MCH

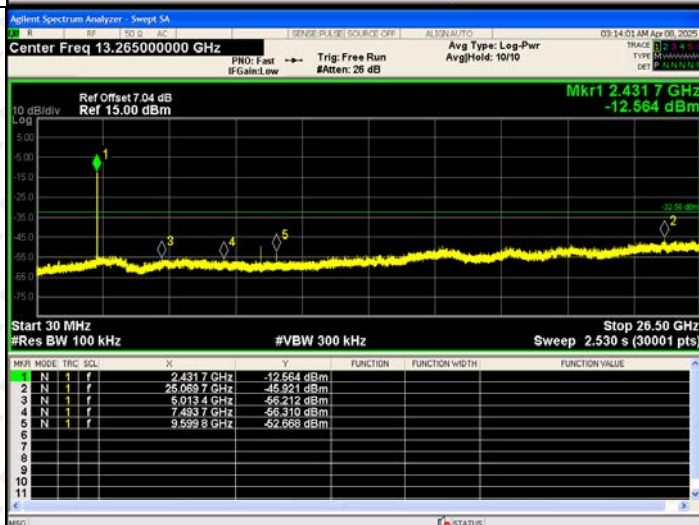


802.11 n(HT40)/HCH

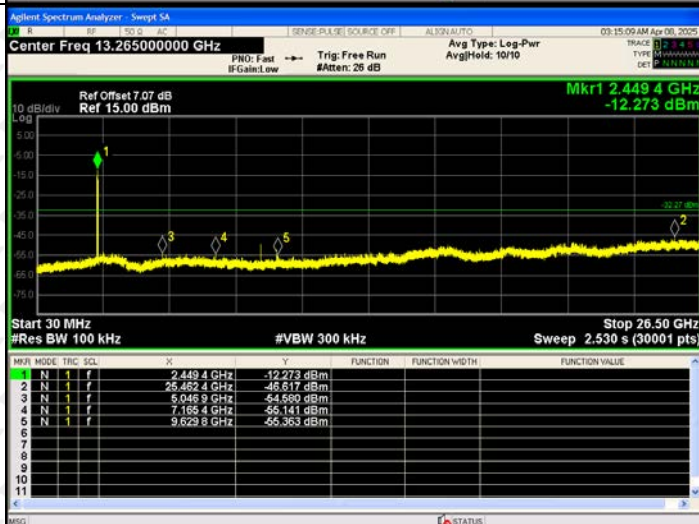


Right ear:

BAND EDGE Graphs

802.11b/LCH

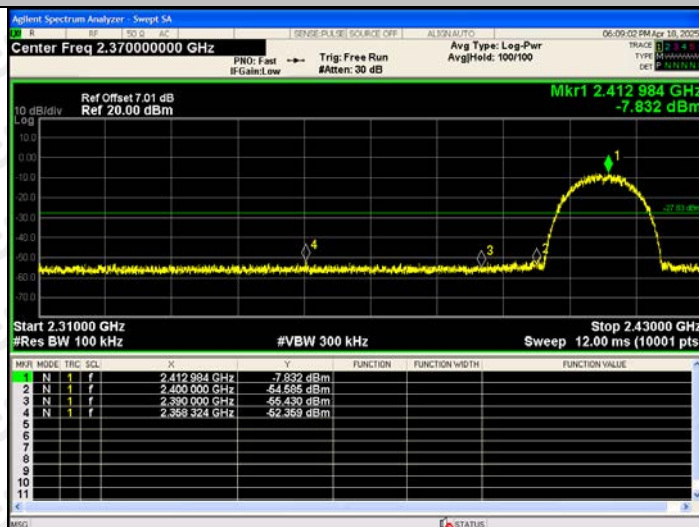


802.11b/HCH

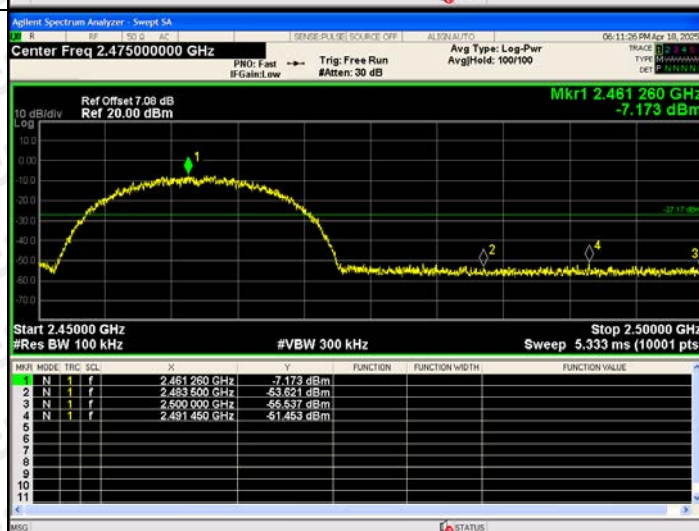



BAND EDGE Graphs

802.11g/LCH

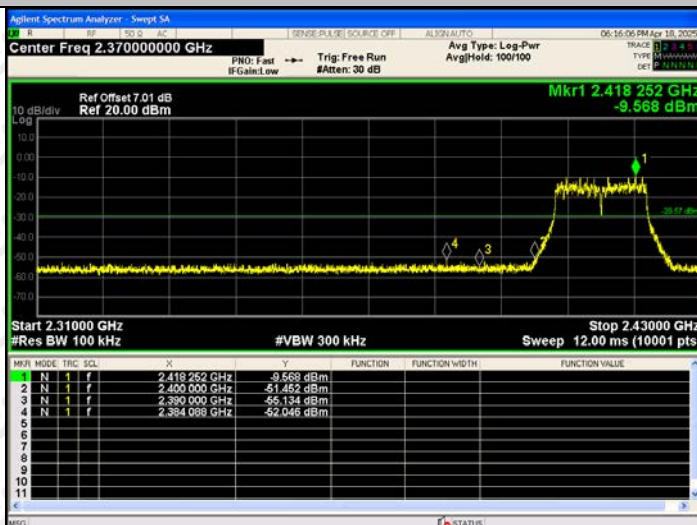

802.11g/HCH

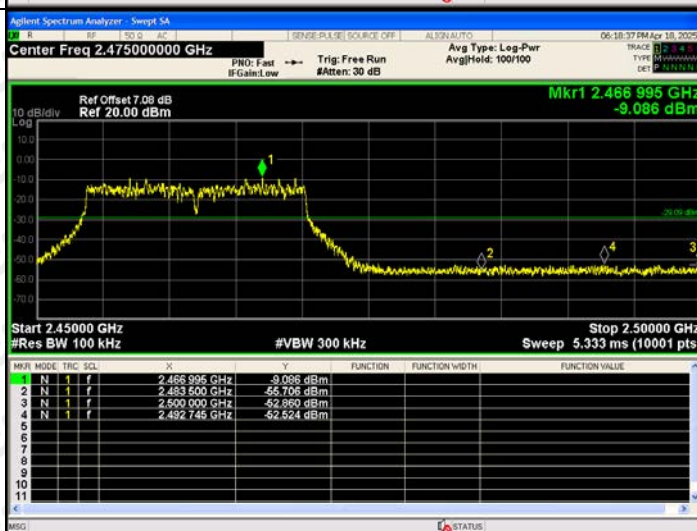


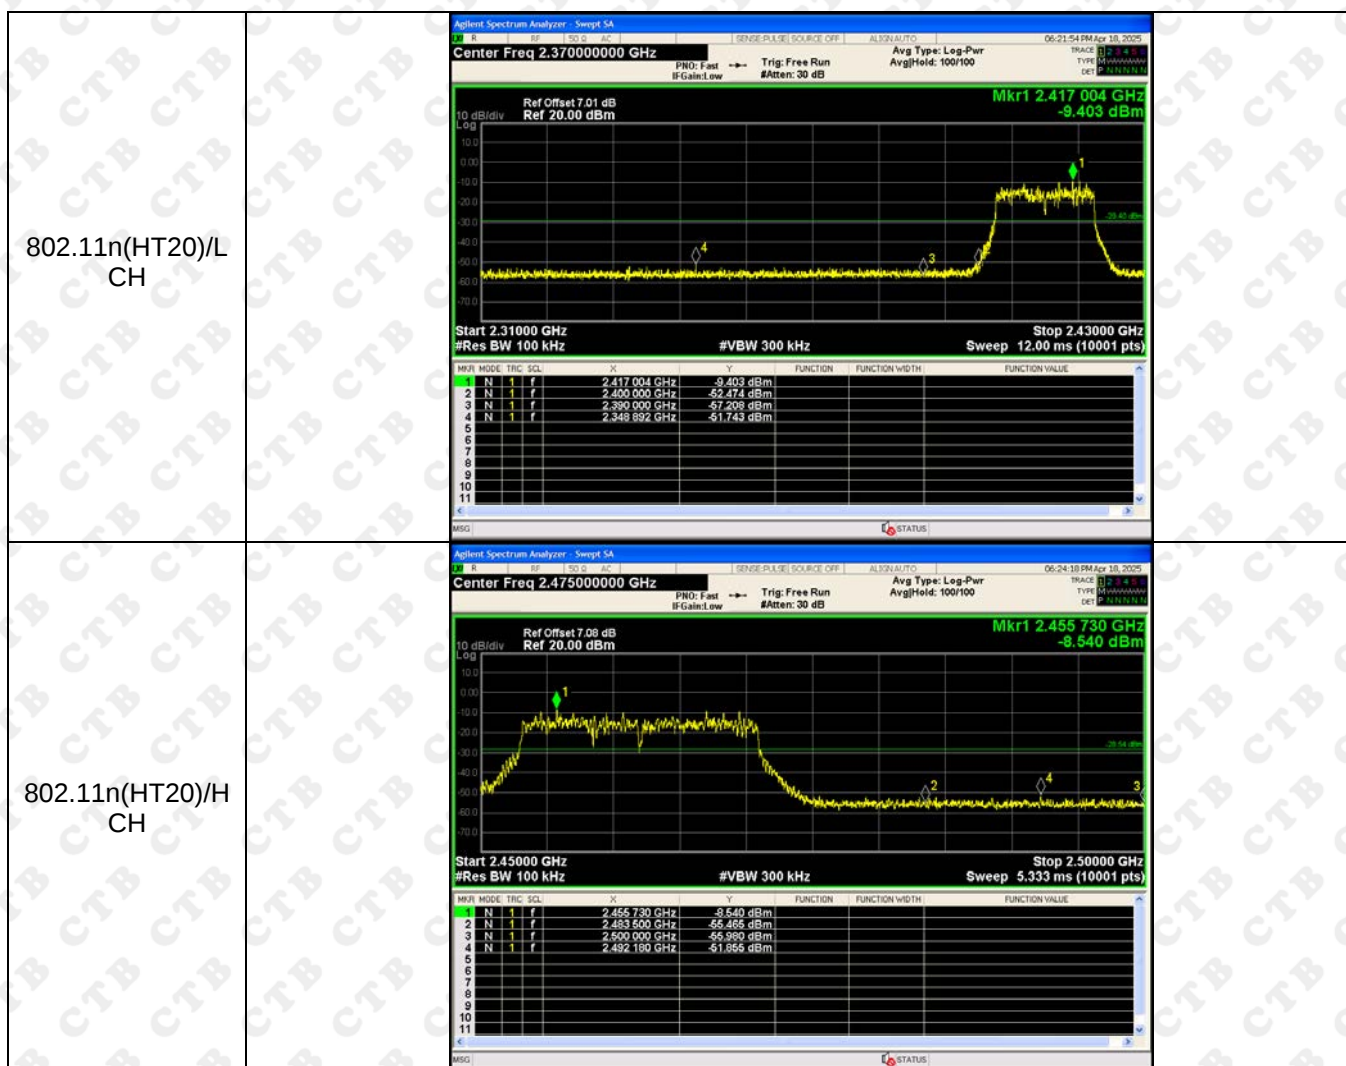




RF Conducted Spurious Emissions Graphs


802.11b/LCH

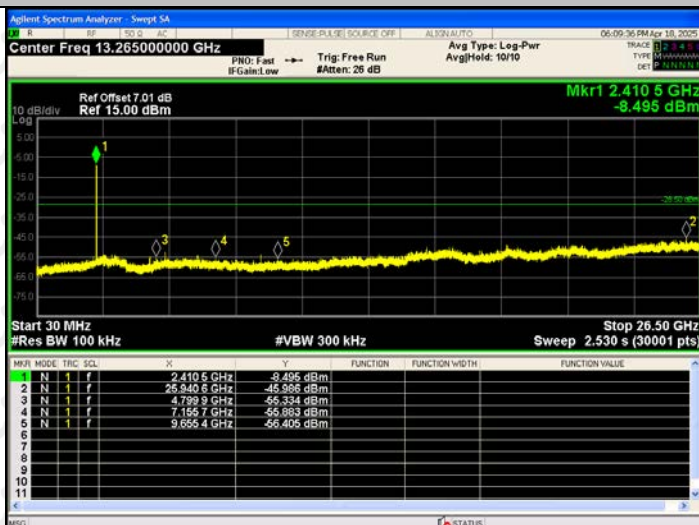

802.11b/MCH

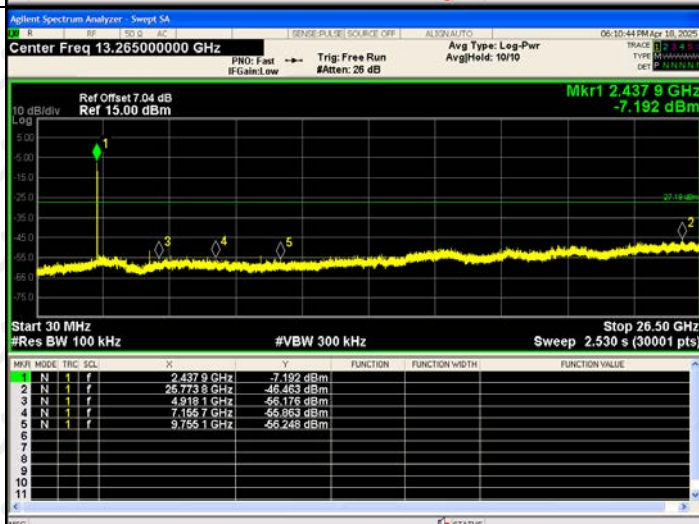


802.11b/HCH

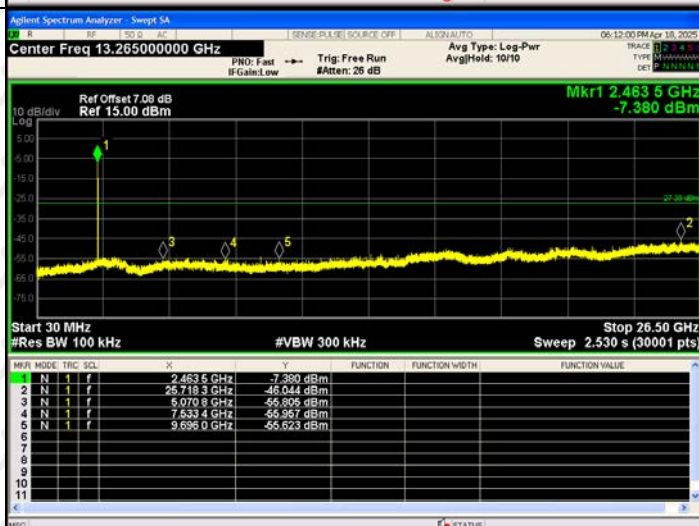


RF Conducted Spurious Emissions Graphs


802.11g/LCH

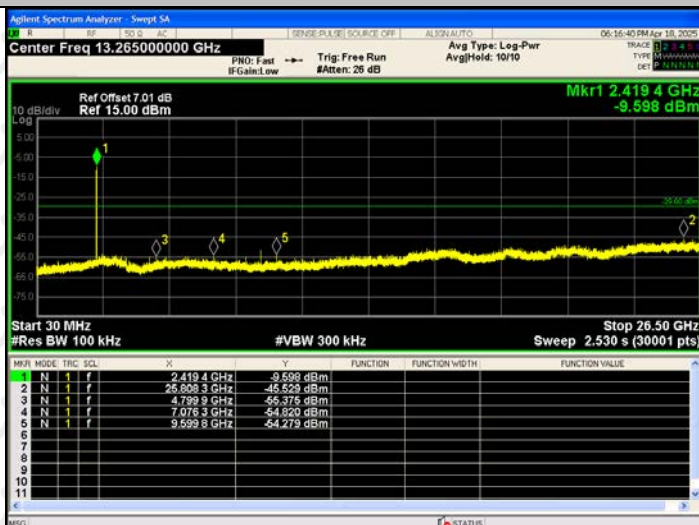

802.11g/MCH

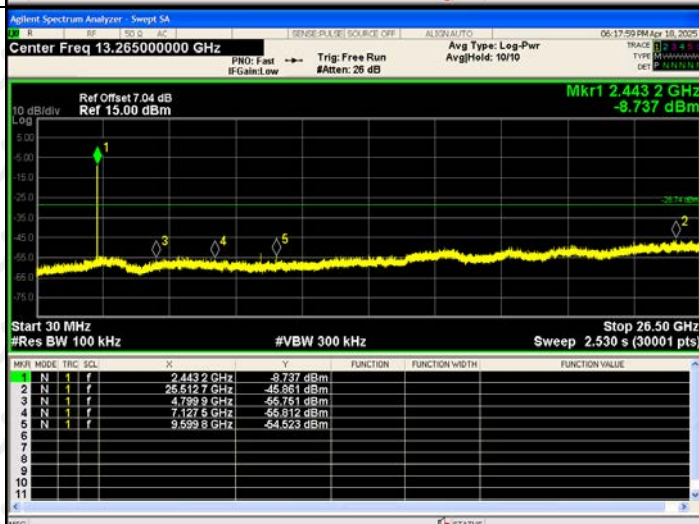


802.11g/HCH

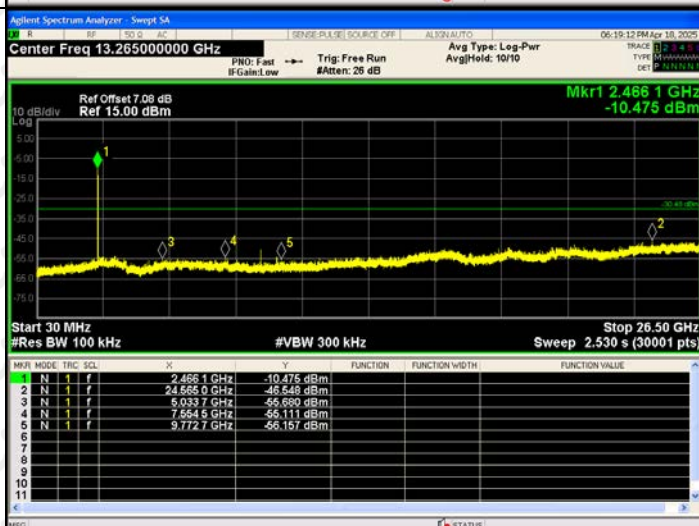


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH

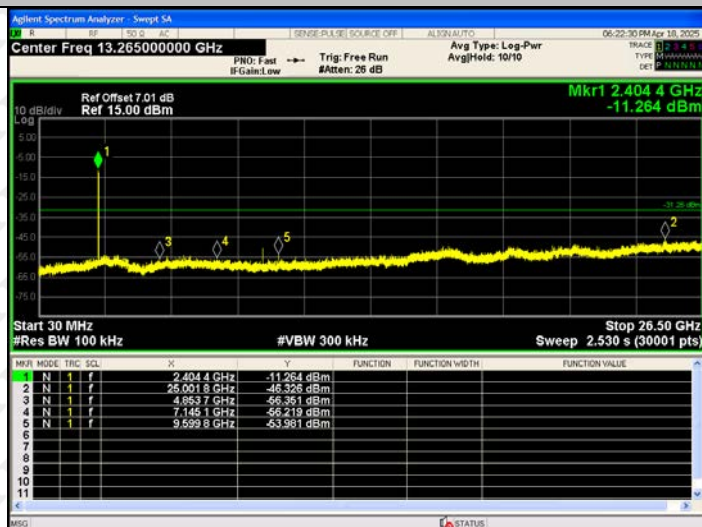

802.11 n(HT20)/MCH

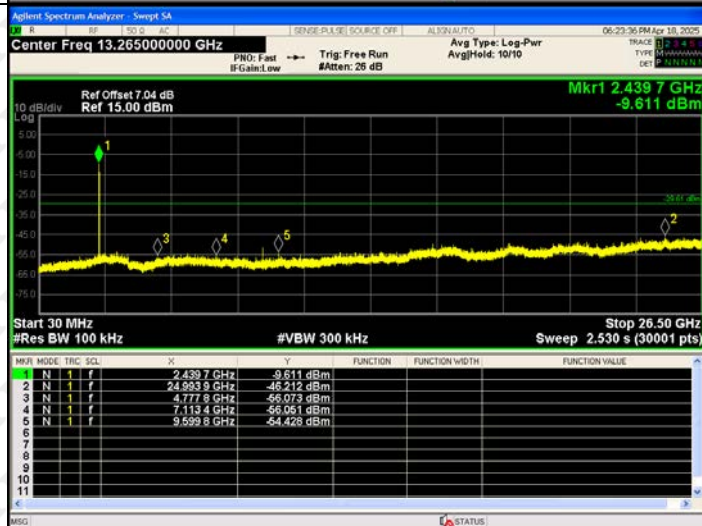

802.11 n(HT20)/HCH

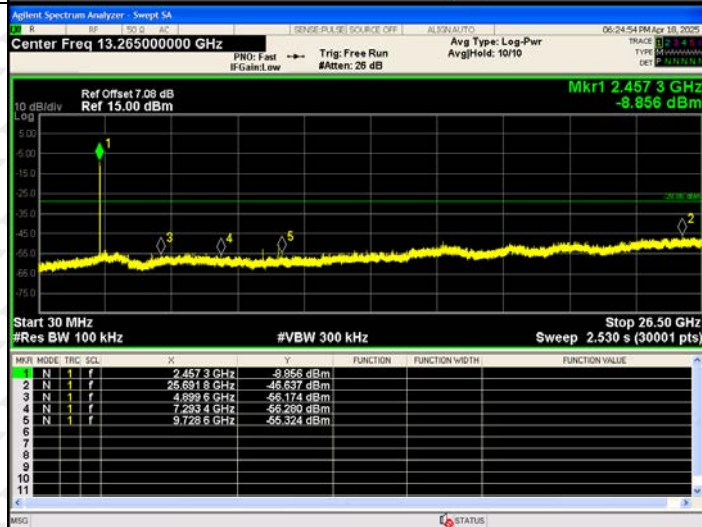

802.11n(HT40)/LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7 dB Ref 15.00 dBm Mkr1 2.4167 GHz -13.365 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MN</th><th>MODE</th><th>TRC</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4167 GHz</td><td>-13.365 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.1779 GHz</td><td>-46.368 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.9940 GHz</td><td>-55.632 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1478 GHz</td><td>-55.750 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5998 GHz</td><td>-52.538 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MN	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4167 GHz	-13.365 dBm				2	N	1	f	26.1779 GHz	-46.368 dBm				3	N	1	f	4.9940 GHz	-55.632 dBm				4	N	1	f	7.1478 GHz	-55.750 dBm				5	N	1	f	9.5998 GHz	-52.538 dBm			
MN	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4167 GHz	-13.365 dBm																																																		
2	N	1	f	26.1779 GHz	-46.368 dBm																																																		
3	N	1	f	4.9940 GHz	-55.632 dBm																																																		
4	N	1	f	7.1478 GHz	-55.750 dBm																																																		
5	N	1	f	9.5998 GHz	-52.538 dBm																																																		
802.11 n(HT40)/MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.4520 GHz -11.762 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MN</th><th>MODE</th><th>TRC</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4520 GHz</td><td>-11.762 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.0680 GHz</td><td>-45.714 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7999 GHz</td><td>-54.895 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1345 GHz</td><td>-55.560 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5998 GHz</td><td>-53.407 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MN	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4520 GHz	-11.762 dBm				2	N	1	f	26.0680 GHz	-45.714 dBm				3	N	1	f	4.7999 GHz	-54.895 dBm				4	N	1	f	7.1345 GHz	-55.560 dBm				5	N	1	f	9.5998 GHz	-53.407 dBm			
MN	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4520 GHz	-11.762 dBm																																																		
2	N	1	f	26.0680 GHz	-45.714 dBm																																																		
3	N	1	f	4.7999 GHz	-54.895 dBm																																																		
4	N	1	f	7.1345 GHz	-55.560 dBm																																																		
5	N	1	f	9.5998 GHz	-53.407 dBm																																																		
802.11 n(HT40)/HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.4467 GHz -13.420 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.530 s (30001 pts) <table><thead><tr><th>MN</th><th>MODE</th><th>TRC</th><th>SQ</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4467 GHz</td><td>-13.420 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.7509 GHz</td><td>-45.822 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.7999 GHz</td><td>-54.875 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4785 GHz</td><td>-55.079 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.8142 GHz</td><td>-56.465 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MN	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4467 GHz	-13.420 dBm				2	N	1	f	26.7509 GHz	-45.822 dBm				3	N	1	f	4.7999 GHz	-54.875 dBm				4	N	1	f	7.4785 GHz	-55.079 dBm				5	N	1	f	9.8142 GHz	-56.465 dBm			
MN	MODE	TRC	SQ	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4467 GHz	-13.420 dBm																																																		
2	N	1	f	26.7509 GHz	-45.822 dBm																																																		
3	N	1	f	4.7999 GHz	-54.875 dBm																																																		
4	N	1	f	7.4785 GHz	-55.079 dBm																																																		
5	N	1	f	9.8142 GHz	-56.465 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure

1. The EUT was directly connected to the Power meter

For Duty cycle:

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.

b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

1) Set the center frequency of the instrument to the center frequency of the transmission.

2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.

3) Set $VBW \geq RBW$. Set detector = peak or average.

4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

9.4 Test Result

Left ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	8.459	30	PASS
	MCH	8.964	30	PASS
	HCH	8.895	30	PASS
802.11g	LCH	7.718	30	PASS
	MCH	8.229	30	PASS
	HCH	8.235	30	PASS
802.11n(HT20)	LCH	7.376	30	PASS
	MCH	8.067	30	PASS
	HCH	7.861	30	PASS
802.11n(HT40)	LCH	7.207	30	PASS

	MCH	7.491	30	PASS
	HCH	7.912	30	PASS

Duty Cycle

Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
802.11b	LCH	100	0
802.11g	LCH	100	0
802.11n(HT20)	LCH	100	0
802.11n(HT40)	LCH	100	0

Right ear:

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
802.11b	LCH	8.701	30	PASS
	MCH	8.656	30	PASS
	HCH	8.556	30	PASS
802.11g	LCH	7.659	30	PASS
	MCH	8.406	30	PASS
	HCH	8.222	30	PASS
802.11n(HT20)	LCH	7.598	30	PASS
	MCH	8.23	30	PASS
	HCH	8.212	30	PASS
802.11n(HT40)	LCH	7.5	30	PASS
	MCH	7.571	30	PASS
	HCH	8.377	30	PASS

Duty Cycle


Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
802.11b	LCH	100	0
802.11g	LCH	100	0
802.11n(HT20)	LCH	100	0
802.11n(HT40)	LCH	100	0

Duty Cycle

Left ear:


802.11b:

Test Graph:

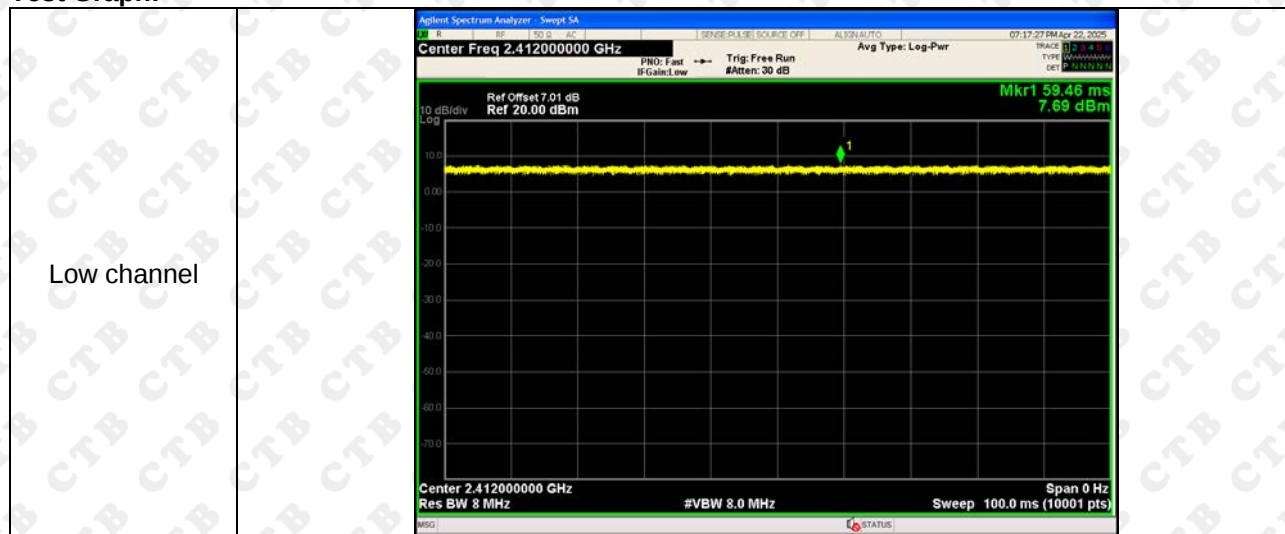

802.11g:

Test Graph:

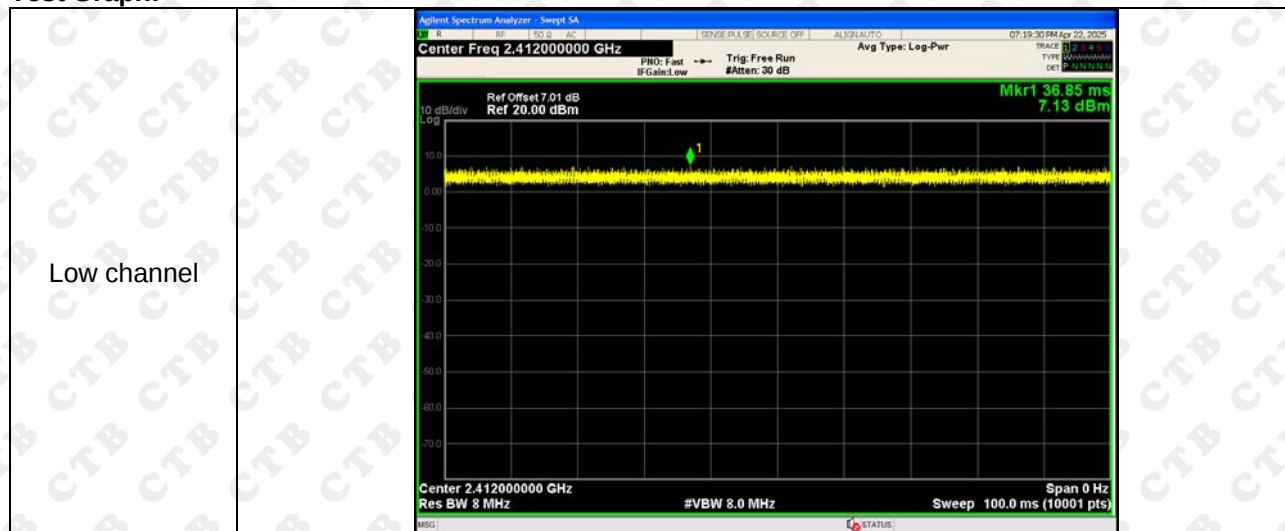


802.11n(HT20):

Test Graph:



802.11n(HT40):


Test Graph:

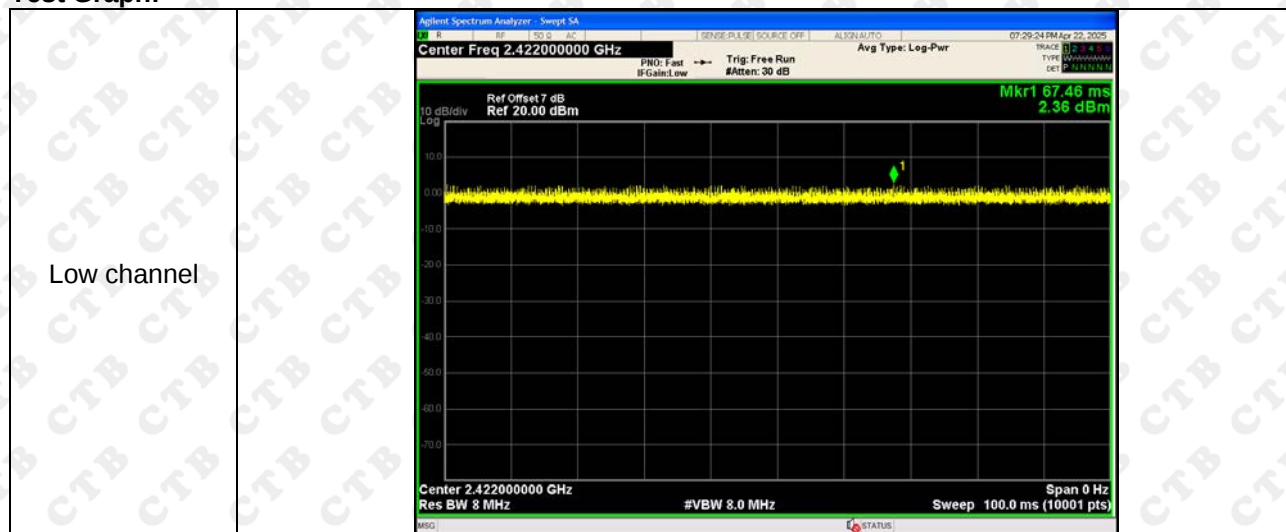

Right ear:


802.11b:

Test Graph:

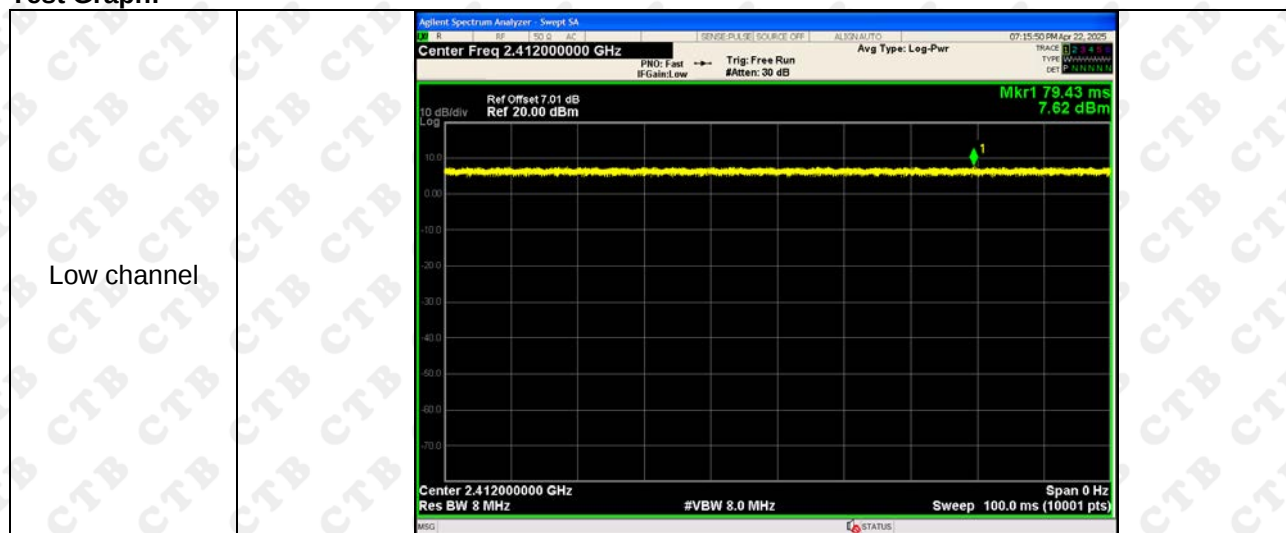


802.11g:

Test Graph:

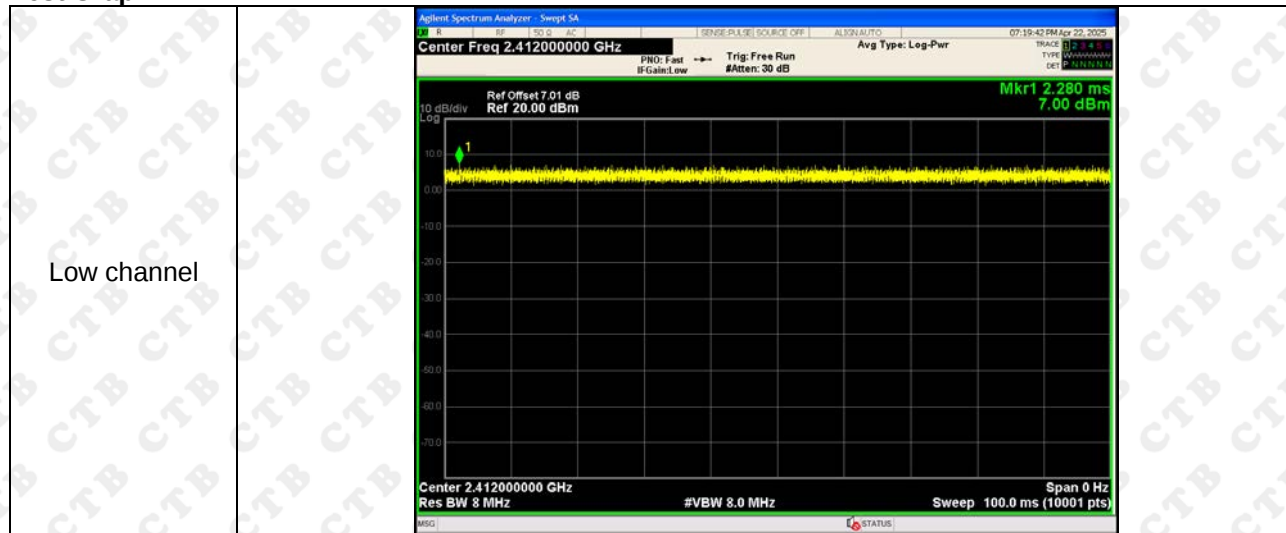


802.11n(HT20):

Test Graph:

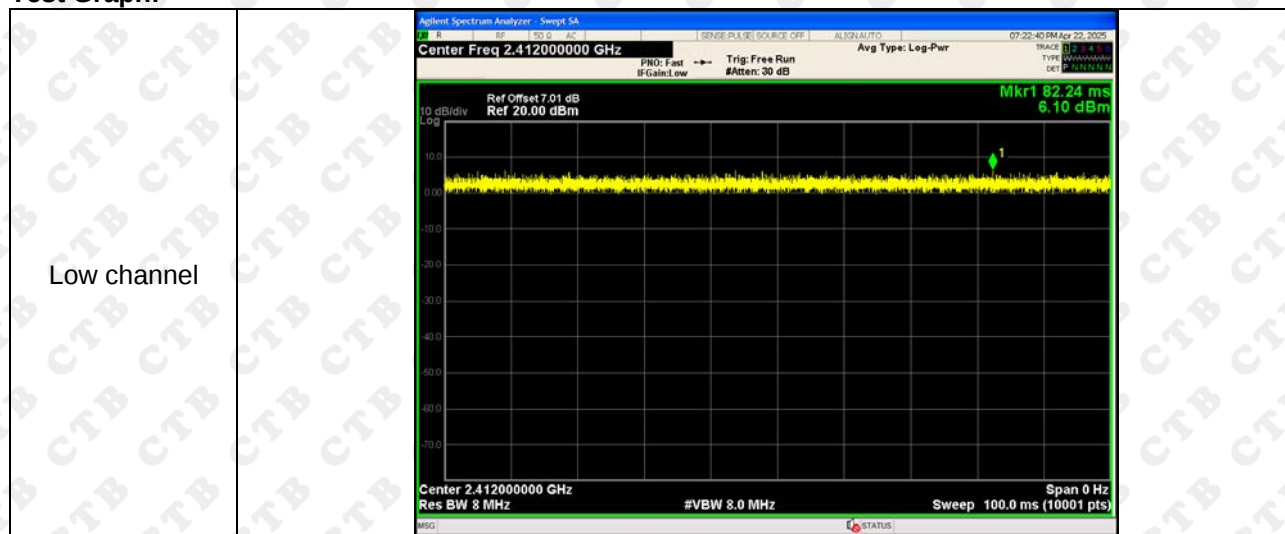


802.11n(HT40):

Test Graph:

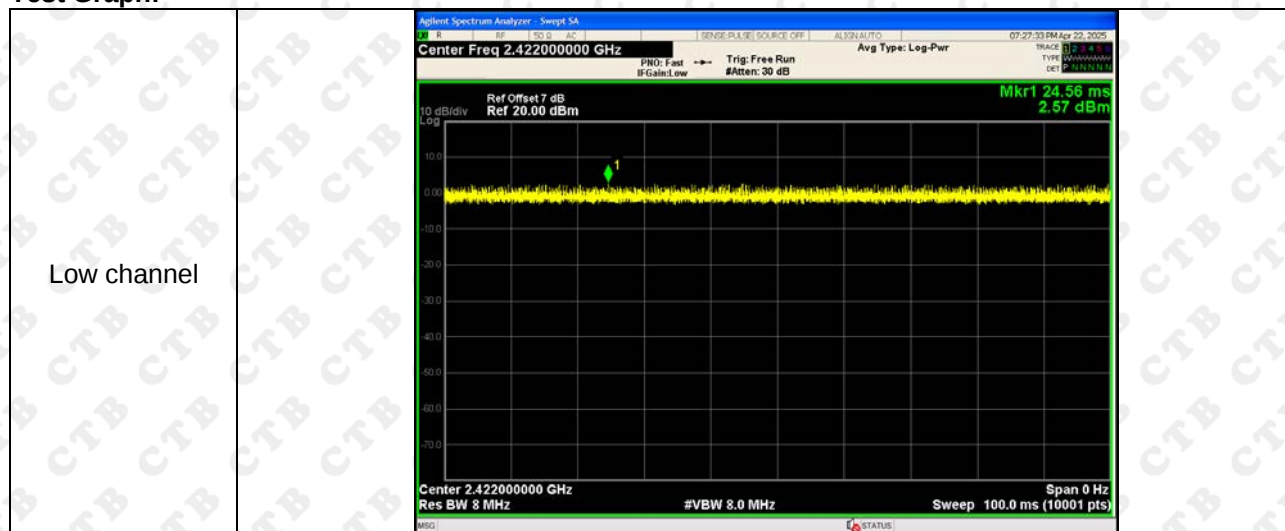

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

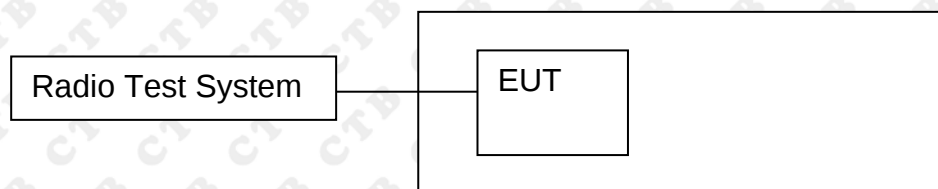

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Left ear:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.027	500	PASS
	MCH	10.415	500	PASS
	HCH	10.778	500	PASS
802.11g	LCH	16.359	500	PASS
	MCH	16.098	500	PASS
	HCH	16.089	500	PASS
802.11n(HT20)	LCH	17.607	500	PASS
	MCH	16.615	500	PASS
	HCH	16.452	500	PASS
802.11n(HT40)	LCH	35.663	500	PASS
	MCH	35.66	500	PASS
	HCH	35.205	500	PASS

Right ear:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.582	500	PASS
	MCH	10.608	500	PASS
	HCH	10.09	500	PASS
802.11g	LCH	16.275	500	PASS
	MCH	15.525	500	PASS
	HCH	16.365	500	PASS
802.11n(HT20)	LCH	17.114	500	PASS
	MCH	16.724	500	PASS
	HCH	17.595	500	PASS
802.11n(HT40)	LCH	35.337	500	PASS
	MCH	35.166	500	PASS
	HCH	35.44	500	PASS

Test Graph:
Left ear:

Graphs

802.11b /LCH




802.11b /MCH




802.11b/HCH




802.11g/LCH


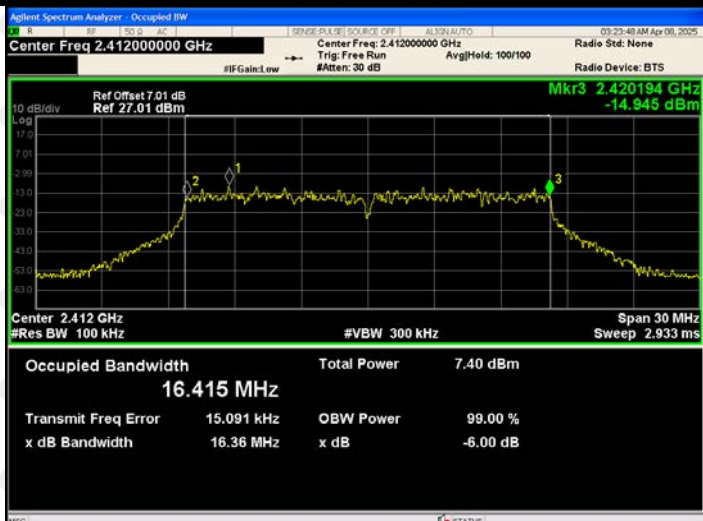





802.11g/MCH

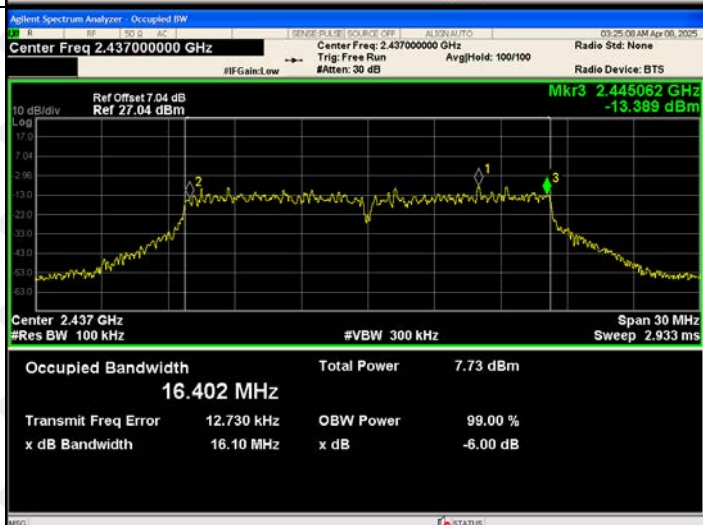

802.11g/HCH

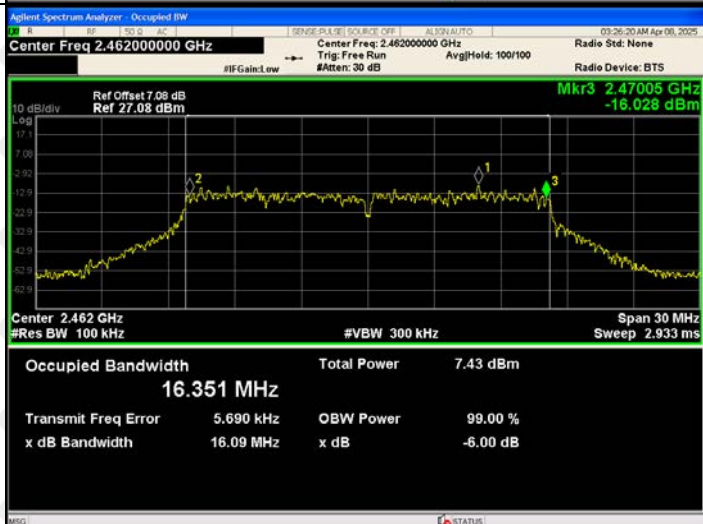

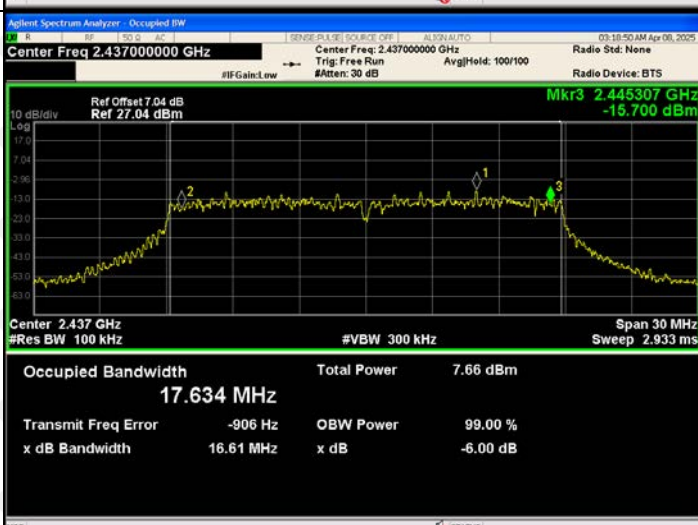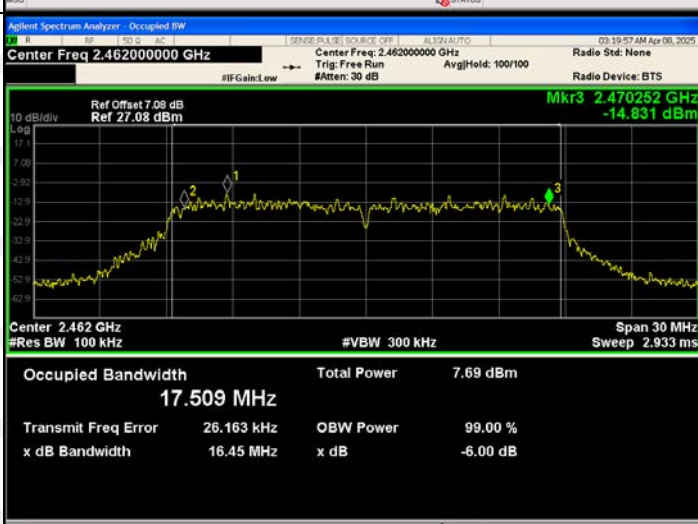802.11n(HT20)/LC H	 <table><tr><th colspan="2">Occupied Bandwidth</th><th colspan="2">Total Power</th></tr><tr><td colspan="2">17.606 MHz</td><td colspan="2">7.06 dBm</td></tr><tr><td>Transmit Freq Error</td><td>2.344 kHz</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>17.61 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth		Total Power		17.606 MHz		7.06 dBm		Transmit Freq Error	2.344 kHz	OBW Power	99.00 %	x dB Bandwidth	17.61 MHz	x dB	-6.00 dB
Occupied Bandwidth		Total Power															
17.606 MHz		7.06 dBm															
Transmit Freq Error	2.344 kHz	OBW Power	99.00 %														
x dB Bandwidth	17.61 MHz	x dB	-6.00 dB														
802.11n(HT20)/MC H	 <table><tr><th colspan="2">Occupied Bandwidth</th><th colspan="2">Total Power</th></tr><tr><td colspan="2">17.634 MHz</td><td colspan="2">7.66 dBm</td></tr><tr><td>Transmit Freq Error</td><td>-906 Hz</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>16.61 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth		Total Power		17.634 MHz		7.66 dBm		Transmit Freq Error	-906 Hz	OBW Power	99.00 %	x dB Bandwidth	16.61 MHz	x dB	-6.00 dB
Occupied Bandwidth		Total Power															
17.634 MHz		7.66 dBm															
Transmit Freq Error	-906 Hz	OBW Power	99.00 %														
x dB Bandwidth	16.61 MHz	x dB	-6.00 dB														
802.11n(HT20)/HC H	 <table><tr><th colspan="2">Occupied Bandwidth</th><th colspan="2">Total Power</th></tr><tr><td colspan="2">17.509 MHz</td><td colspan="2">7.69 dBm</td></tr><tr><td>Transmit Freq Error</td><td>26.163 kHz</td><td>OBW Power</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>16.45 MHz</td><td>x dB</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth		Total Power		17.509 MHz		7.69 dBm		Transmit Freq Error	26.163 kHz	OBW Power	99.00 %	x dB Bandwidth	16.45 MHz	x dB	-6.00 dB
Occupied Bandwidth		Total Power															
17.509 MHz		7.69 dBm															
Transmit Freq Error	26.163 kHz	OBW Power	99.00 %														
x dB Bandwidth	16.45 MHz	x dB	-6.00 dB														

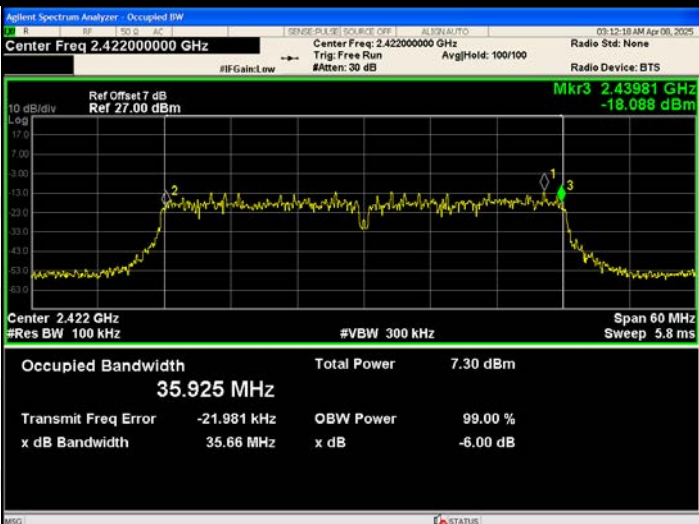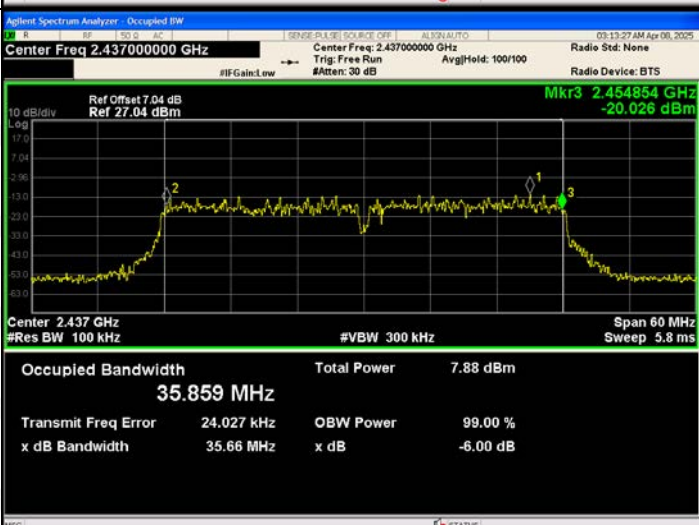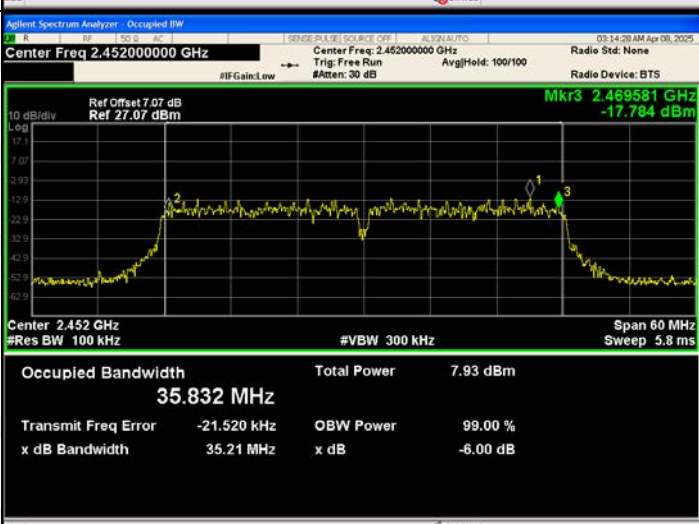802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.43981 GHz -18.088 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.925 MHz Total Power 7.30 dBm Transmit Freq Error -21.981 kHz OBW Power 99.00 % x dB Bandwidth 35.66 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.454854 GHz -20.026 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.859 MHz Total Power 7.88 dBm Transmit Freq Error 24.027 kHz OBW Power 99.00 % x dB Bandwidth 35.66 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.469581 GHz -17.784 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.832 MHz Total Power 7.93 dBm Transmit Freq Error -21.520 kHz OBW Power 99.00 % x dB Bandwidth 35.21 MHz x dB -6.00 dB

Right ear:

Graphs

802.11b /LCH




802.11b /MCH




802.11b/HCH




802.11g/LCH



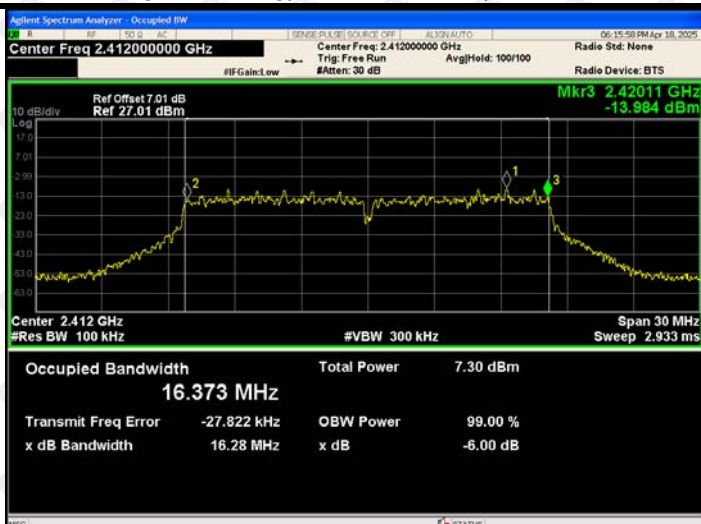





802.11g/MCH

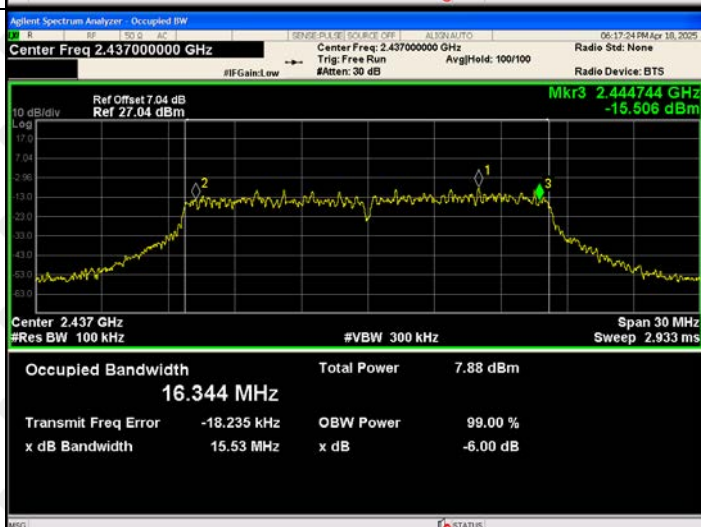

802.11g/HCH

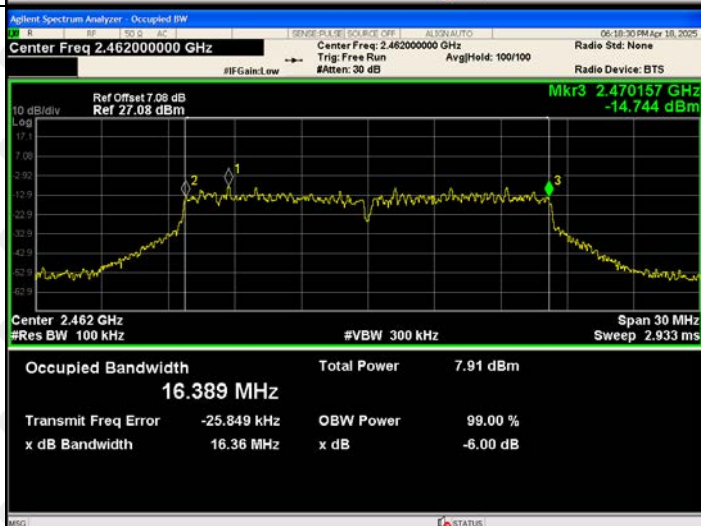


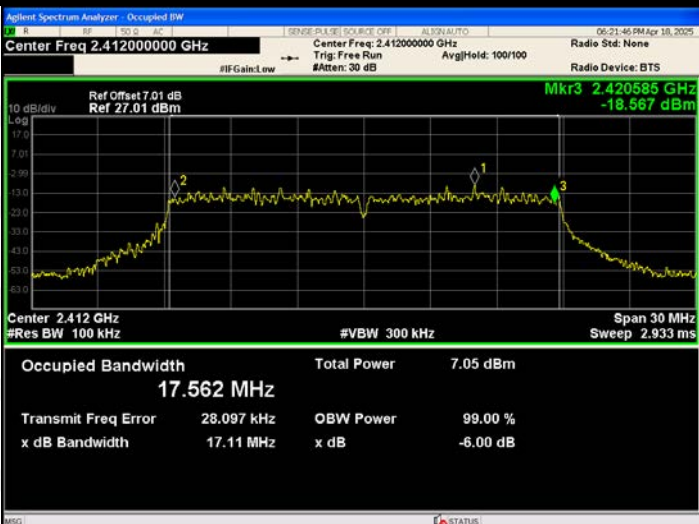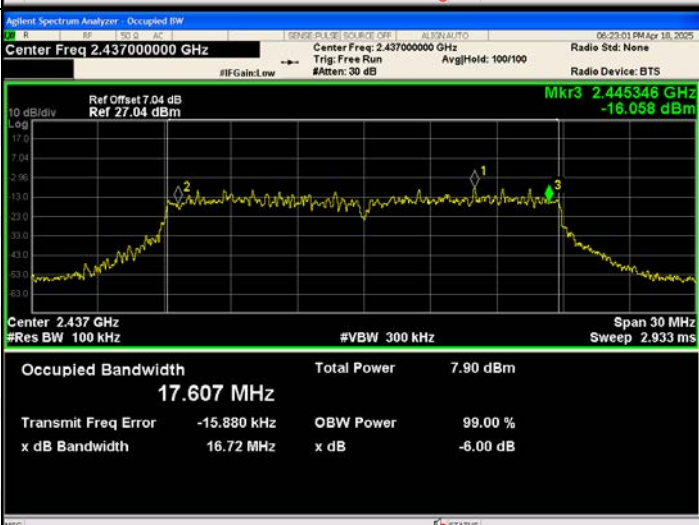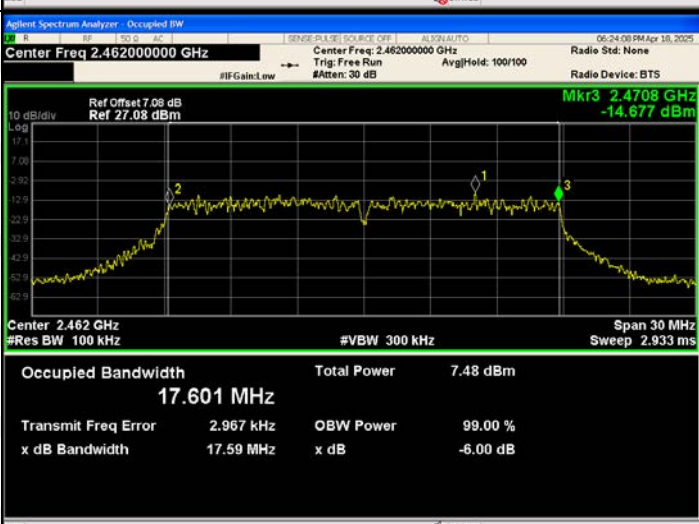802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420585 GHz -18.567 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.562 MHz Total Power 7.05 dBm Transmit Freq Error 28.097 kHz OBW Power 99.00 % x dB Bandwidth 17.11 MHz x dB -6.00 dB Radio Device: BTS
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445346 GHz -16.058 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.607 MHz Total Power 7.90 dBm Transmit Freq Error -15.880 kHz OBW Power 99.00 % x dB Bandwidth 16.72 MHz x dB -6.00 dB Radio Device: BTS
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.06 dB Ref 27.06 dBm Mkr3 2.4708 GHz -14.677 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.601 MHz Total Power 7.48 dBm Transmit Freq Error 2.967 kHz OBW Power 99.00 % x dB Bandwidth 17.59 MHz x dB -6.00 dB Radio Device: BTS

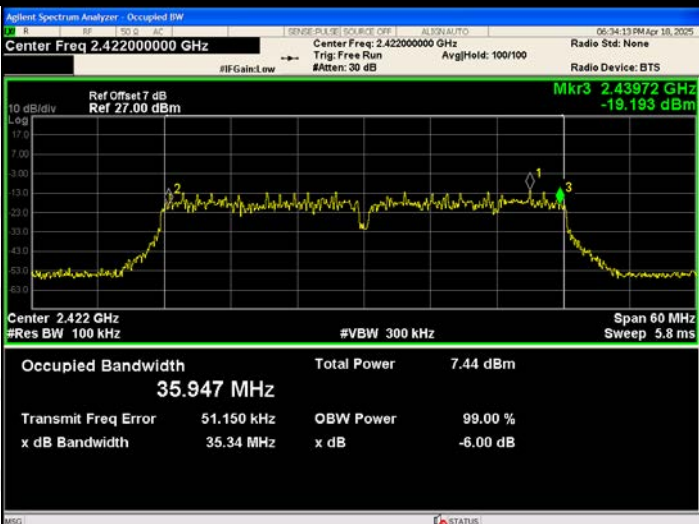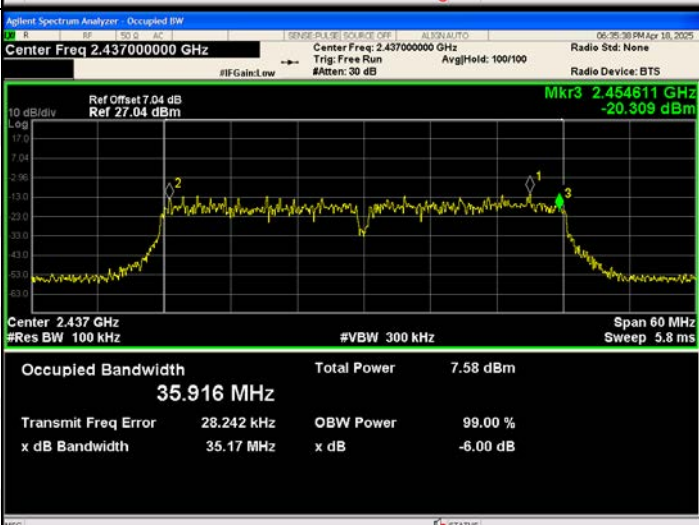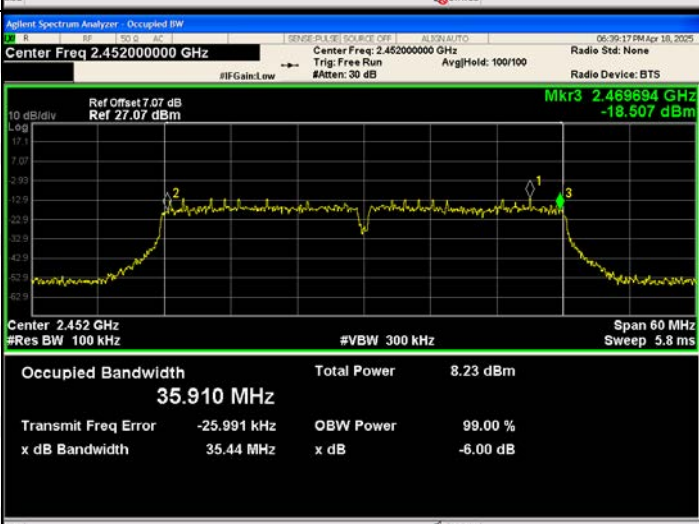802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.43972 GHz -19.193 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.947 MHz Total Power 7.44 dBm Transmit Freq Error 51.150 kHz OBW Power 99.00 % x dB Bandwidth 35.34 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.454611 GHz -20.309 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.916 MHz Total Power 7.58 dBm Transmit Freq Error 28.242 kHz OBW Power 99.00 % x dB Bandwidth 35.17 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.469694 GHz -18.507 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.910 MHz Total Power 8.23 dBm Transmit Freq Error -25.991 kHz OBW Power 99.00 % x dB Bandwidth 35.44 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

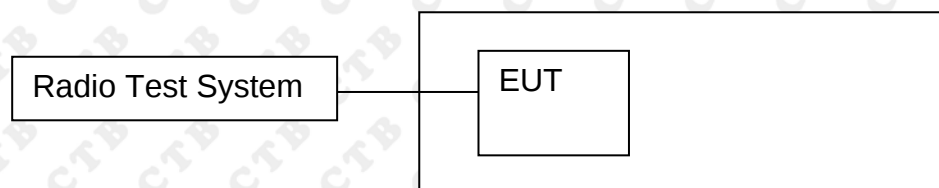

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result


Left ear:

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.314	8	PASS
	MCH	-20.724	8	PASS
	HCH	-20.934	8	PASS
802.11g	LCH	-26.174	8	PASS
	MCH	-24.737	8	PASS
	HCH	-24.793	8	PASS
802.11n(H T20)	LCH	-24.498	8	PASS
	MCH	-23.556	8	PASS
	HCH	-24.069	8	PASS
802.11n(H T40)	LCH	-29.594	8	PASS
	MCH	-28.904	8	PASS
	HCH	-28.84	8	PASS


Right ear:

Mode	Channel.	Power Spectral Density [dBm /3KHz]	Limit(8 dBm (in any 3KHz))	Verdict
802.11b	LCH	-21.519	8	PASS
	MCH	-21.162	8	PASS
	HCH	-21.373	8	PASS
802.11g	LCH	-24.922	8	PASS
	MCH	-24.814	8	PASS
	HCH	-24.582	8	PASS
802.11n(H T20)	LCH	-24.244	8	PASS
	MCH	-23.518	8	PASS
	HCH	-26.148	8	PASS
802.11n(H T40)	LCH	-29.503	8	PASS
	MCH	-27.7	8	PASS
	HCH	-28.314	8	PASS


Test Graph

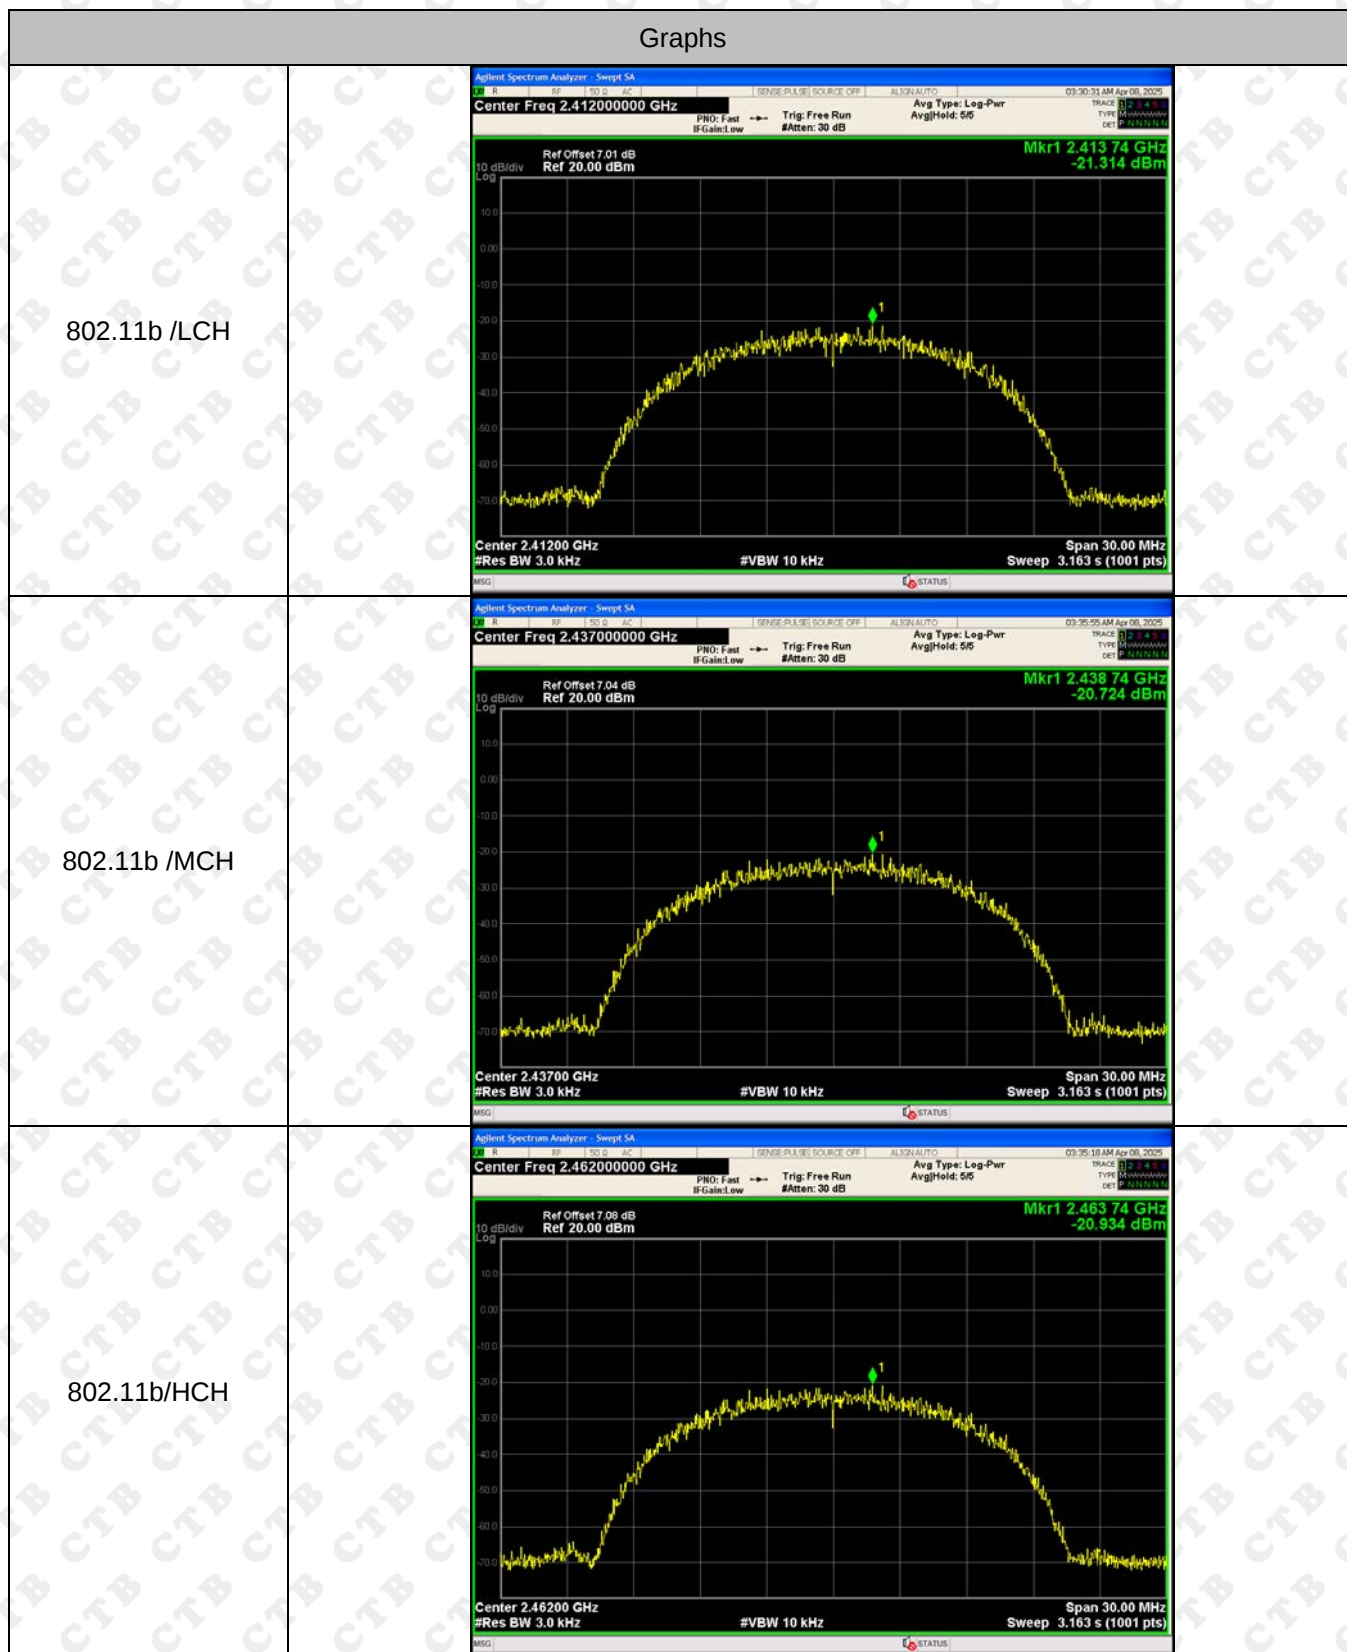


802.11g/LCH



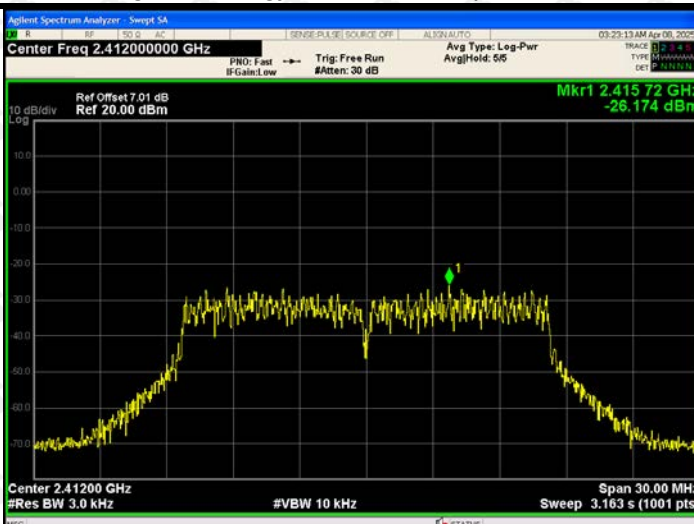





802.11g/MCH

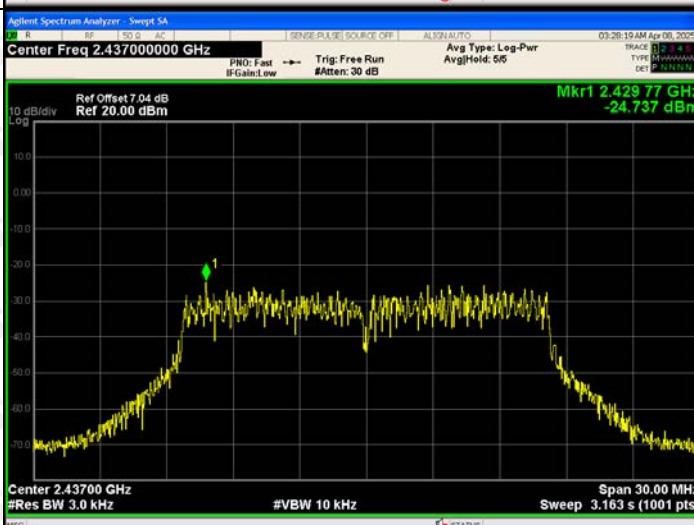

802.11g/HCH

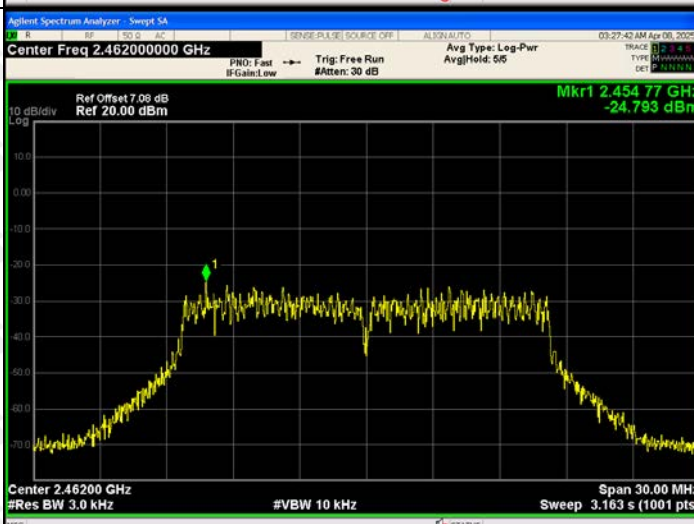

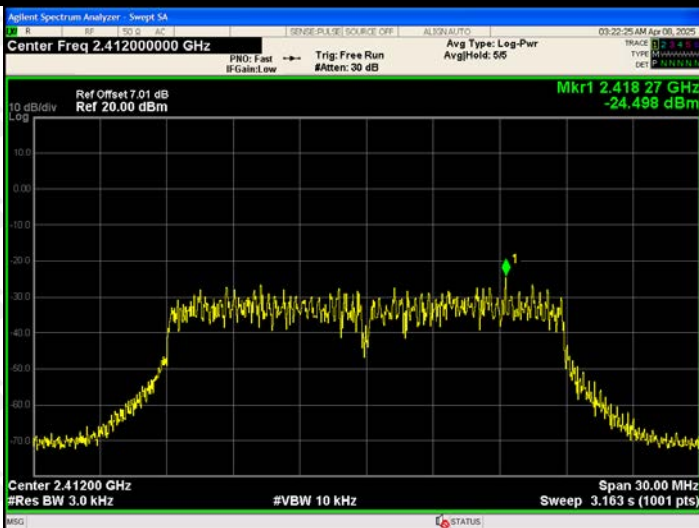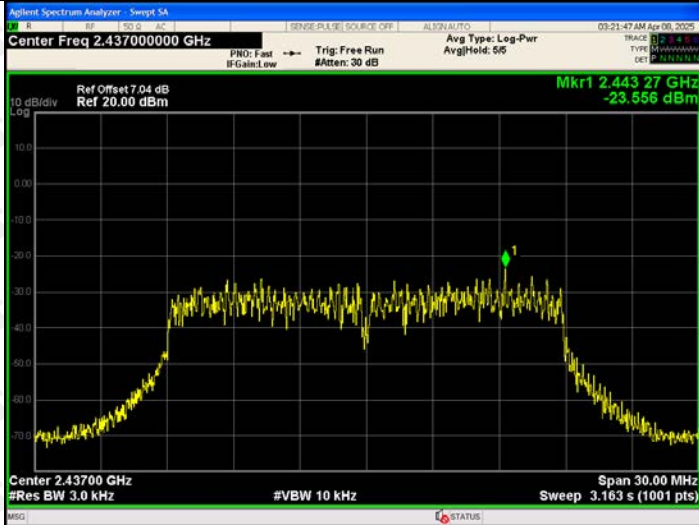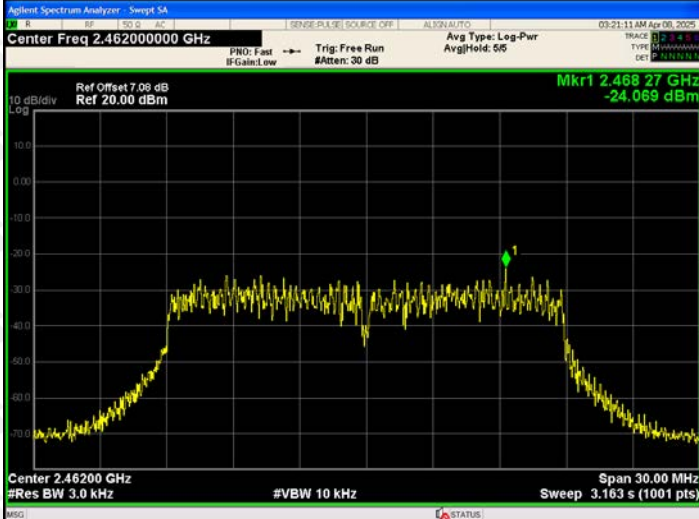802.11n(HT20)/LCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41827 GHz -24.498 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44327 GHz -23.556 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HCH	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.46827 GHz -24.069 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

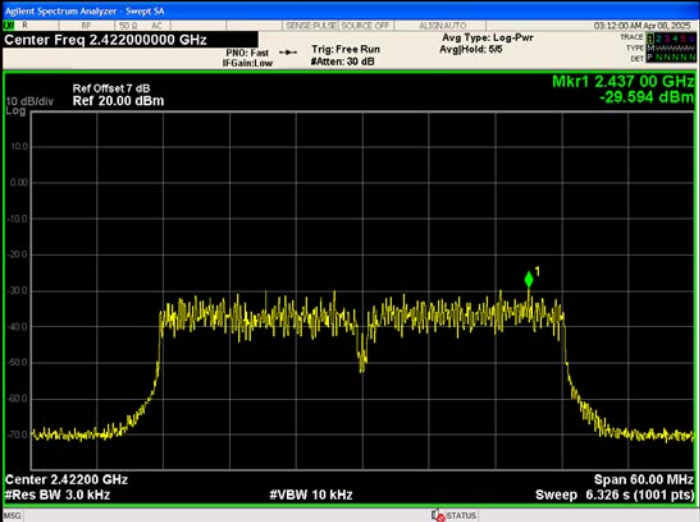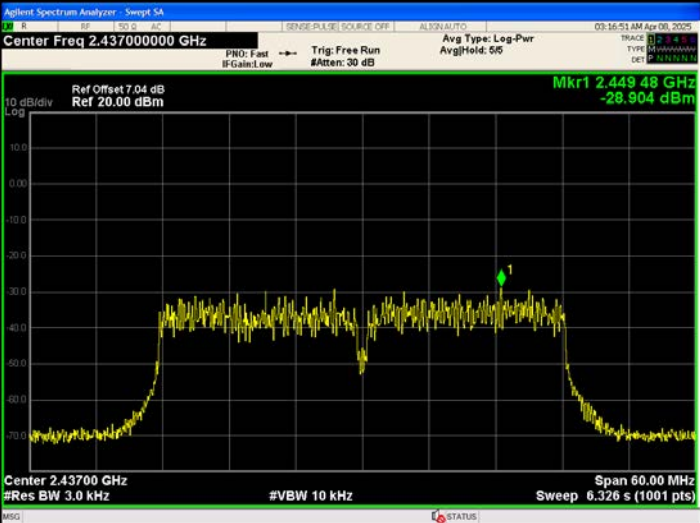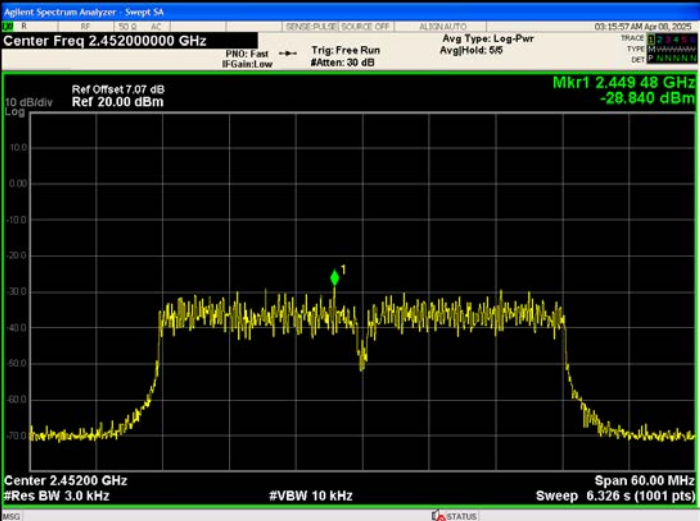802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.437 00 GHz -29.594 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.449 48 GHz -28.904 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.449 48 GHz -28.840 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

Right ear:

Graphs

802.11b /LCH




802.11b /MCH




802.11b/HCH




802.11g/LCH

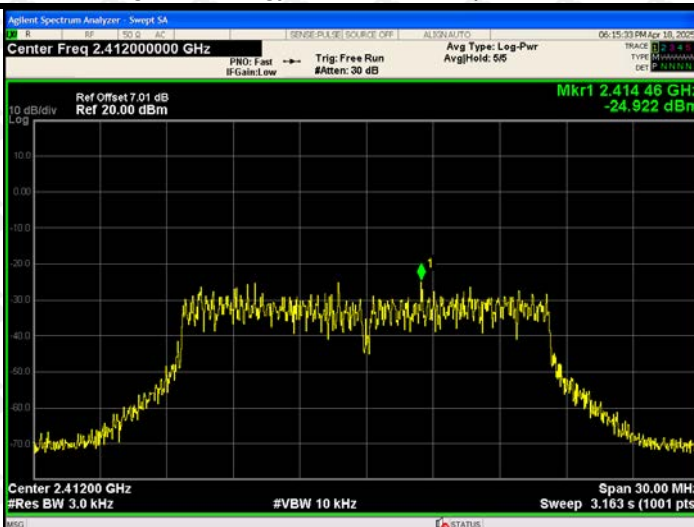


802.11g/MCH

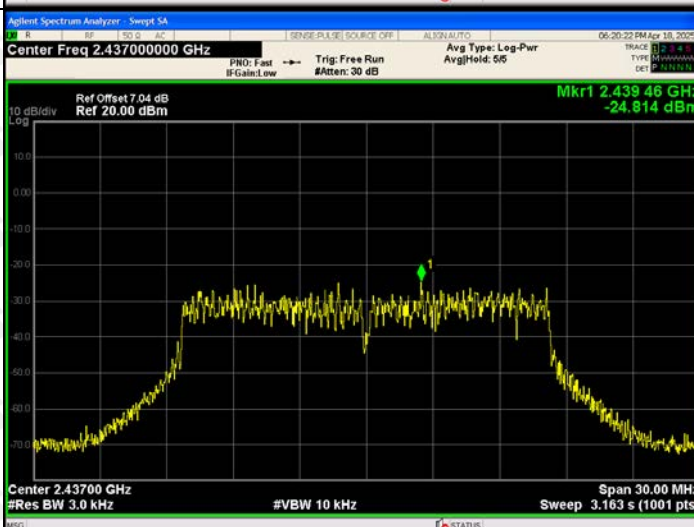


802.11g/HCH

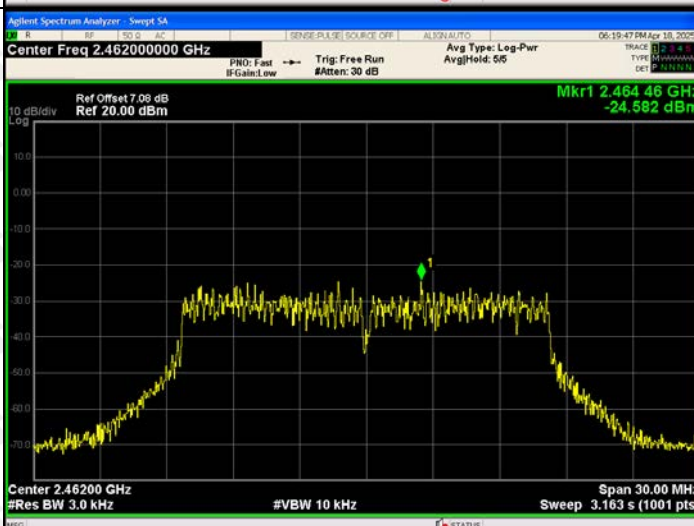


802.11n(HT20)/LCH



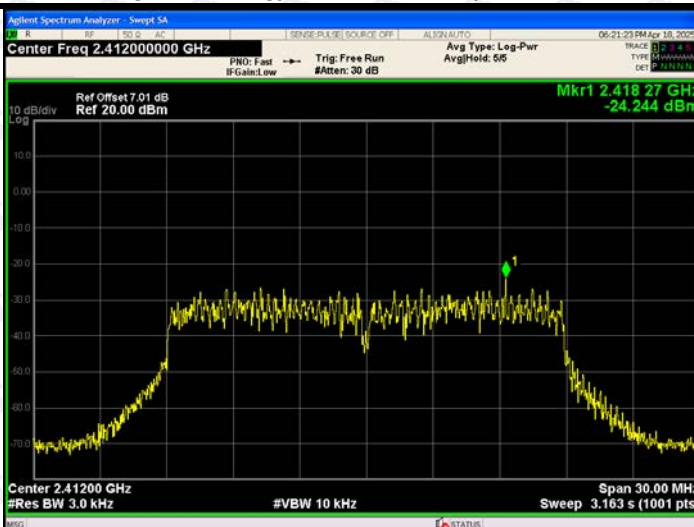


802.11n(HT20)/MCH

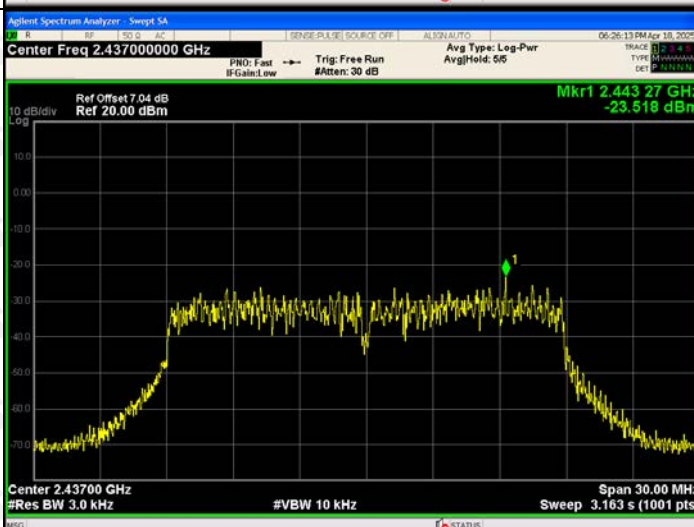

802.11n(HT20)/HCH

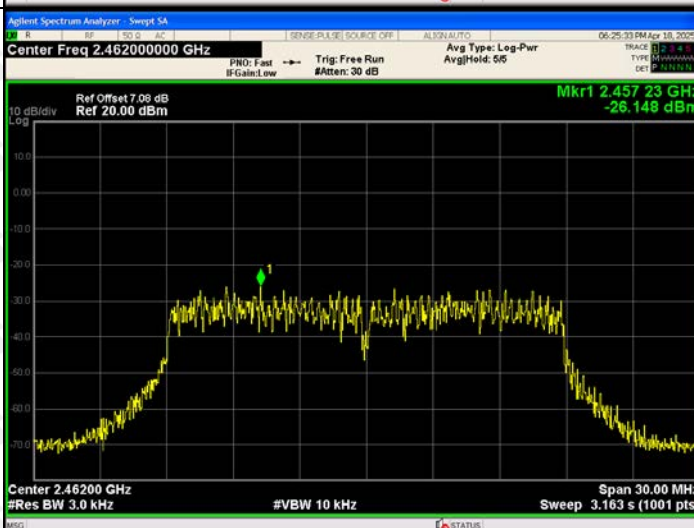

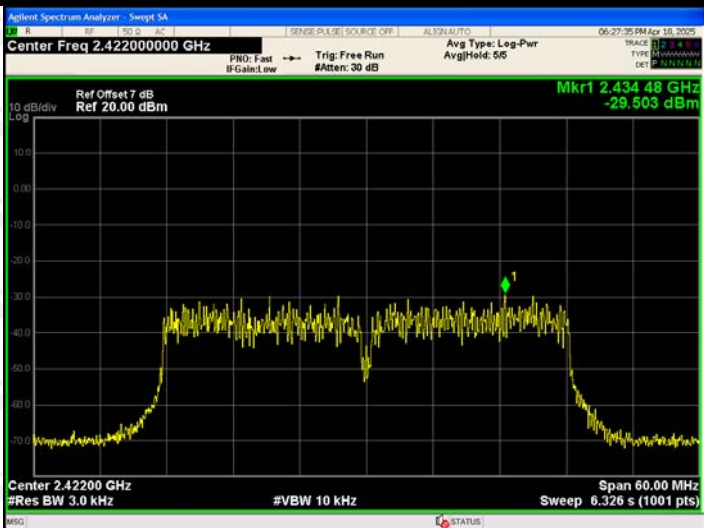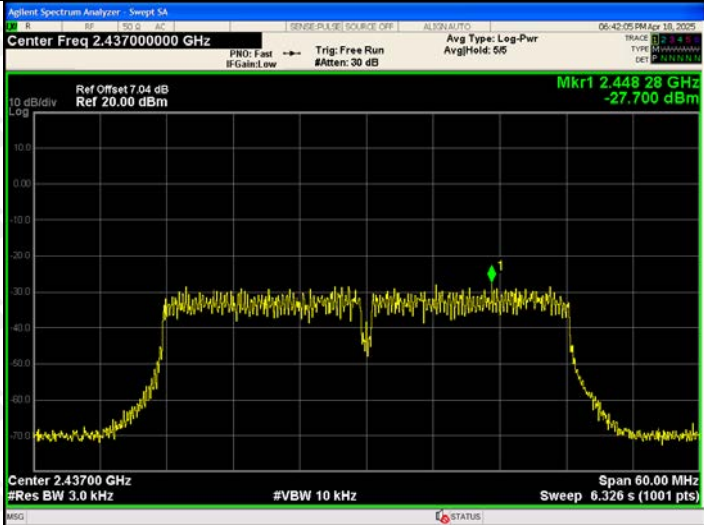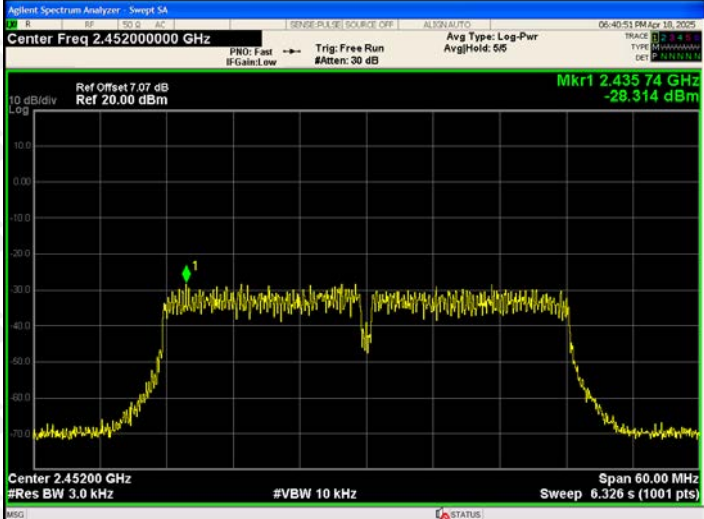802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.43448 GHz -29.503 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44828 GHz -27.700 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.45200000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.43574 GHz -28.314 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Chip antenna and no consideration of replacement. The best case gain of the antenna is 2.67dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

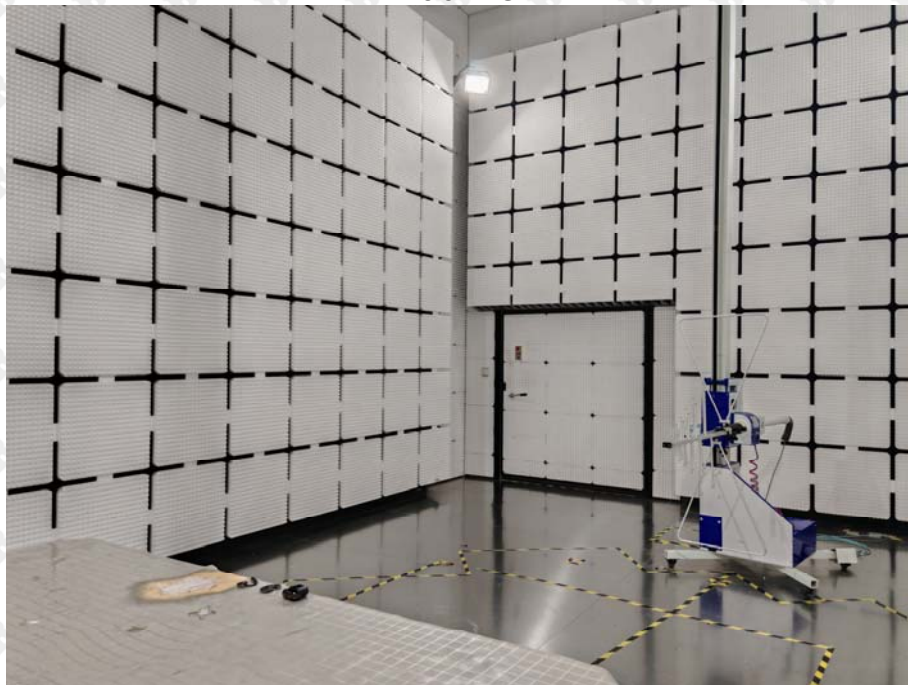

Above 1G



Conducted Emission



※※※※※ END OF REPORT ※※※※※