

## 1. Duty Cycle


### 1.1 Test Result

#### 1.1.1 Ant1


| Ant1 |         |                 |           |             |                |                                   |                       |
|------|---------|-----------------|-----------|-------------|----------------|-----------------------------------|-----------------------|
| Mode | TX Type | Frequency (MHz) | T_on (ms) | Period (ms) | Duty Cycle (%) | Duty Cycle Correction Factor (dB) | Max. DC Variation (%) |
| 1M   | SISO    | 2402            | 0.436     | 0.625       | 69.76          | 1.56                              | 0.03                  |
|      |         | 2440            | 0.436     | 0.625       | 69.76          | 1.56                              | 0.03                  |
|      |         | 2480            | 0.435     | 0.625       | 69.60          | 1.57                              | 0.03                  |
| 2M   | SISO    | 2402            | 0.252     | 0.625       | 40.32          | 3.94                              | 0.03                  |
|      |         | 2440            | 0.252     | 0.625       | 40.32          | 3.94                              | 0.03                  |
|      |         | 2480            | 0.251     | 0.625       | 40.16          | 3.96                              | 0.03                  |

## 1.2 Test Graph


### 1.2.1 Ant1

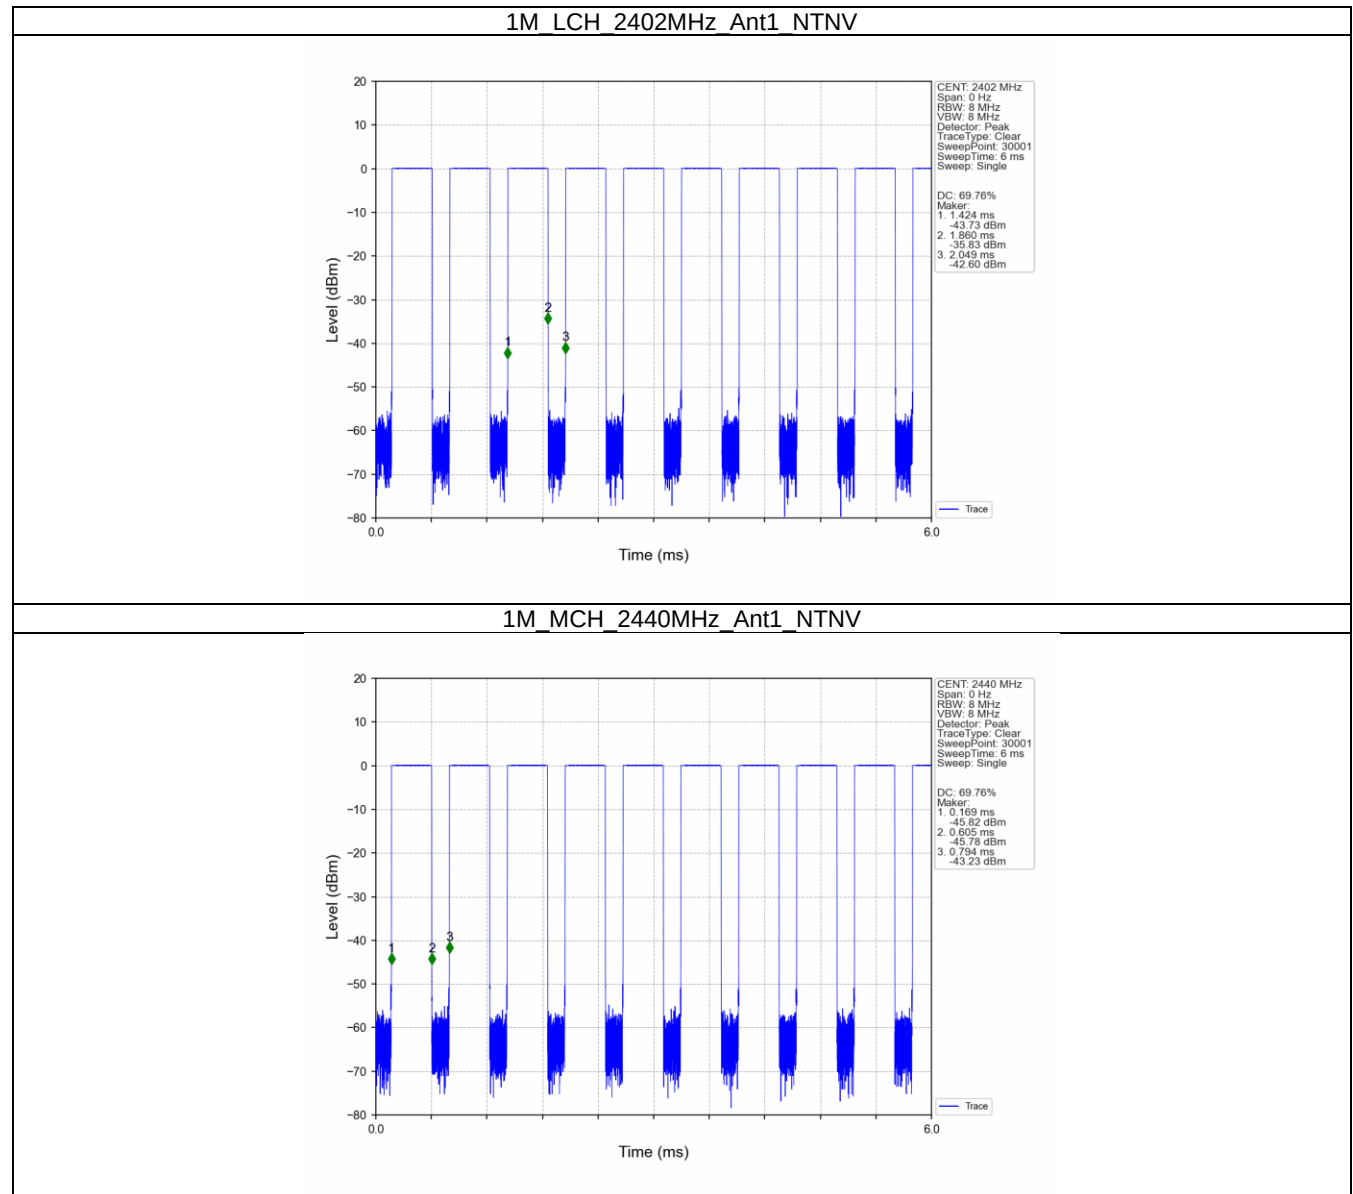


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

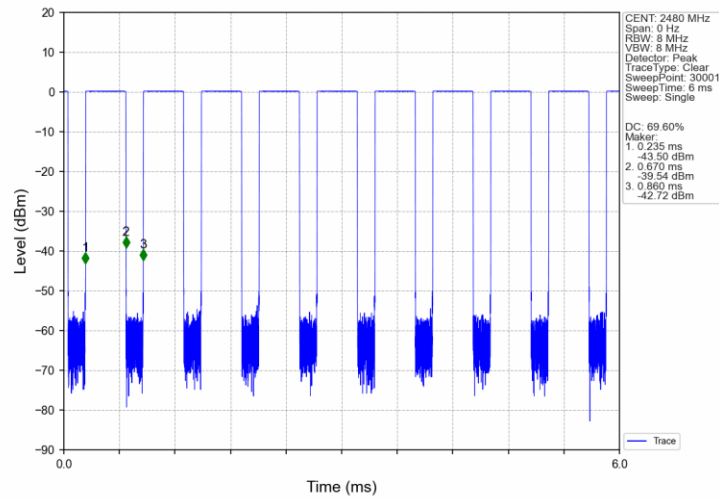


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

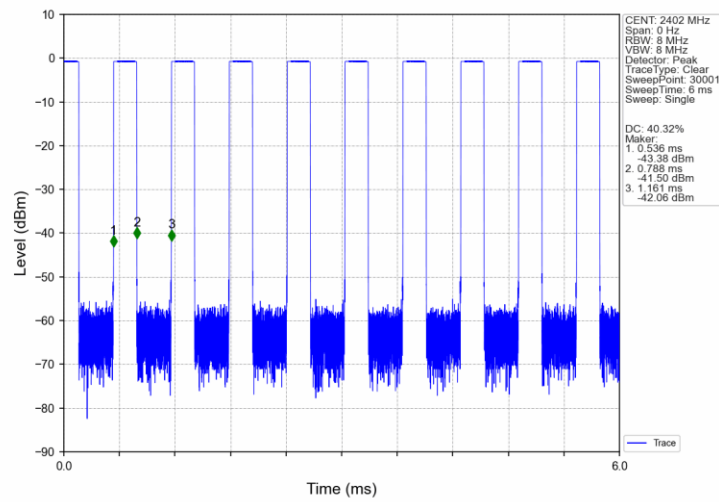

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

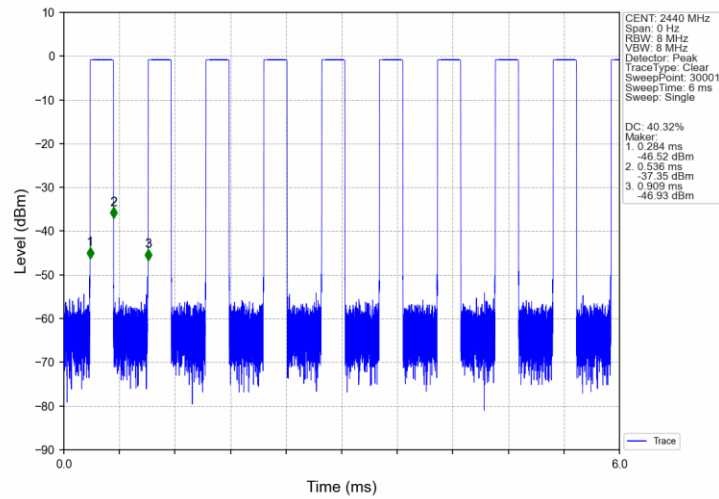

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

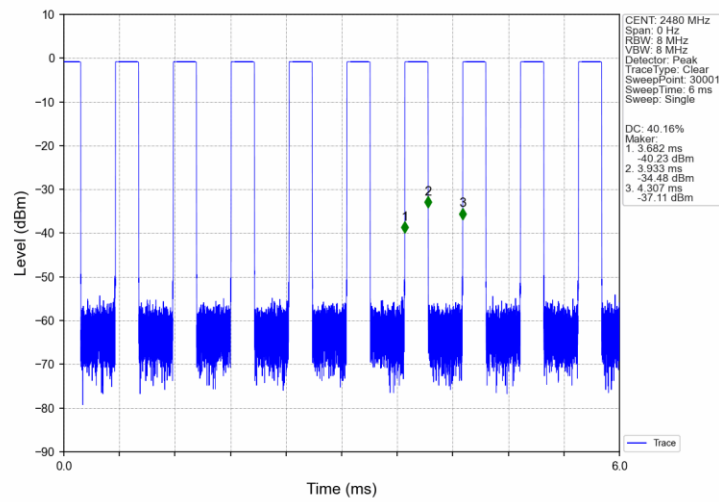

## 2. Bandwidth

### 2.1 Test Result

#### 2.1.1 OBW


| Mode | TX Type | Frequency (MHz) | ANT | 99% Occupied Bandwidth (MHz) |       | Verdict |
|------|---------|-----------------|-----|------------------------------|-------|---------|
|      |         |                 |     | Result                       | Limit |         |
| 1M   | SISO    | 2402            | 1   | 1.011                        | /     | Pass    |
|      |         | 2440            | 1   | 1.009                        | /     | Pass    |
|      |         | 2480            | 1   | 1.005                        | /     | Pass    |
| 2M   | SISO    | 2402            | 1   | 2.008                        | /     | Pass    |
|      |         | 2440            | 1   | 2.011                        | /     | Pass    |
|      |         | 2480            | 1   | 2.014                        | /     | Pass    |

#### 2.1.2 6dB BW


| Mode | TX Type | Frequency (MHz) | ANT | 6dB Bandwidth (MHz) |            | Verdict |
|------|---------|-----------------|-----|---------------------|------------|---------|
|      |         |                 |     | Result              | Limit      |         |
| 1M   | SISO    | 2402            | 1   | 0.708               | $\geq 0.5$ | Pass    |
|      |         | 2440            | 1   | 0.701               | $\geq 0.5$ | Pass    |
|      |         | 2480            | 1   | 0.697               | $\geq 0.5$ | Pass    |
| 2M   | SISO    | 2402            | 1   | 1.187               | $\geq 0.5$ | Pass    |
|      |         | 2440            | 1   | 1.190               | $\geq 0.5$ | Pass    |
|      |         | 2480            | 1   | 1.193               | $\geq 0.5$ | Pass    |

## 2.2 Test Graph


### 2.2.1 OBW

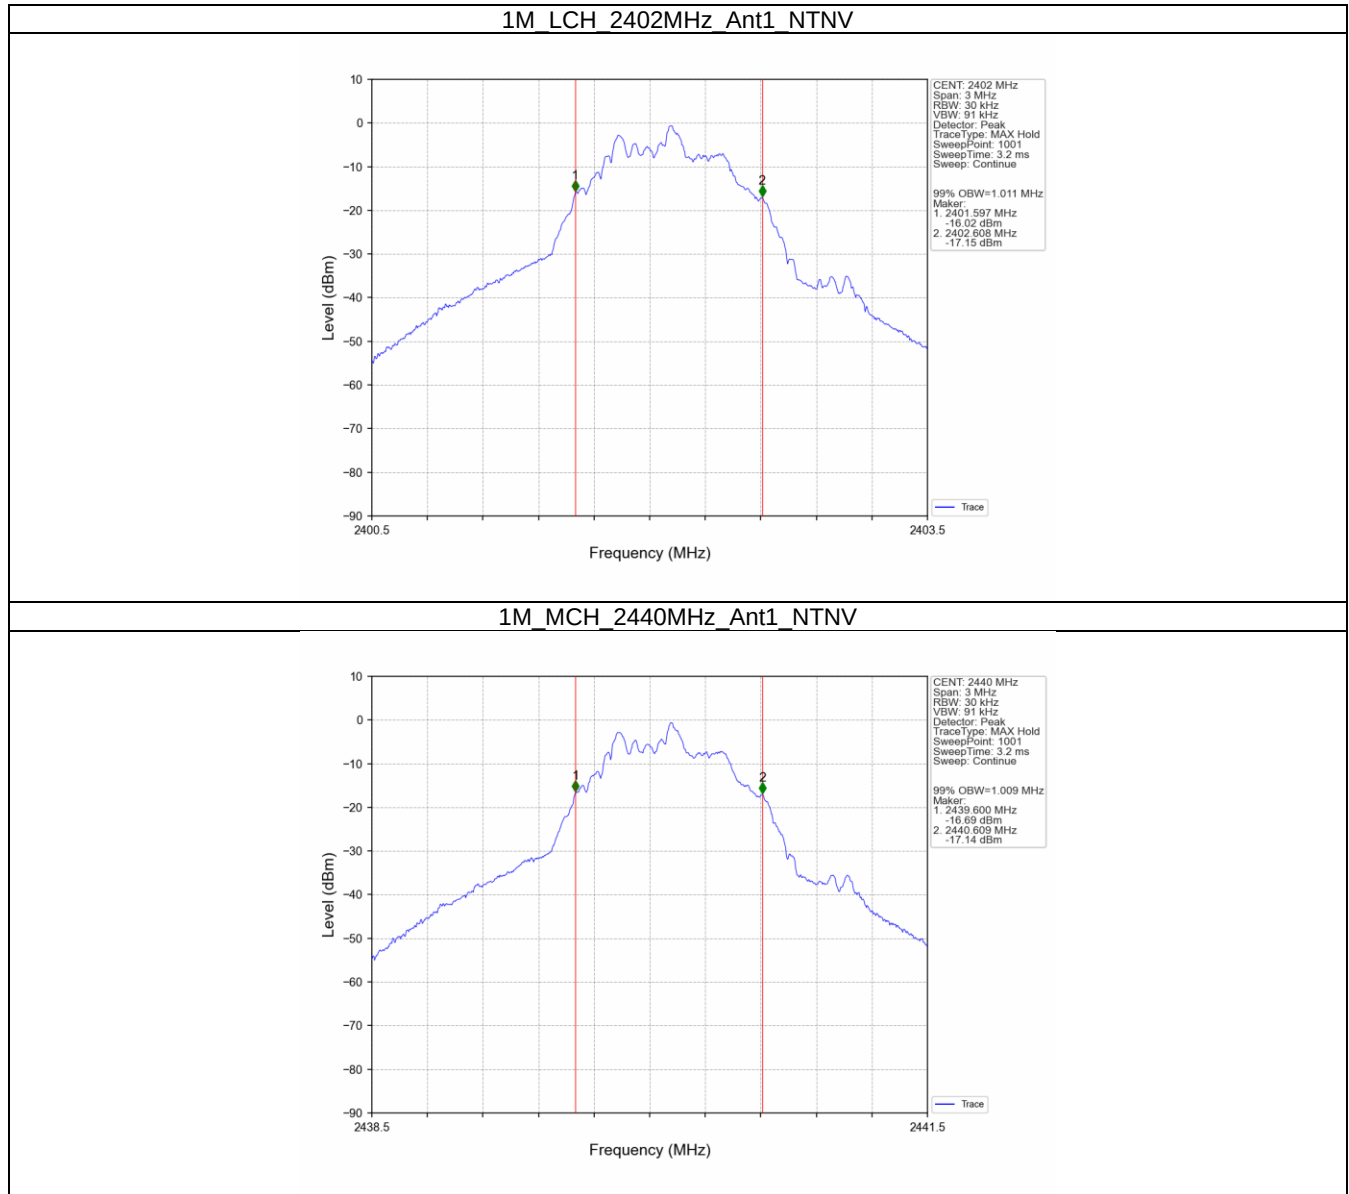


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

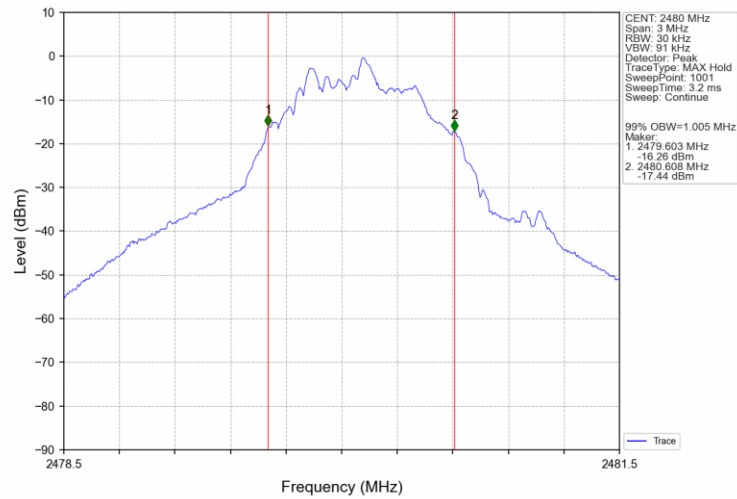


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

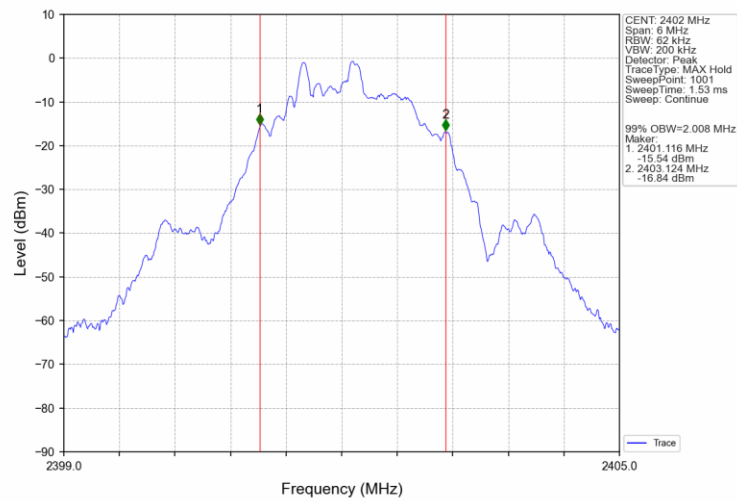

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

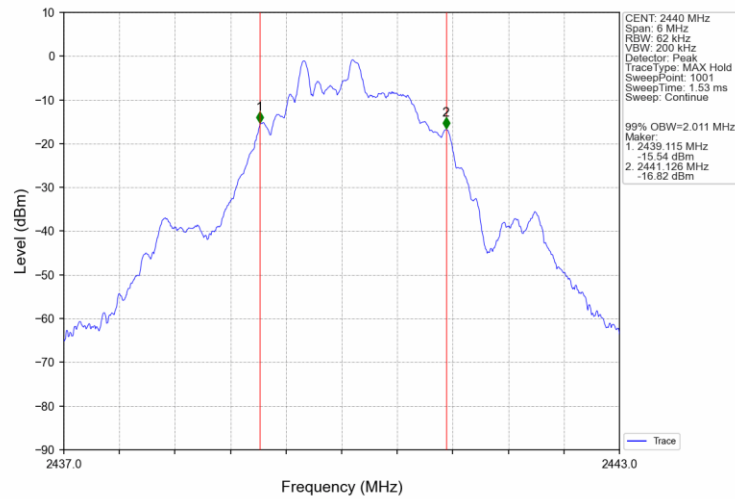


## 2M\_HCH\_2480MHz\_Ant1\_NTNV

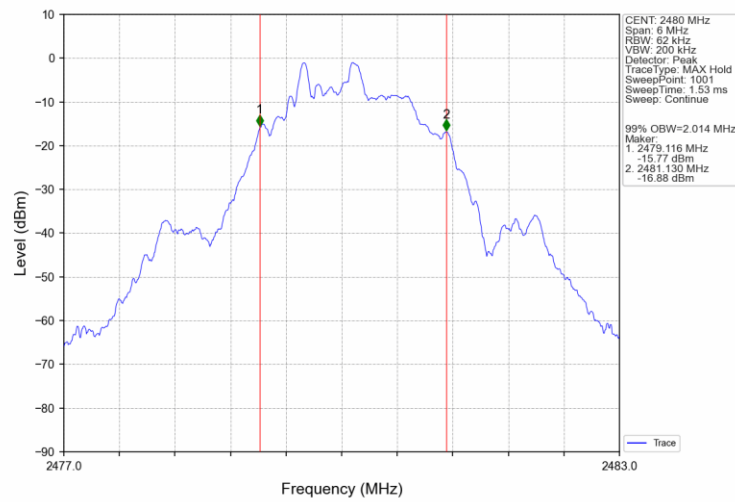




## 2.2.2 6dB BW


1M\_LCH\_2402MHz\_Ant1\_NTNV

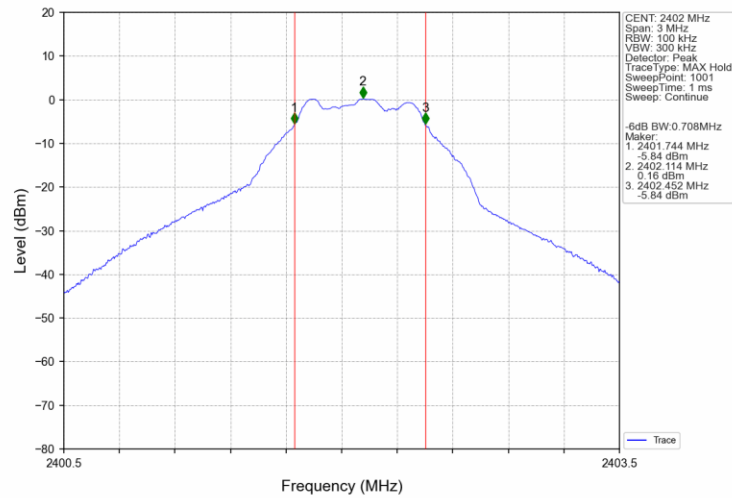


1M\_MCH\_2440MHz\_Ant1\_NTNV

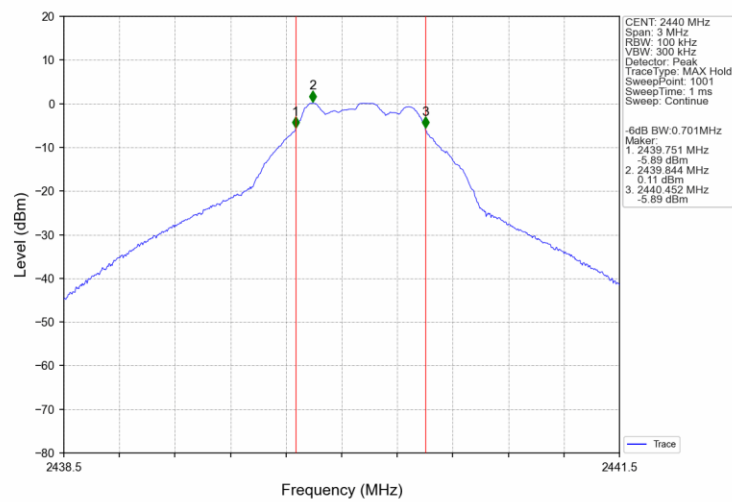


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

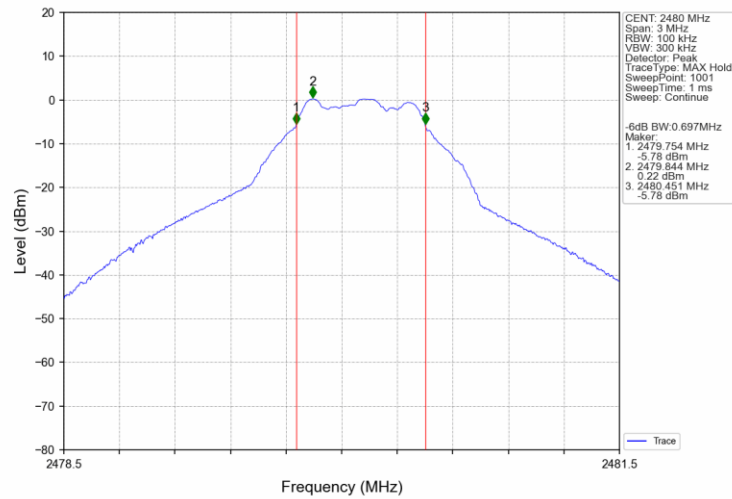


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

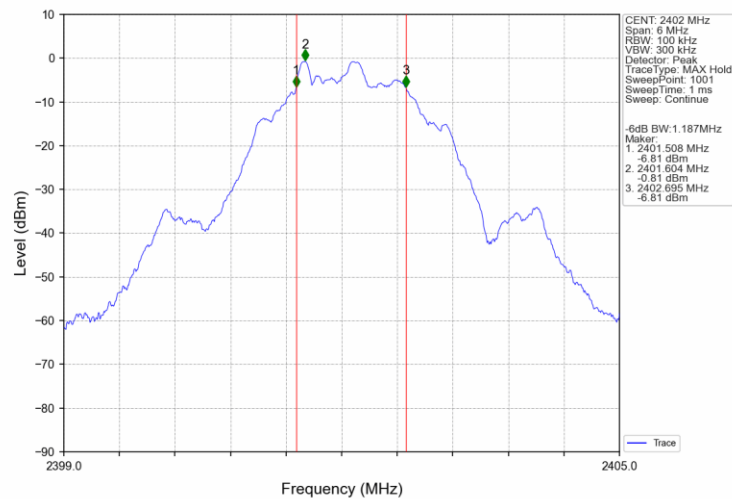

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

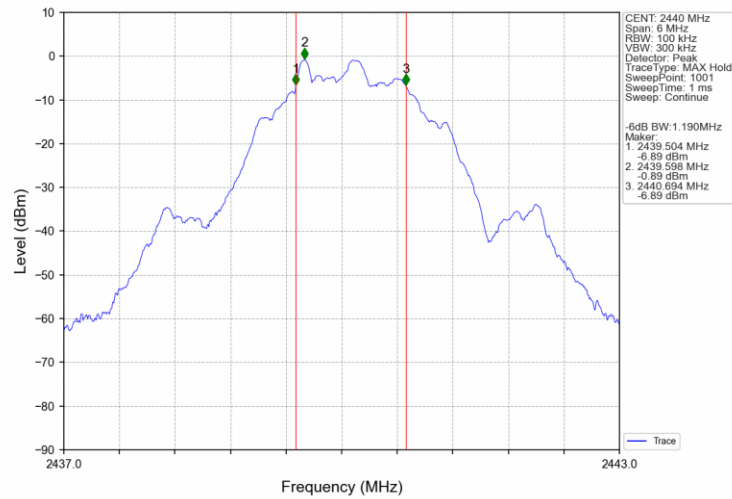

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

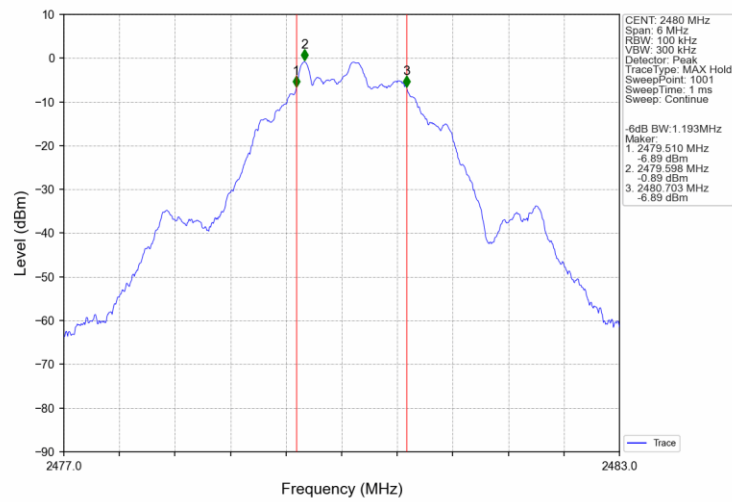

### 3. Maximum Conducted Output Power


#### 3.1 Test Result

##### 3.1.1 Power


| Mode                                 | TX Type | Frequency (MHz) | Maximum Peak Conducted Output Power (dBm) |       | Verdict |
|--------------------------------------|---------|-----------------|-------------------------------------------|-------|---------|
|                                      |         |                 | ANT1                                      | Limit |         |
| 1M                                   | SISO    | 2402            | 0.14                                      | <=30  | Pass    |
|                                      |         | 2440            | 0.10                                      | <=30  | Pass    |
|                                      |         | 2480            | 0.21                                      | <=30  | Pass    |
| 2M                                   | SISO    | 2402            | -0.74                                     | <=30  | Pass    |
|                                      |         | 2440            | -0.83                                     | <=30  | Pass    |
|                                      |         | 2480            | -0.81                                     | <=30  | Pass    |
| Note1: Antenna Gain: Ant1: -0.58dBi; |         |                 |                                           |       |         |

## 3.2 Test Graph


### 3.2.1 Power

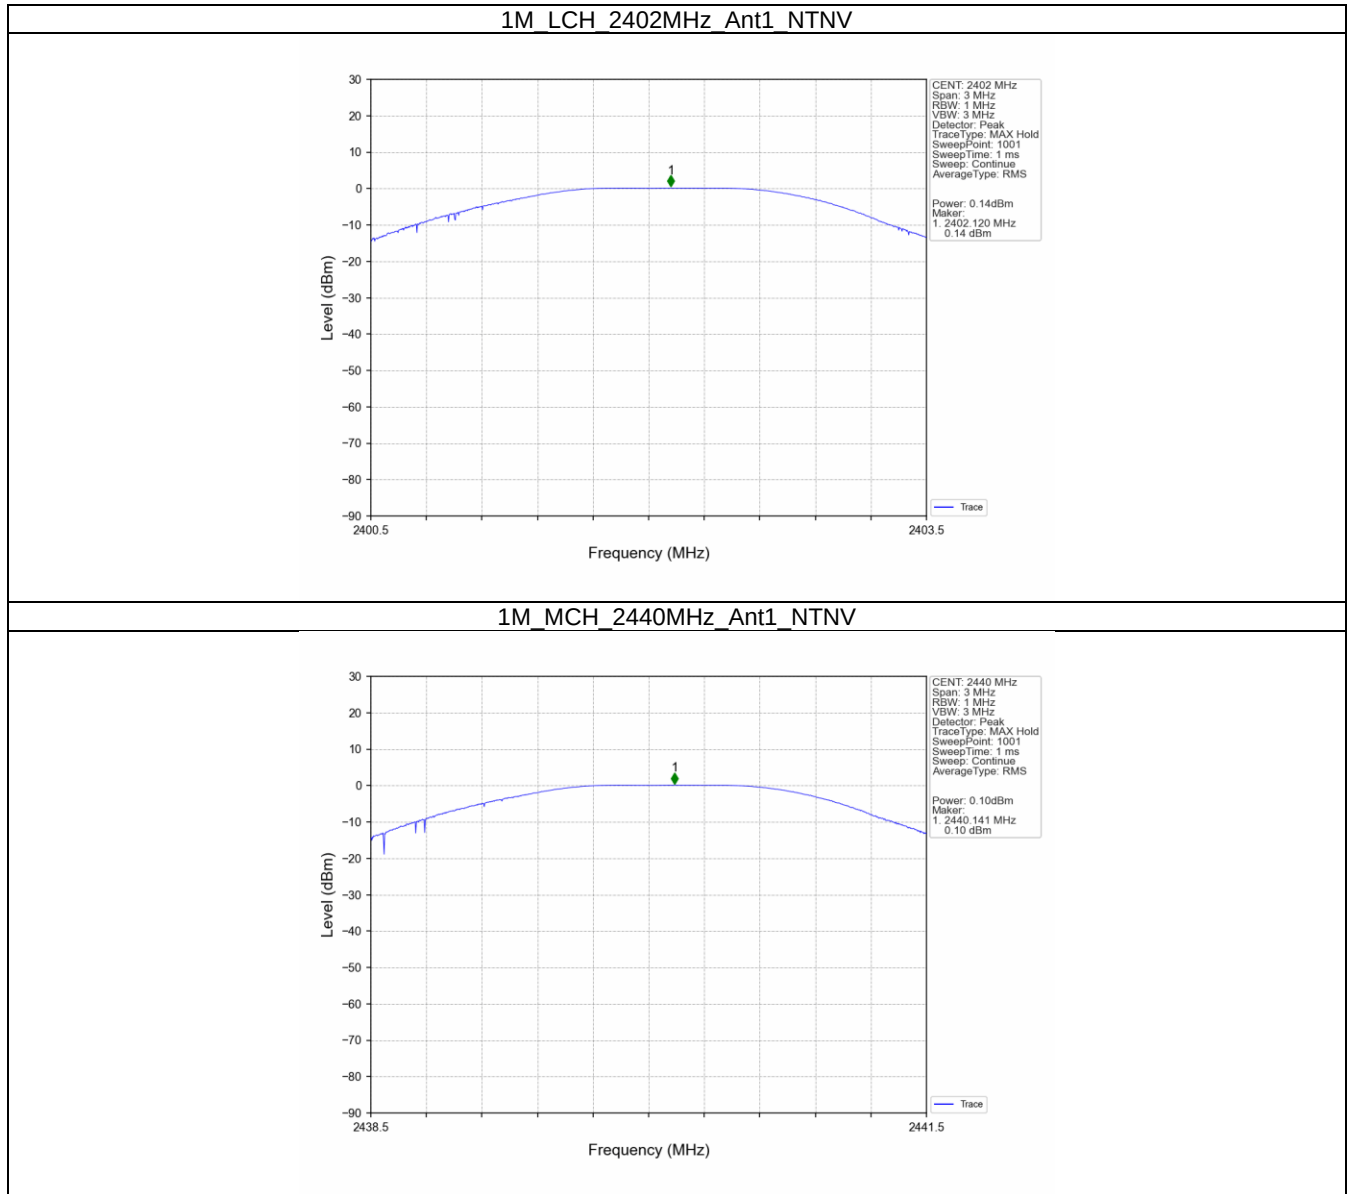

## 1M\_HCH\_2480MHz\_Ant1\_NTNV

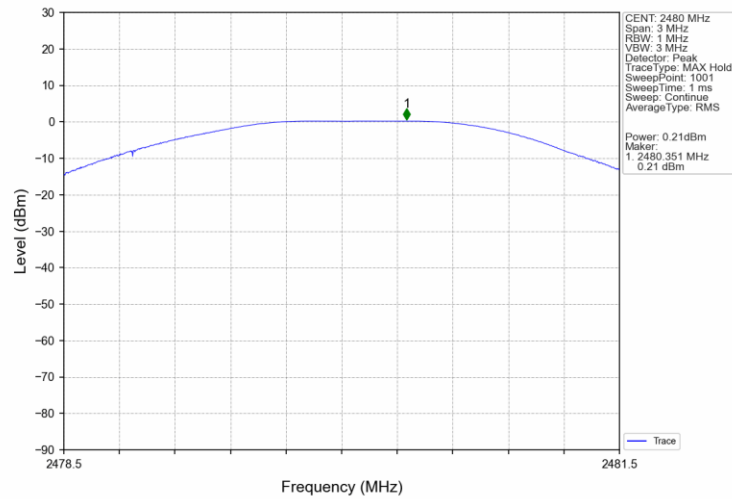


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

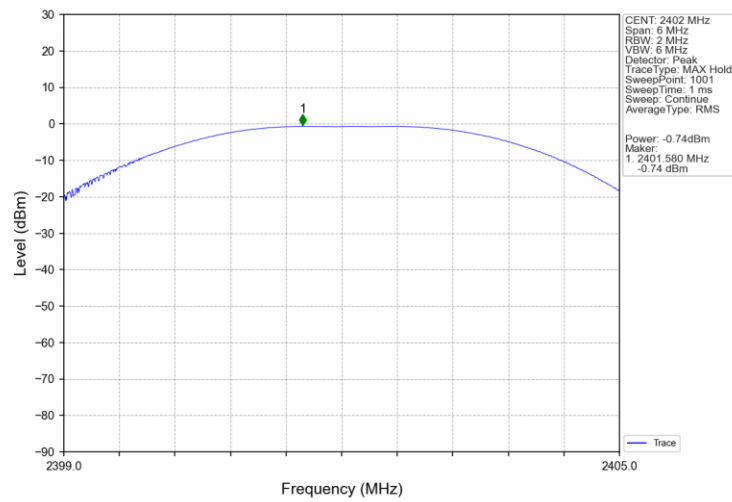




## 2M\_MCH\_2440MHz\_Ant1\_NTNV

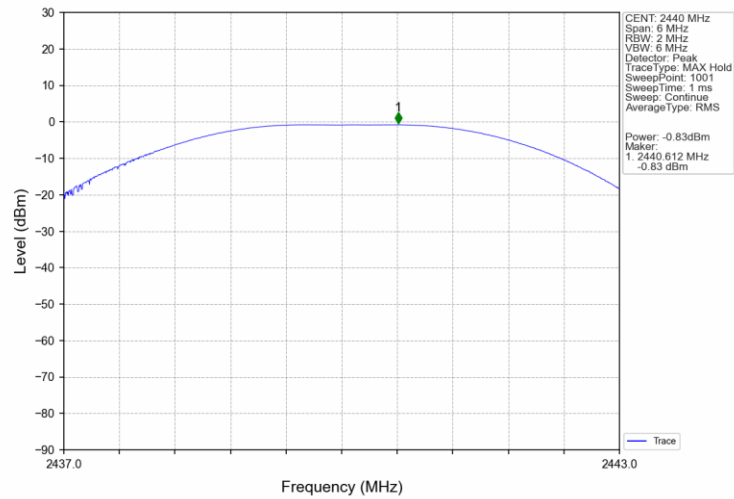

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

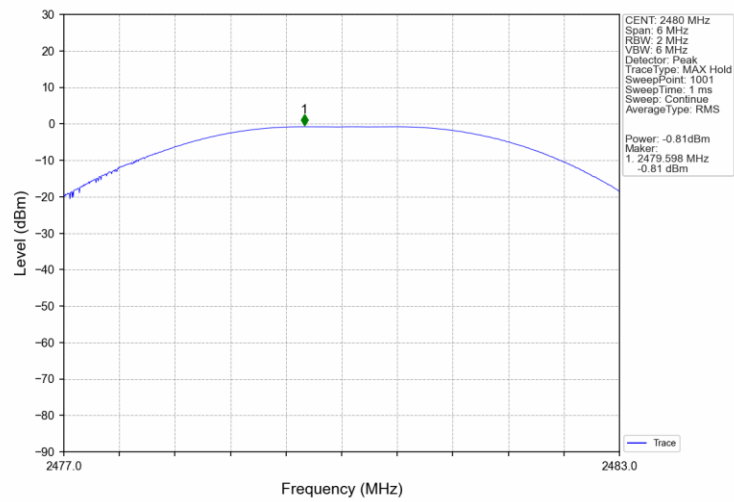

## 4. Maximum Power Spectral Density

### 4.1 Test Result


#### 4.1.1 PSD

| Mode                                 | TX Type | Frequency (MHz) | Maximum PSD (dBm/3kHz) |       | Verdict |
|--------------------------------------|---------|-----------------|------------------------|-------|---------|
|                                      |         |                 | ANT1                   | Limit |         |
| 1M                                   | SISO    | 2402            | -14.54                 | <=8   | Pass    |
|                                      |         | 2440            | -14.66                 | <=8   | Pass    |
|                                      |         | 2480            | -14.00                 | <=8   | Pass    |
| 2M                                   | SISO    | 2402            | -15.60                 | <=8   | Pass    |
|                                      |         | 2440            | -15.44                 | <=8   | Pass    |
|                                      |         | 2480            | -15.54                 | <=8   | Pass    |
| Note1: Antenna Gain: Ant1: -0.58dBi; |         |                 |                        |       |         |




## 4.2 Test Graph


### 4.2.1 PSD

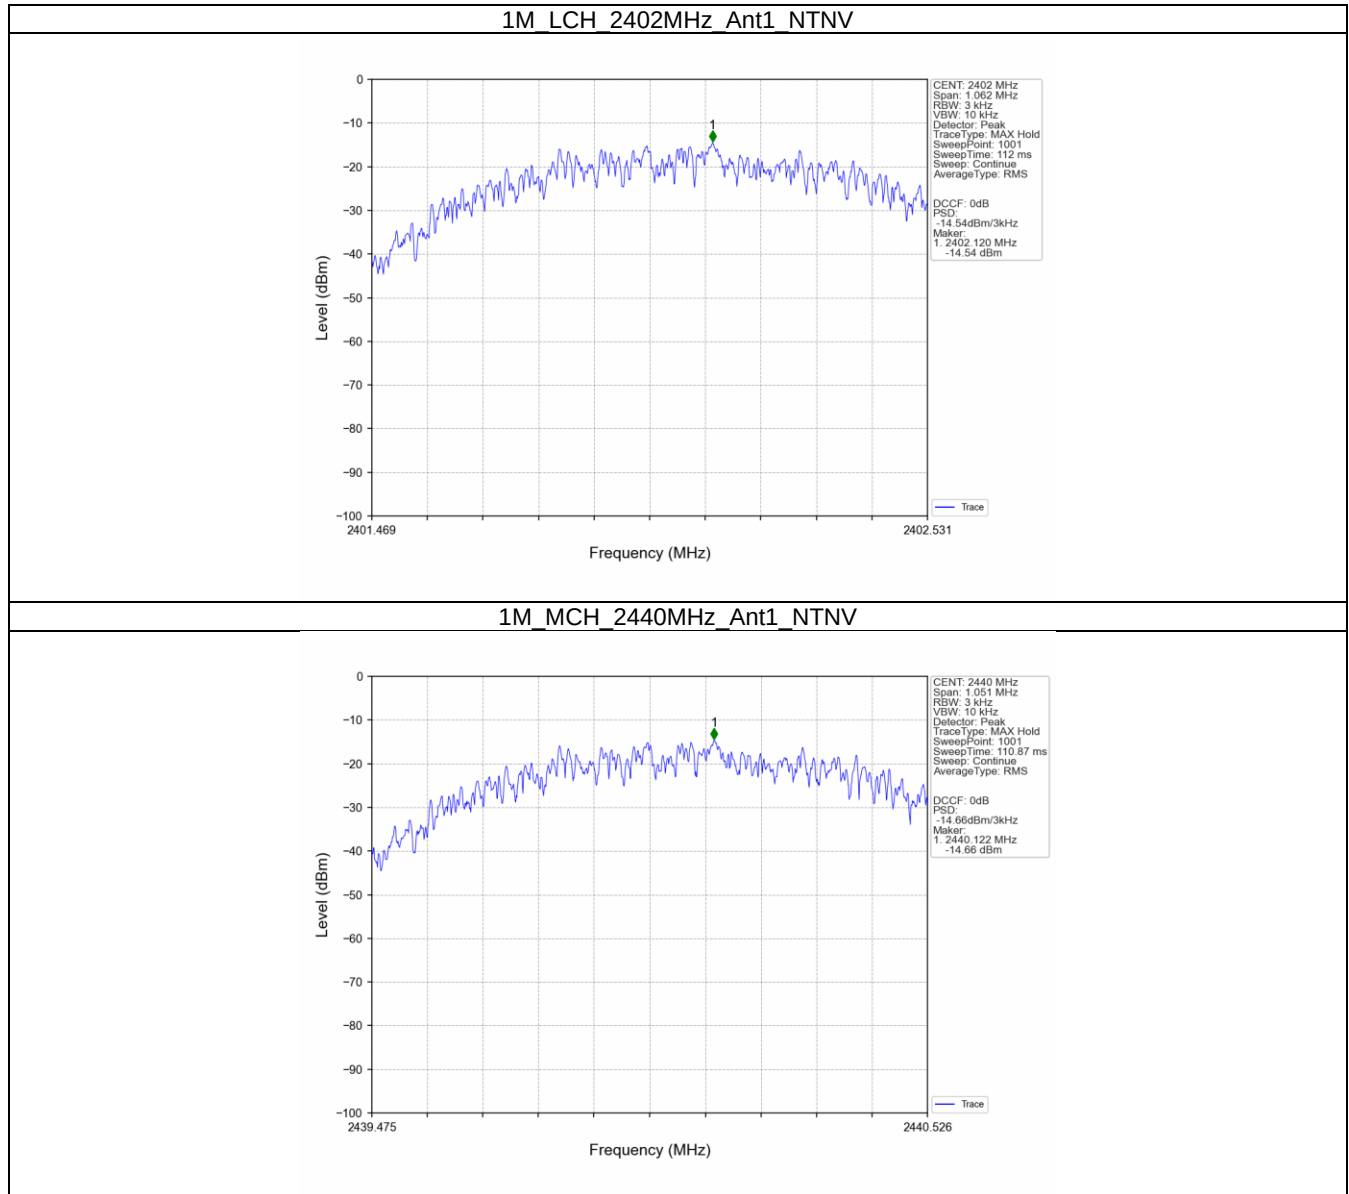


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

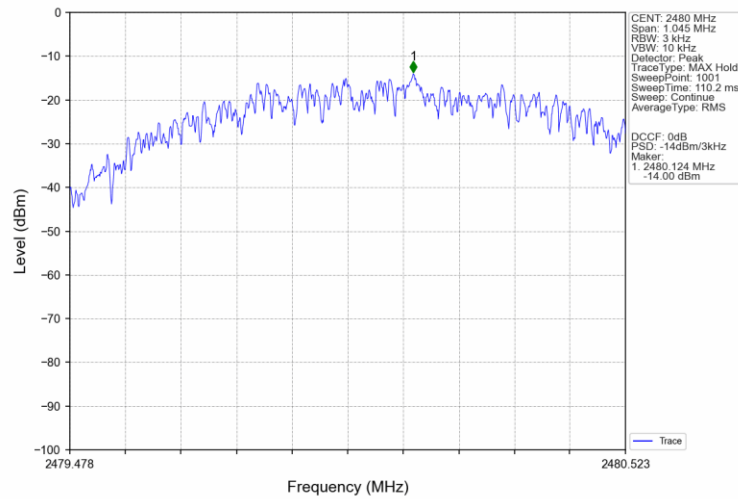


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

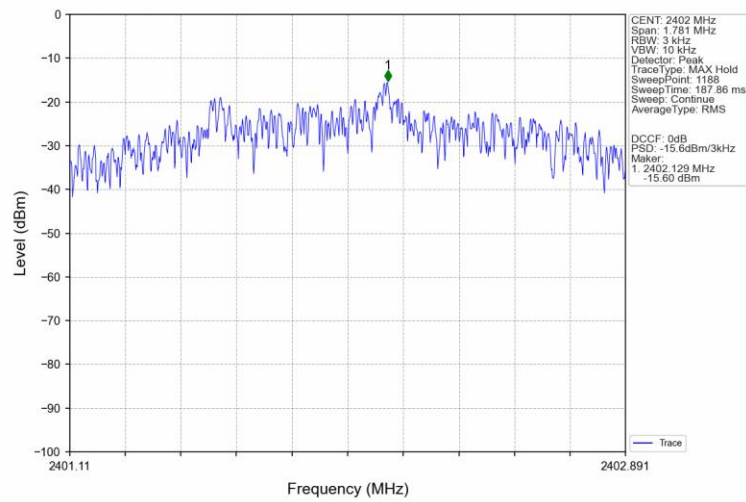

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

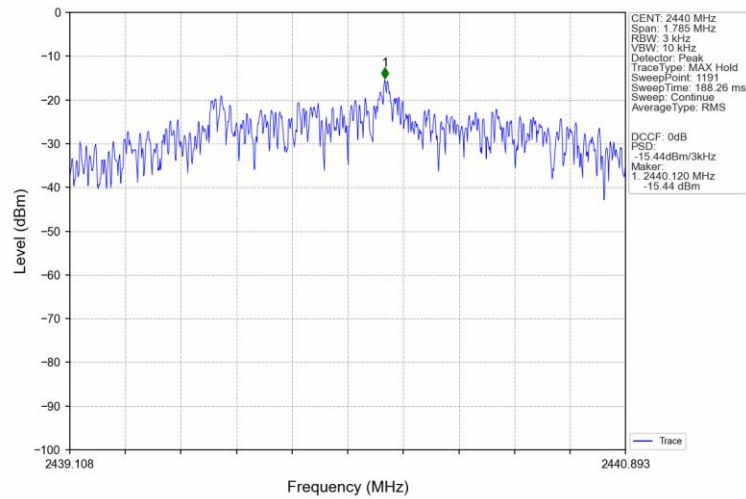

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

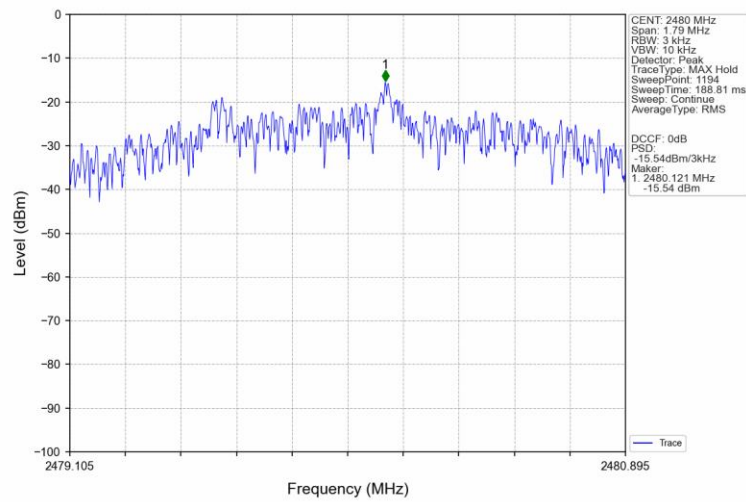

## 5. Unwanted Emissions In Non-restricted Frequency Bands

### 5.1 Test Result

#### 5.1.1 Ref

| Mode | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) |
|------|---------|-----------------|-----|--------------------------|
| 1M   | SISO    | 2402            | 1   | 0.13                     |
|      |         | 2440            | 1   | 0.10                     |
|      |         | 2480            | 1   | 0.20                     |
| 2M   | SISO    | 2402            | 1   | -0.88                    |
|      |         | 2440            | 1   | -0.97                    |
|      |         | 2480            | 1   | -0.95                    |

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


#### 5.1.2 CSE

| Mode | TX Type | Frequency (MHz) | ANT | Level of Reference (dBm) | Limit (dBm) | Verdict |
|------|---------|-----------------|-----|--------------------------|-------------|---------|
| 1M   | SISO    | 2402            | 1   | 0.13                     | -19.87      | Pass    |
|      |         | 2440            | 1   | 0.10                     | -19.90      | Pass    |
|      |         | 2480            | 1   | 0.20                     | -19.80      | Pass    |
| 2M   | SISO    | 2402            | 1   | -0.88                    | -20.88      | Pass    |
|      |         | 2440            | 1   | -0.97                    | -20.97      | Pass    |
|      |         | 2480            | 1   | -0.95                    | -20.95      | Pass    |


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

## 5.2 Test Graph


### 5.2.1 Ref

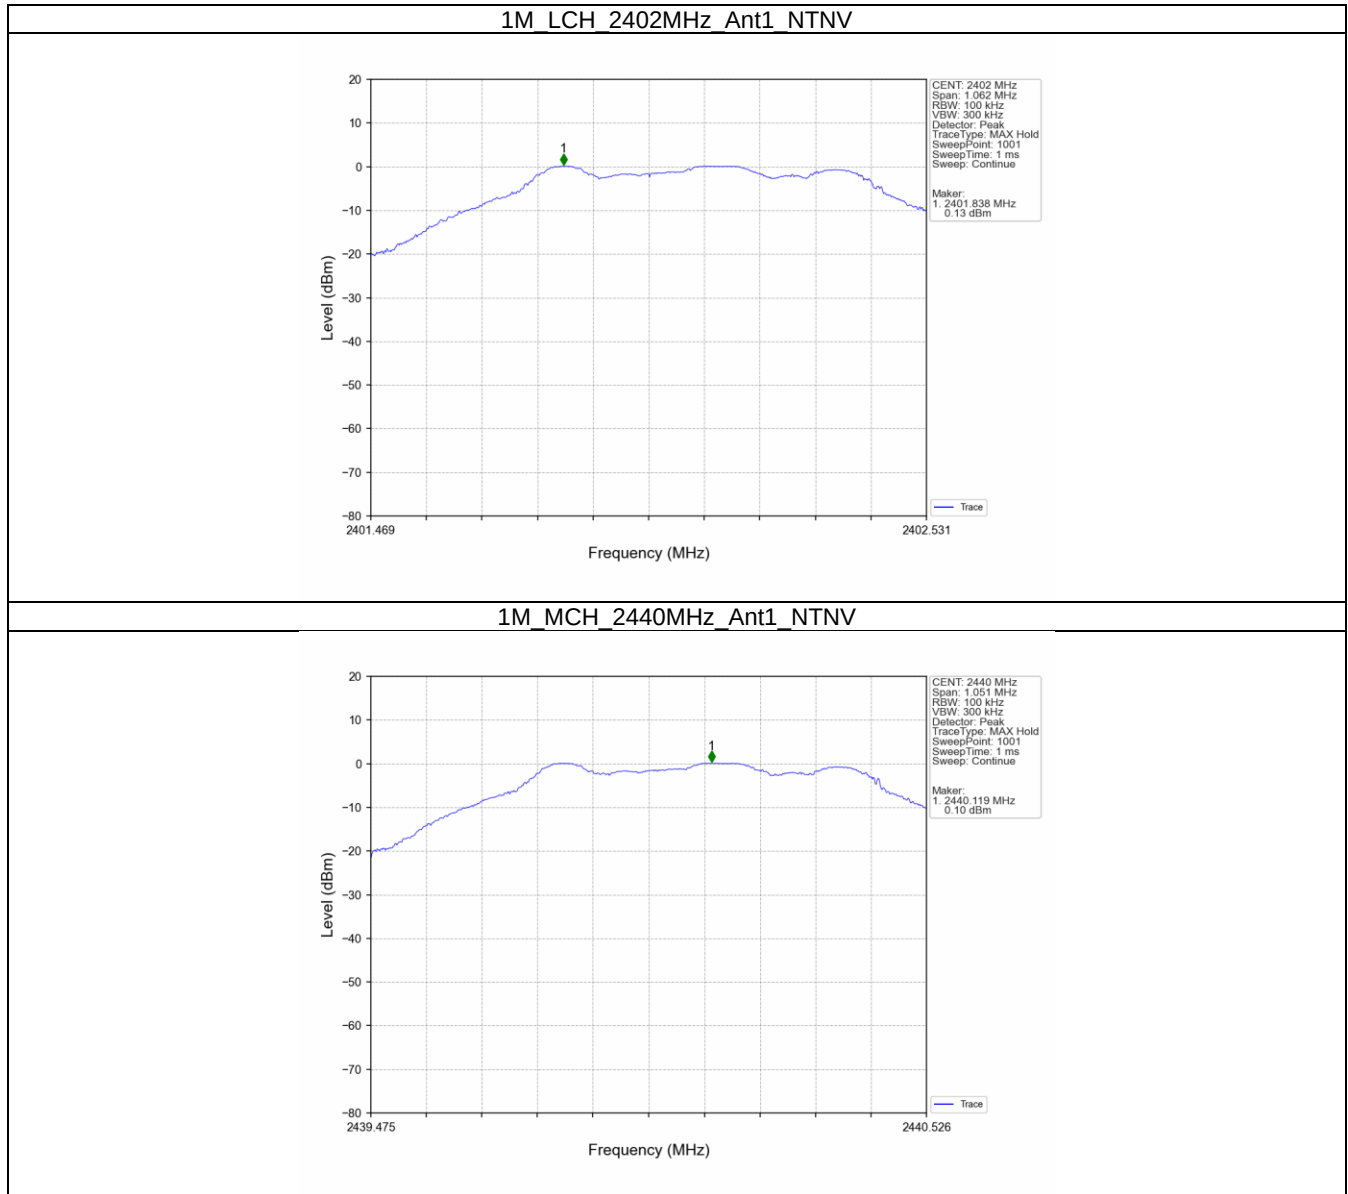


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

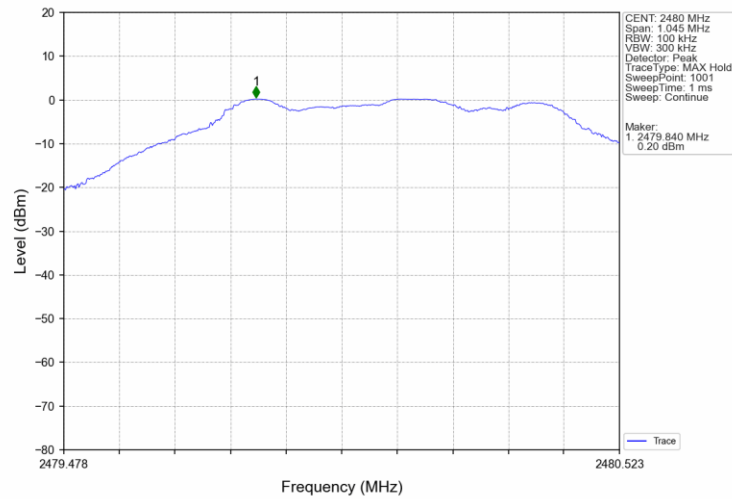


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

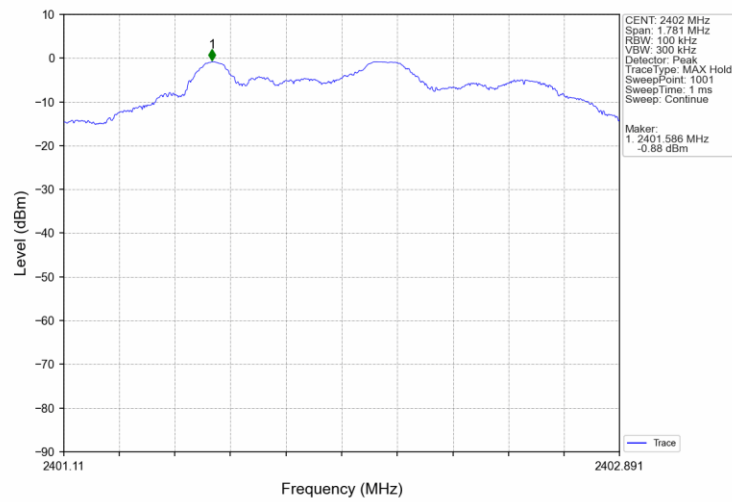

## 2M\_MCH\_2440MHz\_Ant1\_NTNV

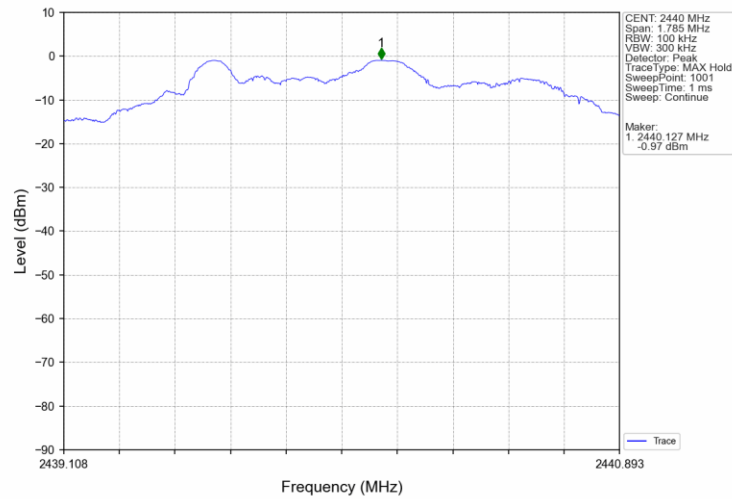


## 2M\_HCH\_2480MHz\_Ant1\_NTNV

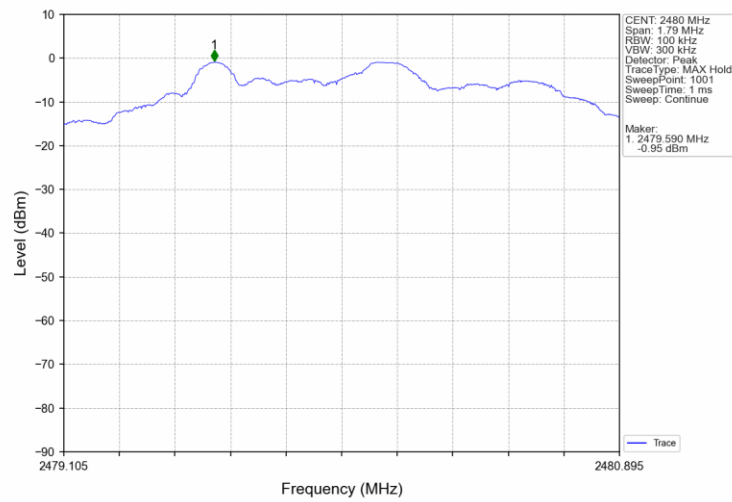


## 5.2.2 CSE

1M LCH 2402MHz Ant1 NTN

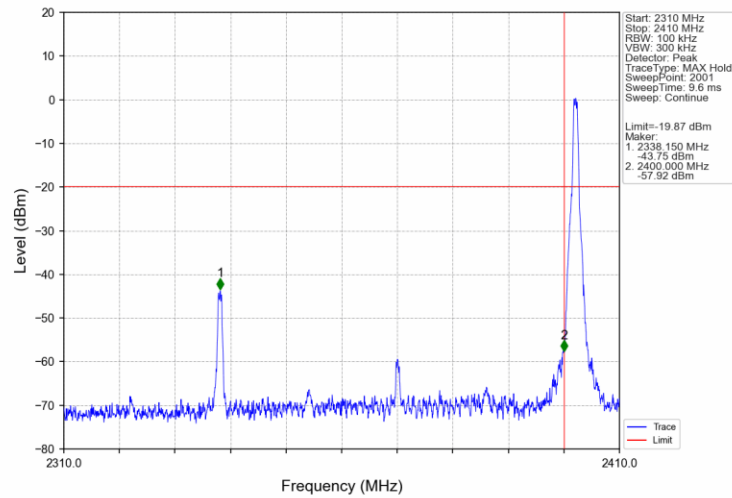


1M\_LCH\_2402MHz\_Ant1\_NTNV

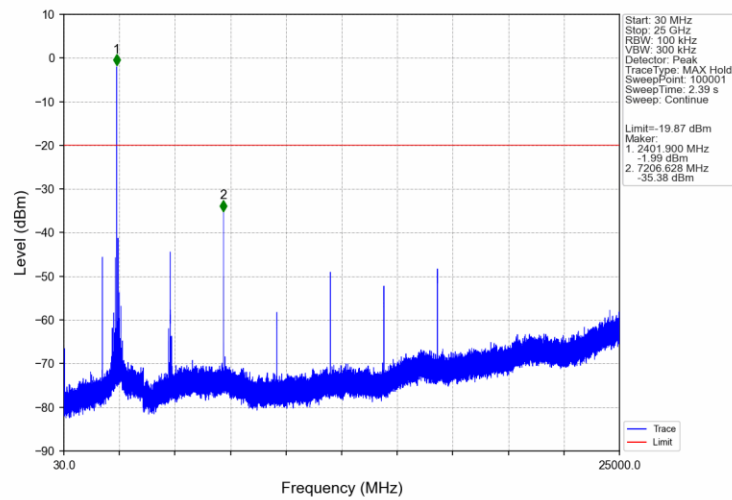





## 1M\_MCH\_2440MHz\_Ant1\_NTNV

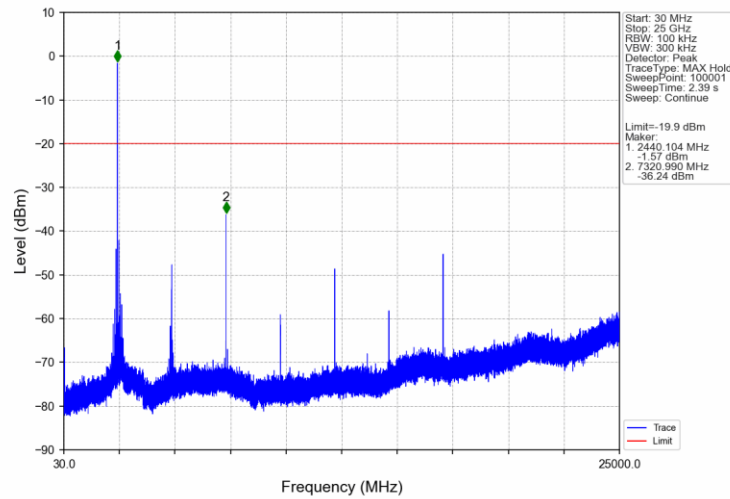


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

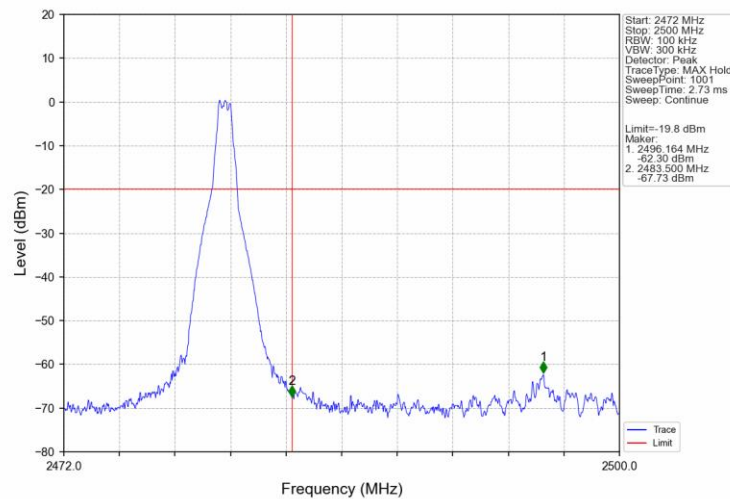


## 1M\_HCH\_2480MHz\_Ant1\_NTNV

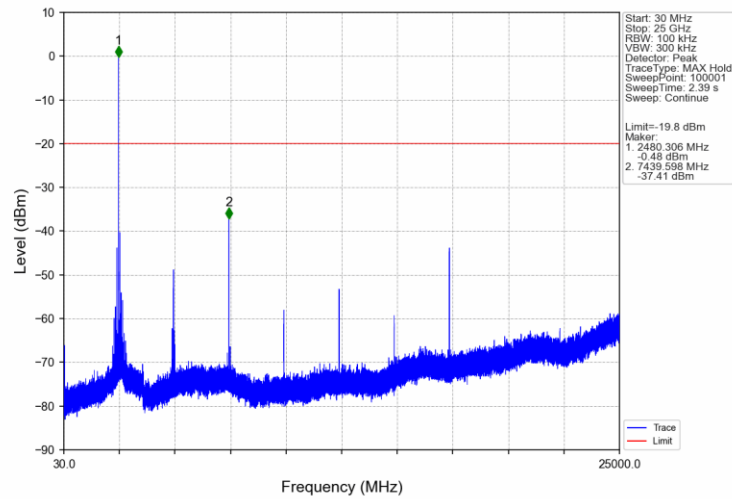


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

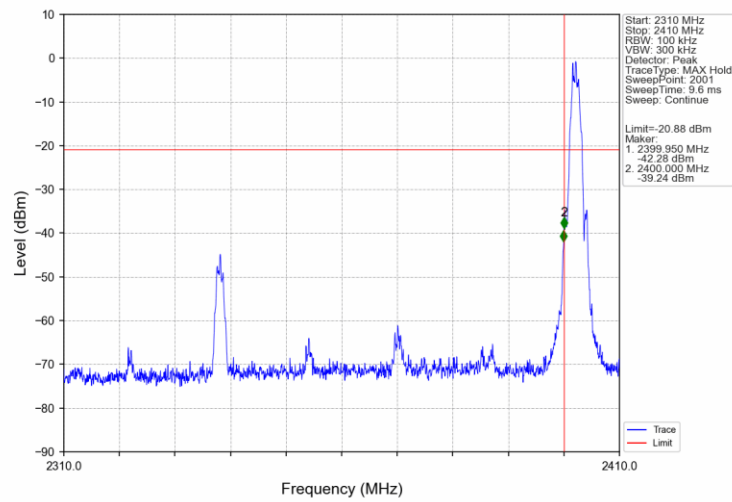


## 2M\_LCH\_2402MHz\_Ant1\_NTNV

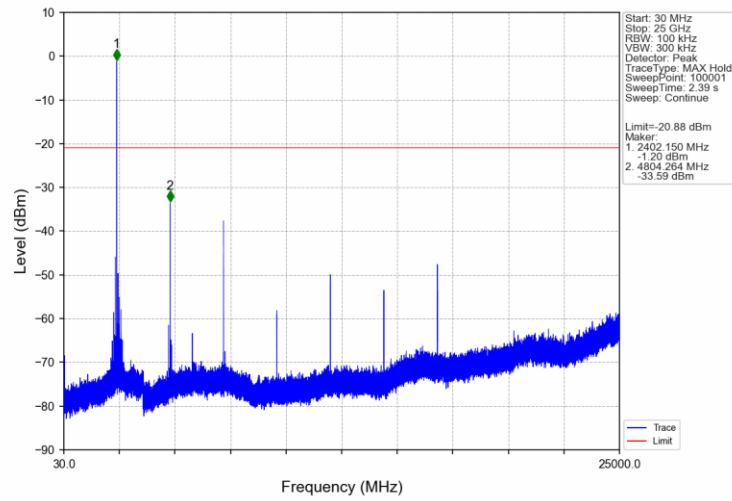


## 2M\_MCH\_2440MHz\_Ant1\_NTNV

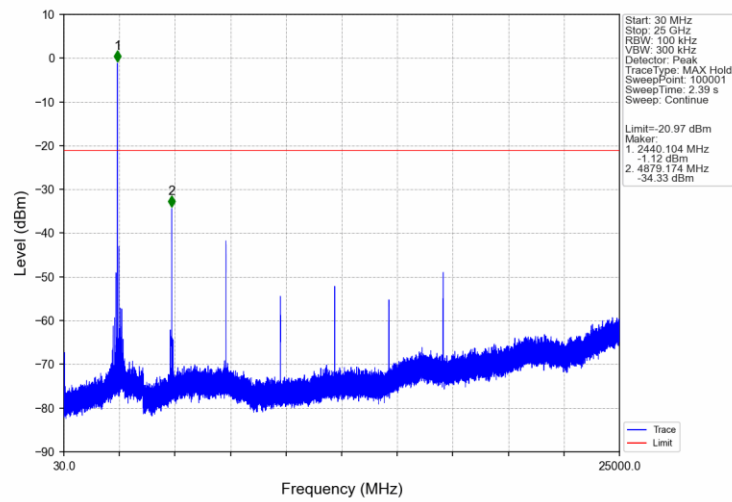

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

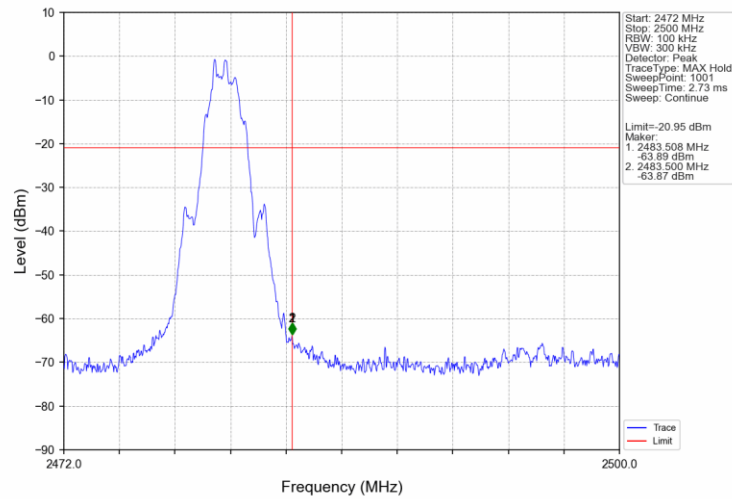

## 2M\_HCH\_2480MHz\_Ant1\_NTNV

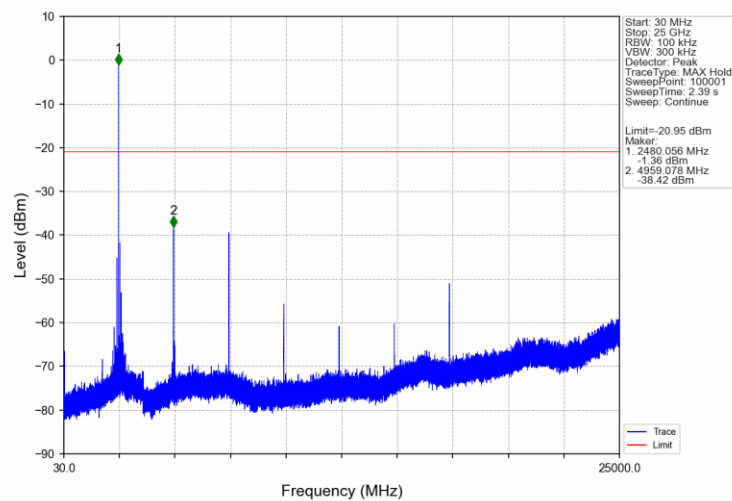

## 6. Form731

### 6.1 Test Result

#### 6.1.1 Form731

| Lower Freq (MHz) | High Freq (MHz) | MAX Power (W) | MAX Power (dBm) |
|------------------|-----------------|---------------|-----------------|
| 2402             | 2480            | 0.0010        | 0.21            |