


A18

User Manual

Karaoke Microphone with Speaker

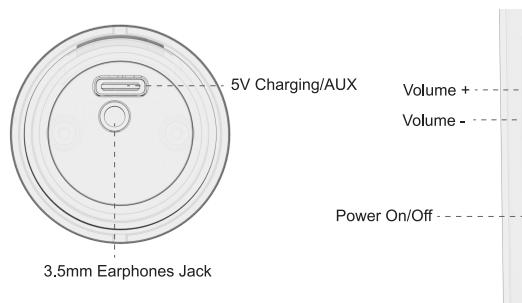

Key Controls

| Button | Function |
|----------------------|---|
| Power On/Off | <ul style="list-style-type: none"> Long Press (3s): Turn ON/OFF Short Press: Play/Pause music Double Clicks: Turn on/off two microphones connected to each other |
| Volume (+/-) | <ul style="list-style-type: none"> Short Press: Adjust microphones volume Long Press: Adjust speaker volume Double Clicks: Adjust the reverb volume |
| M Key (Modes Switch) | <ul style="list-style-type: none"> Short Press: Toggle switch microphone Playback mode/ LINE IN mode/Bluetooth mode Long Press: Switch the flashing modes of light |
| Voice Changing Key | <ul style="list-style-type: none"> Short Press: Voice changing effects switch to be Male voice/Female voice/Baby voice/Monster voice/Original voice Long Press: Original /Accompaniment |
| 5V Charging/AUX | Switch to LINE IN mode, then use the LINE IN cable, the end of Type-C to plug into the AUX port on the bottom of the microphone, and using the 3.5 mm plug (the other end of the same cable) to connect with your mobile phone to start your recording or singing |

| Product | Karaoke Microphone with Speaker |
|-------------------|---------------------------------|
| Model | A18 |
| Bluetooth Version | V5.0 |
| Output Power | Rated 5W / 7W Max |
| Weight | 276g |
| Dimensions | 210mm x 87mm |
| Material | ABS + Foam |
| Battery | 1200mAh |
| Charging | DC 5.0V/1.0A (Type-C Port) |

Pairing Instructions

1. Activate Pairing Mode:
Long press Power button for 3s → Blue LED flashes.
2. Connect Device:
Enable Bluetooth on your devices → Select "A18" in the device list.
3. Confirmation:
Successful: "Dong" sound + Blue LED steady ON.
Failed: Blue LED slow flashes (retry pairing).

Charging & Battery

| Indicator | Status |
|------------------|--|
| Red Light Steady | Charging in progress (2-3 hours to full) |
| Light OFF | Fully charged |
| Low Battery | 3 beeps → Auto-shutdown after 4th alert |

Critical Warning:

- Use ONLY 5V/1A chargers (9V/12V adapters may damage hardware).
- Never charge near heat sources or in temperatures >50°C.

Technical Specifications

| Parameter | Specification |
|-----------------------|--------------------------|
| Bluetooth Range | Up to 10m (unobstructed) |
| Frequency Response | 200Hz-8kHz (±3dB) |
| Playback Time | >2 hours (max volume) |
| Standby Time | ~12 hours |
| Operating Temperature | -10°C to 50°C |
| Charging Temperature | 0°C to 45°C |
| Button Durability | 5,000+ presses |

Storage:

Charge to ≥50% before storing >1 month.
Store at 25°C max, humidity ≤75%.

Transportation:

Protect from rain and prolonged high-temperature exposure.

Troubleshooting

| Issue | Solution |
|-------------------------|--|
| No Bluetooth connection | <ol style="list-style-type: none"> 1. Restart the microphone & device 2. Ensure within a 10m range |
| Standby Time | ~12 hours |
| Short battery life | <ol style="list-style-type: none"> 1. Use correct 5V/1A charger 2. Avoid extreme temperatures |
| Distorted audio | <ol style="list-style-type: none"> 1. Reduce volume 2. Check Bluetooth interference |

Contact Email: senmeituo2021@gmail.com



Made in China

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 -- Reorient or relocate the receiving antenna.
 -- Increase the separation between the equipment and receiver.
 -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 -- Consult the dealer or an experienced radio/TV technician for help.
 The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.