


Test Model

Maximum Peak Conducted Output Power

Bluetooth DSS

Channel 39: 2441MHz

pi/4-DQPSK

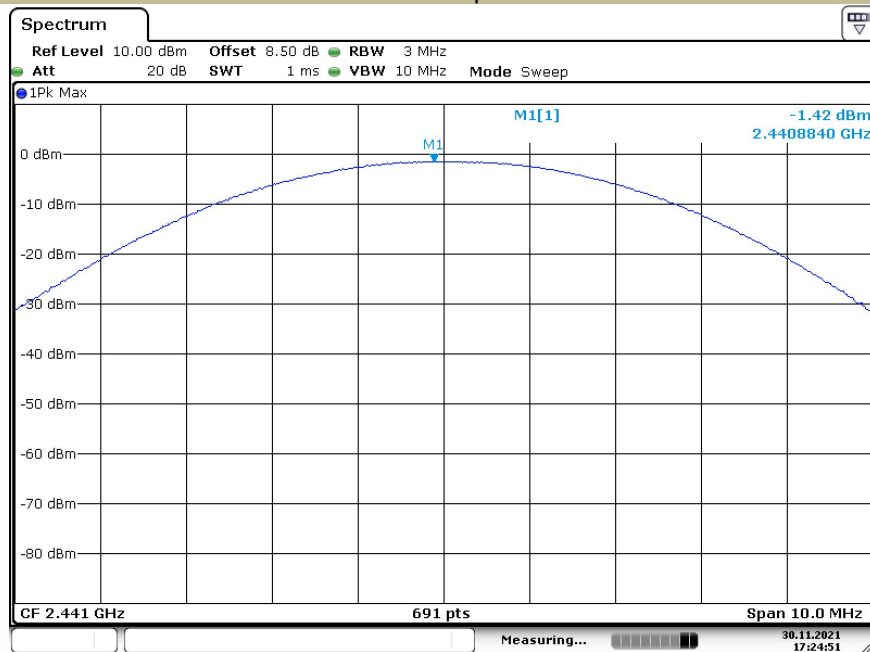

Date: 30 NOV.2021 17:24:52


Test Model

Maximum Peak Conducted Output Power

Bluetooth DSS

Channel 78: 2480MHz

pi/4-DQPSK

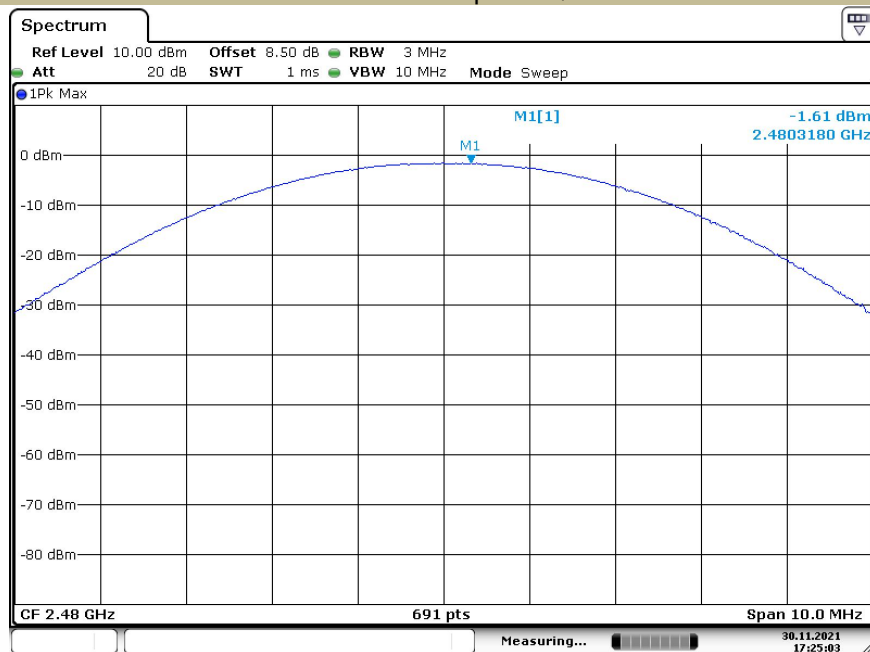

Date: 30 NOV.2021 17:25:03


Test Model

Maximum Peak Conducted Output Power

Bluetooth DSS

Channel 0: 2402MHz

8DPSK

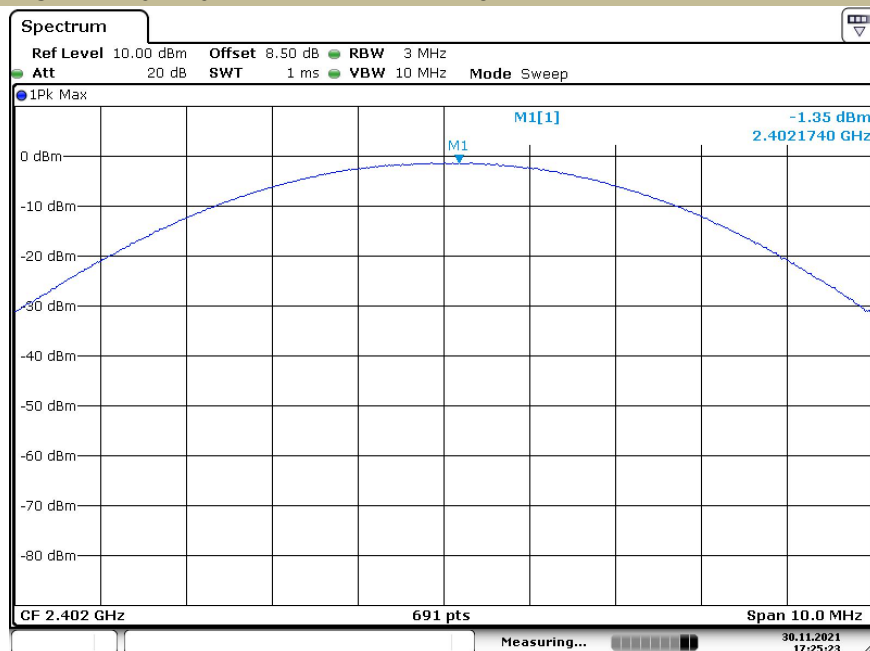

Date: 30.NOV.2021 17:25:23


Test Model

Maximum Peak Conducted Output Power

Bluetooth DSS

Channel 39: 2441MHz

8DPSK

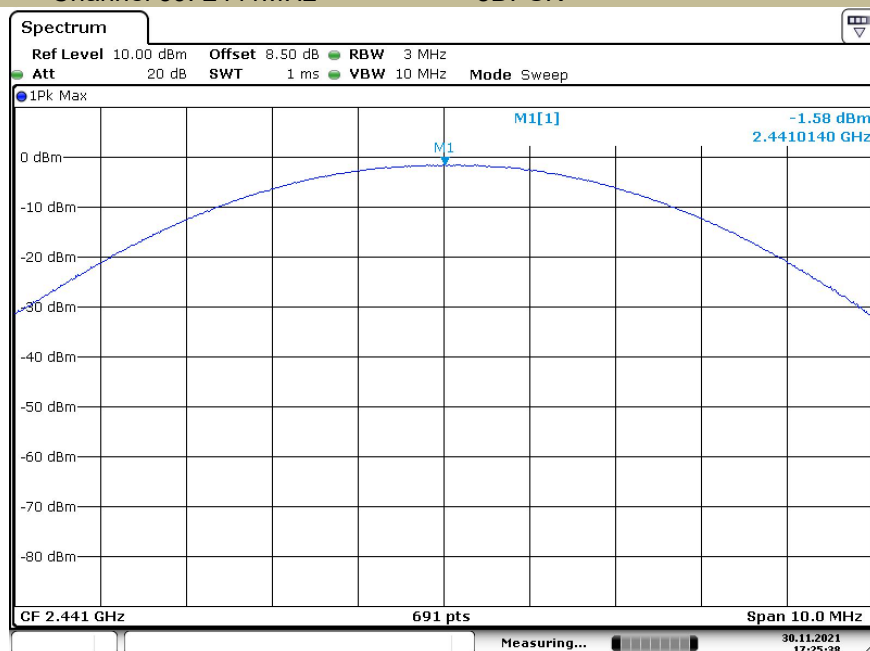

Date: 30.NOV.2021 17:25:38


Test Model

Maximum Peak Conducted Output Power

Bluetooth DSS

Channel 78: 2480MHz

8DPSK

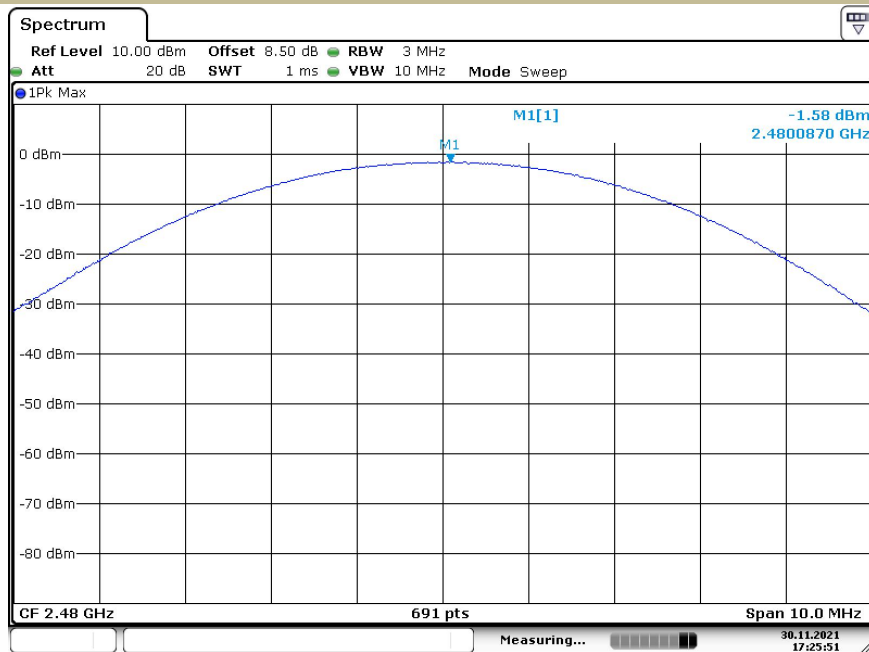

Date: 30.NOV.2021 17:25:51

## 9.6 CONDUCTED SUPRIIOUS EMISSION

### 9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 meas guidance v05r02

### 9.6.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

### 9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

### 9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

#### ■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW  $\geq 3 \times$  RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximum conduceted level.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

#### ■ Band-edge Compliance of RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW  $\geq 1\%$  of the span=100kHz Set VBW  $\geq$  RBW

Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

#### ■ Conduceted Spurious RF Conducted Emission

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz). Set RBW = 100 kHz Set VBW  $\geq$  RBW


Set Sweep = auto Set Detector function = peak Set Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.

## 9.6.5 Test Results


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Maximum Conduced Level RBW=100kHz  
 Test Model Bluetooth DSS  
 Channel 0: 2402MHz GFSK

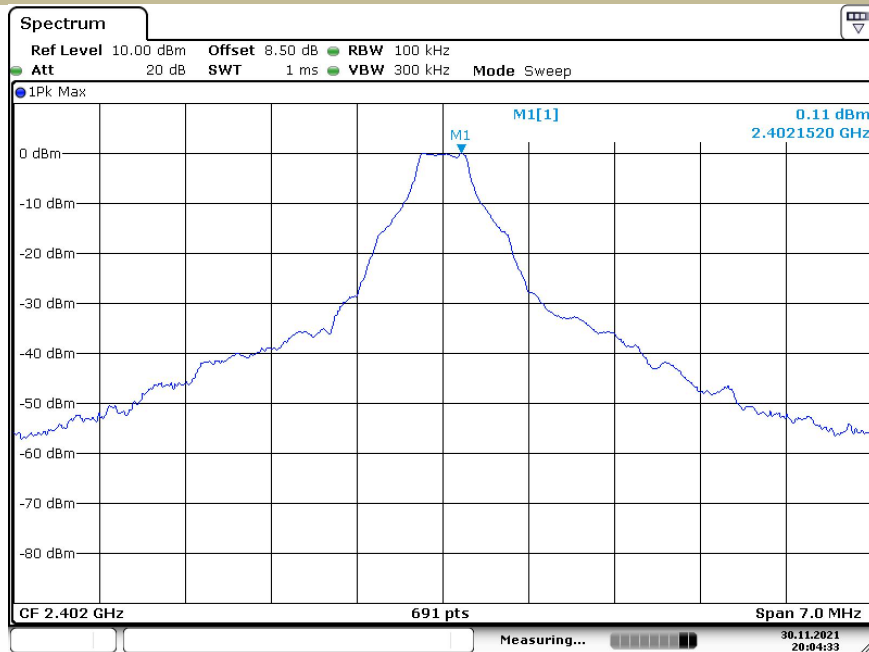

Date: 30.NOV.2021 20:04:33

Conduced Spurious RF Conducted Emission  
 Test Model Bluetooth DSS  
 Channel 0: 2402MHz GFSK

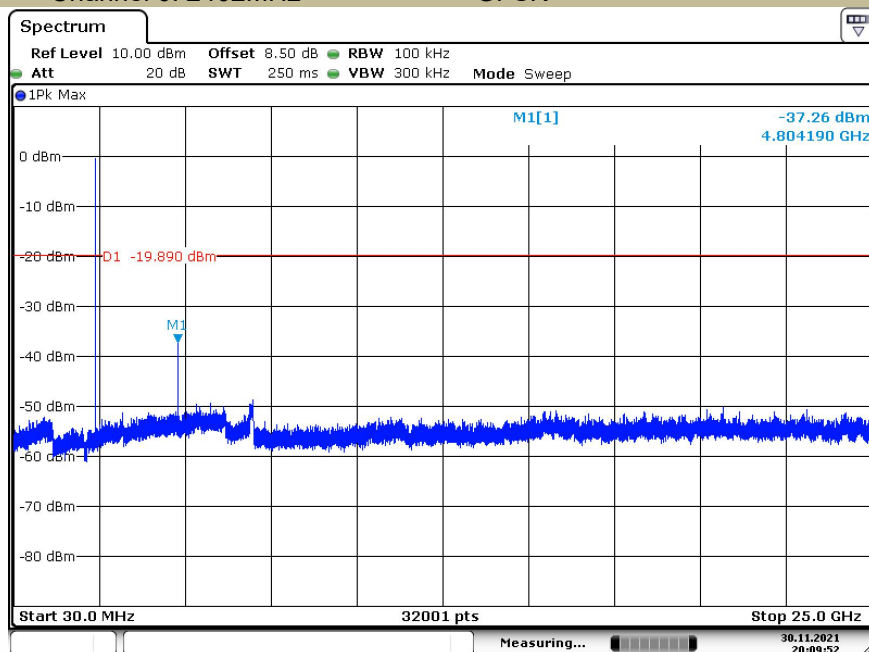

Date: 30.NOV.2021 20:09:52


Test Model

Band-edge Conducted Emissions

Bluetooth DSS

Channel 0: 2402MHz

GFSK

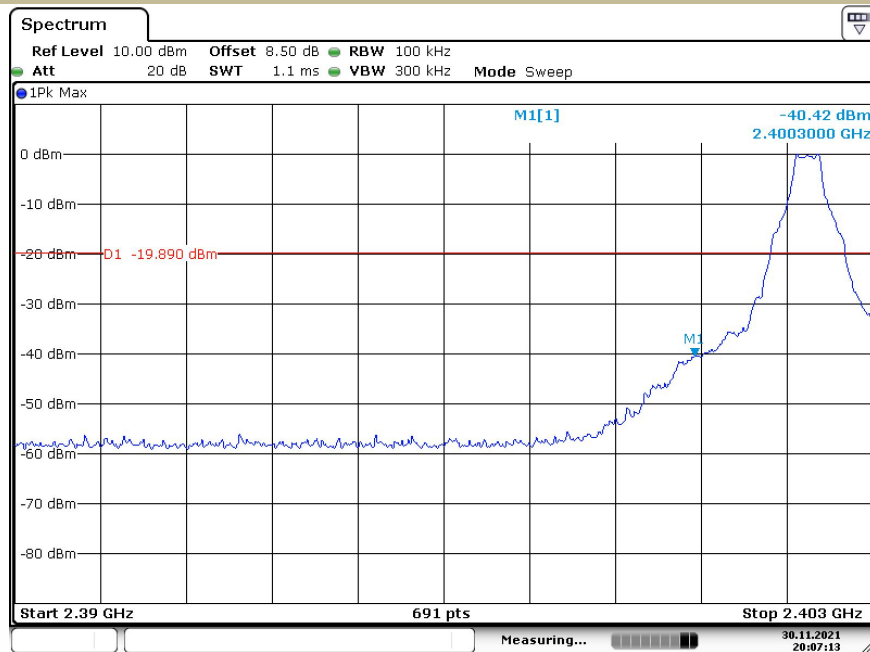

Date: 30.NOV.2021 20:07:13


Test Model

Maximum Conducted Level RBW=100kHz

Bluetooth DSS

Channel 39: 2441MHz


GFSK

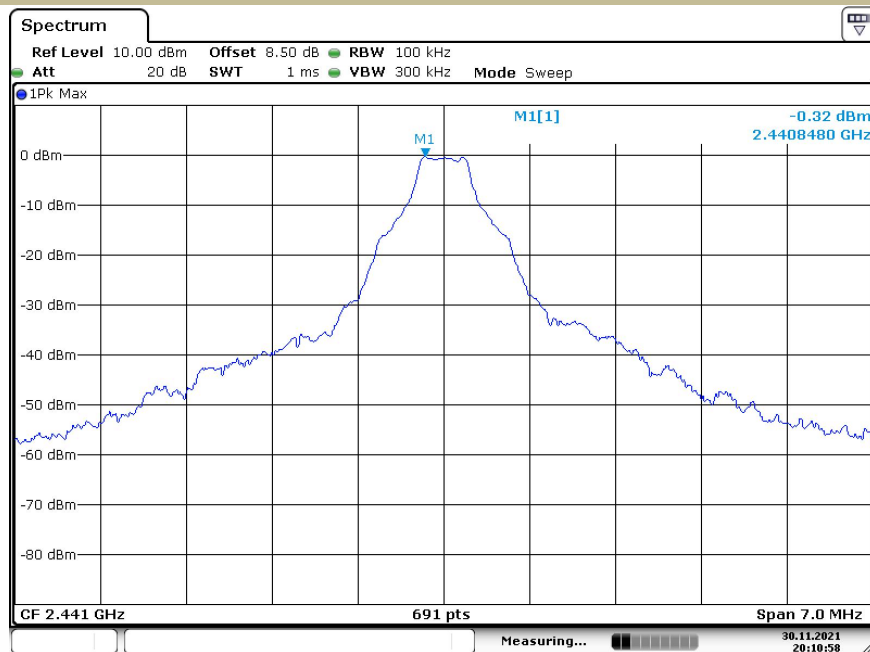

Date: 30.NOV.2021 20:10:58

Test Model

Conduceted Spurious RF Conducted Emission  
Bluetooth DSS  
Channel 39: 2441MHz GFSK

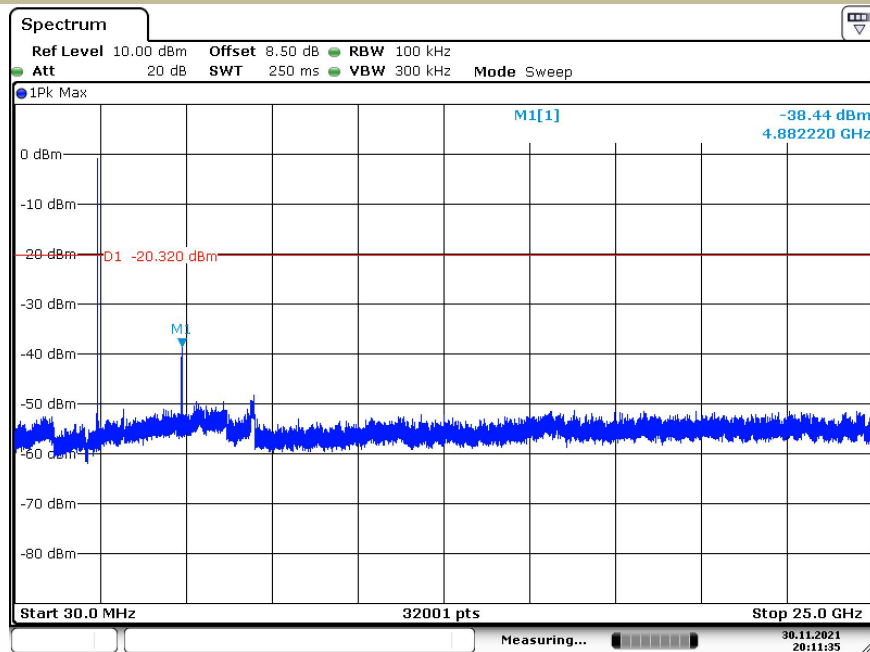

Date: 30.NOV.2021 20:11:36

Test Model


Maximum Conduceted Level RBW=100kHz  
Bluetooth DSS  
Channel 78: 2480MHz GFSK



Date: 30.NOV.2021 20:22:40

Test Model


Conduceted Spurious RF Conducted Emission  
Bluetooth DSS  
Channel 78: 2480MHz GFSK

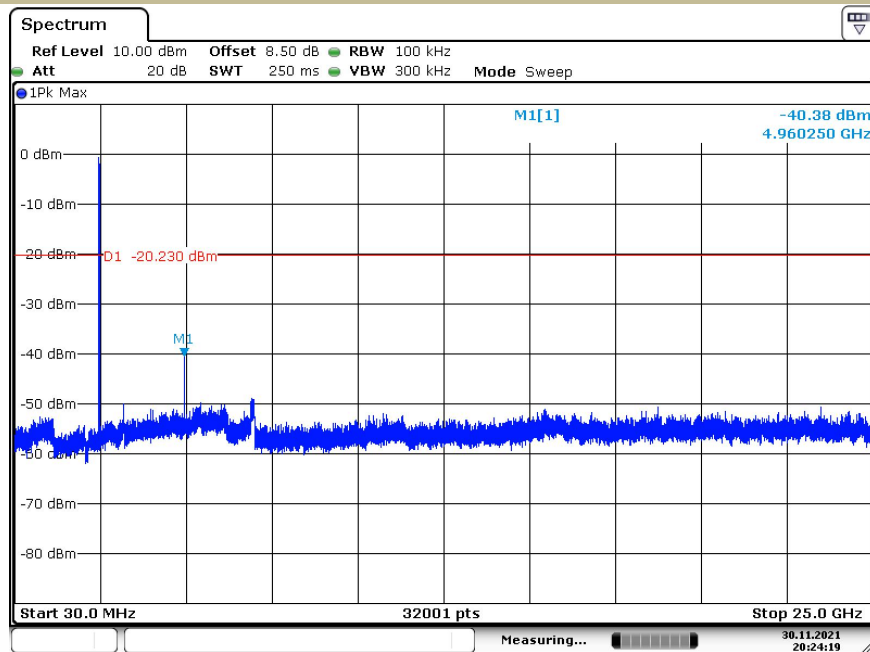

Date: 30.NOV.2021 20:24:19

Test Model

Band-edge Conducted Emissions  
Bluetooth DSS  
Channel 78: 2480MHz GFSK

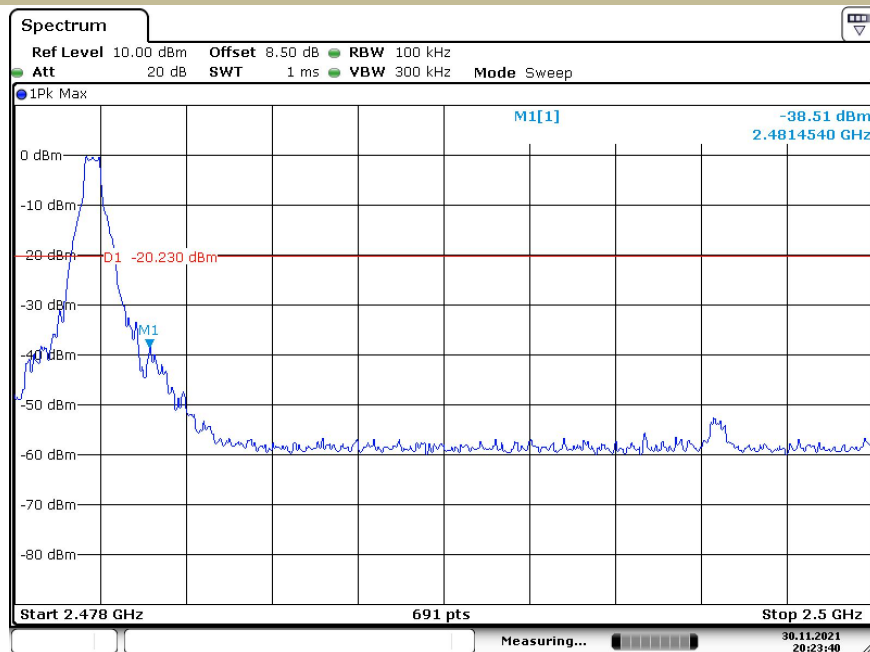


Date: 30.NOV.2021 20:23:41

Test Model

Maximum Conducted Level RBW=100kHz  
Bluetooth DSS  
Hopping


GFSK

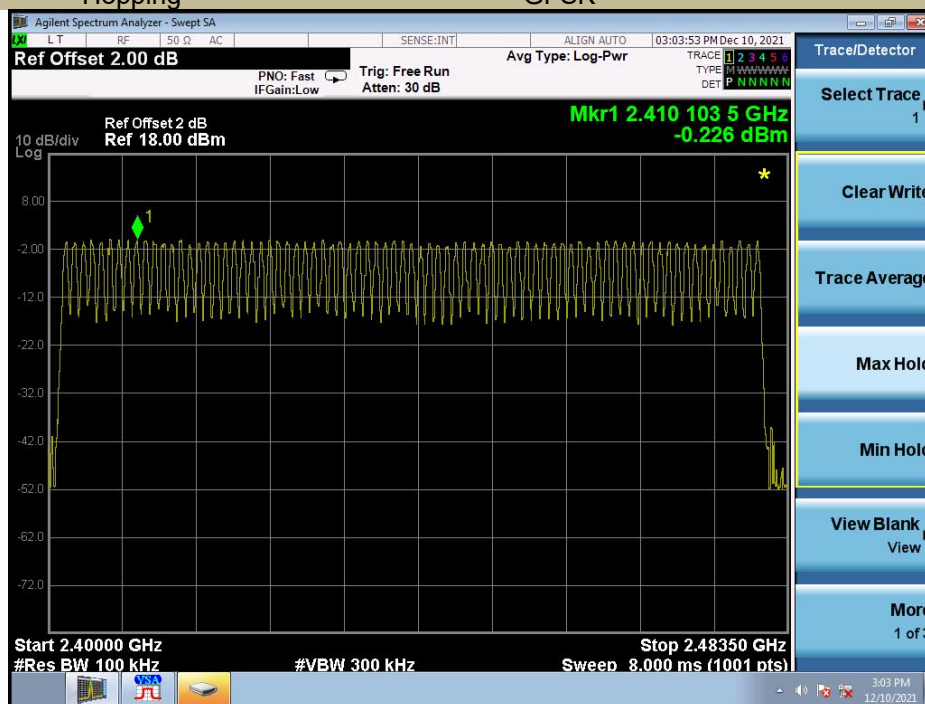

Test Model

Conducted Spurious RF Conducted Emission  
Bluetooth DSS  
Hopping

GFSK

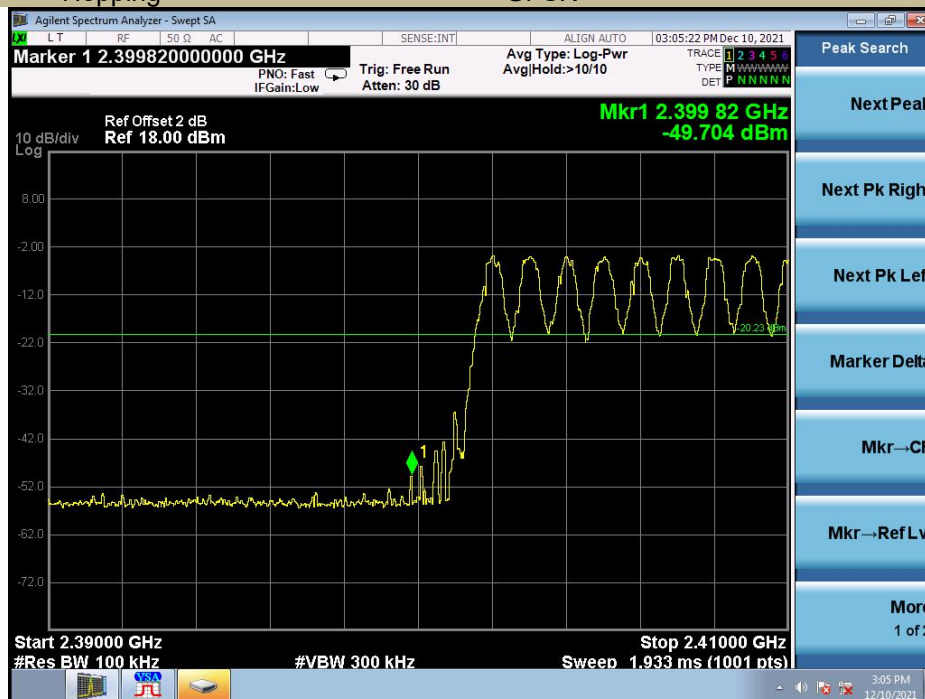

Test Model

Band-edge Conducted Emissions  
Bluetooth DSS  
Hopping

GFSK



## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 meas guidance v05r02

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz               | MHz                 | MHz           | GHz         |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110       | 16.42-16.423        | 399.9-410     | 4.5-5.15    |
| 10.495-0.505      | 16.69475-16.69525   | 608-614       | 5.35-5.46   |
| 2.1735-2.1905     | 16.80425-16.80475   | 960-1240      | 7.25-7.75   |
| 4.125-4.128       | 25.5-25.67          | 1300-1427     | 8.025-8.5   |
| 4.17725-4.17775   | 37.5-38.25          | 1435-1626.5   | 9.0-9.2     |
| 4.20725-4.20775   | 73-74.6             | 1645.5-1646.5 | 9.3-9.5     |
| 6.215-6.218       | 74.8-75.2           | 1660-1710     | 10.6-12.7   |
| 6.26775-6.26825   | 123-138             | 2200-2300     | 14.47-14.5  |
| 8.291-8.294       | 149.9-150.05        | 2310-2390     | 15.35-16.2  |
| 8.362-8.366       | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4   |
| 8.37625-8.38675   | 156.7-156.9         | 2690-2900     | 22.01-23.12 |
| 8.41425-8.41475   | 162.0125-167.17     | 3260-3267     | 23.6-24.0   |
| 12.29-12.293      | 167.72-173.2        | 3332-3339     | 31.2-31.8   |
| 12.51975-12.52025 | 240-285             | 3345.8-3358   | 36.43-36.5  |
| 12.57675-12.57725 | 322-335.4           | 3600-4400     | (2)         |
| 13.36-13.41       |                     |               |             |

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength (μV/m) | Field Strength (dBμV/m) | Measurement Distance |
|---------------------------|-----------------------|-------------------------|----------------------|
| 0.009-0.490               | 2400/F(KHz)           | 20 log (uV/m)           | 300                  |
| 0.490-1.705               | 24000/F(KHz)          | 20 log (uV/m)           | 30                   |
| 1.705-30                  | 30                    | 29.5                    | 30                   |
| 30-88                     | 100                   | 40                      | 3                    |
| 88-216                    | 150                   | 43.5                    | 3                    |
| 216-960                   | 200                   | 46                      | 3                    |
| Above 960                 | 500                   | 54                      | 3                    |

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW ≥ RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

## 9.7.5 Test Results

|                    |           |
|--------------------|-----------|
| Temperature:       | 26° C     |
| Relative Humidity: | 54%       |
| ATM Pressure:      | 1011 mbar |

### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |    | Limit 3m(dBuV/m) |    | Over(dB) |    |
|----------------|-----------------|---------------------------|----|------------------|----|----------|----|
|                |                 | PK                        | AV | PK               | AV | PK       | AV |
| --             | --              | --                        | -- | --               | -- | --       | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor

#### ■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                        | AV    | PK               | AV | PK       | AV     |
| 10978.88       | V               | 55.28                     | 37.16 | 74               | 54 | -18.72   | -16.84 |
| 14975.26       | V               | 57.08                     | 40.16 | 74               | 54 | -16.92   | -13.84 |
| 17935.08       | V               | 61.46                     | 44.25 | 74               | 54 | -12.54   | -9.75  |
| 11669.28       | H               | 54.96                     | 38.12 | 74               | 54 | -19.04   | -15.88 |
| 14420.92       | H               | 55.84                     | 39.16 | 74               | 54 | -18.16   | -14.84 |
| 17984.39       | H               | 63.68                     | 45.17 | 74               | 54 | -12.98   | -10.32 |

Test mode: GFSK Frequency: Channel 39: 2441MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                     | AV    | PK               | AV | PK       | AV     |
| 10958.27       | V               | 55.28                  | 38.42 | 74               | 54 | -18.72   | -15.58 |
| 14996.91       | V               | 55.42                  | 39.12 | 74               | 54 | -18.58   | -14.88 |
| 17893.66       | V               | 62.30                  | 44.15 | 74               | 54 | -11.70   | -9.85  |
| 11530.15       | H               | 54.96                  | 36.89 | 74               | 54 | -19.04   | -17.11 |
| 14658.36       | H               | 56.54                  | 39.12 | 74               | 54 | -17.46   | -14.88 |
| 18000.00       | H               | 61.88                  | 43.59 | 74               | 54 | -12.12   | -10.41 |

Test mode: GFSK Frequency: Channel 78: 2480MHz

| Freq.<br>(MHz) | Ant.Pol.<br>H/V | Emission<br>Level(dBuV/m) |       | Limit 3m(dBuV/m) |    | Over(dB) |        |
|----------------|-----------------|---------------------------|-------|------------------|----|----------|--------|
|                |                 | PK                        | AV    | PK               | AV | PK       | AV     |
| 11849.42       | V               | 56.54                     | 40.50 | 74               | 54 | -17.46   | -13.50 |
| 14854.55       | V               | 58.18                     | 42.20 | 74               | 54 | -15.82   | -11.80 |
| 17986.99       | V               | 63.26                     | 46.50 | 74               | 54 | -10.74   | -7.50  |
| 11837.44       | H               | 55.68                     | 40.40 | 74               | 54 | -18.32   | -13.60 |
| 14968.77       | H               | 56.91                     | 41.30 | 74               | 54 | -17.09   | -12.70 |
| 17961.02       | H               | 62.93                     | 47.50 | 74               | 54 | -11.07   | -6.50  |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor.

(3) Correct Factor= Ant\_F + Cab\_L - Preamp

(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

# ■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Bluetooth (GFSK, pi/4-DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result (GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|--------------|-----------------------|-------------------|-----------------------|-------------------|
| 2386.284        | H            | 50.49                 | 74                | 35.20                 | 54                |
| 2386.744        | V            | 51.33                 | 74                | 36.80                 | 54                |

Test mode: GFSK Frequency: Channel 78: 2480MHz


| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|--------------|-----------------------|-------------------|-----------------------|-------------------|
| 2483.630        | H            | 50.70                 | 74                | 36.80                 | 54                |
| 2483.865        | V            | 51.31                 | 74                | 37.50                 | 54                |

Test mode: GFSK Frequency: Hopping


| Frequency (MHz) | Polarity H/V | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|--------------|-----------------------|-------------------|-----------------------|-------------------|
| 2400.00         | H            | 58.96                 | 74                | 41.29                 | 54                |
| 2483.50         | H            | 51.94                 | 74                | 33.25                 | 54                |
| 2400.00         | V            | 58.46                 | 74                | 41.29                 | 54                |
| 2483.50         | V            | 50.94                 | 74                | 32.19                 | 54                |

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp  
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

|            |                                                   |
|------------|---------------------------------------------------|
| Test Model | Spurious Emission in Restricted Band 2310-2390MHz |
|            | Bluetooth                                         |
|            | Channel 0: 2402MHz                                |
|            | GFSK                                              |
|            | Test By:Tom                                       |
|            | H                                                 |

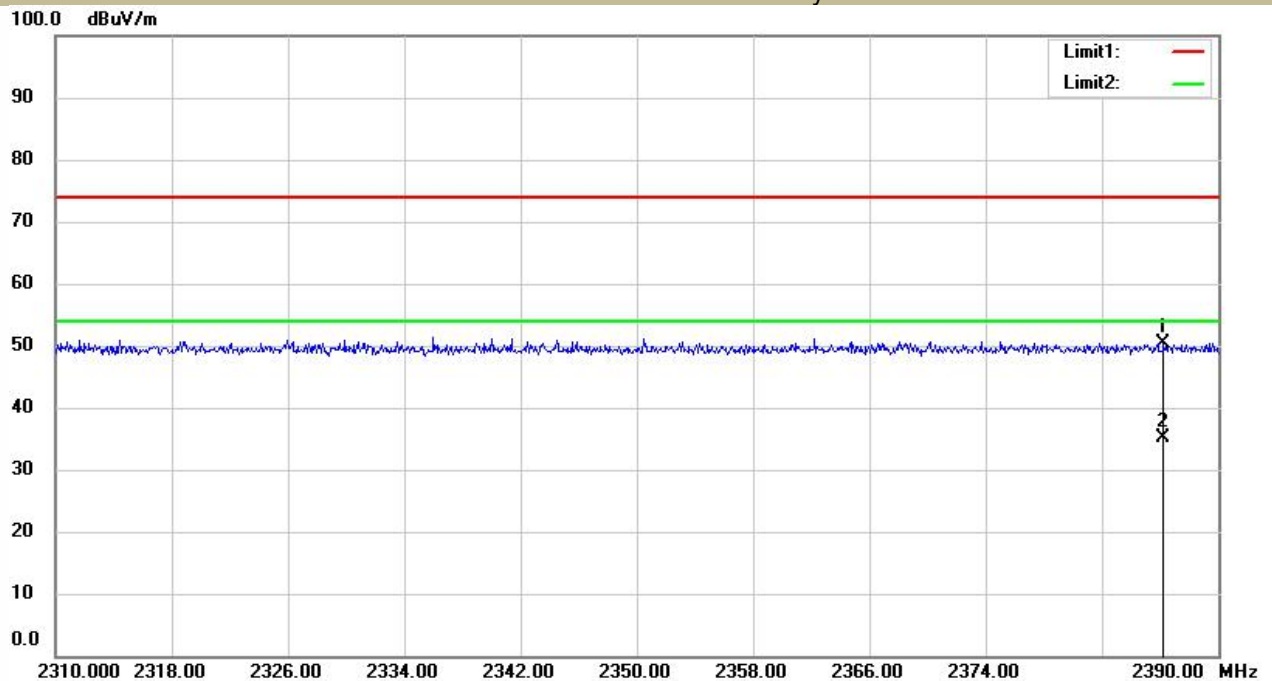

|            |                                                   |
|------------|---------------------------------------------------|
| Test Model | Spurious Emission in Restricted Band 2310-2390MHz |
|            | Bluetooth                                         |
|            | Channel 0: 2402MHz                                |
|            | GFSK                                              |
|            | Test By:Tom                                       |
|            | V                                                 |

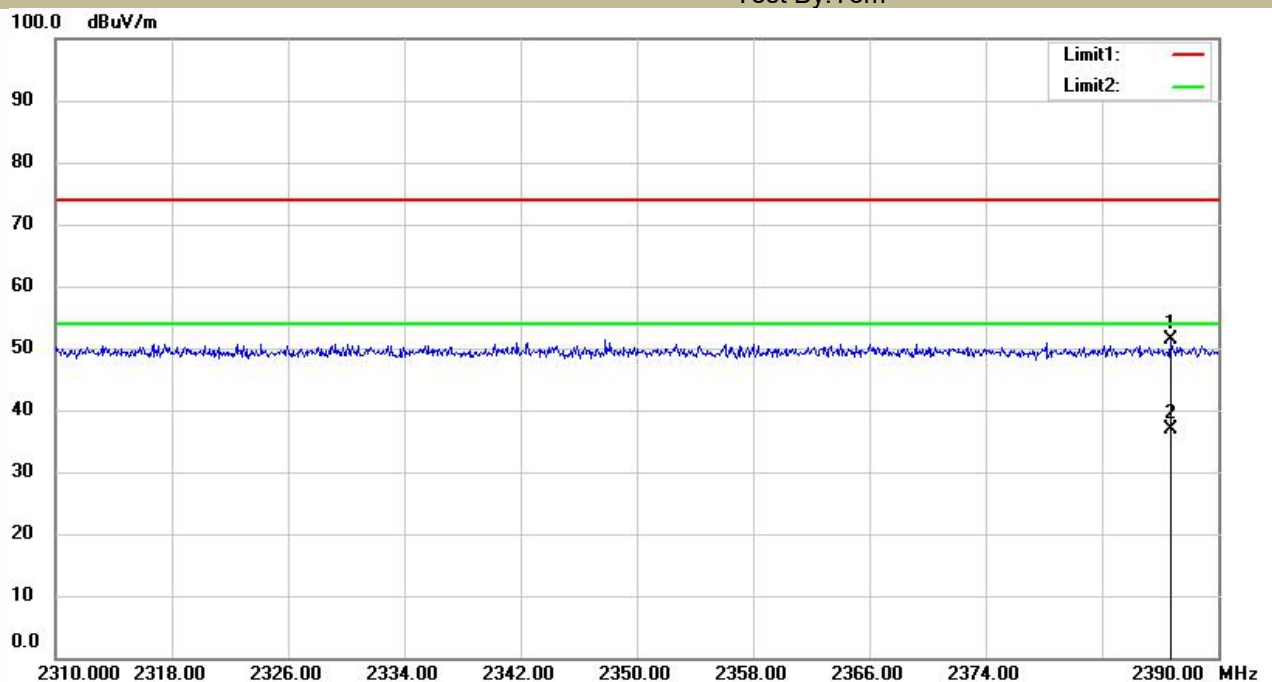

Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz


Bluetooth

Channel 78: 2480MHz

GFSK

H

Test By:Tom

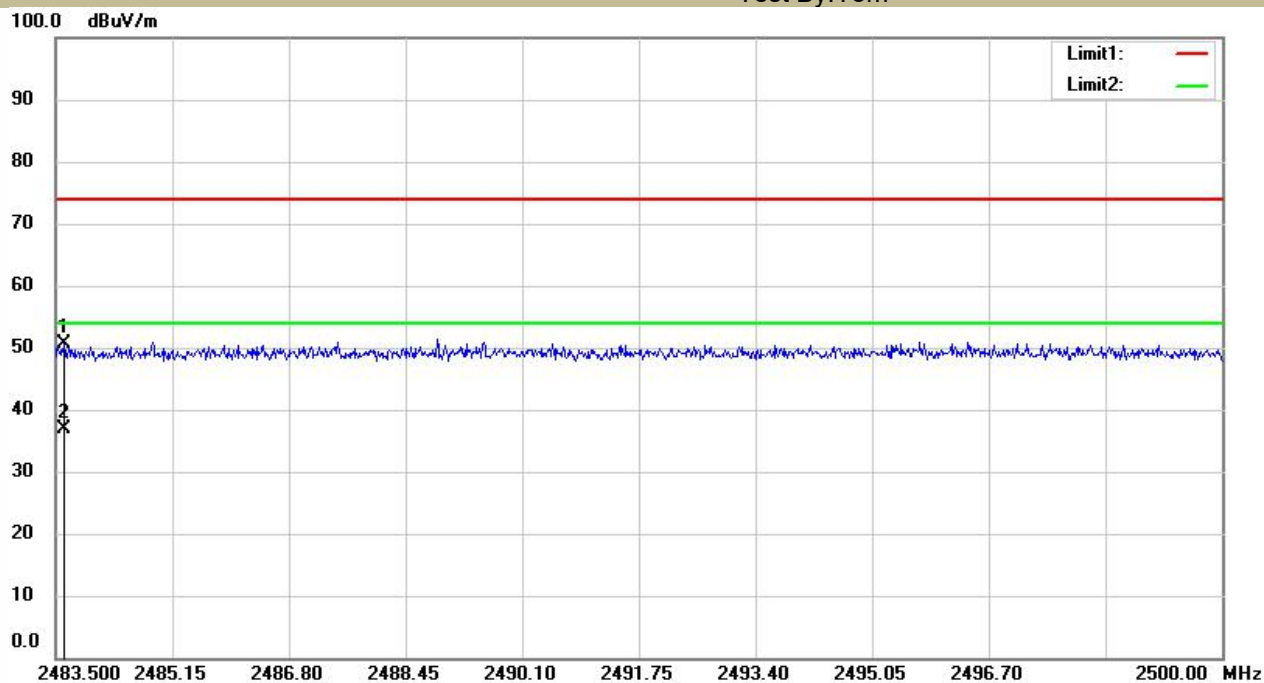

Test Model

Spurious Emission in Restricted Band 2483.5-2500MHz


Bluetooth

Channel 78: 2480MHz


GFSK

V


Test By:Tom

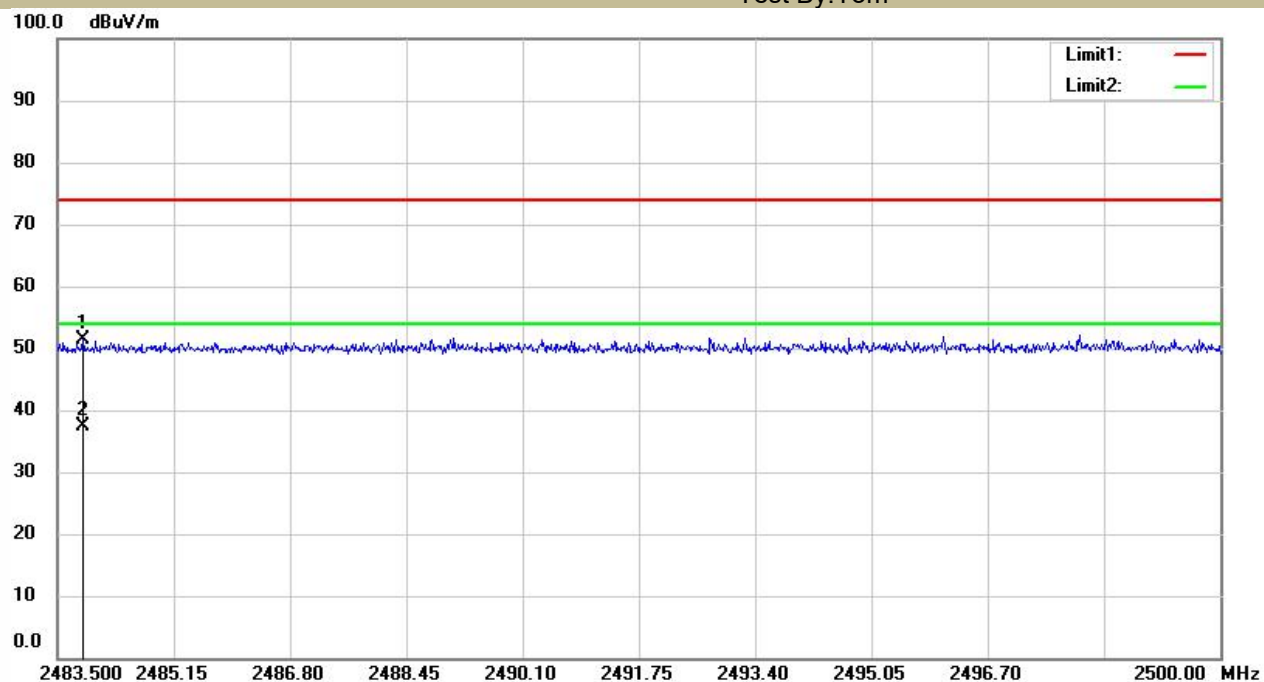

|            |                                                                      |
|------------|----------------------------------------------------------------------|
| Test Model | Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz |
|            | Bluetooth                                                            |
|            | Hopping                                                              |
|            | GFSK                                                                 |
|            | H                                                                    |
|            | Test By:Tom                                                          |

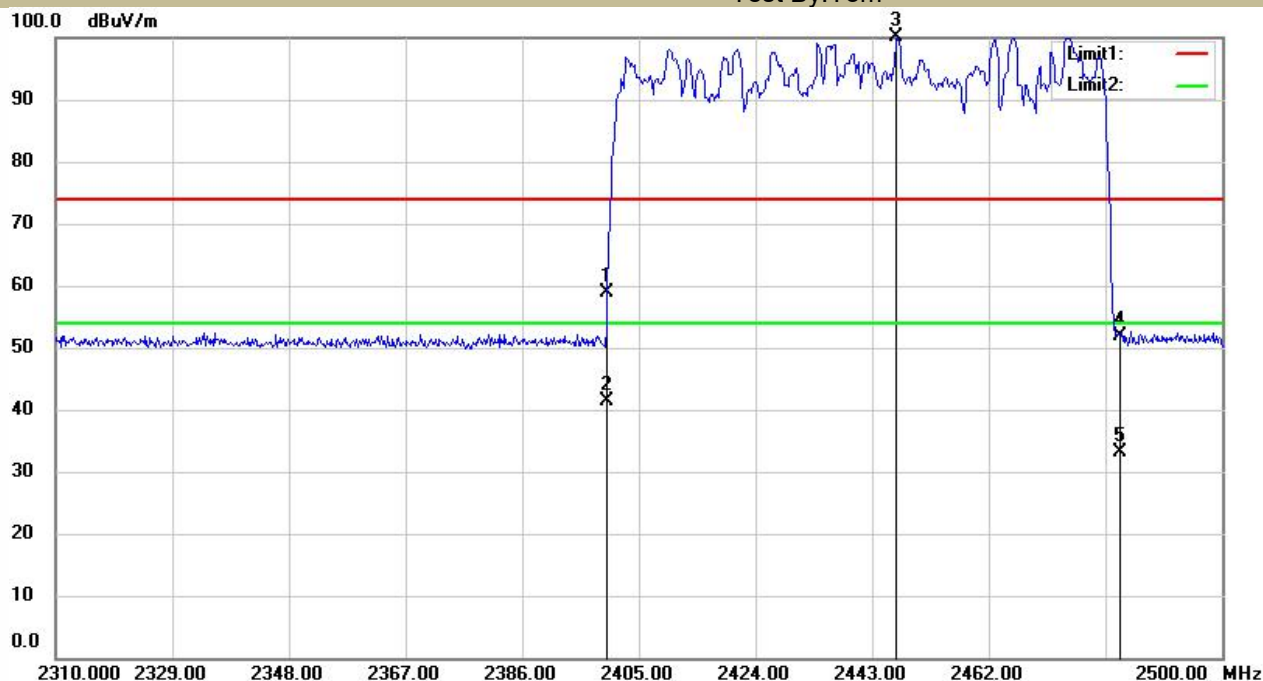


|            |                                                                      |
|------------|----------------------------------------------------------------------|
| Test Model | Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz |
|            | Bluetooth                                                            |
|            | Hopping                                                              |
|            | GFSK                                                                 |
|            | V                                                                    |
|            | Test By:Tom                                                          |

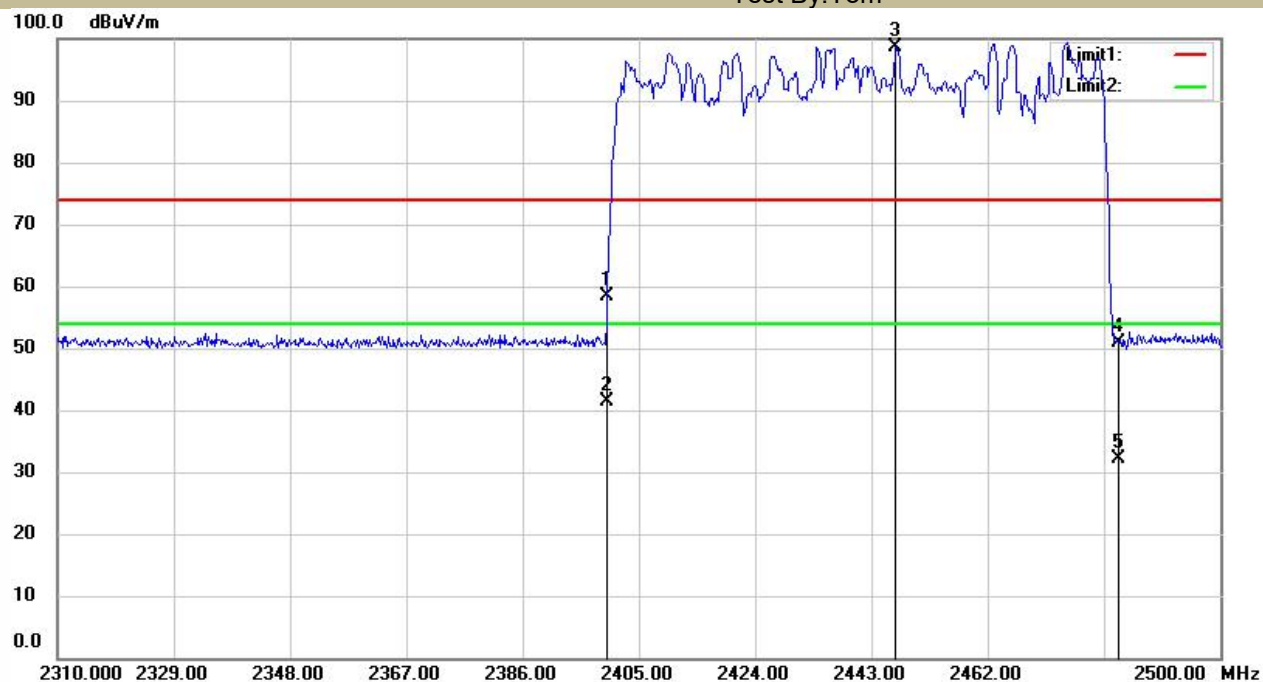


## ■ Spurious Emission below 1GHz (30MHz to 1GHz)


Bluetooth (GFSK, pi/4-DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

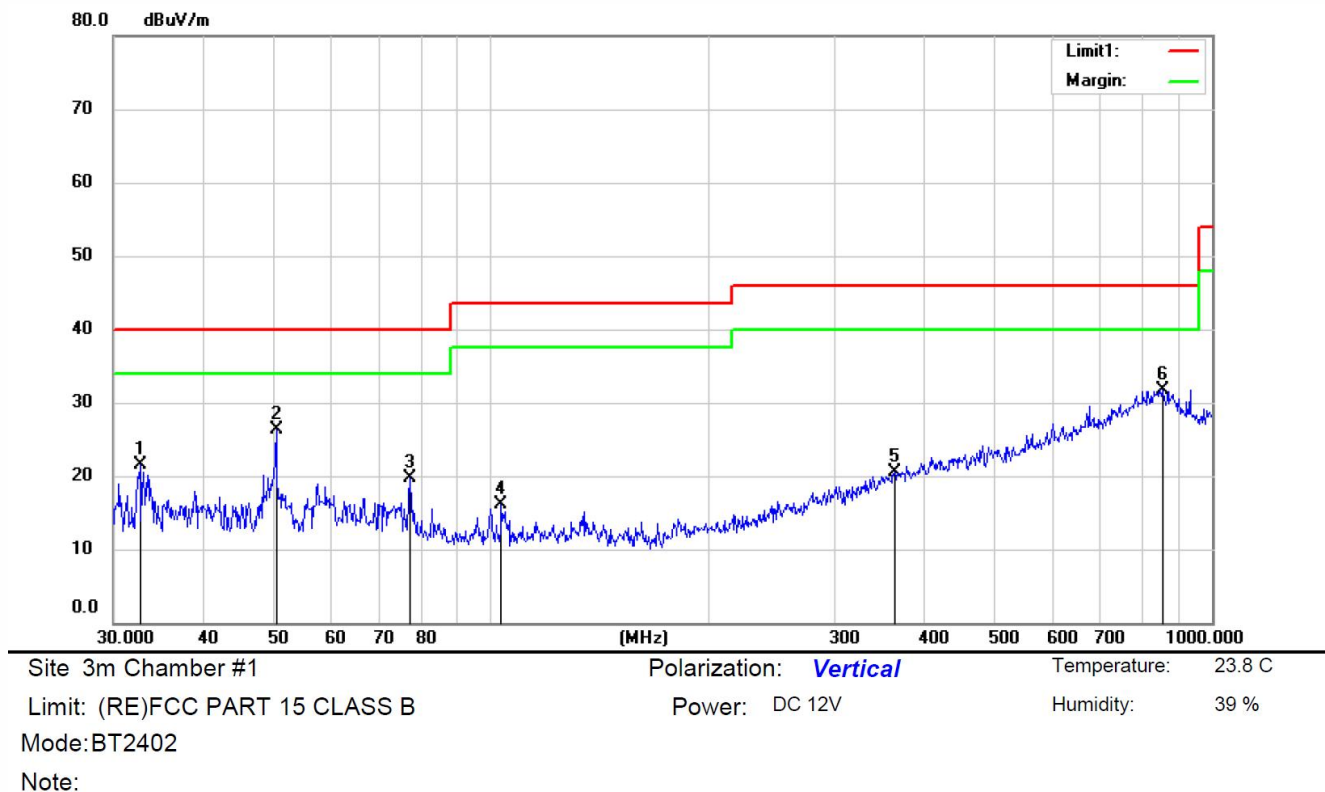


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 32.6340  | 35.82         | -14.36         | 21.46        | 40.00  | -18.54 | QP             |              |         |
| 2   | *   | 50.4090  | 38.33         | -11.96         | 26.37        | 40.00  | -13.63 | QP             |              |         |
| 3   |     | 77.3210  | 34.26         | -14.53         | 19.73        | 40.00  | -20.27 | QP             |              |         |
| 4   |     | 103.4420 | 30.57         | -14.45         | 16.12        | 43.50  | -27.38 | QP             |              |         |
| 5   |     | 362.9843 | 27.89         | -7.38          | 20.51        | 46.00  | -25.49 | QP             |              |         |
| 6   |     | 854.0247 | 29.12         | 2.64           | 31.76        | 46.00  | -14.24 | QP             |              |         |

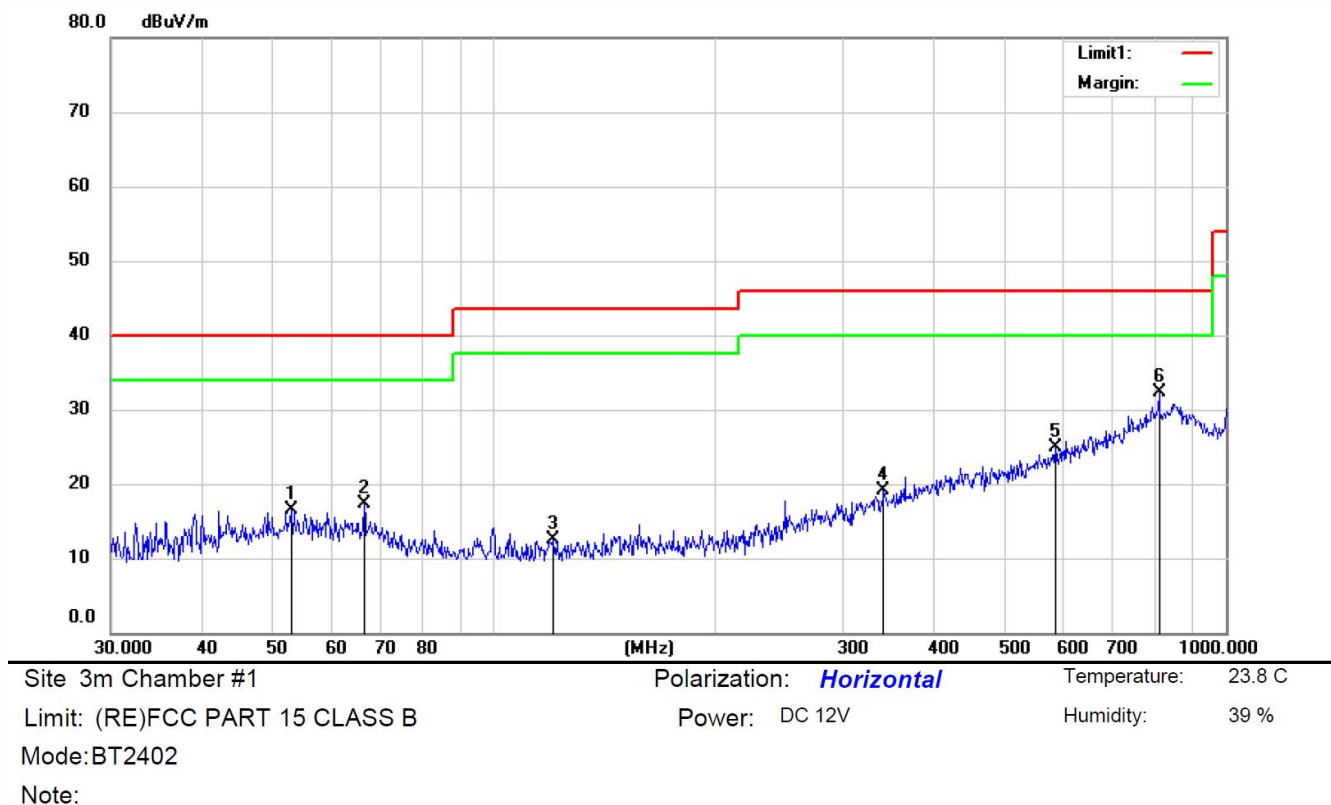

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   | Antenna | Table  |         |
|-----|-----|----------|---------|---------|----------|--------|--------|---------|--------|---------|
|     |     | MHz      | Level   | Factor  | ment     |        |        | Height  | Degree |         |
|     |     |          | dBuV    | dB      | dBuV/m   | dBuV/m | dB     | cm      | degree | Comment |
| 1   |     | 52.9453  | 28.42   | -11.85  | 16.57    | 40.00  | -23.43 | QP      |        |         |
| 2   |     | 66.4990  | 29.71   | -12.43  | 17.28    | 40.00  | -22.72 | QP      |        |         |
| 3   |     | 120.6991 | 26.78   | -14.36  | 12.42    | 43.50  | -31.08 | QP      |        |         |
| 4   |     | 340.7816 | 26.95   | -7.78   | 19.17    | 46.00  | -26.83 | QP      |        |         |
| 5   |     | 584.7894 | 28.21   | -3.40   | 24.81    | 46.00  | -21.19 | QP      |        |         |
| 6   | *   | 810.2653 | 30.54   | 1.75    | 32.29    | 46.00  | -13.71 | QP      |        |         |

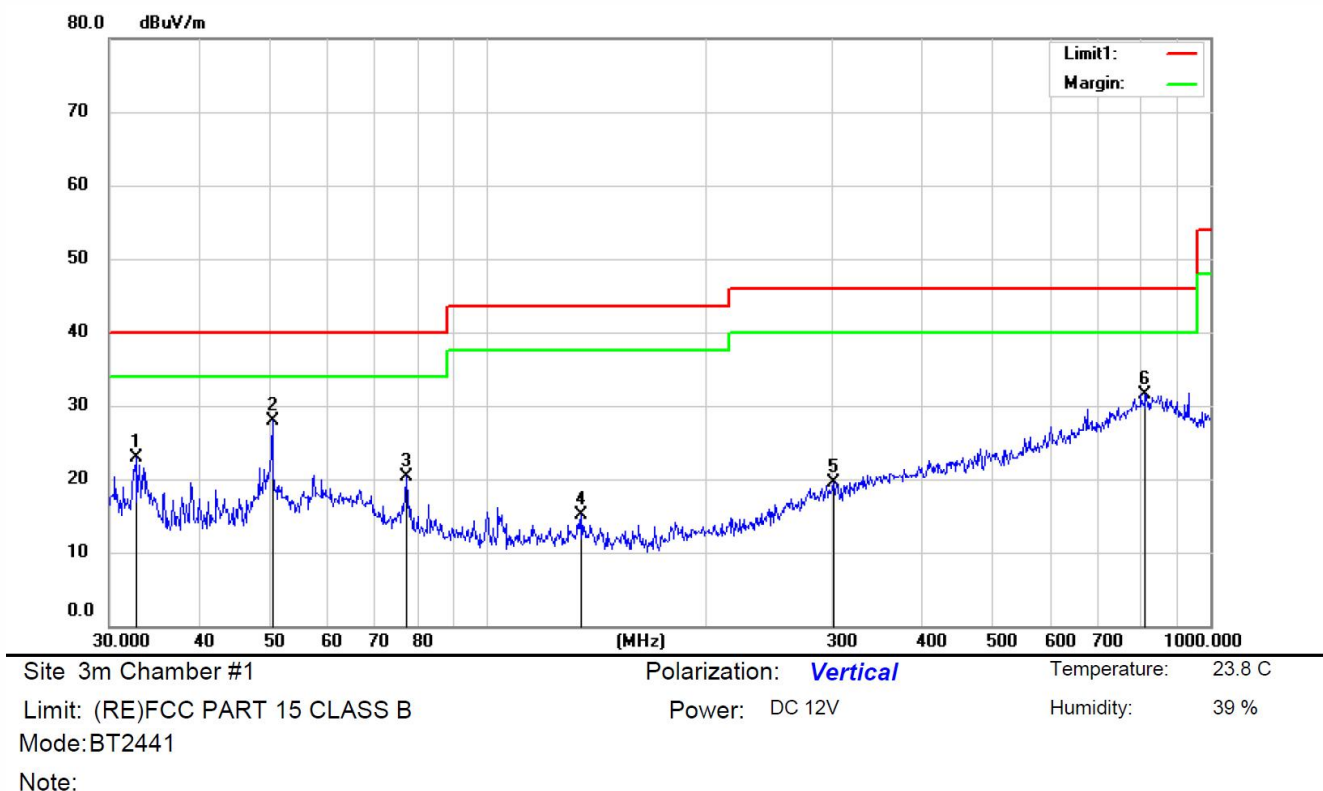

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |        |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|--------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector       | cm           | degree | Comment |
| 1   |     | 32.6340  | 37.32         | -14.36         | 22.96       | 40.00  | -17.04 | QP             |              |        |         |
| 2   | *   | 50.4090  | 39.83         | -11.96         | 27.87       | 40.00  | -12.13 | QP             |              |        |         |
| 3   |     | 77.3210  | 34.76         | -14.53         | 20.23       | 40.00  | -19.77 | QP             |              |        |         |
| 4   |     | 135.0318 | 29.27         | -14.19         | 15.08       | 43.50  | -28.42 | QP             |              |        |         |
| 5   |     | 301.4223 | 28.55         | -8.99          | 19.56       | 46.00  | -26.44 | QP             |              |        |         |
| 6   |     | 813.1114 | 29.63         | 1.81           | 31.44       | 46.00  | -14.56 | QP             |              |        |         |

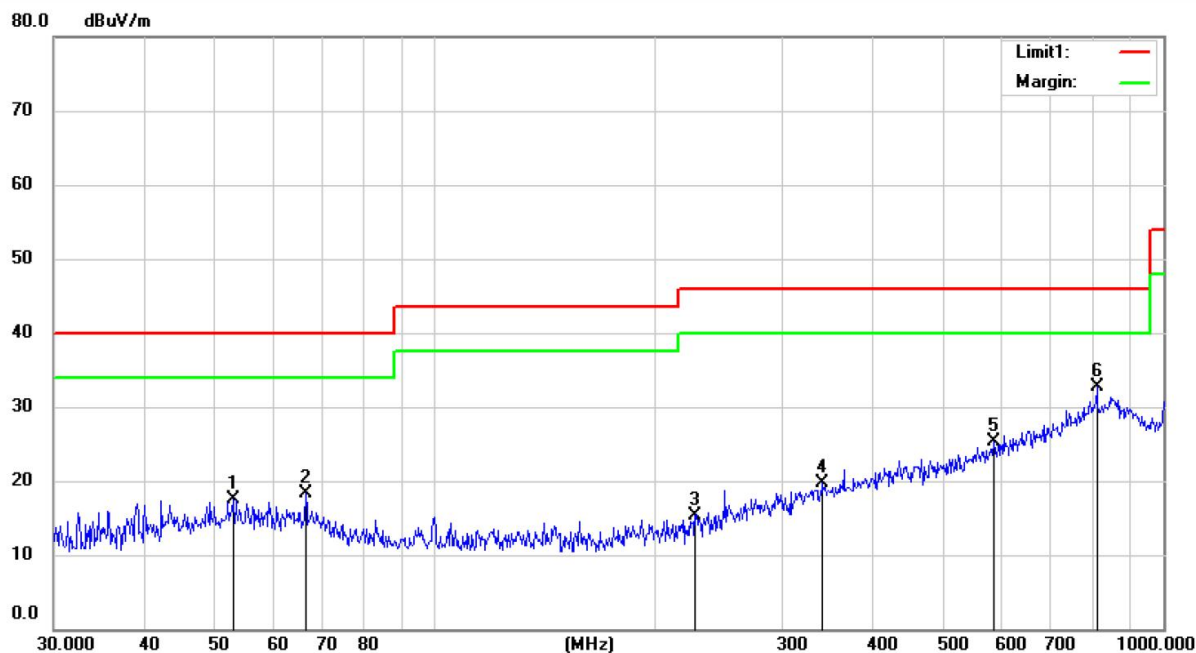

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 23.8 C

Limit: (RE)FCC PART 15 CLASS B


Power: DC 12V

Humidity: 39 %

Mode: BT2441

Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 52.9453  | 29.42         | -11.85         | 17.57       | 40.00  | -22.43 | QP             |              |         |
| 2   |     | 66.4990  | 30.71         | -12.43         | 18.28       | 40.00  | -21.72 | QP             |              |         |
| 3   |     | 227.6904 | 28.02         | -12.69         | 15.33       | 46.00  | -30.67 | QP             |              |         |
| 4   |     | 340.7816 | 27.45         | -7.78          | 19.67       | 46.00  | -26.33 | QP             |              |         |
| 5   |     | 584.7894 | 28.71         | -3.40          | 25.31       | 46.00  | -20.69 | QP             |              |         |
| 6   | *   | 810.2653 | 31.04         | 1.75           | 32.79       | 46.00  | -13.21 | QP             |              |         |

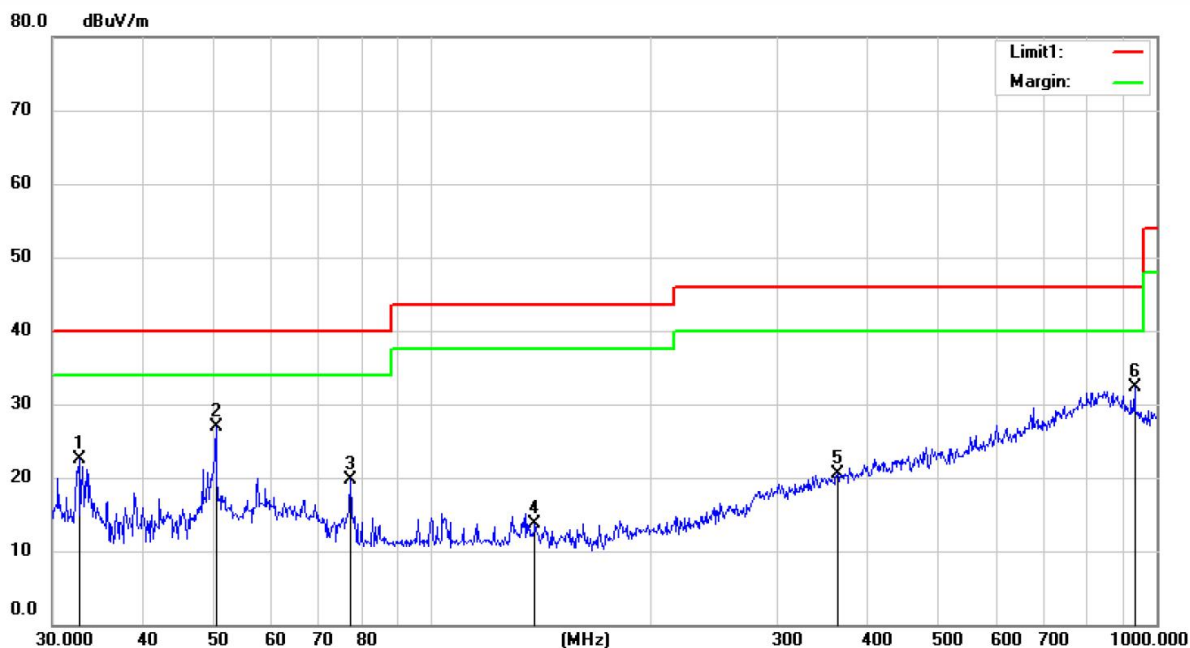

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 23.8 C

Limit: (RE)FCC PART 15 CLASS B


Power: DC 12V

Humidity: 39 %

Mode: BT2480

Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 32.6340  | 36.82         | -14.36         | 22.46       | 40.00  | -17.54 | QP             |              |         |
| 2   | *   | 50.4090  | 38.83         | -11.96         | 26.87       | 40.00  | -13.13 | QP             |              |         |
| 3   |     | 77.3210  | 34.26         | -14.53         | 19.73       | 40.00  | -20.27 | QP             |              |         |
| 4   |     | 138.8734 | 28.10         | -14.38         | 13.72       | 43.50  | -29.78 | QP             |              |         |
| 5   |     | 362.9843 | 27.89         | -7.38          | 20.51       | 46.00  | -25.49 | QP             |              |         |
| 6   |     | 932.2712 | 31.74         | 0.49           | 32.23       | 46.00  | -13.77 | QP             |              |         |

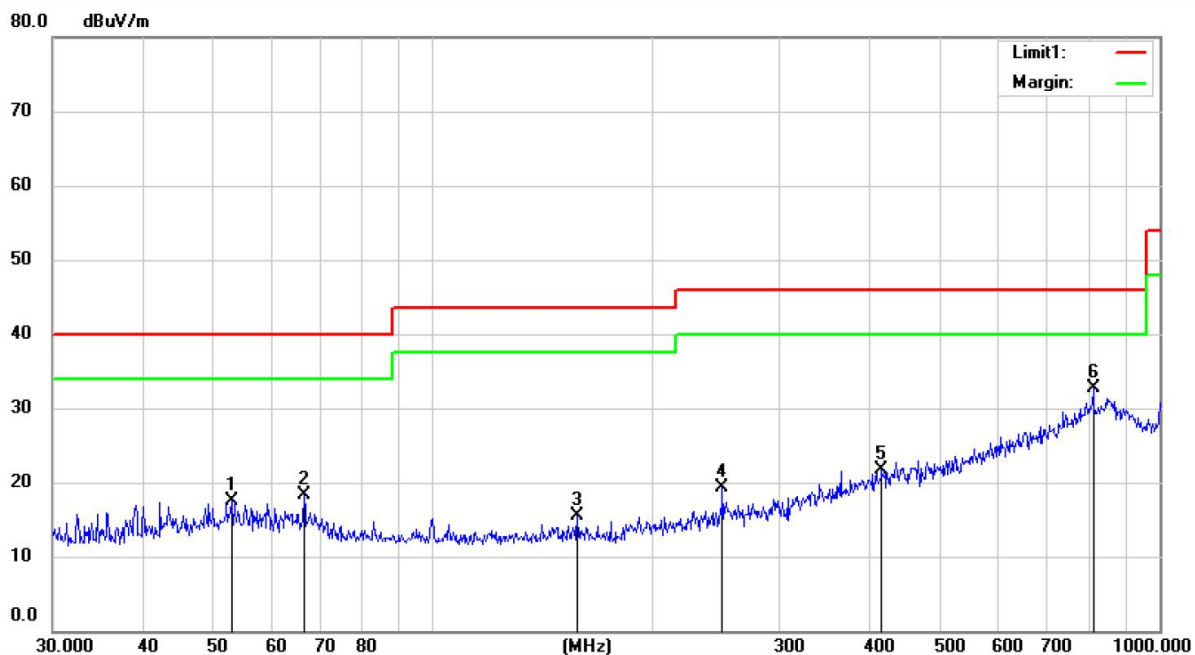

Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 23.8 C

Limit: (RE)FCC PART 15 CLASS B

Power: DC 12V

Humidity: 39 %

Mode: BT2480

Note:

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 52.9453  | 29.42         | -11.85         | 17.57       | 40.00  | -22.43 | QP             |              |         |
| 2   |     | 66.4990  | 30.71         | -12.43         | 18.28       | 40.00  | -21.72 | QP             |              |         |
| 3   |     | 158.1123 | 29.42         | -13.90         | 15.52       | 43.50  | -27.98 | QP             |              |         |
| 4   |     | 250.3010 | 30.45         | -11.22         | 19.23       | 46.00  | -26.77 | QP             |              |         |
| 5   |     | 414.7223 | 27.79         | -6.16          | 21.63       | 46.00  | -24.37 | QP             |              |         |
| 6   | *   | 810.2653 | 31.04         | 1.75           | 32.79       | 46.00  | -13.21 | QP             |              |         |

## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a)

### 9.8.2 Conformance Limit

| Conducted Emission Limit                                                                                                                                                  |            |         |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|---------|
| Frequency(MHz)                                                                                                                                                            | Quasi-peak | Average |
| 0.15-0.5                                                                                                                                                                  | 66-56      | 56-46   |
| 0.5-5.0                                                                                                                                                                   | 56         | 46      |
| 5.0-30.0                                                                                                                                                                  | 60         | 50      |
| Note: 1. The lower limit shall apply at the transition frequencies<br>2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz. |            |         |

### 9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

### 9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results

N/A.

The EUT is DC powered.

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

| Standard            | Requirement                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

PASS.

The EUT has 1 antenna: a Internal Antenna for BT, the gain is 2.08 dBi;

Note: ☒ Antennas use a permanently attached antenna which is not replaceable.  
☐ Not using a standard antenna jack or electrical connector for antenna replacement  
☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

## Detail of factor for radiated emission

| Frequency(MHz) | Ant_F(dB) | Cab_L(dB) | Preamp(dB) | Correct Factor(dB) |
|----------------|-----------|-----------|------------|--------------------|
| 0.009          | 20.6      | 0.03      | \          | 20.63              |
| 0.15           | 20.7      | 0.1       | \          | 20.8               |
| 1              | 20.9      | 0.15      | \          | 21.05              |
| 10             | 20.1      | 0.28      | \          | 20.38              |
| 30             | 18.8      | 0.45      | \          | 19.25              |
| 30             | 11.7      | 0.62      | 27.9       | -15.58             |
| 100            | 12.5      | 1.02      | 27.8       | -14.28             |
| 300            | 12.9      | 1.91      | 27.5       | -12.69             |
| 600            | 19.2      | 2.92      | 27         | -4.88              |
| 800            | 21.1      | 3.54      | 26.6       | -1.96              |
| 1000           | 22.3      | 4.17      | 26.2       | 0.27               |
| 1000           | 25.6      | 1.76      | 41.4       | -14.04             |
| 3000           | 28.9      | 3.27      | 43.2       | -11.03             |
| 5000           | 31.1      | 4.2       | 44.6       | -9.3               |
| 8000           | 36.2      | 5.95      | 44.7       | -2.55              |
| 10000          | 38.4      | 6.3       | 43.9       | 0.8                |
| 12000          | 38.5      | 7.14      | 42.3       | 3.34               |
| 15000          | 40.2      | 8.15      | 41.4       | 6.95               |
| 18000          | 45.4      | 9.02      | 41.3       | 13.12              |
| 18000          | 37.9      | 1.81      | 47.9       | -8.19              |
| 21000          | 37.9      | 1.95      | 48.7       | -8.85              |
| 25000          | 39.3      | 2.01      | 42.8       | -1.49              |
| 28000          | 39.6      | 2.16      | 46.0       | -4.24              |
| 31000          | 41.2      | 2.24      | 44.5       | -1.06              |
| 34000          | 41.5      | 2.29      | 46.6       | -2.81              |
| 37000          | 43.8      | 2.30      | 46.4       | -0.3               |
| 40000          | 43.2      | 2.50      | 42.2       | 3.5                |

----- END OF REPORT -----