



For BEB/120/40+32/1 & BEB/120/32+22/1 model

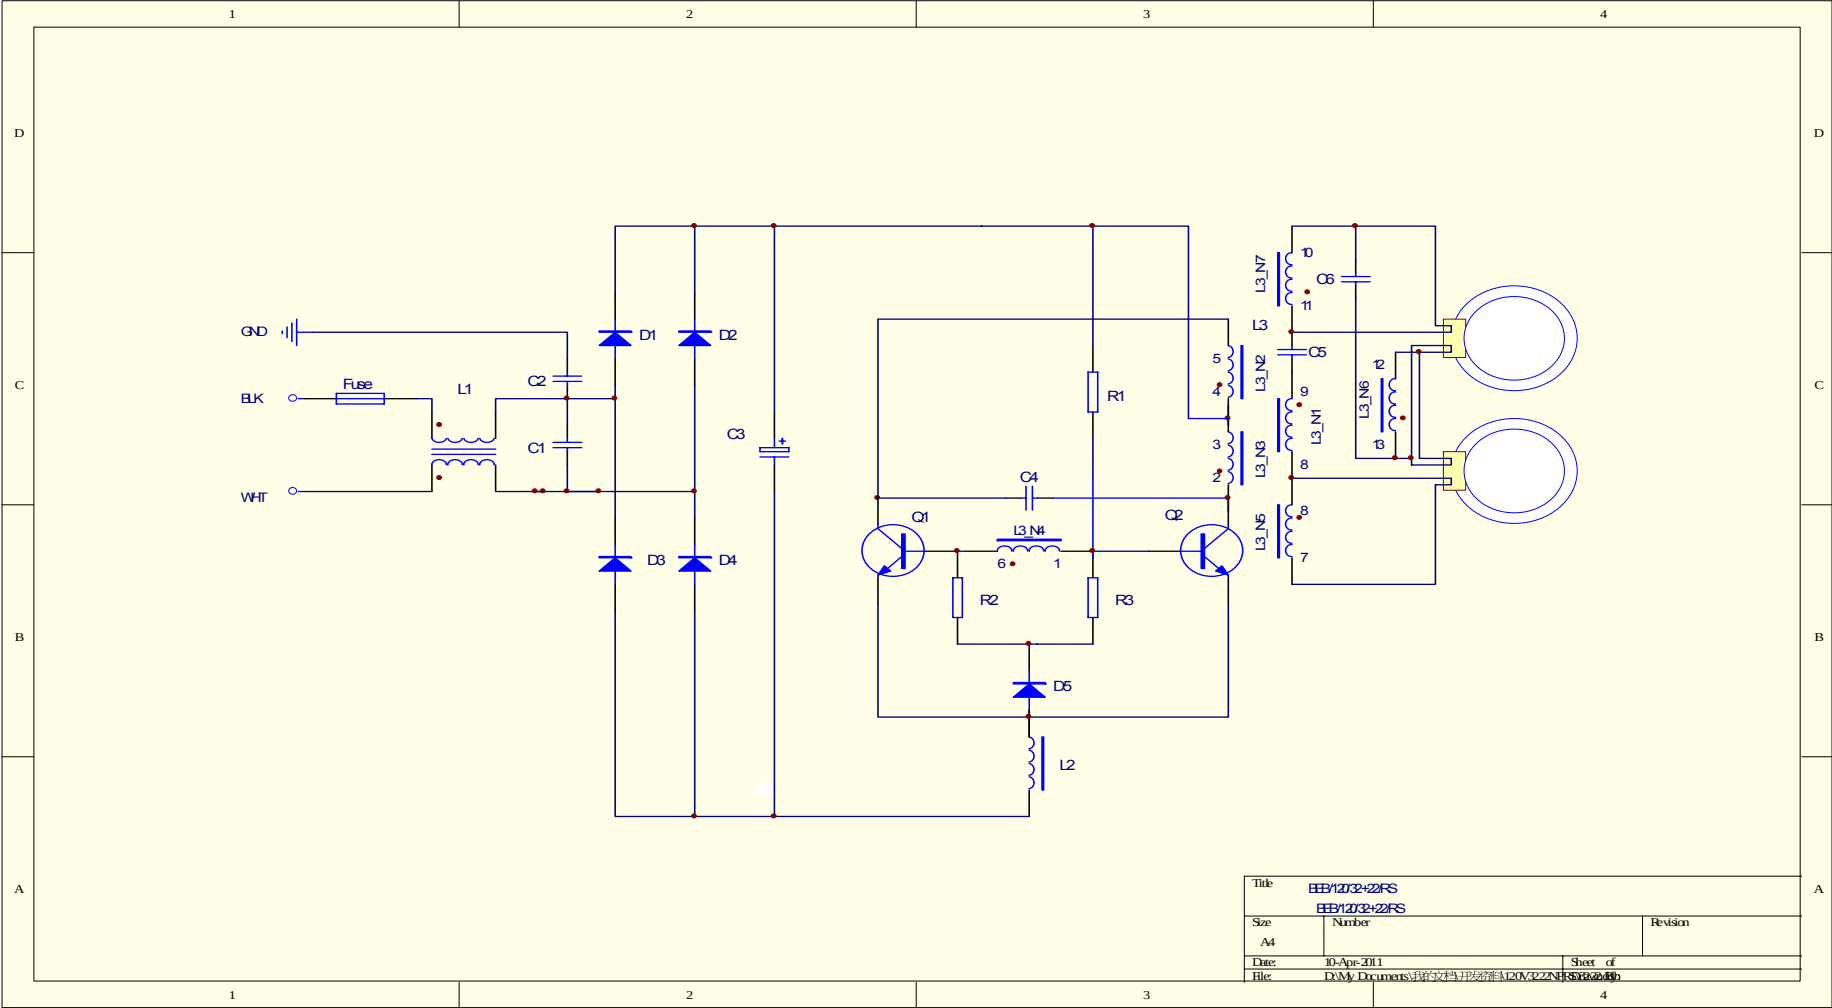

For BEB/120/22 model

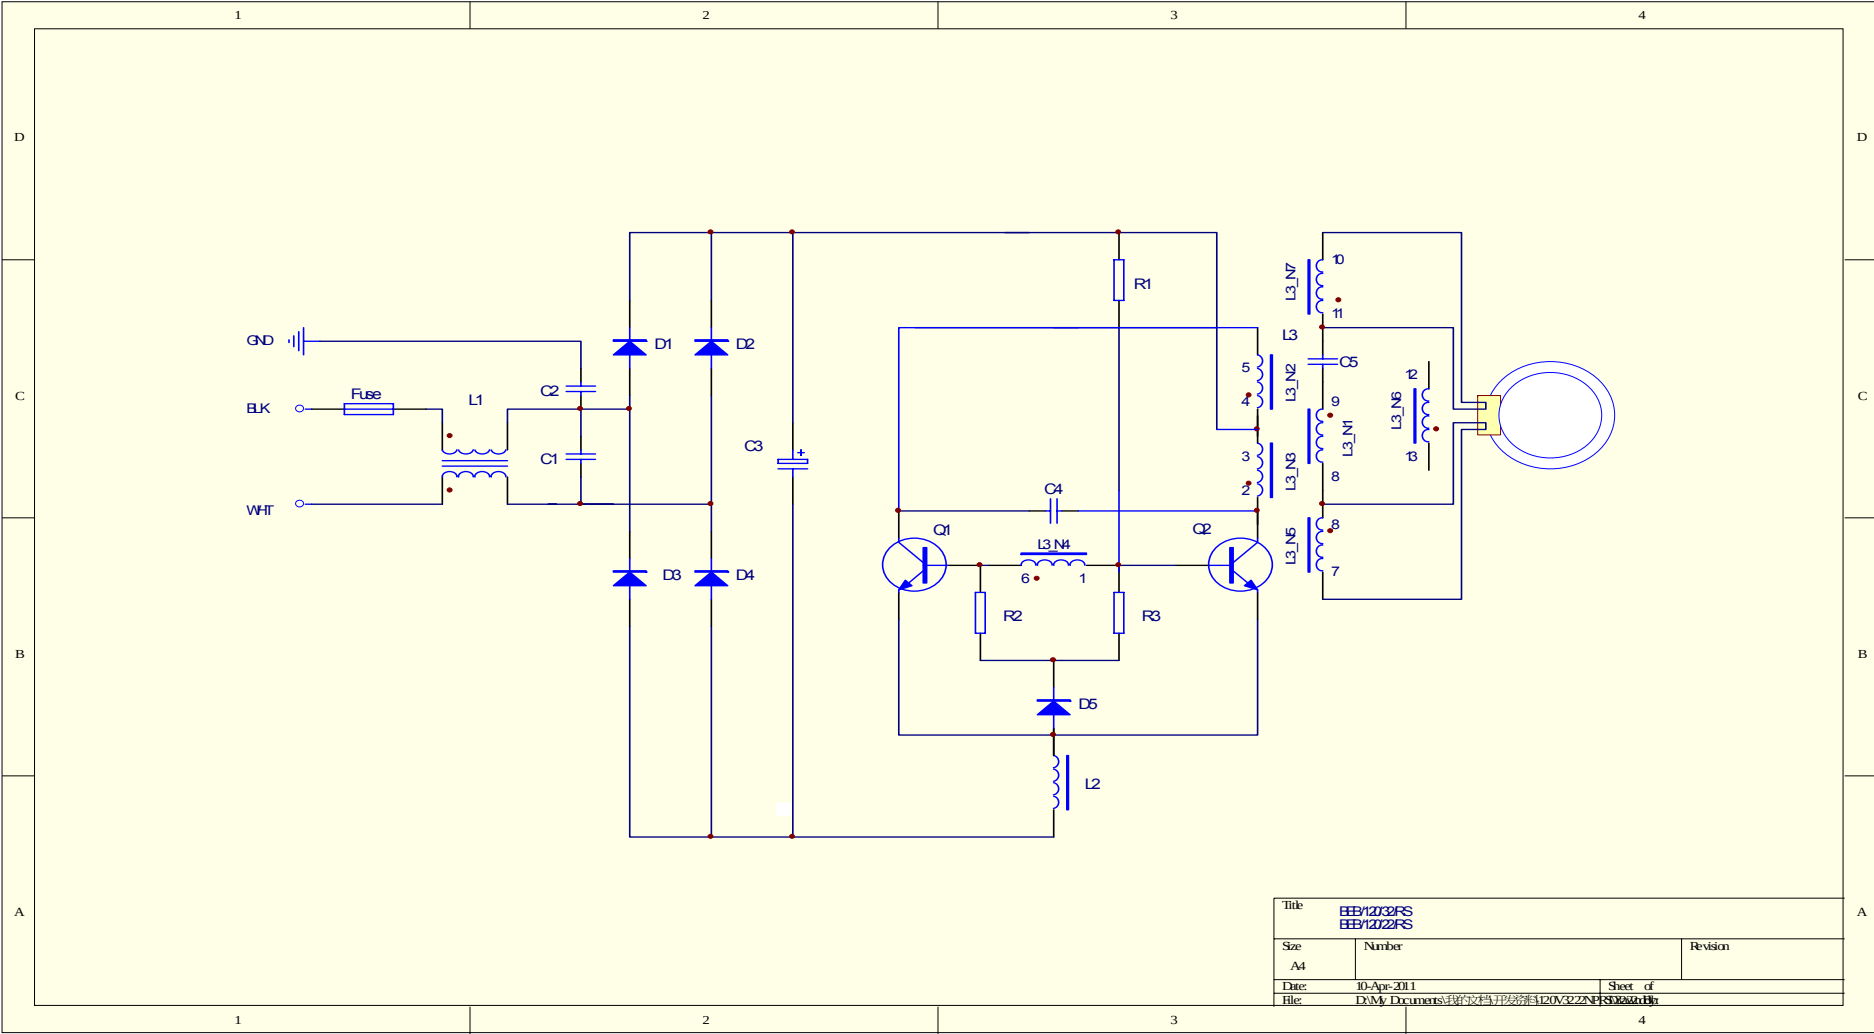

BOM list for BEB/120/40+32/1 & BEB/120/32+22/1 model

No.	Code	Name	Specific	Num.
1	R1	MOS	0.5W 62K J	1
2	R2,3	MOS	0.5W 150Ω J	2
3	C1	CL21	400V0.1uF K P10	1
4	C2	CT81	3KV2200pF M P7.5	1
5	C3	CD11GH	200V47uF105℃M12.5×20	1
6	C4	NPP	1.6KV3.9nF J P15	1
7	C5	NPP	1.6KV1.5nF J P15	1
8	C6	CT81	2KV220pF M P5	1
9	D1-4	RD	1N4007 1000V 1A DO41	4
10	D5	FRD	1N4148 75V 0.15A DO-35	1
11	Q1,2	NPN	BUL742C TO-220	2
12	L1	BT1901	EE19 10K	1
13	L2	BT1902	EE19 2.5K	1
14	L3	BT2503	EF25/9 2.5K	1
15	Fuse	3E	125V 3A 3.6×10mm	1
16	J1	JUM	Φ0.6 P=15	1
17	Lead	AWM	11125 105℃600V 18AWG	3.16m
18	GND	AWM	1015 105℃600V 22AWG	0.07
19	RVT	RVT	1.6X2.5	10
20	PCB	DFD-3	DFD-3 122×34mm	1/6
21	IP1,2	6520	0.15mm	1 套
22	Potting	HF-28P	Potting HF-28P HB	0.2Kg
23	LC	LC-1	PP-HVO V-0 65℃	3
24	LH	G10Q	G10Q	2
25	CASE	CS-1	Case153X40X30mm	1
26	Label	ZT4	ZT4 100℃	1
27	L0	7447031		1

BOM list for BEB/120/22 model

No.	Code	Name	Specific	Num.
1	R1	MOS	0.5W 62K J	1
2	R2,3	MOS	0.5W 150Ω J	2
3	C1	CL21	400V0.1uF K P10	1
4	C2	CT81	3KV2200pF M P7.5	1
5	C3	CD11GH	200V47uF105℃M12.5×20	1
6	C4	NPP	1.6KV3.9nF J P15	1
7	C5	NPP	1.6KV1.5nF J P15	1
8	D1-4	RD	1N4007 1000V 1A DO41	4
9	D5	FRD	1N4148 75V 0.15A DO-35	1
10	Q1,2	NPN	BUL742C TO-220	2
11	L1	BT1901	EE19 10K	1
12	L2	BT1902	EE19 2.5K	1
13	L3	BT2503	EF25/9 2.5K	1
14	Fuse	3E	125V 3A 3.6×10mm	1
15	J1	JUM	Φ0.6 P=15	1
16	Lead	AWM	11125 105℃600V 18AWG	2.16m
17	GND	AWM	1015 105℃600V 22AWG	0.07
18	RVT	RVT	1.6X2.5	10
19	PCB	DFD-3	DFD-3 122×34mm	1/6
20	IP1,2	6520	0.15mm	1 套
21	Potting	HF-28P	Potting HF-28P HB	0.2Kg
22	LC	LC-1	PP-HVO V-0 65℃	3
23	LH	G10Q	G10Q	1
24	CASE	CS-1	Case153X40X30mm	1
25	Label	ZT4	ZT4 100℃	1
26	L0	7447031		1