


ALIGNMENT PROCEDURE FORM-4		REFERENCE DIAGRAM NO.				PAGE 28																																																						
MODEL		UNIT		BLOCK		ISSUE DATE		ISSUED																																																				
UT601ZH		RF				2004/11/16		KAWAGUCHI																																																				
TITLE		ADJUST POINT			SUB TITLE			REF DIAGRAM																																																				
ADJUSTMENT POINTS RF PCB B101 PD-877 (TOP VIEW)																																																												
<table border="1"> <tr> <td>RT101</td> <td>SQUELCH ADJUST</td> <td>ADJ SQ TIGHT LEVEL 0.6uV ANT IN</td> </tr> <tr> <td>RT202</td> <td>TX HI-POWER ADJUST</td> <td>TX POWER : 24W ADJ @ 14CH</td> </tr> <tr> <td>RT203</td> <td>TX LO-POWER ADJUST</td> <td>TX POWER : 1W ADJ @ 14CH</td> </tr> <tr> <td>RT405</td> <td>MIC DEVIATION LEVEL ADJUST</td> <td>4.4KHz DEV @ 0.1 V MIC IN</td> </tr> <tr> <td>L101</td> <td>BPF ADJUST</td> <td>ANT to TP101 with TG(*1)</td> </tr> <tr> <td>L102</td> <td>BPF ADJUST</td> <td>ANT to TP101 with TG</td> </tr> <tr> <td>L104</td> <td>BPF ADJUST</td> <td>ANT to TP101 with TG</td> </tr> <tr> <td>L105</td> <td>BPF ADJUST</td> <td>ANT to TP101 with TG</td> </tr> <tr> <td>L106</td> <td>BPF ADJUST</td> <td>ANT to TP101 with TG</td> </tr> <tr> <td>L109</td> <td>DISCRI ADJUST</td> <td>TP102 1.6V @ 1mV ANT IN CH70</td> </tr> <tr> <td>L114</td> <td>DISCRI ADJUST</td> <td>TP102 1.6V @ 1mV ANT IN CH16</td> </tr> <tr> <td>L119</td> <td>BPF ADJUST</td> <td>ADJUST TO MAXIMUM SINAD CH70</td> </tr> <tr> <td>L120</td> <td>BPF ADJUST</td> <td>ADJUST TO MAXIMUM SINAD CH70</td> </tr> <tr> <td>L121</td> <td>BPF ADJUST</td> <td>ADJUST TO MAXIMUM SINAD CH70</td> </tr> <tr> <td>L405</td> <td>VCO ADJUST</td> <td>TP401 2.5V @CH16</td> </tr> <tr> <td>L411</td> <td>VCO ADJUST</td> <td>TP402 2.5V @CH70</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>										RT101	SQUELCH ADJUST	ADJ SQ TIGHT LEVEL 0.6uV ANT IN	RT202	TX HI-POWER ADJUST	TX POWER : 24W ADJ @ 14CH	RT203	TX LO-POWER ADJUST	TX POWER : 1W ADJ @ 14CH	RT405	MIC DEVIATION LEVEL ADJUST	4.4KHz DEV @ 0.1 V MIC IN	L101	BPF ADJUST	ANT to TP101 with TG(*1)	L102	BPF ADJUST	ANT to TP101 with TG	L104	BPF ADJUST	ANT to TP101 with TG	L105	BPF ADJUST	ANT to TP101 with TG	L106	BPF ADJUST	ANT to TP101 with TG	L109	DISCRI ADJUST	TP102 1.6V @ 1mV ANT IN CH70	L114	DISCRI ADJUST	TP102 1.6V @ 1mV ANT IN CH16	L119	BPF ADJUST	ADJUST TO MAXIMUM SINAD CH70	L120	BPF ADJUST	ADJUST TO MAXIMUM SINAD CH70	L121	BPF ADJUST	ADJUST TO MAXIMUM SINAD CH70	L405	VCO ADJUST	TP401 2.5V @CH16	L411	VCO ADJUST	TP402 2.5V @CH70			
RT101	SQUELCH ADJUST	ADJ SQ TIGHT LEVEL 0.6uV ANT IN																																																										
RT202	TX HI-POWER ADJUST	TX POWER : 24W ADJ @ 14CH																																																										
RT203	TX LO-POWER ADJUST	TX POWER : 1W ADJ @ 14CH																																																										
RT405	MIC DEVIATION LEVEL ADJUST	4.4KHz DEV @ 0.1 V MIC IN																																																										
L101	BPF ADJUST	ANT to TP101 with TG(*1)																																																										
L102	BPF ADJUST	ANT to TP101 with TG																																																										
L104	BPF ADJUST	ANT to TP101 with TG																																																										
L105	BPF ADJUST	ANT to TP101 with TG																																																										
L106	BPF ADJUST	ANT to TP101 with TG																																																										
L109	DISCRI ADJUST	TP102 1.6V @ 1mV ANT IN CH70																																																										
L114	DISCRI ADJUST	TP102 1.6V @ 1mV ANT IN CH16																																																										
L119	BPF ADJUST	ADJUST TO MAXIMUM SINAD CH70																																																										
L120	BPF ADJUST	ADJUST TO MAXIMUM SINAD CH70																																																										
L121	BPF ADJUST	ADJUST TO MAXIMUM SINAD CH70																																																										
L405	VCO ADJUST	TP401 2.5V @CH16																																																										
L411	VCO ADJUST	TP402 2.5V @CH70																																																										
*1 TG = TRACKING GENERATOR																																																												
REVISIONS:	REV. CODE	△	△	△	△	△	△	△	△	△	△	△	△	△																																														
	DATE																																																											
	LOT # / RN #																																																											
	REVISED BY																																																											
	CHECKED BY																																																											

ALIGNMENT PROCEDURE		FORM-4	REFERENCE DIAGRAM NO. 3-2		PAGE
MODEL	UNIT	BLOCK	ISSUE DATE	ISSUED	
UT601ZH	FRONT	FRONT+WHAM RF	2004/11/16	KWG	
TITLE	FRONT		SUB TITLE	TX	REF. DIAGRAM

FRONT PCB ADJ. POINT PD-875 TOP VIEW

Figure:3-2

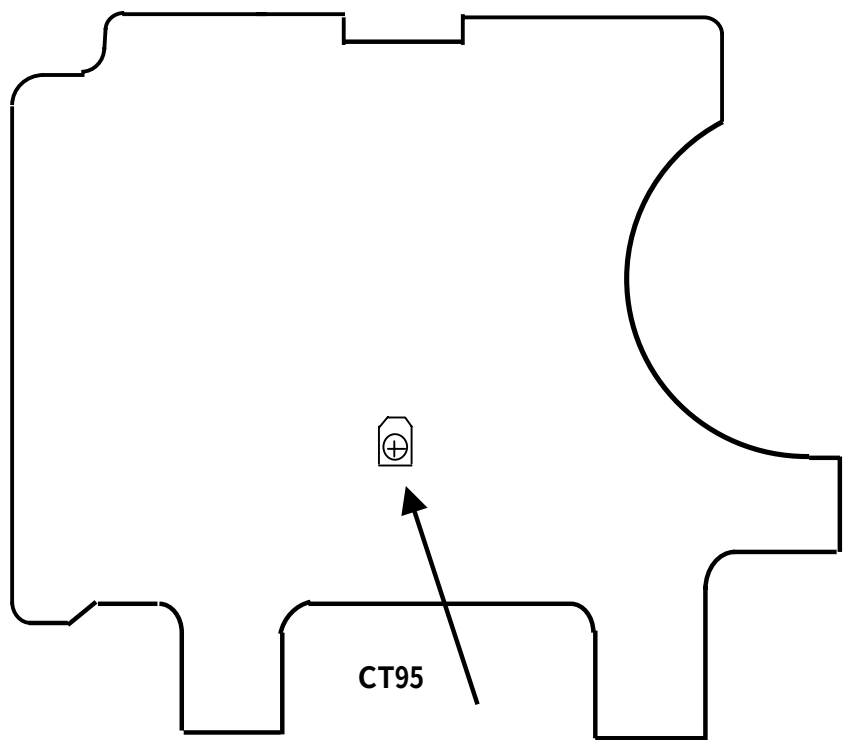

CT95	CLOCK ADJUST	CLOCK ADJUST 12.288MHz
------	--------------	------------------------