

SAR Test Report

Report No.: AGC10211210703FH01

FCC ID : 2A2LB-PRIME1

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Mobile Phone

BRAND NAME : FLASH

MODEL NAME : PRIME 1

APPLICANT : FLASH 3C LIMITED

DATE OF ISSUE : Aug. 16,2021

STANDARD(S) : IEEE Std. 1528:2013
FCC 47 CFR Part 2§2.1093:2013
IEEE Std C95.1™-2005
IEC 62209-1: 2016

REPORT VERSION : V1.0

Attestation of Global Compliance(Shenzhen) Co., Ltd.



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 16,2021	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>

Test Report	
Applicant Name	FLASH 3C LIMITED
Applicant Address	FLAT/RM 605 6/F STAG BUILDING 148-150 QUEEN'S ROAD CENTRAL HK
Manufacturer Name	YOLOTEL MOBILE LIMITED
Manufacturer Address	Room 2309, Sanhang Science and Technology Building, Northwestern Polytechnical University, Yuexing Fifth Road, Nanshan District, Shenzhen, China
Factory Name	YOLOTEL MOBILE LIMITED
Factory Address	Room 2309, Sanhang Science and Technology Building, Northwestern Polytechnical University, Yuexing Fifth Road, Nanshan District, Shenzhen, China
Product Designation	Mobile Phone
Brand Name	FLASH
Model Name	PRIME 1
EUT Voltage	DC3.7V by battery
Applicable Standard	IEEE Std. 1528:2013 FCC 47 CFR Part 2§2.1093:2013 IEEE Std C95.1™-2005 IEC 62209-1: 2016
Test Date	Jul. 24,2021 to Aug. 05,2021
Report Template	AGCRT-US-4G/SAR (2021-04-20)

Note: The results of testing in this report apply to the product/system which was tested only.

Thea Huang

Prepared By

Thea Huang (Project Engineer)

Aug. 05,2021

Angela Li

Reviewed By

Angela Li (Reviewer)

Aug. 16,2021

Forrest Lei

Approved By

Forrest Lei (Authorized Officer)

Aug. 16,2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



TABLE OF CONTENTS

1. SUMMARY OF MAXIMUM SAR VALUE	5
2. GENERAL INFORMATION.....	6
2.1. EUT DESCRIPTION.....	6
3. SAR MEASUREMENT SYSTEM.....	8
3.1. THE SATIMO SYSTEM USED FOR PERFORMING COMPLIANCE TESTS CONSISTS OF FOLLOWING ITEMS	8
3.2. COMOSAR E-FIELD PROBE	9
3.3. ROBOT.....	9
3.4. VIDEO POSITIONING SYSTEM	10
3.5. DEVICE HOLDER	10
3.6. SAM TWIN PHANTOM.....	11
4. SAR MEASUREMENT PROCEDURE.....	12
4.1. SPECIFIC ABSORPTION RATE (SAR).....	12
4.2. SAR MEASUREMENT PROCEDURE	13
4.3. RF EXPOSURE CONDITIONS	15
5. TISSUE SIMULATING LIQUID.....	17
5.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID.....	17
5.2. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	18
5.3. TISSUE CALIBRATION RESULT	19
6. SAR SYSTEM CHECK PROCEDURE	21
6.1. SAR SYSTEM CHECK PROCEDURES	21
6.2. SAR SYSTEM CHECK.....	22
7. EUT TEST POSITION.....	24
7.1. DEFINE TWO IMAGINARY LINES ON THE HANDSET.....	24
7.2. CHEEK POSITION	25
7.3. TILT POSITION.....	25
7.4. BODY WORN POSITION	26
8. SAR EXPOSURE LIMITS	27
9. TEST FACILITY	28
10. TEST EQUIPMENT LIST	29
11. MEASUREMENT UNCERTAINTY	30
12. CONDUCTED POWER MEASUREMENT.....	33
13. TEST RESULTS	62
13.1. SAR TEST RESULTS SUMMARY.....	62
APPENDIX A. SAR SYSTEM CHECK DATA	92
APPENDIX B. SAR MEASUREMENT DATA.....	110
APPENDIX C. TEST SETUP PHOTOGRAPHS.....	202
APPENDIX D. CALIBRATION DATA	209

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



1. SUMMARY OF MAXIMUM SAR VALUE

The maximum results of Specific Absorption Rate (SAR) found during testing for EUT are as follows:

Frequency Band	Highest Reported 1g-SAR(W/kg)			SAR Test Limit (W/kg)
	Head	Body-worn (with 10mm separation)	Hotapot (with 10mm separation)	
GSM 850	0.536	0.652	0.572	1.6
PCS 1900	0.167	0.607	0.607	
UMTS Band II	0.372	0.506	0.506	
UMTS Band IV	0.508	0.862	0.862	
UMTS Band V	0.101	0.075	0.075	
LTE Band 2	0.254	0.512	0.512	
LTE Band 4	0.511	1.073	1.073	
LTE Band 5	0.458	0.624	0.624	
LTE Band 7	0.947	1.175	1.175	
LTE Band 12	0.255	0.438	0.438	
LTE Band 17	0.272	0.447	0.447	
LTE Band 66	0.565	0.939	0.939	
WIFI 2.4G	0.259	0.156	0.156	
Simultaneous Reported SAR	1.326			
SAR Test Result	PASS			

This device is compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6W/kg) specified in IEEE Std. 1528:2013; FCC 47CFR § 2.1093; IEEE/ANSI C95.1:2005 and the following specific FCC Test Procedures:

- KDB 447498 D01 General RF Exposure Guidance v06
- KDB 648474 D04 Handset SAR v01r03
- KDB 865664 D01 SAR Measurement 100MHz to 6GHz v01r04
- KDB 941225 D01 3G SAR Procedures v03r01
- KDB 941225 D06 Hotspot Mode v02r01
- KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- KDB 941225 D05 SAR for LTE Devices v02r05

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



2. GENERAL INFORMATION

2.1. EUT Description

General Information	
Product Designation	Mobile Phone
Test Model	PRIME 1
Sample ID	210714055
Hardware Version	M95V1.0
Software Version	FLASH_PRIME_1_V1.0_10072021
Device Category	Portable
RF Exposure Environment	Uncontrolled
Antenna Type	Internal
GSM and GPRS& EGPRS	
Support Band	☒ GSM 850 ☒ PCS 1900 (U.S. Bands) ☒ GSM 900 ☒ DCS 1800 (Non-U.S. Bands)
GPRS & EGPRS Type	Class B
GPRS & EGPRS Class	Class 12(1Tx+4Rx, 2Tx+3Rx, 3Tx+2Rx, 4Tx+1Rx)
TX Frequency Range	GSM 850: 820-850MHz; PCS 1900: 1850-1910MHz;
RX Frequency Range	GSM 850: 869~894MHz; PCS 1900: 1930~1990MHz
Release Version	R99
Type of modulation	GMSK for GSM/GPRS; GMSK & 8-PSK for EGPRS
Antenna Gain	GSM850: -3.35dBi; PCS1900: -2.58dBi
Max. Average Power	GSM850: 32.10 dBm; PCS1900: 30.05 dBm
WCDMA	
Support Band	☒ UMTS FDD Band II ☒ UMTS FDD Band V ☒ UMTS FDD Band IV (U.S. Bands) ☒ UMTS FDD Band I ☐ UMTS FDD Band III ☒ UMTS FDD Band VIII (Non-U.S. Bands)
HS Type	HSPA(HSUPA/HSDPA)
TX Frequency Range	FDD Band II: 1850-1910MHz; FDD Band V: 824-849MHz FDD Band IV: 1710-1770MHz
RX Frequency Range	FDD Band II: 1930-1990MHz; FDD Band V: 869-894MHz FDD Band IV: 2110-2170MHz
Release Version	Rel-6
Type of modulation	HSDPA: QPSK/16QAM; HSUPA: BPSK; WCDMA: QPSK
Antenna Gain	WCDMA Band II: -2.58dBi; WCDMA Band IV: -2.69dBi; WCDMA Band V: -3.35dBi
Max. Average Power	Band II: 22.55 dBm; Band IV: 22.35dBm; Band V: 22.36dBm

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



EUT Description(Continue)

LTE	
Support Band	☒ FDD Band 2 ☒ FDD Band 4 ☒ FDD Band 5 ☒ FDD Band 7 ☒ FDD Band 12 ☒ FDD Band 17 ☐ FDD Band 25 ☐ FDD Band 26 ☐ TDD Band 41 ☒ FDD Band 66 (U.S. Bands) ☒ FDD Band 1 ☐ FDD Band 3 ☐ FDD Band 7 ☒ FDD Band 8 ☐ FDD Band 20 ☒ FDD Band 28 ☐ TDD Band 38 ☐ TDD Band 40 ☐ TDD Band 42 ☐ TDD Band 43 (Non-U.S. Bands)
TX Frequency Range	Band 2:1850-1910MHz; Band 4:1710-1755MHz; Band 5:824-849MHz; Band 7:2500-2570MHz; Band 12:699-716MHz; Band 17: 704-716MHz; Band 66:1700-1780MHz;
RX Frequency Range	Band 2:1930-1990MHz; Band 4:2110-2155MHz; Band 5:869-894MHz; Band 7:2620-2690MHz; Band 12: 729-746 MHz; Band 17: 734-746 MHz; Band 66:2110-2200MHz;
Release Version	Rel-8
Type of modulation	QPSK, 16QAM
Antenna Gain	FDD Band 2: -2.58dBi, FDD Band 4: -2.69dBi, FDD Band 5: -3.35dBi, FDD Band 7: -3.02dBi, FDD Band 12: -4.74dBi, FDD Band 17: -4.58dBi, FDD Band 66: -2.53dBi;
Max. Average Power	Band 2: 23.93 dBm; Band 4: 23.54 dBm; Band 5: 23.92dBm; Band 7: 22.71 dBm; Band 12: 24.29 dBm; Band 17: 24.33 dBm; Band 66: 23.87 dBm;
Bluetooth	
Bluetooth Version	☐ V2.0 ☐ V2.1 ☐ V2.1+EDR ☐ V3.0 ☐ V4.0 ☒ V4.2
Operation Frequency	2402~2480MHz
Type of modulation	☒ GFSK ☒ π/4-DQPSK ☒ 8-DPSK
Peak Power	3.32dBm
Antenna Gain	-2.96dBi
WIFI	
WIFI Specification	☐ 802.11a ☒ 802.11b ☒ 802.11g ☒ 802.11n(20) ☐ 802.11n(40)
Operation Frequency	2412~2462MHz
Avg. Burst Power	11b: 13.65dBm, 11g:9.58dBm, 11n(20):8.66dBm
Antenna Gain	-2.96dBi
Accessories	
Battery	Brand name: FLASH Model No. : PRIME 1 Voltage and Capacitance: 3.7 V & 2000mAh
Earphone	Brand name: N/A Model No. : N/A

- Note:1.CMU200 can measure the average power and Peak power at the same time
 2.The sample used for testing is end product.
 3. The test sample has no any deviation to the test method of standard mentioned in page 1.


Product	Type
	☒ Production unit ☐ Identical Prototype

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



3. SAR MEASUREMENT SYSTEM

3.1. The SATIMO system used for performing compliance tests consists of following items

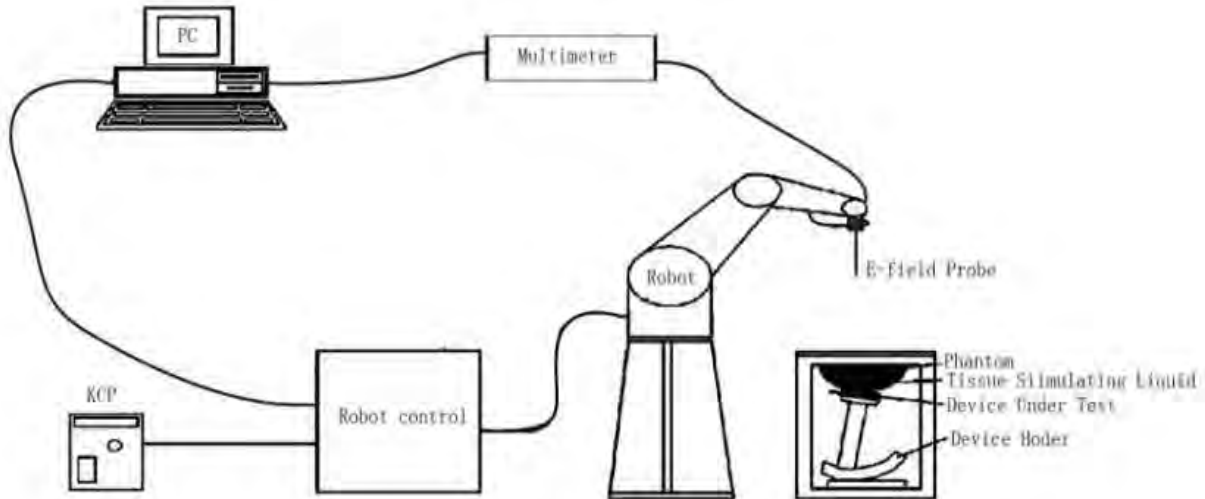

The COMOSAR system for performing compliance tests consists of the following items:

- The PC. It controls most of the bench devices and stores measurement data. A computer running WinXP and the Opensar software.
- The E-Field probe. The probe is a 3-axis system made of 3 distinct dipoles. Each dipole returns a voltage in function of the ambient electric field.
- The Keithley multimeter measures each probe dipole voltages.
- The SAM phantom simulates a human head. The measurement of the electric field is made inside the phantom.
- The liquids simulate the dielectric properties of the human head tissues.
- The network emulator controls the mobile phone under test.
- The validation dipoles are used to measure a reference SAR. They are used to periodically check the bench to make sure that there is no drift of the system characteristics over time.
- The phantom, the device holder and other accessories according to the targeted measurement.

3.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dosimetric probe manufactured by SATIMO. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SATIMO conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528 and relevant KDB files.) The calibration data are in Appendix D.

Isotropic E-Field Probe Specification

Model	SSE5	
Manufacture	MVG	
Identification No.	SN 03/18 EP327	
Frequency	0.15GHz-3GHz Linearity:±0.08dB(150MHz-3GHz)	
Dynamic Range	0.01W/kg-100W/kg Linearity:±0.08dB	
Dimensions	Overall length:330mm Length of individual dipoles:4.5mm Maximum external diameter:8mm Probe Tip external diameter:5mm Distance between dipoles/ probe extremity:2.7mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 3 GHz with precision of better 30%.	

3.3. Robot

The COMOSAR system uses the KUKA robot from SATIMO SA (France).For the 6-axis controller COMOSAR system, the KUKA robot controller version from SATIMO is used.

The XL robot series have many features that are important for our application:

- ☐ High precision (repeatability 0.02 mm)
- ☐ High reliability (industrial design)
- ☐ Jerk-free straight movements
- ☐ Low ELF interference (the closed metallic construction shields against motor control fields)
- ☐ 6-axis controller




3.4. Video Positioning System

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



3.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles. The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon_r = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

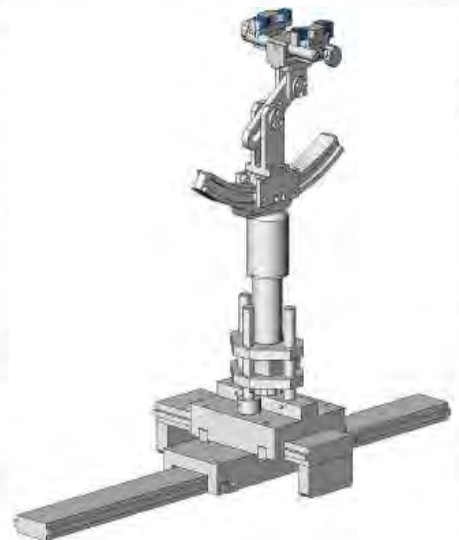

3.6. SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- ☐ Left head
- ☐ Right head
- ☐ Flat phantom



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



4. SAR MEASUREMENT PROCEDURE

4.1. Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and occupational/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element(dv) of given mass density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR can be obtained using either of the following equations:

$$SAR = \frac{\sigma E^2}{\rho}$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

Where

SAR	is the specific absorption rate in watts per kilogram;
E	is the r.m.s. value of the electric field strength in the tissue in volts per meter;
σ	is the conductivity of the tissue in siemens per metre;
ρ	is the density of the tissue in kilograms per cubic metre;
C _h	is the heat capacity of the tissue in joules per kilogram and Kelvin;

$\left. \frac{dT}{dt} \right|_{t=0}$ is the initial time derivative of temperature in the tissue in kelvins per second

4.2. SAR Measurement Procedure

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurement are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface is 2.7mm This distance cannot be smaller than the distance os sensor calibration points to probe tip as `defined in the probe properties,

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in SATIMO software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in db) is specified in the standards for compliance testing. For example, a 2db range is required in IEEE Standard 1528 and IEC62209 standards, whereby 3db is a requirement when compliance is assessed in accordance with the ARIB standard (Japan) If one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximum are detected, the number of Zoom Scan has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100MHz to 6GHz

	$\leq 3 \text{ GHz}$	$> 3 \text{ GHz}$
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz}: \leq 15 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 12 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 12 \text{ mm}$ $4 - 6 \text{ GHz}: \leq 10 \text{ mm}$
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scan are used to assess the peak spatial SAR value within a cubic average volume containing 1g abd 10g of simulated tissue. The Zoom Scan measures points(refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1g and 10g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB865664 d01 SAR Measurement 100MHz to 6GHz

Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ $2 - 3 \text{ GHz}: \leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz}: \leq 5 \text{ mm}^*$ $4 - 6 \text{ GHz}: \leq 4 \text{ mm}^*$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		$\leq 5 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 4 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 3 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	$\leq 4 \text{ mm}$	$3 - 4 \text{ GHz}: \leq 3 \text{ mm}$ $4 - 5 \text{ GHz}: \leq 2.5 \text{ mm}$ $5 - 6 \text{ GHz}: \leq 2 \text{ mm}$
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		$\geq 30 \text{ mm}$	$3 - 4 \text{ GHz}: \geq 28 \text{ mm}$ $4 - 5 \text{ GHz}: \geq 25 \text{ mm}$ $5 - 6 \text{ GHz}: \geq 22 \text{ mm}$
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}$, $\leq 8 \text{ mm}$, $\leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power Drift Measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the same settings. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

4.3. RF Exposure Conditions


Test Configuration and setting:

The EUT is a model of GSM Portable Mobile Station (MS). It supports GSM/GPRS/EGPRS, WCDMA/HSPA, LTE, BT, WIFI, and support hot spot mode.

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator were established by air link. The distance between the EUT and the antenna is larger than 50cm, and the output power radiated from the emulator antenna is at least 30db smaller than the output power of EUT.

For WLAN testing, the EUT is configured with the WLAN continuous TX tool through engineering command.

Antenna Location: (the back view)

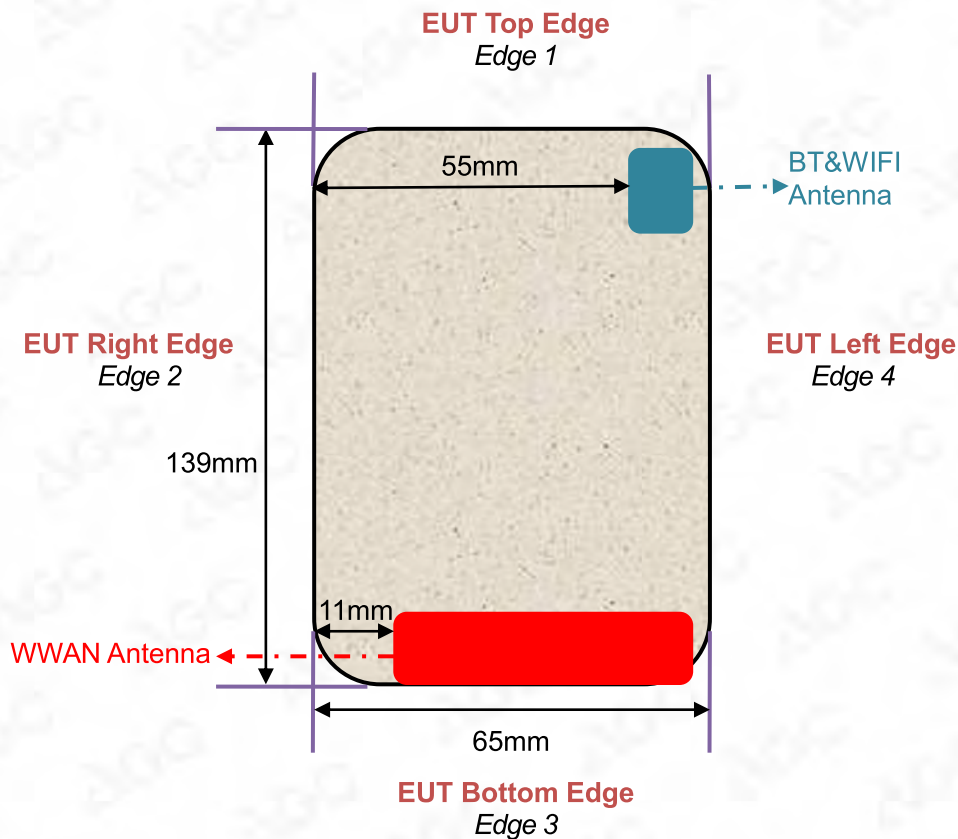

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



For WWAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	--
Left Tilt		Yes	--
Right Touch		Yes	--
Right Tilt		Yes	--
Body			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Hotspot			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Edge 1 (Top)	132mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 2 (Right)	11mm	Yes	--
Edge 3 (Bottom)	1mm	Yes	--
Edge 4 (Left)	1mm	Yes	--

For WLAN mode:

Test Configurations	Antenna to edges/surface	SAR required	Note
Head			
Left Touch		Yes	--
Left Tilt		Yes	--
Right Touch		Yes	--
Right Tilt		Yes	--
Body			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Hotspot			
Back	<25mm	Yes	--
Front	<25mm	Yes	--
Edge 1 (Top)	1mm	Yes	--
Edge 2 (Right)	52mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 3 (Bottom)	116mm	No	SAR is not required for the distance between the antenna and the edge is >25mm as per KDB 941225 D06 Hotspot SAR
Edge 4 (Left)	1mm	Yes	--

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



5. TISSUE SIMULATING LIQUID

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10% are listed in 6.2

5.1. The composition of the tissue simulating liquid

Ingredient (% Weight) Frequency (MHz)	Water	Nacl	Polysorbate 20	DGBE	1,2 Propanediol	Triton X-100
750 Head	35	2	0.0	0.0	63	0.0
835 Head	50.36	1.25	48.39	0.0	0.0	0.0
1750 Head	52.64	0.36	0.0	47	0.0	0.0
1900 Head	54.9	0.18	0.0	44.92	0.0	0.0
2450 Head	71.88	0.16	0.0	7.99	0.0	19.97
2600 Head	55.242	0.306	0	44.452	0	0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



5.2. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1 have been incorporated in the following table. The body tissue dielectric parameters recommended by the IEC 62209-2 have been incorporated in the following table.

Target Frequency (MHz)	head		body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
300	45.3	0.87	45.3	0.87
450	43.5	0.87	43.5	0.87
750	41.9	0.89	41.9	0.89
835	41.5	0.90	41.5	0.90
900	41.5	0.97	41.5	0.97
915	41.5	1.01	41.5	1.01
1450	40.5	1.20	40.5	1.20
1610	40.3	1.29	40.3	1.29
1750	40.1	1.37	40.1	1.37
1800 – 2000	40.0	1.40	40.0	1.40
2450	39.2	1.80	39.2	1.80
2600	39.0	1.96	39.0	1.96
3000	38.5	2.40	38.5	2.40

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



5.3. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using SATIMO Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Tissue Stimulant Measurement for 750MHz					
Head	Fr. (MHz)	Dielectric Parameters (±10%)		Tissue Temp [°C]	Test time
		εr 41.9 (37.71-46.09)	δ[s/m] 0.89(0.801-0.979)		
	707.5	44.36	0.84	21.2	Jul. 27,2021
	710	43.52	0.86		
	750	42.61	0.88		

Tissue Stimulant Measurement for 835MHz					
Head	Fr. (MHz)	Dielectric Parameters (±10%)		Tissue Temp [°C]	Test time
		εr 41.5 (37.35-45.65)	δ[s/m] 0.90(0.81-0.99)		
	835	42.37	0.91	21.2	Jul. 24,2021
	836.4	41.62	0.93		
	836.6	41.62	0.93		

Tissue Stimulant Measurement for 835MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 41.5 (37.35-45.65)	δ [s/m] 0.90(0.81-0.99)		
	835	40.61	0.89	21.1	Aug. 02,2021
	836.5	39.42	0.92		

Tissue Stimulant Measurement for 1750MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 40.1 (36.09-44.11)	δ [s/m] 1.37(1.233-1.507)		
	1712.4	43.25	1.32	21.3	Jul. 30,2021
	1720	42.52	1.34		
	1732.4	41.35	1.36		
	1732.5	41.35	1.36		
	1745	40.28	1.39		
	1750	39.71	1.42		
	1752.6	38.52	1.44		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Tissue Stimulant Measurement for 1750MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 40.1 (36.09-44.11)	δ [s/m]1.37(1.233-1.507)		
	1720	41.25	1.35	21.5	Aug. 04,2021
	1750	40.37	1.37		
	1755	39.62	1.39		
	1770	38.53	1.42		

Tissue Stimulant Measurement for 1900MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 40.00(36.00-44.00)	δ [s/m]1.40(1.26-1.54)		
	1880	41.42	1.38	20.8	Jul. 25,2021
	1900	40.81	1.41		

Tissue Stimulant Measurement for 1900MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 40.00(36.00-44.00)	δ [s/m]1.40(1.26-1.54)		
	1880	41.63	1.38	21.8	Aug. 03,2021
	1900	39.51	1.41		

Tissue Stimulant Measurement for 2450MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 39.2(35.28-43.12)	δ [s/m]1.80(1.62-1.98)		
	2437	41.05	1.78	21.3	Aug. 05,2021
	2450	39.49	1.82		

Tissue Stimulant Measurement for 2600MHz					
Head	Fr. (MHz)	Dielectric Parameters ($\pm 10\%$)		Tissue Temp [°C]	Test time
		ϵ_r 39(35.1-42.9)	δ [s/m]1.96(1.764-2.156)		
	2510	41.74	1.79	21.3	Jul. 28,2021
	2535	40.17	1.86		
	2560	39.82	1.92		
	2600	39.14	1.98		

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




6. SAR SYSTEM CHECK PROCEDURE

6.1. SAR System Check Procedures

SAR system check is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are remeasured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

Each SATIMO system is equipped with one or more system check kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system check setup is shown as below.

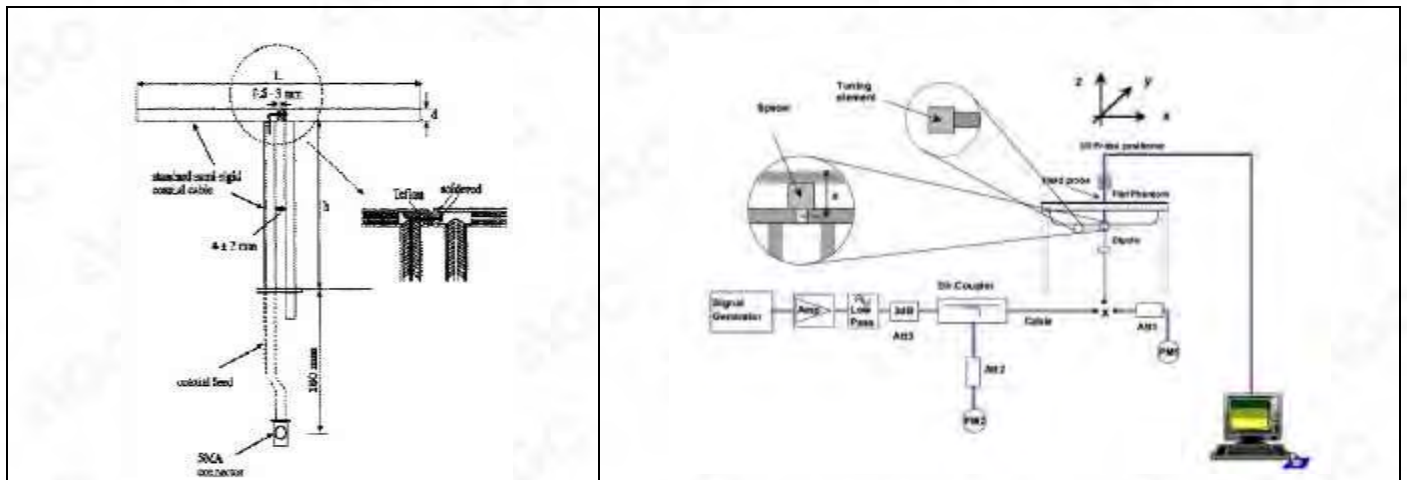


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



6.2. SAR System Check

6.2.1. Dipoles

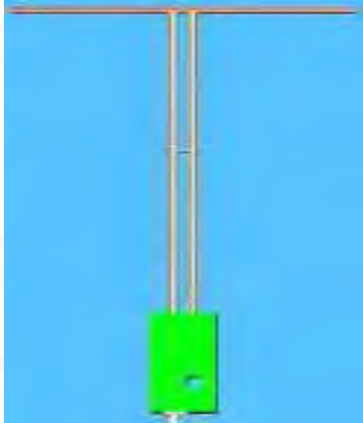	The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of IEEE. the table below provides details for the mechanical and electrical Specifications for the dipoles.
---	---

Frequency	L (mm)	h (mm)	d (mm)
750MHz	176	100	6.35
835MHz	161.0	89.8	3.6
1800MHz	71.6	41.7	3.6
1900MHz	68	39.5	3.6
2450MHz	51.5	30.4	3.6
2600MHz	48.5	28.8	3.6

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



6.2.2. System Check Result

System Performance Check at 750MHz&835MHz &1800MHz &1900MHz &2450MHz&2600MHz for Head								
Validation Kit: SN47/14 DIP 0G750-340& SN29/15 DIP 0G835-383& SN46/11 DIP 1G800-186& SN 46/11 DIP 1G900-187& SN46/11 DIP 2G450-189& SN 47/14 DIP 2G600-342								
Frequency [MHz]	Target Value(W/kg)		Reference Result ($\pm 10\%$)		Tested Value(W/kg)		Tissue Temp. [°C]	Test time
	1g	10g	1g	10g	1g	10g		
750	8.31	5.45	7.479-9.141	4.905-5.995	8.71	5.79	21.2	Jul. 27,2021
835	9.85	6.27	8.865-10.835	5.643-6.897	9.73	6.17	21.2	Jul. 24,2021
835	9.85	6.27	8.865-10.835	5.643-6.897	9.89	6.11	21.1	Aug. 02,2021
1800	39.07	20.29	35.163-42.977	18.261-22.319	40.52	20.45	21.3	Jul. 30,2021
1800	39.07	20.29	35.163-42.977	18.261-22.319	37.11	19.25	21.5	Aug. 04,2021
1900	40.25	20.50	36.225-44.275	18.45-22.55	37.44	19.24	20.8	Jul. 25,2021
1900	40.25	20.50	36.225-44.275	18.45-22.55	40.66	20.34	21.8	Aug. 03,2021
2450	53.97	24.01	48.573-59.367	21.609-26.411	54.10	24.27	21.3	Aug. 05,2021
2600	56.86	24.84	51.174-62.546	22.356-27.324	54.94	24.05	21.3	Jul. 28,2021

Note:

(1) We use a CW signal of 18dBm for system check, and then all SAR value are normalized to 1W forward power. The result must be within $\pm 10\%$ of target value.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/





7. EUT TEST POSITION

This EUT was tested in **Right Cheek, Right Tilted, Left Cheek, Left Tilted, Body back, Body front and 4 edges.**

7.1. Define Two Imaginary Lines on the Handset

- (1) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the handset.
- (2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

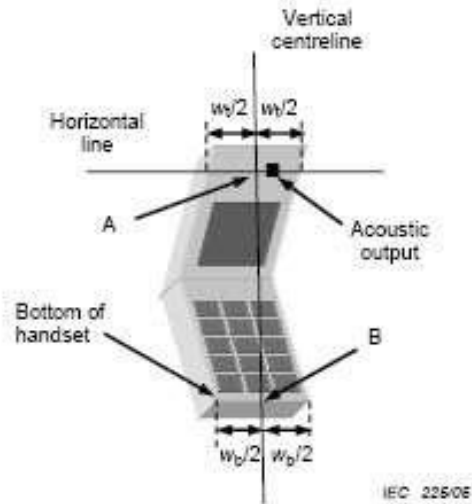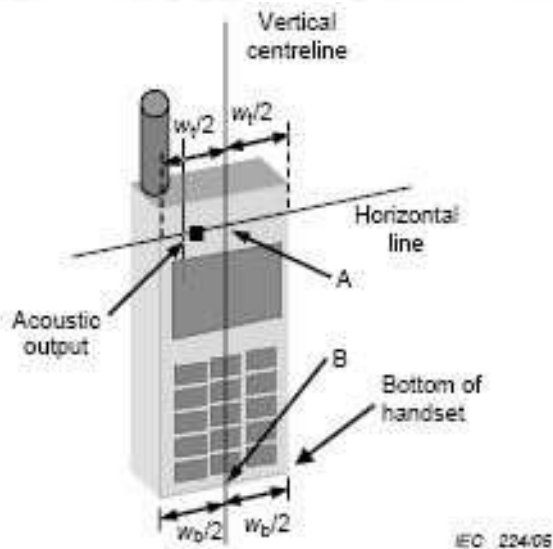

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



7.2. Cheek Position

- (1) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (2) To move the device towards the phantom with the ear piece aligned with the the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost




7.3. Tilt Position

- (1) To position the device in the “cheek” position described above.
- (2) While maintaining the device in the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until with the ear is lost.



7.4. Body Worn Position

- (1) To position the EUT parallel to the phantom surface.
- (2) To adjust the EUT parallel to the flat phantom.
- (3) To adjust the distance between the EUT surface and the flat phantom to **10mm**.

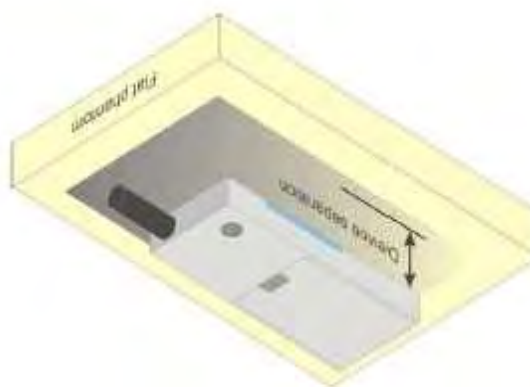

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



8. SAR EXPOSURE LIMITS

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit (W/kg)
Spatial Peak SAR (1g cube tissue for brain or body)	1.60
Spatial Average SAR (Whole body)	0.08
Spatial Peak SAR (Limbs)	4.0

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



9. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



10. TEST EQUIPMENT LIST

Equipment description	Manufacturer/ Model	Identification No.	Current calibration date	Next calibration date
SAR Probe	MVG	SN 03/18 EP327	Dec. 17,2020	Dec. 16,2021
Phantom	SATIMO	SN_4511_SAM90	Validated. No cal required.	Validated. No cal required.
Liquid	SATIMO	-	Validated. No cal required.	Validated. No cal required.
Comm Tester	Agilent-8960	GB46310822	Aug. 21,2020	Aug. 20,2021
Comm Tester	R&S- CMW500	121209	Aug. 21,2020	Aug. 20,2021
Multimeter	Keithley 2000	1350784	Sep. 07,2020	Sep. 06,2021
SAR Software	SATIMO-OpenSAR	OpenSAR V4_02_32	N/A	N/A
Dipole	SATIMO SID750	SN47/14 DIP 0G750-340	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID835	SN29/15 DIP 0G835-383	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID1800	SN46/11 DIP 1G800-186	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID1900	SN 46/11 DIP 1G900-187	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID2450	SN46/11 DIP 2G450-189	Apr. 26,2019	Apr. 25,2022
Dipole	SATIMO SID2600	SN 47/14 DIP 2G600-342	Apr. 26,2019	Apr. 25,2022
Signal Generator	Agilent-E4438C	US41461365	Aug. 21,2020	Aug. 20,2021
Vector Analyzer	Agilent / E4440A	US41421290	Sep. 06,2020	Sep. 05,2021
Network Analyzer	Rhode & Schwarz ZVL6	SN101443	Oct. 16,2020	Oct. 15,2021
Attenuator	Warison /WATT-6SR1211	S/N:WRJ34AYM2F1	June 09,2021	June 08,2022
Attenuator	Mini-circuits / VAT-10+	31405	June 09,2021	June 08,2022
Amplifier	AS0104-55_55	1004793	June 10,2021	June 09,2022
Directional Couple	Werlatone/ C5571-10	SN99463	May 15,2020	May 14,2022
Directional Couple	Werlatone/ C6026-10	SN99482	May 15,2020	May 14,2022
Power Sensor	NRP-Z21	1137.6000.02	Sep. 08,2020	Sep. 07,2021
Power Sensor	NRP-Z23	100323	Feb. 17,2021	Feb. 16,2022
Power Viewer	R&S	V2.3.1.0	N/A	N/A

Note: Per KDB 865664 Dipole SAR Validation, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss is within 20% of calibrated measurement;
4. Impedance is within 5Ω of calibrated measurement.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



11. MEASUREMENT UNCERTAINTY

SATIMO Uncertainty- SN 03/18 EP327 Measurement uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	E.2.2	0.075	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.031	0.031	∞
Hemispherical Isotropy	E.2.2	0.075	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.031	0.031	∞
Boundary effect	E.2.3	1.000	R	$\sqrt{3}$	1	1	0.577	0.577	∞
Linearity	E.2.4	0.870	R	$\sqrt{3}$	1	1	0.502	0.502	∞
System detection limits	E.2.4	1.000	R	$\sqrt{3}$	1	1	0.577	0.577	∞
Modulation response	E.2.5	3.000	R	$\sqrt{3}$	1	1	1.732	1.732	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.000	R	$\sqrt{3}$	1	1	0.000	0.000	∞
Integration Time	E.2.8	1.400	R	$\sqrt{3}$	1	1	0.808	0.808	∞
RF ambient conditions-Noise	E.6.1	3.000	R	$\sqrt{3}$	1	1	1.732	1.732	∞
RF ambient conditions-reflections	E.6.1	3.000	R	$\sqrt{3}$	1	1	1.732	1.732	∞
Probe positioner mechanical tolerance	E.6.2	1.400	R	$\sqrt{3}$	1	1	0.808	0.808	∞
Probe positioning with respect to phantom shell	E.6.3	1.400	R	$\sqrt{3}$	1	1	0.808	0.808	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.300	R	$\sqrt{3}$	1	1	1.328	1.328	∞
Test sample Related									
Test sample positioning	E.4.2	2.6	N	1	1	1	2.600	2.600	∞
Device holder uncertainty	E.4.1	3	N	1	1	1	3.000	3.000	∞
Output power variation—SAR drift measurement	E.2.9	5	R	$\sqrt{3}$	1	1	2.887	2.887	∞
SAR scaling	E.6.5	5	R	$\sqrt{3}$	1	1	2.887	2.887	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.309	2.309	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.900	1.596	∞
Liquid conductivity measurement	E.3.3	2.5	R	$\sqrt{3}$	0.78	0.71	1.126	1.025	∞
Liquid permittivity measurement	E.3.3	4	N	1	0.78	0.71	3.120	2.840	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.332	0.375	∞
Liquid permittivity—temperature uncertainty	E.3.4	5	N	1	0.23	0.26	1.150	1.300	M
Combined Standard Uncertainty			RSS				10.525	10.341	
Expanded Uncertainty (95% Confidence interval)			K=2				21.051	20.681	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SATIMO Uncertainty- SN 03/18 EP327									
System Validation uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration	E.2.1	7.000	N	1	1	1	7.000	7.000	∞
Axial Isotropy	E.2.2	0.075	R	$\sqrt{3}$	1	1	0.043	0.043	∞
Hemispherical Isotropy	E.2.2	0.075	R	$\sqrt{3}$	0	0	0.000	0.000	∞
Boundary effect	E.2.3	1.000	R	$\sqrt{3}$	1	1	0.577	0.577	∞
Linearity	E.2.4	0.870	R	$\sqrt{3}$	1	1	0.502	0.502	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	1	1	0.021	0.021	∞
Response Time	E.2.7	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source									
Deviation of experimental dipole from numerical dipole	E.6.4	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	E.3.3	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	E.3.4	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				10.458	10.272	
Expanded Uncertainty (95% Confidence interval)			K=2				20.916	20.543	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SATIMO Uncertainty- SN 03/18 EP327									
System Check uncertainty for DUT averaged over 1 gram / 10 gram.									
Uncertainty Component	Sec.	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System									
Probe calibration drift	E.2.1.3	0.5	N	1	1	1	0.50	0.50	∞
Axial Isotropy	E.2.2	0.075	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Hemispherical Isotropy	E.2.2	0.075	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	E.2.3	1.000	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Linearity	E.2.4	0.870	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System detection limits	E.2.4	1.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Modulation response	E.2.5	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	E.2.6	0.021	N	1	0	0	0.00	0.00	∞
Response Time	E.2.7	0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	E.2.8	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-reflections	E.6.1	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Probe positioner mechanical tolerance	E.6.2	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	E.6.3	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation	E.5	2.3	R	$\sqrt{3}$	0	0	0.00	0.00	∞
System check source (dipole)									
Deviation of experimental dipoles	E.6.4	2.0	N	1	1	1	2.00	2.00	∞
Input power and SAR drift measurement	8,6.6.4	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Dipole axis to liquid distance	8,E.6.6	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and tissue parameters									
Phantom shell uncertainty—shape, thickness, and permittivity	E.3.1	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	E.3.2	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity measurement	E.3.3	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid permittivity measurement	E.3.3	4	N	1	0.78	0.71	3.12	2.84	M
Liquid conductivity—temperature uncertainty	E.3.4	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity—temperature uncertainty	E.3.4	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty			RSS				5.562	5.203	
Expanded Uncertainty (95% Confidence interval)			K=2				11.124	10.406	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



12. CONDUCTED POWER MEASUREMENT

GSM BAND

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
GSM 850	824.2	31.85	-9	22.85
	836.6	32.02	-9	23.02
	848.8	32.10	-9	23.10
GPRS 850 (1 Slot)	824.2	31.32	-9	22.32
	836.6	31.57	-9	22.57
	848.8	31.66	-9	22.66
GPRS 850 (2 Slot)	824.2	29.93	-6	23.93
	836.6	30.04	-6	24.04
	848.8	30.05	-6	24.05
GPRS 850 (3 Slot)	824.2	29.19	-4.26	24.93
	836.6	29.30	-4.26	25.04
	848.8	29.00	-4.26	24.74
GPRS 850 (4 Slot)	824.2	27.04	-3	24.04
	836.6	26.96	-3	23.96
	848.8	27.21	-3	24.21
EGPRS 850 (1 Slot)	824.2	24.68	-9	15.68
	836.6	24.33	-9	15.33
	848.8	23.56	-9	14.56
EGPRS 850 (2 Slot)	824.2	23.30	-6	17.30
	836.6	22.63	-6	16.63
	848.8	22.73	-6	16.73
EGPRS 850 (3 Slot)	824.2	20.47	-4.26	16.21
	836.6	20.30	-4.26	16.04
	848.8	21.29	-4.26	17.03
EGPRS 850 (4 Slot)	824.2	19.21	-3	16.21
	836.6	19.06	-3	16.06
	848.8	18.81	-3	15.81

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



GSM BAND CONTINUE

Mode	Frequency(MHz)	Avg. Burst Power(dBm)	Duty cycle Factor(dBm)	Frame Power(dBm)
Maximum Power <1>				
PCS1900	1850.2	30.01	-9	21.01
	1880	29.97	-9	20.97
	1909.8	30.05	-9	21.05
GPRS1900 (1 Slot)	1850.2	29.64	-9	20.64
	1880	29.68	-9	20.68
	1909.8	29.55	-9	20.55
GPRS1900 (2 Slot)	1850.2	27.59	-6	21.59
	1880	27.60	-6	21.60
	1909.8	27.34	-6	21.34
GPRS1900 (3 Slot)	1850.2	26.45	-4.26	22.19
	1880	26.77	-4.26	22.51
	1909.8	26.44	-4.26	22.18
GPRS1900 (4 Slot)	1850.2	25.52	-3	22.52
	1880	25.67	-3	22.67
	1909.8	25.64	-3	22.64
EGPRS1900 (1 Slot)	1850.2	21.94	-9	12.94
	1880	21.27	-9	12.27
	1909.8	22.31	-9	13.31
EGPRS1900 (2 Slot)	1850.2	21.03	-6	15.03
	1880	21.09	-6	15.09
	1909.8	21.04	-6	15.04
EGPRS1900 (3 Slot)	1850.2	19.01	-4.26	14.75
	1880	19.00	-4.26	14.74
	1909.8	19.40	-4.26	15.14
EGPRS1900 (4 Slot)	1850.2	18.21	-3	15.21
	1880	17.93	-3	14.93
	1909.8	18.39	-3	15.39

Note 1:

The Frame Power (Source-based time-averaged Power) is scaled the maximum burst average power based on time slots. The calculated methods are show as following:

Frame Power = Max burst power (1 Up Slot) – 9 dB

Frame Power = Max burst power (2 Up Slot) – 6 dB

Frame Power = Max burst power (3 Up Slot) – 4.26 dB

Frame Power = Max burst power (4 Up Slot) – 3 dB

Note 2:

SAR is not required for GPRS (1 Slot) Mode because its output power is less than of Voice Mode

UMTS BAND HSDPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Based Station with following setting:
 - (1) Set Gain Factors(β_c and β_d) parameters set according to each
 - (2) Set RMC 12.2Kbps+HSDPA mode.
 - (3) Set Cell Power=-86dBm
 - (4) Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - (5) Select HSDPA Uplink Parameters
 - (6) Set Delta ACK, Delta NACK and Delta CQI=8
 - (7) Set Ack - Nack Repetition Factor to 3
 - (8) Set CQI Feedback Cycle (k) to 4ms
 - (9) Set CQI Repetition Factor to 2
 - (10) Power Ctrl Mode=All Up bits
- The transmitted maximum output power was recorded.

Table C.10.2.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c (Note5)	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15(Note 4)	15/15(Note 4)	64	12/15(Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause

5.13.1AA, ΔACK and $\Delta NACK = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta CQI = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $hs/c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the c/d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $c = 11/15$ and $d = 15/15$.

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - (1) Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - (2) Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - (3) Set Cell Power = -86 dBm
 - (4) Set Channel Type = 12.2k + HSPA
 - (5) Set UE Target Power
 - (6) Power Ctrl Mode= Alternating bits
 - (7) Set and observe the E-TFCI
 - (8) Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Code s)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TF CI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, ΔACK , $\Delta NACK$ and $\Delta CQI = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, ΔACK , $\Delta NACK$ and $\Delta CQI = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $hs/c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the c/d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $c = 10/15$ and $d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

UMTS BAND II

Mode	Frequency (MHz)	Avg. Burst Power (dBm)
WCDMA 1900 RMC	1852.4	22.55
	1880	22.07
	1907.6	22.22
WCDMA 1900 AMR	1852.4	22.01
	1880	22.05
	1907.6	22.04
HSDPA Subtest 1	1852.4	21.20
	1880	20.77
	1907.6	20.68
HSDPA Subtest 2	1852.4	20.05
	1880	20.12
	1907.6	20.80
HSDPA Subtest 3	1852.4	19.84
	1880	20.01
	1907.6	20.18
HSDPA Subtest 4	1852.4	20.39
	1880	20.62
	1907.6	20.56
HSUPA Subtest 1	1852.4	20.62
	1880	20.31
	1907.6	20.25
HSUPA Subtest 2	1852.4	21.64
	1880	21.75
	1907.6	21.48
HSUPA Subtest 3	1852.4	21.42
	1880	21.14
	1907.6	21.09
HSUPA Subtest 4	1852.4	21.26
	1880	22.11
	1907.6	22.07
HSUPA Subtest 5	1852.4	21.03
	1880	21.57
	1907.6	21.91

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



UMTS BAND IV

Mode	Frequency (MHz)	Avg. Burst Power (dBm)
WCDMA 1700 RMC	1712.4	22.35
	1732.4	22.11
	1752.6	22.26
WCDMA 1700 AMR	1712.4	22.16
	1732.4	21.92
	1752.6	21.79
HSDPA Subtest 1	1712.4	21.12
	1732.4	20.79
	1752.6	20.79
HSDPA Subtest 2	1712.4	20.41
	1732.4	20.22
	1752.6	20.79
HSDPA Subtest 3	1712.4	19.92
	1732.4	20.00
	1752.6	19.98
HSDPA Subtest 4	1712.4	20.02
	1732.4	20.59
	1752.6	20.91
HSUPA Subtest 1	1712.4	20.68
	1732.4	20.34
	1752.6	20.57
HSUPA Subtest 2	1712.4	21.38
	1732.4	21.52
	1752.6	21.26
HSUPA Subtest 3	1712.4	21.26
	1732.4	21.05
	1752.6	21.31
HSUPA Subtest 4	1712.4	21.34
	1732.4	22.19
	1752.6	22.33
HSUPA Subtest 5	1712.4	21.24
	1732.4	21.75
	1752.6	21.97

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



UMTS BAND V

Mode	Frequency (MHz)	Avg. Burst Power (dBm)
WCDMA 850 RMC	826.4	22.32
	836.4	21.84
	846.6	22.02
WCDMA 850 AMR	826.4	21.97
	836.4	21.86
	846.6	21.91
HSDPA Subtest 1	826.4	21.20
	836.4	21.02
	846.6	20.78
HSDPA Subtest 2	826.4	20.35
	836.4	20.00
	846.6	20.70
HSDPA Subtest 3	826.4	19.83
	836.4	19.96
	846.6	20.22
HSDPA Subtest 4	826.4	20.04
	836.4	20.35
	846.6	20.80
HSUPA Subtest 1	826.4	20.44
	836.4	20.22
	846.6	20.31
HSUPA Subtest 2	826.4	21.47
	836.4	21.55
	846.6	21.22
HSUPA Subtest 3	826.4	21.30
	836.4	21.10
	846.6	21.10
HSUPA Subtest 4	826.4	21.02
	836.4	22.36
	846.6	22.35
HSUPA Subtest 5	826.4	21.09
	836.4	21.54
	846.6	21.88

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	MAX(CM-1,0)
Note: CM=1 for $\beta_d/\beta_{d'}=12/15$, $\beta_{hs}/\beta_c=24/15$.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensation for the power back-off by increasing the gain of TX_AGc in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

LTE Band

LTE (TDD) Considerations

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band 41 supports 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS)

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Table 4.2-2: Uplink-downlink configurations

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Calculated Duty Cycle

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle(%)
		0	1	2	3	4	5	6	7	8	9	
0	5ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5ms	D	S	U	U	U	D	S	U	U	D	53.33

Note: Calculated Duty Cycle = Extended cyclic prefix in uplink x (Ts) x # of S + # of U

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

Calculated Duty Cycle = $5120 \times [1/(15000 \times 2048)] \times 2 + 6 \text{ ms} = 63.33\%$

where

$T_s = 1/(15000 \times 2048)$ seconds

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



LTE Band

Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18607	18900	19193
1.4MHz	QPSK	1	0	0	23.22	22.76	23.32
			3	0	23.20	22.73	22.95
			5	0	23.26	22.79	22.90
		3	0	0	23.29	22.85	23.27
			2	0	23.28	22.83	23.39
			3	0	23.32	22.84	23.35
		6	0	1	23.26	22.16	21.89
	16QAM	1	0	1	22.62	22.42	21.72
			3	1	22.67	22.29	21.73
			5	1	22.64	22.45	21.70
		3	0	1	22.43	21.80	21.90
			2	1	22.43	21.80	21.90
			3	1	22.38	21.83	21.88
		6	0	2	21.77	21.08	21.17
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18615	18900	19185
3MHz	QPSK	1	0	0	23.33	23.03	23.29
			7	0	23.31	23.04	23.34
			14	0	23.25	23.06	23.44
		8	0	1	22.20	22.09	22.37
			4	1	22.20	22.21	22.22
			7	1	22.33	22.22	22.27
		15	0	1	22.26	22.13	22.34
	16QAM	1	0	1	21.96	22.39	22.14
			7	1	22.04	22.39	22.19
			14	1	22.01	22.43	22.17
		8	0	2	21.66	21.48	21.11
			4	2	21.67	21.49	21.13
			7	2	21.60	21.52	21.18
		15	0	2	21.55	21.38	21.11

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18625	18900	19175
5MHz	QPSK	1	0	0	22.94	23.17	23.12
			13	0	22.76	23.31	23.37
			24	0	23.25	23.24	23.30
		12	0	1	21.92	22.12	22.21
			6	1	21.91	22.12	22.21
			13	1	21.92	22.16	22.23
		25	0	1	21.78	22.17	22.34
	16QAM	1	0	1	21.68	22.24	22.55
			13	1	21.71	22.27	22.44
			24	1	21.68	22.24	22.57
		12	0	2	21.33	21.11	21.55
			6	2	21.37	21.12	21.49
			13	2	21.34	21.17	21.57
		25	0	2	21.49	21.21	21.56
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18650	18900	19150
10MHz	QPSK	1	0	0	23.16	23.33	23.36
			25	0	23.17	23.27	23.36
			49	0	23.20	23.51	23.35
		25	0	1	22.22	22.04	22.36
			13	1	22.22	22.04	22.37
			25	1	22.25	22.06	22.36
		50	0	1	22.27	22.06	22.32
	16QAM	1	0	1	22.47	22.32	22.22
			25	1	22.50	22.41	22.16
			49	1	22.49	22.35	22.16
		25	0	2	21.34	21.28	21.73
			13	2	21.34	21.30	21.56
			25	2	21.26	21.35	21.61
		50	0	2	21.40	21.33	21.44

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 2(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18675	18900	19125
15MHz	QPSK	1	0	0	23.31	23.49	23.59
			38	0	23.00	23.41	23.53
			74	0	23.39	23.66	23.31
		36	0	1	22.16	22.19	22.23
			18	1	22.22	22.34	22.69
			39	1	22.15	22.60	22.62
		75	0	1	22.09	22.24	22.56
	16QAM	1	0	1	21.72	22.29	22.67
			38	1	22.05	22.45	22.61
			74	1	22.00	22.30	22.93
		36	0	2	21.54	21.34	21.92
			18	2	21.82	21.32	21.83
			39	2	21.62	21.26	21.99
		75	0	2	21.80	21.63	21.85
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					18700	18900	19100
20MHz	QPSK	1	0	0	23.56	23.36	23.45
			50	0	23.58	23.35	23.47
			99	0	23.63	23.93	23.66
		50	0	1	22.60	22.39	22.49
			25	1	22.31	22.43	22.60
			50	1	22.73	22.29	22.48
		100	0	1	22.53	22.30	22.73
	16QAM	1	0	1	22.78	22.79	22.50
			50	1	22.92	22.83	22.61
			99	1	22.64	22.68	22.65
		50	0	2	21.61	21.38	21.88
			25	2	21.63	21.62	22.01
			50	2	21.52	21.61	22.09
		100	0	2	21.88	21.33	21.52

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19957	20175	20393
1.4MHz	QPSK	1	0	0	23.52	23.12	23.30
			3	0	23.54	23.09	23.27
			5	0	23.36	23.16	23.31
		3	0	0	23.37	23.06	23.32
			2	0	23.34	23.03	23.20
			3	0	23.32	23.01	23.20
		6	0	1	22.28	21.99	22.00
	16QAM	1	0	1	23.18	22.39	23.25
			3	1	23.16	22.38	23.13
			5	1	23.20	22.37	23.17
		3	0	1	22.59	22.40	22.32
			2	1	22.58	22.39	22.31
			3	1	22.60	22.38	22.33
		6	0	2	21.61	21.29	21.22
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19965	20175	20385
3MHz	QPSK	1	0	0	23.27	23.14	23.28
			7	0	23.30	23.26	23.26
			14	0	23.16	23.06	23.26
		8	0	1	22.31	22.04	22.03
			4	1	22.31	22.03	22.03
			7	1	22.33	22.03	22.04
		15	0	1	22.40	22.11	21.89
	16QAM	1	0	1	22.99	22.95	22.42
			7	1	22.97	22.94	22.33
			14	1	22.91	22.97	22.35
		8	0	2	21.81	21.37	21.34
			4	2	21.81	21.39	21.34
			7	2	21.85	21.33	21.47
		15	0	2	21.54	21.26	21.37

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					19975	20175	20375
5MHz	QPSK	1	0	0	23.34	23.17	23.01
			13	0	23.28	23.14	23.00
			24	0	23.34	23.21	22.95
		12	0	1	22.24	22.07	22.07
			6	1	22.37	22.07	22.07
			13	1	22.34	22.04	22.10
		25	0	1	22.35	22.03	22.02
	16QAM	1	0	1	21.83	22.48	21.75
			13	1	21.87	22.41	21.79
			24	1	21.79	22.42	21.77
		12	0	2	21.59	21.31	21.24
			6	2	21.56	21.33	21.12
			13	2	21.56	21.30	21.17
		25	0	2	21.48	21.21	21.20
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20000	20175	20350
10MHz	QPSK	1	0	0	23.27	23.24	23.32
			25	0	23.14	23.24	23.32
			49	0	23.11	23.22	23.30
		25	0	1	22.35	21.99	22.04
			13	1	22.34	21.99	22.04
			25	1	22.15	21.99	22.04
		50	0	1	22.29	22.04	21.93
	16QAM	1	0	1	22.73	22.50	21.96
			25	1	22.70	22.42	21.85
			49	1	22.70	22.44	21.89
		25	0	2	21.44	21.50	21.32
			13	2	21.45	21.39	21.33
			25	2	21.54	21.43	21.35
		50	0	2	21.39	21.30	21.43

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 4(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20025	20175	20325
15MHz	QPSK	1	0	0	23.23	23.19	23.25
			38	0	23.21	23.23	23.25
			74	0	23.09	23.21	23.28
		36	0	1	22.21	22.03	22.11
			18	1	22.21	22.03	22.11
			39	1	22.21	22.03	22.11
		75	0	1	22.27	22.12	22.19
	16QAM	1	0	1	22.80	22.38	22.75
			38	1	22.70	22.42	22.74
			74	1	22.55	22.39	22.66
		36	0	2	21.48	21.31	21.26
			18	2	21.49	21.32	21.27
			39	2	21.50	21.34	21.28
		75	0	2	21.45	21.21	21.34
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20050	20175	20300
20MHz	QPSK	1	0	0	23.52	23.31	23.28
			50	0	23.35	23.35	23.23
			99	0	23.43	23.23	23.23
		50	0	1	22.26	22.12	22.00
			25	1	22.26	22.12	22.11
			50	1	22.12	22.07	22.05
		100	0	1	22.23	22.15	21.98
	16QAM	1	0	1	22.58	22.48	22.84
			50	1	22.42	22.33	22.65
			99	1	22.30	22.44	22.78
		50	0	2	21.50	21.46	21.15
			25	2	21.51	21.47	21.15
			50	2	21.38	21.30	21.18
		100	0	2	21.31	21.14	21.35

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 5(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20407	20525	20643
1.4MHz	QPSK	1	0	0	23.53	23.64	23.92
			3	0	23.59	23.64	23.87
			5	0	23.60	23.66	23.83
		3	0	0	23.55	23.59	23.80
			2	0	23.53	23.73	23.78
			3	0	23.50	23.67	23.84
		6	0	1	22.58	22.67	22.71
	16QAM	1	0	1	23.43	23.35	22.39
			3	1	23.29	23.38	22.41
			5	1	23.34	23.40	22.49
		3	0	1	22.93	22.65	22.36
			2	1	22.93	22.64	22.35
			3	1	22.92	22.61	22.53
		6	0	2	22.09	21.70	21.89
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20415	20525	20635
3MHz	QPSK	1	0	0	23.46	23.68	23.73
			7	0	23.46	23.61	23.81
			14	0	23.51	23.65	23.84
		8	0	1	22.53	22.55	22.79
			4	1	22.53	22.55	22.79
			7	1	22.54	22.61	22.84
		15	0	1	22.60	22.58	22.71
	16QAM	1	0	1	23.16	23.50	22.68
			7	1	23.03	23.48	22.48
			14	1	23.00	23.39	22.61
		8	0	2	22.25	22.19	21.98
			4	2	22.39	22.19	21.98
			7	2	22.27	21.71	21.96
		15	0	2	22.01	21.64	21.74

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 5(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20425	20525	20625
5MHz	QPSK	1	0	0	23.43	23.90	23.70
			13	0	23.55	23.67	23.64
			24	0	23.68	23.68	23.77
		12	0	1	22.56	22.53	22.86
			6	1	22.57	22.53	22.86
			13	1	22.46	22.47	22.79
		25	0	1	22.63	22.60	22.80
	16QAM	1	0	1	21.97	22.90	22.41
			13	1	21.97	22.87	22.40
			24	1	22.07	22.88	22.45
		12	0	2	21.99	22.15	21.75
			6	2	21.99	22.15	21.64
			13	2	22.01	21.80	21.55
		25	0	2	21.97	21.71	21.57
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20450	20525	20600
10MHz	QPSK	1	0	0	23.39	23.74	23.60
			25	0	23.56	23.78	23.65
			49	0	23.57	23.96	23.71
		25	0	1	22.49	22.55	22.50
			13	1	22.50	22.56	22.50
			25	1	22.65	22.73	22.78
		50	0	1	22.55	22.61	22.70
	16QAM	1	0	1	22.81	22.95	22.36
			25	1	22.90	22.89	22.47
			49	1	22.93	22.93	22.45
		25	0	2	21.94	22.15	21.80
			13	2	21.94	22.15	21.80
			25	2	21.85	21.83	21.83
		50	0	2	21.47	21.66	21.70

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 7 (dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20775	21100	21425
5MHz	QPSK	1	0	0	22.48	22.13	21.57
			12	0	22.33	22.10	21.61
			24	0	22.47	21.95	21.49
		12	0	1	21.22	21.18	20.79
			6	1	21.29	21.17	20.62
			13	1	21.33	20.98	20.73
		25	0	1	21.20	20.91	20.96
	16QAM	1	0	1	20.56	21.24	20.36
			12	1	20.68	21.20	20.38
			24	1	20.73	21.14	20.40
		12	0	2	20.25	20.17	19.96
			6	2	20.25	20.18	19.96
			13	2	20.37	20.40	19.80
		25	0	2	20.54	20.63	19.73
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20800	21100	21400
10MHz	QPSK	1	0	0	22.27	22.18	21.74
			24	0	22.23	22.05	21.76
			49	0	22.21	21.95	21.68
		25	0	1	21.47	20.90	20.70
			12	1	21.47	20.89	20.71
			25	1	21.28	21.01	20.75
		50	0	1	21.14	20.92	20.66
	16QAM	1	0	1	21.43	21.41	20.89
			24	1	21.56	21.28	20.71
			49	1	21.42	21.37	20.72
		25	0	2	20.35	20.34	20.10
			12	2	20.21	20.34	20.11
			25	2	20.32	20.18	20.08
		50	0	2	20.59	20.24	19.83

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 7 (dBm)

Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20825	21100	21375
15MHz	QPSK	1	0	0	22.33	22.29	21.84
			37	0	22.30	22.06	21.77
			74	0	22.33	22.17	21.75
		37	0	1	21.23	20.91	20.67
			16	1	21.24	21.14	20.67
			35	1	21.24	20.89	20.67
		75	0	1	21.11	21.05	20.84
	16QAM	1	0	1	21.77	21.67	21.66
			37	1	21.72	21.57	21.49
			74	1	21.74	21.49	21.44
		37	0	2	20.30	20.50	20.06
			16	2	20.40	20.23	20.07
			35	2	20.31	20.24	19.96
		75	0	2	20.43	20.28	19.88
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					20850	21100	21350
20MHz	QPSK	1	0	0	22.53	22.71	21.88
			49	0	22.46	22.47	21.85
			99	0	22.37	22.28	21.88
		50	0	1	21.67	21.05	20.69
			25	1	21.68	21.03	20.71
			49	1	21.46	21.05	20.61
		100	0	1	21.14	21.06	20.88
	16QAM	1	0	1	21.34	21.63	21.72
			49	1	21.27	21.52	21.57
			99	1	21.42	21.39	21.53
		50	0	2	20.51	20.27	20.11
			25	2	20.52	20.28	19.99
			49	2	20.42	20.20	19.85
		100	0	2	20.41	20.17	20.02

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 12(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23017	23095	23173
1.4MHz	QPSK	1	0	0	24.02	24.06	24.11
			3	0	24.17	24.03	24.03
			5	0	24.16	24.10	24.03
		3	0	0	24.09	23.89	23.93
			2	0	24.14	23.87	23.91
			3	0	24.19	23.90	23.86
		6	0	1	23.01	22.76	22.86
	16QAM	1	0	1	23.75	23.16	22.69
			3	1	23.61	23.23	22.66
			5	1	23.62	23.20	22.63
		3	0	1	23.33	22.85	22.64
			2	1	23.32	22.85	22.66
			3	1	23.26	23.21	22.59
		6	0	2	22.48	22.33	22.40
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23025	23095	23165
3MHz	QPSK	1	0	0	23.93	24.04	23.96
			7	0	23.91	24.03	24.05
			14	0	24.04	23.96	23.94
		8	0	1	23.14	22.97	22.84
			4	1	23.27	22.97	22.84
			7	1	22.84	22.92	22.87
		15	0	1	23.04	22.70	22.80
	16QAM	1	0	1	23.46	23.76	22.67
			7	1	23.41	23.62	22.83
			14	1	23.24	23.58	22.91
		8	0	2	22.44	22.27	22.18
			4	2	22.44	22.28	22.18
			7	2	22.10	22.09	22.40
		15	0	2	22.38	22.15	22.09

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 12(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23035	23095	23155
5MHz	QPSK	1	0	0	24.06	23.96	23.80
			13	0	23.93	23.94	23.88
			24	0	24.08	24.03	23.85
		12	0	1	23.15	22.87	22.96
			6	1	23.14	22.88	22.95
			13	1	22.87	22.84	22.88
		25	0	1	22.66	22.72	22.89
	16QAM	1	0	1	22.45	22.95	22.63
			13	1	22.16	22.95	22.49
			24	1	22.22	23.06	22.78
		12	0	2	22.17	22.25	21.73
			6	2	22.17	22.26	21.89
			13	2	21.83	21.93	21.81
		25	0	2	21.96	22.06	21.85
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23060	23095	23130
10MHz	QPSK	1	0	0	24.03	24.00	24.23
			25	0	23.99	23.97	24.29
			49	0	23.89	23.96	24.12
		25	0	1	22.84	22.91	23.01
			13	1	22.84	22.92	22.87
			25	1	22.85	23.14	23.03
		50	0	1	22.83	22.79	23.03
	16QAM	1	0	1	23.31	23.15	22.63
			25	1	23.03	23.20	22.69
			49	1	23.13	23.16	22.63
		25	0	2	21.82	22.24	22.03
			13	2	21.83	22.26	22.04
			25	2	22.18	22.38	22.06
		50	0	2	22.26	22.07	22.31

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 17(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23755	23790	23825
5MHz	QPSK	1	0	0	24.03	23.90	23.99
			13	0	24.04	24.05	24.00
			24	0	23.94	23.96	23.96
		12	0	1	23.04	22.90	23.07
			6	1	23.04	22.90	23.07
			13	1	22.88	22.88	23.16
		25	0	1	22.80	22.96	23.07
	16QAM	1	0	1	22.28	23.09	22.78
			13	1	22.24	23.15	22.93
			24	1	22.29	23.18	22.87
		12	0	2	22.23	21.89	21.92
			6	2	22.18	21.91	22.11
			13	2	21.93	22.08	22.16
		25	0	2	22.44	22.29	22.05
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					23780	23790	23800
10MHz	QPSK	1	0	0	24.11	24.11	24.33
			25	0	23.99	24.08	24.21
			49	0	24.05	24.04	24.23
		25	0	1	23.07	23.02	22.96
			13	1	23.07	23.03	22.96
			25	1	23.09	23.01	23.15
		50	0	1	23.09	23.11	23.09
	16QAM	1	0	1	23.08	23.29	22.72
			25	1	23.27	23.37	23.03
			49	1	23.28	23.33	22.88
		25	0	2	22.27	22.12	22.13
			13	2	22.28	22.08	22.15
			25	2	22.17	22.10	22.24
		50	0	2	22.12	22.57	22.53

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 66(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					131979	132422	132665
1.4MHz	QPSK	1	0	0	23.52	23.36	23.32
			2	0	23.53	23.35	23.28
			5	0	23.57	23.34	21.96
		3	0	0	23.39	23.13	23.08
			1	0	23.42	23.24	23.15
			3	0	23.40	23.11	23.07
		6	0	1	23.87	22.16	22.02
	16QAM	1	0	1	23.39	23.23	22.10
			2	1	23.36	23.22	22.97
			5	1	23.35	23.26	22.96
		3	0	1	22.66	22.37	22.41
			1	1	22.74	22.36	22.40
			3	1	22.77	22.39	22.05
		6	0	2	21.60	21.20	21.40
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					131987	132422	132657
3MHz	QPSK	1	0	0	23.39	23.11	23.07
			8	0	23.35	23.13	23.04
			14	0	23.35	23.14	23.14
		8	0	1	22.40	22.06	22.08
			4	1	22.40	22.06	22.07
			7	1	22.42	22.10	22.16
		15	0	1	22.40	22.05	22.01
	16QAM	1	0	1	23.03	22.96	22.29
			8	1	22.98	22.87	22.15
			14	1	22.95	22.86	22.18
		8	0	2	21.96	21.36	21.41
			4	2	21.96	21.49	21.42
			7	2	21.99	21.42	21.50
		15	0	2	21.53	21.39	21.20

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 66(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					131997	132422	132647
5MHz	QPSK	1	0	0	23.27	23.35	23.14
			12	0	23.21	23.28	23.17
			24	0	23.27	23.27	23.08
		12	0	1	22.40	22.20	22.10
			6	1	22.40	22.19	22.23
			13	1	22.36	22.09	22.12
		25	0	1	22.43	22.07	22.09
	16QAM	1	0	1	22.07	22.32	21.90
			12	1	22.07	22.46	21.83
			24	1	22.01	22.41	21.90
		12	0	2	21.69	21.34	21.15
			6	2	21.70	21.16	21.16
			13	2	21.69	21.22	21.21
		25	0	2	21.57	21.44	21.22
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					132022	132422	132622
10MHz	QPSK	1	0	0	23.28	23.14	23.09
			24	0	23.31	23.12	23.12
			49	0	23.34	23.22	23.15
		25	0	1	22.25	22.05	22.15
			12	1	22.36	22.05	22.16
			25	1	22.34	22.21	22.23
		50	0	1	22.37	22.15	22.04
	16QAM	1	0	1	22.77	22.87	21.84
			24	1	22.73	22.85	21.85
			49	1	22.74	22.82	21.94
		25	0	2	21.69	21.30	21.30
			12	2	21.52	21.44	21.30
			25	2	21.46	21.29	21.40
		50	0	2	21.47	21.47	21.38

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Conducted Power of LTE Band 66(dBm)							
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					132047	132422	132597
15MHz	QPSK	1	0	0	23.33	23.18	23.20
			38	0	23.24	23.21	23.20
			74	0	23.10	23.26	23.17
		38	0	1	22.20	22.07	22.11
			18	1	22.20	22.17	22.11
			37	1	22.20	22.17	22.11
		75	0	1	22.37	22.06	22.15
	16QAM	1	0	1	22.83	22.84	22.72
			38	1	22.78	22.95	22.80
			74	1	22.68	22.84	22.78
		38	0	2	21.57	21.38	21.31
			18	2	21.57	21.38	21.32
			37	2	21.57	21.39	21.33
		75	0	2	21.42	21.38	21.34
Bandwidth	Modulation	RB size	RB offset	Target MPR	Channel	Channel	Channel
					132072	132422	132572
20MHz	QPSK	1	0	0	23.58	23.49	23.17
			49	0	23.41	23.49	23.15
			99	0	23.40	23.57	23.13
		50	0	1	22.24	22.20	22.20
			25	1	22.24	22.19	22.21
			50	1	22.20	22.10	22.14
		100	0	1	22.35	22.23	22.11
	16QAM	1	0	1	22.77	22.33	22.72
			49	1	22.70	22.30	22.72
			99	1	22.50	22.16	22.85
		50	0	2	21.66	21.33	21.16
			25	2	21.66	21.22	21.18
			50	2	21.51	21.18	21.18
		100	0	2	21.39	21.24	21.41

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3.3-1 of the 3GPP TS36.101.

Table 6.2.3.3-1 Maximum Power Reduction (MPR) for Power class3

Modulation	Maximum Power Reduction (MPR) for Power[RB]						MPR(dB)
	1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
QPSK	>5	>4	>8	>12	>16	>18	≤1
16QAM	≤5	≤4	≤8	≤12	≤16	≤18	≤1
16QAM	>5	>4	>8	>12	>16	>18	≤2

The allowed A-MPR values specified below in Table 6.2.4.3-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Table 6.2.4.3-1: Additional Maximum Power Reduction (A-MPR) / Spectrum Emission requirements

Network Signaling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.2-1	1.4,3,5,10,15,20	Table 5.4.2-1	N/A
NS_03	6.6.2.2.3.1	2,4,10, 23, 25,35,36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.3.2	41	5	>6	≤ 1
			10, 15, 20	Table 6.2.4.3-4	
NS_05	6.6.3.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.4.2-1	N/A
NS_07	6.6.2.2.3.3 6.6.3.3.3.2	13	10	Table 6.2.4.3-2	Table 6.2.4.3-2
NS_08	6.6.3.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4.3-3	Table 6.2.4.3-3
NS_11	6.6.2.2.1 6.6.3.3.13	231	1.4, 3, 5, 10,15,20	Table 6.2.4.3-5	Table 6.2.4.3-5
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4.3-6	Table 6.2.4.3-6
NS_13	6.6.3.3.6	26	5	Table 6.2.4.3-7	Table 6.2.4.3-7
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4.3-8	Table 6.2.4.3-8
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4.3-9 Table 6.2.4.3-10	Table 6.2.4.3-9, Table 6.2.4.3-10
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4.3-11, Table 6.2.4.3-12, Table 6.2.4.3-13	
NS_17	6.6.3.3.10 6.6.3.3.11	28	5, 10	Table 5.4.2-1	N/A
		28	5	≥ 2	≤ 1
NS_18			10, 15, 20	≥ 1	≤ 4
NS_19			10, 15, 20	Table 6.2.4.3-15	Table 6.2.4.3-15
NS_20			5, 10, 15, 20	Table 6.2.4.3-14	Table 6.2.4.3-14
...					
NS_20	-	-	-	-	-

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



WIFI

Mode	Data Rate (Mbps)	Channel	Frequency(MHz)	Avg. Burst Power(dBm)
802.11b	1	01	2412	13.44
		06	2437	13.65
		11	2462	11.48
802.11g	6	01	2412	8.79
		06	2437	9.58
		11	2462	7.84
802.11n(20)	6.5	01	2412	7.76
		06	2437	8.66
		11	2462	6.97

Bluetooth_V4.2(BR/EDR)

Modulation	Channel	Frequency(MHz)	Peak Power (dBm)
GFSK	0	2402	2.06
	39	2441	2.61
	78	2480	2.49
π /4-DQPSK	0	2402	2.02
	39	2441	3.07
	78	2480	3.18
8-DPSK	0	2402	2.21
	39	2441	3.28
	78	2480	3.32

Bluetooth_V4.2(BLE)

Modulation	Channel	Frequency(MHz)	Peak Power (dBm)
GFSK	0	2402	-4.02
	19	2440	-4.60
	39	2480	-5.21

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



13. TEST RESULTS

13.1. SAR Test Results Summary

13.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to IEEE 1528-2013, Body-worn and 4 Edges SAR was performed with the device 10mm from the phantom.

13.1.2. Operation Mode

1. Per KDB 447498 D01 v06 ,for each exposure position, if the highest 1-g SAR is ≤ 0.8 W/kg, testing for low and high channel is optional.
2. Per KDB 865664 D01 v01r04,for each frequency band, if the measured SAR is ≥ 0.8 W/kg, testing for repeated SAR measurement is required , that the highest measured SAR is only to be tested. When the SAR results are near the limit, the following procedures are required for each device to verify these types of SAR measurement related variation concerns by repeating the highest measured SAR configuration in each frequency band.
 - (1) When the original highest measured SAR is ≥ 0.8 W/kg, repeat that measurement once.
 - (2) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is >1.20 or when the original or repeated measurement is ≥ 1.45 W/kg.
 - (3) Perform a third repeated measurement only if the original, first and second repeated measurement is ≥ 1.5 W/kg and ratio of largest to smallest SAR for the original, first and second measurement is ≥ 1.20 .
3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be test.
4. Per KDB 648474 D04 v01r03,when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected is not required.
5. Per KDB 248227 D01v02r02,for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
6. Per KDB 941225 D06 V02r01, When the same wireless mode transmission configurations for voice and data are required for SAR measurements, the more conservative configuration with a smaller separation distance should be tested for the overlapping SAR configurations.
7. Maximum Scaling SAR in order to calculate the Maximum SAR values to test under the standard Peak Power, Calculation method is as follows:
Maximum Scaling SAR =tested SAR (Max.) $\times$ [maximum turn-up power (mw)/ maximum measurement output power(mw)]
8. Proximity sensor, just for avoiding the wrong operation in the phone screen when call, and has no influence on output power or SAR result
9. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1RB allocation using the RB offset and required test channel combination with highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
10. Per KDB 941125 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
11. Per KDB 941125 D05v02r05. For QPSK with 100% RB allocation. SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



1RB allocation and the highest reported SAR is >1.45 W/kg, the remaining required test channels must also be tested.

12. Per KDB 941125 D05v02r05. 16QAM output power for each RB allocation configuration is not 1/2 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg, Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
13. Per KDB 941125 D05v02r05. Smaller bandwidth output power for each RB allocation configuration is $>$ not 1/2 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg. Per KDB 941125 D05v02r05, smaller bandwidth SAR testing is not required.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



13.1.3. Test Result

SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 51.7					
Product: Mobile Phone									
Test Mode: GSM850 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
SIM 1 Card									
Left Cheek	voice	190	836.6	-0.21	0.446	32.50	32.02	0.498	1.6
Left Tilt	voice	190	836.6	-0.05	0.301	32.50	32.02	0.336	1.6
Right Cheek	voice	190	836.6	-0.27	0.480	32.50	32.02	0.536	1.6
Right Tilt	voice	190	836.6	0.32	0.281	32.50	32.02	0.314	1.6
Body back	voice	190	836.6	-0.05	0.584	32.50	32.02	0.652	1.6
Body front	voice	190	836.6	0.20	0.517	32.50	32.02	0.577	1.6
Body back	GPRS-3 slot	190	836.6	-0.18	0.546	29.50	29.30	0.572	1.6
Body front	GPRS-3 slot	190	836.6	-0.17	0.459	29.50	29.30	0.481	1.6
Edge 2(Right)	GPRS-3 slot	190	836.6	0.42	0.413	29.50	29.30	0.432	1.6
Edge 3(Bottom)	GPRS-3 slot	190	836.6	-0.10	0.062	29.50	29.30	0.065	1.6
Edge 4(Left)	GPRS-3 slot	190	836.6	-0.03	0.312	29.50	29.30	0.327	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 57.3					
Product: Mobile Phone									
Test Mode: PCS1900 with GMSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
SIM 1 Card									
Left Cheek	voice	661	1880.0	-0.24	0.148	30.50	29.97	0.167	1.6
Left Tilt	voice	661	1880.0	-0.15	0.014	30.50	29.97	0.016	1.6
Right Cheek	voice	661	1880.0	-0.27	0.108	30.50	29.97	0.122	1.6
Right Tilt	voice	661	1880.0	0.53	0.023	30.50	29.97	0.026	1.6
Body back	voice	661	1880.0	-0.62	0.213	30.50	29.97	0.241	1.6
Body front	voice	661	1880.0	0.20	0.217	30.50	29.97	0.245	1.6
Body back	GPRS-4 slot	661	1880	0.11	0.203	27.00	25.67	0.276	1.6
Body front	GPRS-4 slot	661	1880	-0.08	0.230	27.00	25.67	0.312	1.6
Edge 2(Right)	GPRS-4 slot	661	1880.0	-0.26	0.034	27.00	25.67	0.046	1.6
Edge 3(Bottom)	GPRS-4 slot	661	1880.0	0.20	0.447	27.00	25.67	0.607	1.6
Edge 4(Left)	GPRS-4 slot	661	1880.0	-0.30	0.112	27.00	25.67	0.152	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 57.3					
Product: Mobile Phone									
Test Mode: WCDMA Band II with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	9400	1880	-0.31	0.212	22.60	22.07	0.240	1.6
Left Tilt	RMC 12.2kbps	9400	1880	-0.08	0.026	22.60	22.07	0.029	1.6
Right Cheek	RMC 12.2kbps	9400	1880	0.27	0.329	22.60	22.07	0.372	1.6
Right Tilt	RMC 12.2kbps	9400	1880	-0.42	0.029	22.60	22.07	0.033	1.6
Body back	RMC 12.2kbps	9400	1880	-0.52	0.293	22.60	22.07	0.331	1.6
Body front	RMC 12.2kbps	9400	1880	0.14	0.339	22.60	22.07	0.383	1.6
Edge 2(Right)	RMC 12.2kbps	9400	1880	-0.05	0.050	22.60	22.07	0.056	1.6
Edge 3(Bottom)	RMC 12.2kbps	9400	1880	-0.28	0.448	22.60	22.07	0.506	1.6
Edge 4(Left)	RMC 12.2kbps	9400	1880	0.10	0.148	22.60	22.07	0.167	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 55.3				
Product: Mobile Phone									
Test Mode: WCDMA Band IV with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	8662	1732.4	-0.23	0.464	22.50	22.11	0.508	1.6
Left Tilt	RMC 12.2kbps	8662	1732.4	-0.04	0.107	22.50	22.11	0.117	1.6
Right Cheek	RMC 12.2kbps	8662	1732.4	-0.28	0.396	22.50	22.11	0.433	1.6
Right Tilt	RMC 12.2kbps	8662	1732.4	0.22	0.092	22.50	22.11	0.101	1.6
Body back	RMC 12.2kbps	8662	1732.4	-0.62	0.464	22.50	22.11	0.508	1.6
Body front	RMC 12.2kbps	8562	1712.4	-0.29	0.833	22.50	22.35	0.862	1.6
Body front	RMC 12.2kbps	8662	1732.4	-0.35	0.771	22.50	22.11	0.843	1.6
Body front	RMC 12.2kbps	8763	1752.6	-0.20	0.729	22.50	22.26	0.770	1.6
Edge 2(Right)	RMC 12.2kbps	8662	1732.4	0.03	0.152	22.50	22.11	0.166	1.6
Edge 3(Bottom)	RMC 12.2kbps	8662	1732.4	-0.25	0.179	22.50	22.11	0.196	1.6
Edge 4(Left)	RMC 12.2kbps	8662	1732.4	0.10	0.071	22.50	22.11	0.078	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT									
Depth of Liquid (cm):>15					Relative Humidity (%): 51.7				
Product: Mobile Phone									
Test Mode: WCDMA Band V with QPSK modulation									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
Left Cheek	RMC 12.2kbps	4183	836.4	-0.17	0.087	22.50	21.84	0.101	1.6
Left Tilt	RMC 12.2kbps	4183	836.4	-0.05	0.042	22.50	21.84	0.049	1.6
Right Cheek	RMC 12.2kbps	4183	836.4	-0.24	0.076	22.50	21.84	0.088	1.6
Right Tilt	RMC 12.2kbps	4183	836.4	0.13	0.079	22.50	21.84	0.092	1.6
Body back	RMC 12.2kbps	4183	836.4	-0.09	0.033	22.50	21.84	0.038	1.6
Body front	RMC 12.2kbps	4183	836.4	-0.25	0.063	22.50	21.84	0.073	1.6
Edge 2(Right)	RMC 12.2kbps	4183	836.4	0.10	0.038	22.50	21.84	0.044	1.6
Edge 3(Bottom)	RMC 12.2kbps	4183	836.4	0.04	0.002	22.50	21.84	0.002	1.6
Edge 4(Left)	RMC 12.2kbps	4183	836.4	-0.07	0.064	22.50	21.84	0.075	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 51.7						
Product: Mobile Phone												
Test Mode: LTE Band 2												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	18900	1880	-0.17	0.218	24.00	23.36	0.253	1.6
		Left Tilt	1	0	18900	1880	-0.08	0.026	24.00	23.36	0.030	1.6
		Right Cheek	1	0	18900	1880	-0.35	0.157	24.00	23.36	0.182	1.6
		Right Tilt	1	0	18900	1880	0.27	0.033	24.00	23.36	0.038	1.6
		Body back	1	0	18900	1880	-0.42	0.261	24.00	23.36	0.302	1.6
		Body front	1	0	18900	1880	-0.16	0.283	24.00	23.36	0.328	1.6
		Edge 2(Right)	1	0	18900	1880	-0.27	0.041	24.00	23.36	0.048	1.6
		Edge 3(Bottom)	1	0	18900	1880	0.35	0.442	24.00	23.36	0.512	1.6
		Edge 4(Left)	1	0	18900	1880	-0.12	0.127	24.00	23.36	0.147	1.6
20	QPSK	Left Cheek	50%	0	18900	1880	-0.51	0.175	24.00	22.39	0.254	1.6
		Left Tilt	50%	0	18900	1880	-0.06	0.020	24.00	22.39	0.029	1.6
		Right Cheek	50%	0	18900	1880	-0.28	0.121	24.00	22.39	0.175	1.6
		Right Tilt	50%	0	18900	1880	0.10	0.030	24.00	22.39	0.043	1.6
		Body back	50%	0	18900	1880	-0.17	0.199	24.00	22.39	0.288	1.6
		Body front	50%	0	18900	1880	-0.20	0.236	24.00	22.39	0.342	1.6
		Edge 2(Right)	50%	0	18900	1880	0.03	0.031	24.00	22.39	0.045	1.6
		Edge 3(Bottom)	50%	0	18900	1880	-0.06	0.320	24.00	22.39	0.464	1.6
		Edge 4(Left)	50%	0	18900	1880	0.24	0.102	24.00	22.39	0.148	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 55.3						
Product: Mobile Phone												
Test Mode: LTE Band 4												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift ($\leq \pm 5\%$)	SAR (1g) (W/kg)	Max. Tuneu p Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	20175	1732.5	-0.15	0.458	23.60	23.31	0.490	1.6
		Left Tilt	1	0	20175	1732.5	-0.04	0.133	23.60	23.31	0.142	1.6
		Right Cheek	1	0	20175	1732.5	0.27	0.478	23.60	23.31	0.511	1.6
		Right Tilt	1	0	20175	1732.5	-0.42	0.115	23.60	23.31	0.123	1.6
		Body back	1	0	20050	1720	-0.16	1.005	23.60	23.52	1.024	1.6
		Body back	1	0	20175	1732.5	-0.35	0.975	23.60	23.31	1.042	1.6
		Body back	1	0	20300	1745	0.20	0.997	23.60	23.28	1.073	1.6
		Body front	1	0	20175	1732.5	-0.05	0.944	23.60	23.52	0.962	1.6
		Body front	1	0	20175	1732.5	0.57	0.945	23.60	23.31	1.010	1.6
		Body front	1	0	20175	1732.5	0.41	0.951	23.60	23.28	1.024	1.6
		Edge 2(Right)	1	0	20175	1732.5	0.05	0.198	23.60	23.31	0.212	1.6
		Edge 3(Bottom)	1	0	20175	1732.5	0.30	0.734	23.60	23.31	0.785	1.6
		Edge 4(Left)	1	0	20175	1732.5	0.50	0.275	23.60	23.31	0.294	1.6
20	QPSK	Left Cheek	50%	0	20175	1732.5	-0.25	0.321	22.40	22.12	0.342	1.6
		Left Tilt	50%	0	20175	1732.5	-0.04	0.099	22.40	22.12	0.106	1.6
		Right Cheek	50%	0	20175	1732.5	0.28	0.364	22.40	22.12	0.388	1.6
		Right Tilt	50%	0	20175	1732.5	-0.35	0.077	22.40	22.12	0.082	1.6
		Body back	50%	0	20175	1732.5	-0.27	0.744	22.40	22.12	0.794	1.6
		Body front	50%	0	20175	1732.5	-0.10	0.725	22.40	22.12	0.773	1.6
		Edge 2(Right)	50%	0	20175	1732.5	0.05	0.124	22.40	22.12	0.132	1.6
		Edge 3(Bottom)	50%	0	20175	1732.5	0.26	0.693	22.40	22.12	0.739	1.6
		Edge 4(Left)	50%	0	20175	1732.5	-0.13	0.211	22.40	22.12	0.225	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT												
Depth of Liquid (cm):>15					Relative Humidity (%): 54.6							
Product: Mobile Phone												
Test Mode: LTE Band 5												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	20525	836.5	-0.33	0.349	24.00	23.74	0.371	1.6
		Left Tilt	1	0	20525	836.5	0.08	0.236	24.00	23.74	0.251	1.6
		Right Cheek	1	0	20525	836.5	-0.27	0.403	24.00	23.74	0.428	1.6
		Right Tilt	1	0	20525	836.5	-0.15	0.267	24.00	23.74	0.283	1.6
		Body back	1	0	20525	836.5	-0.27	0.551	24.00	23.74	0.585	1.6
		Body front	1	0	20525	836.5	-0.16	0.468	24.00	23.74	0.497	1.6
		Edge 2(Right)	1	0	20525	836.5	-0.35	0.403	24.00	23.74	0.428	1.6
		Edge 3(Bottom)	1	0	20525	836.5	0.28	0.079	24.00	23.74	0.084	1.6
		Edge 4(Left)	1	0	20525	836.5	-0.42	0.294	24.00	23.74	0.312	1.6
10	QPSK	Left Cheek	50%	0	20525	836.5	-0.10	0.276	24.00	22.55	0.385	1.6
		Left Tilt	50%	0	20525	836.5	-0.05	0.179	24.00	22.55	0.250	1.6
		Right Cheek	50%	0	20525	836.5	0.28	0.328	24.00	22.55	0.458	1.6
		Right Tilt	50%	0	20525	836.5	-0.32	0.192	24.00	22.55	0.268	1.6
		Body back	50%	0	20525	836.5	-0.42	0.447	24.00	22.55	0.624	1.6
		Body front	50%	0	20525	836.5	0.05	0.371	24.00	22.55	0.518	1.6
		Edge 2(Right)	50%	0	20525	836.5	-0.29	0.308	24.00	22.55	0.430	1.6
		Edge 3(Bottom)	50%	0	20525	836.5	-0.30	0.046	24.00	22.55	0.064	1.6
		Edge 4(L left)	50%	0	20525	836.5	0.18	0.202	24.00	22.55	0.282	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15					Relative Humidity (%): 59.1							
Product: Mobile Phone												
Test Mode: LTE Band 7												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	21100	2535	-0.16	0.666	22.80	22.71	0.680	1.6
		Left Tilt	1	0	21100	2535	0.21	0.225	22.80	22.71	0.230	1.6
		Right Cheek	1	0	20850	2510	-0.17	0.740	22.80	22.53	0.787	1.6
		Right Cheek	1	0	21100	2535	0.41	0.828	22.80	22.71	0.845	1.6
		Right Cheek	1	0	21350	2560	-0.05	0.766	22.80	21.88	0.947	1.6
		Right Tilt	1	0	21100	2535	-0.26	0.484	22.80	22.71	0.494	1.6
		Body back	1	0	20850	2510	0.25	0.915	22.80	22.53	0.974	1.6
		Body back	1	0	21100	2535	-0.34	0.960	22.80	22.71	0.980	1.6
		Body back	1	0	21350	2560	0.28	0.947	22.80	21.88	1.170	1.6
		Body front	1	0	20850	2510	-0.10	0.931	22.80	22.53	0.991	1.6
		Body front	1	0	21100	2535	0.05	0.964	22.80	22.71	0.984	1.6
		Body front	1	0	21350	2560	-0.18	0.951	22.80	21.88	1.175	1.6
		Edge 2(Right)	1	0	21100	2535	-0.05	0.053	22.80	22.71	0.054	1.6
		Edge 3(Bottom)	1	0	21100	2535	0.30	0.531	22.80	22.71	0.542	1.6
		Edge 4(Left)	1	0	21100	2535	-0.05	0.537	22.80	22.71	0.548	1.6
20	QPSK	Left Cheek	50%	0	21100	2535	-0.27	0.512	22.00	21.05	0.637	1.6
		Left Tilt	50%	0	21100	2535	0.27	0.184	22.00	21.05	0.229	1.6
		Right Cheek	50%	0	21100	2535	-0.40	0.569	22.00	21.05	0.708	1.6
		Right Tilt	50%	0	21100	2535	-0.05	0.372	22.00	21.05	0.463	1.6
		Body back	50%	0	21100	2535	0.26	0.644	22.00	21.05	0.801	1.6
		Body front	50%	0	20850	2510	-0.08	0.873	22.00	21.67	0.942	1.6
		Body front	50%	0	21100	2535	0.31	0.871	22.00	21.05	1.084	1.6
		Body front	50%	0	21350	2560	0.04	0.843	22.00	20.69	1.140	1.6
		Edge 2(Right)	50%	0	21100	2535	-0.12	0.039	22.00	21.05	0.049	1.6
		Edge 3(Bottom)	50%	0	21100	2535	-0.05	0.512	22.00	21.05	0.637	1.6
		Edge 4(Left)	50%	0	21100	2535	0.08	0.656	22.00	21.05	0.816	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 57.2						
Product: Mobile Phone												
Test Mode: LTE Band 12												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	23095	707.5	-0.13	0.207	24.30	24.00	0.222	1.6
		Left Tilt	1	0	23095	707.5	0.09	0.157	24.30	24.00	0.168	1.6
		Right Cheek	1	0	23095	707.5	-0.28	0.216	24.30	24.00	0.231	1.6
		Right Tilt	1	0	23095	707.5	-0.34	0.142	24.30	24.00	0.152	1.6
		Body back	1	0	23095	707.5	-0.27	0.369	24.30	24.00	0.395	1.6
		Body front	1	0	23095	707.5	0.42	0.266	24.30	24.00	0.285	1.6
		Edge 2(Right)	1	0	23095	707.5	-0.15	0.156	24.30	24.00	0.167	1.6
		Edge 3(Bottom)	1	0	23095	707.5	0.06	0.040	24.30	24.00	0.043	1.6
		Edge 4(Left)	1	0	23095	707.5	0.27	0.214	24.30	24.00	0.229	1.6
10	QPSK	Left Cheek	50%	0	23095	707.5	-0.43	0.185	24.30	22.91	0.255	1.6
		Left Tilt	50%	0	23095	707.5	-0.18	0.130	24.30	22.91	0.179	1.6
		Right Cheek	50%	0	23095	707.5	0.27	0.109	24.30	22.91	0.150	1.6
		Right Tilt	50%	0	23095	707.5	-0.52	0.182	24.30	22.91	0.251	1.6
		Body back	50%	0	23095	707.5	0.13	0.318	24.30	22.91	0.438	1.6
		Body front	50%	0	23095	707.5	-0.05	0.262	24.30	22.91	0.361	1.6
		Edge 2(Right)	50%	0	23095	707.5	0.28	0.128	24.30	22.91	0.176	1.6
		Edge 3(Bottom)	50%	0	23095	707.5	-0.42	0.021	24.30	22.91	0.029	1.6
		Edge 4(Left)	50%	0	23095	707.5	0.10	0.183	24.30	22.91	0.252	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 57.2						
Product: Mobile Phone												
Test Mode: LTE Band 17												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
10	QPSK	Left Cheek	1	0	23790	710	-0.28	0.221	24.40	24.11	0.236	1.6
		Left Tilt	1	0	23790	710	0.24	0.177	24.40	24.11	0.189	1.6
		Right Cheek	1	0	23790	710	-0.15	0.215	24.40	24.11	0.230	1.6
		Right Tilt	1	0	23790	710	-0.35	0.130	24.40	24.11	0.139	1.6
		Body back	1	0	23790	710	0.26	0.344	24.40	24.11	0.368	1.6
		Body front	1	0	23790	710	-0.27	0.277	24.40	24.11	0.296	1.6
		Edge 2(Right)	1	0	23790	710	-0.21	0.147	24.40	24.11	0.157	1.6
		Edge 3(Bottom)	1	0	23790	710	0.05	0.040	24.40	24.11	0.043	1.6
		Edge 4(Left)	1	0	23790	710	-0.34	0.205	24.40	24.11	0.219	1.6
10	QPSK	Left Cheek	50%	0	23790	710	0.24	0.191	24.40	23.02	0.262	1.6
		Left Tilt	50%	0	23790	710	-0.10	0.136	24.40	23.02	0.187	1.6
		Right Cheek	50%	0	23790	710	-0.05	0.198	24.40	23.02	0.272	1.6
		Right Tilt	50%	0	23790	710	-0.26	0.118	24.40	23.02	0.162	1.6
		Body back	50%	0	23790	710	-0.05	0.325	24.40	23.02	0.447	1.6
		Body front	50%	0	23790	710	-0.13	0.260	24.40	23.02	0.357	1.6
		Edge 2(Right)	50%	0	23790	710	0.08	0.143	24.40	23.02	0.196	1.6
		Edge 3(Bottom)	50%	0	23790	710	-0.20	0.039	24.40	23.02	0.054	1.6
		Edge 4(Left)	50%	0	23790	710	0.09	0.199	24.40	23.02	0.273	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



SAR MEASUREMENT												
Depth of Liquid (cm):>15						Relative Humidity (%): 58.9						
Product: LTE smartphone												
Test Mode: LTE Band 66												
BW MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/Kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Left Cheek	1	0	132422	1755	-0.18	0.341	24.00	23.49	0.383	1.6
		Left Tilt	1	0	132422	1755	-0.25	0.210	24.00	23.49	0.236	1.6
		Right Cheek	1	0	132422	1755	0.34	0.357	24.00	23.49	0.401	1.6
		Right Tilt	1	0	132422	1755	-0.17	0.164	24.00	23.49	0.184	1.6
		Body back	1	0	132072	1720	-0.10	0.799	24.00	23.58	0.880	1.6
		Body back	1	0	132422	1755	0.06	0.812	24.00	23.49	0.913	1.6
		Body back	1	0	132572	1770	-0.29	0.776	24.00	23.17	0.939	1.6
		Body front	1	0	132422	1755	0.27	0.569	24.00	23.49	0.640	1.6
		Edge 2(Right)	1	0	132422	1755	-0.43	0.338	24.00	23.49	0.380	1.6
		Edge 3(Bottom)	1	0	132422	1755	0.24	0.289	24.00	23.49	0.325	1.6
		Edge 4(Left)	1	0	132422	1755	0.20	0.186	24.00	23.49	0.209	1.6
20	QPSK	Left Cheek	50%	0	132422	1755	-0.05	0.254	23.50	22.20	0.343	1.6
		Left Tilt	50%	0	132422	1755	-0.28	0.171	23.50	22.20	0.231	1.6
		Right Cheek	50%	0	132422	1755	0.34	0.419	23.50	22.20	0.565	1.6
		Right Tilt	50%	0	132422	1755	-0.20	0.138	23.50	22.20	0.186	1.6
		Body back	50%	0	132422	1755	0.04	0.583	23.50	22.20	0.786	1.6
		Body front	50%	0	132422	1755	-0.17	0.523	23.50	22.20	0.706	1.6
		Edge 2(Right)	50%	0	132422	1755	0.26	0.147	23.50	22.20	0.198	1.6
		Edge 3(Bottom)	50%	0	132422	1755	-0.20	0.251	23.50	22.20	0.339	1.6
		Edge 4(Left)	50%	0	132422	1755	0.22	0.125	23.50	22.20	0.169	1.6

Note:

- When the 1-g Reported SAR is ≤ 0.8 W/kg, testing for low and high channel is optional. Refer to KDB 447498.
- The test separation for body back, body front and 4 Edges is 10mm of all above table

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



SAR MEASUREMENT									
Depth of Liquid (cm):>15				Relative Humidity (%): 51.4					
Product: Mobile Phone									
Test Mode:802.11b									
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tune-up Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
Left Cheek	DTS	6	2437	-0.18	0.155	13.70	13.65	0.157	1.6
Left Tilt	DTS	6	2437	-0.05	0.043	13.70	13.65	0.043	1.6
Right Cheek	DTS	6	2437	0.27	0.256	13.70	13.65	0.259	1.6
Right Tilt	DTS	6	2437	-0.42	0.092	13.70	13.65	0.093	1.6
Body back	DTS	6	2437	-0.13	0.154	13.70	13.65	0.156	1.6
Body front	DTS	6	2437	0.06	0.090	13.70	13.65	0.091	1.6
Edge 1 (Top)	DTS	6	2437	-0.28	0.021	13.70	13.65	0.021	1.6
Edge 4(Left)	DTS	6	2437	-0.08	0.139	13.70	13.65	0.141	1.6

Note:

- According to KDB248227, SAR is not required for 802.11n HT20/HT40 channels when the maximum average output power is less than 1/4 dB higher than that measured on the corresponding 802.11a/b channels.
- All of above "DTS" means data transmitters.
- The test separation for body back, body front and 4 Edges is 10mm of all above table.

Repeated SAR										
Product: Mobile Phone										
Test Mode: WCDMA Band IV										
Position	Mode	Ch.	Fr. (MHz)	Power Drift (<±5%)	Once SAR (1g) (W/kg)	Power Drift (<±5%)	Twice SAR (1g) (W/kg)	Power Drift (<±5%)	Third SAR (1g) (W/kg)	Limit W/kg
Body front	RMC 12.2kbps	8562	1712.4	0.20	0.833	--	--	--	--	1.6

Repeated SAR												
Product: Mobile Phone												
Test Mode: LTE Band 4& LTE Band 7& LTE Band 66												
BM MHz	MOD	Position	Test Mode		Ch.	Freq. (MHz)	Power Drift (<±5%)	SAR (1g) (W/kg)	Max. Tuneup Power (dBm)	Meas. output Power (dBm)	Scaled SAR (W/kg)	Limit (W/kg)
			UL RB Allocation	UL RB START								
20	QPSK	Body back	1	0	20050	1720	-0.15	0.992	--	--	--	1.6
		Body front	1	0	21100	2535	0.02	0.951	--	--	--	1.6
		Body back	1	0	132422	1755	-0.06	0.735	--	--	--	1.6

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



The second repeated SAR judge reference									
Product: Mobile Phone									
Band	Position	Mode		Ch.	Fr. (MHz)	Orignal SAR (1g) (W/kg)	First SAR (1g) (W/kg)	Ratio	Limit
WCDMA Band IV	Body front	RMC 12.2kbps		8562	1712.4	0.836	0.833	1.004	<1.2
Band	Position	Mode		Ch.	Fr. (MHz)	Orignal SAR (1g) (W/kg)	First SAR (1g) (W/kg)	Ratio	Limit
		UL RB Alloc ation	UL RB STA RT						
LTE Band 4	Body back	1	0	20050	1720	1.005	0.992	1.013	<1.2
LTE Band 7	Body front	1	0	21100	2535	0.964	0.951	1.014	<1.2
LTE Band 66	Body back	1	0	132422	1755	0.812	0.735	1.105	<1.2

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



Simultaneous Multi-band Transmission Evaluation: Application Simultaneous Transmission information:

NO	Simultaneous state	Portable Handset		
		Head	Body-worn	Hotspot
1	GSM(voice)+ WLAN 2.4GHz (data)	Yes	Yes	-
2	GSM(voice)+ Bluetooth(data)	Yes	Yes	-
3	GSM (Data) + WLAN 2.4GHz (data)	-	Yes	Yes
4	GSM (Data) + Bluetooth(data)	-	Yes	Yes
5	WCDMA+ WLAN 2.4GHz (data)	Yes	Yes	Yes
6	WCDMA+ Bluetooth(data)	Yes	Yes	Yes
7	LTE + WLAN 2.4GHz (data)	Yes	Yes	Yes
8	LTE + Bluetooth(data)	Yes	Yes	Yes

NOTE:

1. WIFI and BT share the same antenna, and cannot transmit simultaneously.
2. Simultaneous with every transmitter must be the same test position.
3. KDB 447498 D01, BT SAR is excluded as below table.
4. KDB 447498 D01, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR and 10mm for body-worn SAR.
5. According to KDB 447498 D01 4.3.1, Standalone SAR test exclusion is as follow:
For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
for 1-g SAR, and ≤ 7.5 for 10-g extremity SAR³⁰, where
 - f(GHz) is the RF channel transmit frequency in GHz
 - Power and distance are rounded to the nearest mW and mm before calculation³¹
 - The result is rounded to one decimal place for comparison
 - The values 3.0 and 7.5 are referred to as numeric thresholds in step b) below
The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 4.1 f) is applied to determine SAR test exclusion.
6. If the test separation distance is < 5 mm, 5mm is used for excluded SAR calculation.
7. According to KDB 447498 D01 4.3.2, simultaneous transmission SAR test exclusion is as follow:
 - (1) Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.
 - (2) Any transmitters and antennas should be considered when calculating simultaneous mode.
 - (3) For mobile phone and PC, it's the sum of all transmitters and antennas at the same mode with same position in each applicable exposure condition
 - (4) When the standalone SAR test exclusion of section 4.3.2 is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to det
$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x] \leq W/\text{kg}$$
for test separation distances ≤ 50 mm;
where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

8. When the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR to peak location separation ratio. The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion. The ratio is determined by $(SAR1 + SAR2)1.5/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

Estimated SAR		Max Power including Tune-up Tolerance		Separation Distance (mm)	Estimated SAR (W/kg)
		dBm	mW		
BT	Head	4.0	2.512	0	0.105
	Body	4.0	2.512	10	0.052

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



Sum of the SAR for GSM 850 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		GSM 850	Wi-Fi DTS Band	Bluetooth		
Head (voice)	Left Touch	0.498	0.157		0.655	No
	Left Tilt	0.336	0.043		0.379	No
	Right Touch	0.536	0.259		0.795	No
	Right Tilt	0.314	0.093		0.407	No
Head (voice)	Left Touch	0.498		0.105	0.603	No
	Left Tilt	0.336		0.105	0.441	No
	Right Touch	0.536		0.105	0.641	No
	Right Tilt	0.314		0.105	0.419	No
Body-worn (voice)	Rear	0.652	0.156		0.808	No
		0.652		0.052	0.704	No
	Front	0.577	0.091		0.668	No
		0.577		0.052	0.629	No
Body-worn (Data)	Rear	0.572		0.052	0.624	No
		0.572	0.156		0.728	No
	Front	0.481		0.052	0.533	No
		0.481	0.091		0.572	No
Body-worn (Hotspot)	Edge 4	0.327	0.141		0.468	No
	Edge 4	0.327		0.052	0.379	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for GSM 1900 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		PCS 1900	Wi-Fi DTS Band	Bluetooth		
Head (voice)	Left Touch	0.167	0.157		0.324	No
	Left Tilt	0.016	0.043		0.059	No
	Right Touch	0.122	0.259		0.381	No
	Right Tilt	0.026	0.093		0.119	No
Head (voice)	Left Touch	0.167		0.105	0.272	No
	Left Tilt	0.016		0.105	0.121	No
	Right Touch	0.122		0.105	0.227	No
	Right Tilt	0.026		0.105	0.131	No
Body-worn (voice)	Rear	0.241	0.156		0.397	No
		0.241		0.052	0.293	No
	Front	0.245	0.091		0.336	No
		0.245		0.052	0.297	No
Body-worn (Data)	Rear	0.276		0.052	0.328	No
		0.276	0.156		0.432	No
	Front	0.312		0.052	0.364	No
		0.312	0.091		0.403	No
Body-worn (Hotspot)	Edge 4	0.152	0.141		0.293	No
	Edge 4	0.152		0.052	0.204	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for WCDMA Band II & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		WCDMA Band II	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.240	0.157		0.397	No
	Left Tilt	0.029	0.043		0.072	No
	Right Touch	0.372	0.259		0.631	No
	Right Tilt	0.033	0.093		0.126	No
Head	Left Touch	0.240		0.105	0.345	No
	Left Tilt	0.029		0.105	0.134	No
	Right Touch	0.372		0.105	0.477	No
	Right Tilt	0.033		0.105	0.138	No
Body-worn	Rear	0.331	0.156		0.487	No
	Front	0.383	0.091		0.474	No
	Edge 4	0.167	0.141		0.308	No
	Rear	0.331		0.052	0.383	No
	Front	0.383		0.052	0.435	No
	Edge 4	0.167		0.052	0.219	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for WCDMA Band IV & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		WCDMA Band IV	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.508	0.157		0.665	No
	Left Tilt	0.117	0.043		0.160	No
	Right Touch	0.433	0.259		0.692	No
	Right Tilt	0.101	0.093		0.194	No
Head	Left Touch	0.508		0.105	0.613	No
	Left Tilt	0.117		0.105	0.222	No
	Right Touch	0.433		0.105	0.538	No
	Right Tilt	0.101		0.105	0.206	No
Body-worn	Rear	0.508	0.156		0.664	No
	Front	0.862	0.091		0.953	No
	Edge 4	0.078	0.141		0.219	No
	Rear	0.508		0.052	0.560	No
	Front	0.862		0.052	0.914	No
	Edge 4	0.078		0.052	0.130	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for WCDMA Band V & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		WCDMA Band V	Wi-Fi DTS Band	Bluetooth		
Head	Left Touch	0.101	0.157		0.258	No
	Left Tilt	0.049	0.043		0.092	No
	Right Touch	0.088	0.259		0.347	No
	Right Tilt	0.092	0.093		0.185	No
Head	Left Touch	0.101		0.105	0.206	No
	Left Tilt	0.049		0.105	0.154	No
	Right Touch	0.088		0.105	0.193	No
	Right Tilt	0.092		0.105	0.197	No
Body-worn	Rear	0.038	0.156		0.194	No
	Front	0.073	0.091		0.164	No
	Edge 4	0.075	0.141		0.216	No
	Rear	0.038		0.052	0.090	No
	Front	0.073		0.052	0.125	No
	Edge 4	0.075		0.052	0.127	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is “The SAR to Peak Location Separation Ratio “

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 2 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 2	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.253	0.157		0.410	No
	Left Tilt	0.030	0.043		0.073	No
	Right Touch	0.182	0.259		0.441	No
	Right Tilt	0.038	0.093		0.131	No
Head	Left Touch	0.253		0.105	0.358	No
	Left Tilt	0.030		0.105	0.135	No
	Right Touch	0.182		0.105	0.287	No
	Right Tilt	0.038		0.105	0.143	No
Body-worn	Rear	0.302	0.156		0.458	No
	Front	0.328	0.091		0.419	No
	Edge 4	0.147	0.141		0.288	No
	Rear	0.302		0.052	0.354	No
	Front	0.328		0.052	0.380	No
	Edge 4	0.147		0.052	0.199	No
50%RB						
Head	Left Touch	0.254	0.157		0.411	No
	Left Tilt	0.029	0.043		0.072	No
	Right Touch	0.175	0.259		0.434	No
	Right Tilt	0.043	0.093		0.136	No
Head	Left Touch	0.254		0.105	0.359	No
	Left Tilt	0.029		0.105	0.134	No
	Right Touch	0.175		0.105	0.280	No
	Right Tilt	0.043		0.105	0.148	No
Body-worn	Rear	0.288	0.156		0.444	No
	Front	0.342	0.091		0.433	No
	Edge 4	0.148	0.141		0.289	No
	Rear	0.288		0.052	0.340	No
	Front	0.342		0.052	0.394	No
	Edge 4	0.148		0.052	0.200	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 4 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ 1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 4	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.490	0.157		0.647	No
	Left Tilt	0.142	0.043		0.185	No
	Right Touch	0.511	0.259		0.770	No
	Right Tilt	0.123	0.093		0.216	No
Head	Left Touch	0.490		0.105	0.595	No
	Left Tilt	0.142		0.105	0.247	No
	Right Touch	0.511		0.105	0.616	No
	Right Tilt	0.123		0.105	0.228	No
Body-worn	Rear	1.073	0.156		1.229	No
	Front	1.024	0.091		1.115	No
	Edge 4	0.294	0.141		0.435	No
	Rear	1.073		0.052	1.125	No
	Front	1.024		0.052	1.076	No
	Edge 4	0.294		0.052	0.346	No
50%RB						
Head	Left Touch	0.342	0.157		0.499	No
	Left Tilt	0.106	0.043		0.149	No
	Right Touch	0.388	0.259		0.647	No
	Right Tilt	0.082	0.093		0.175	No
Head	Left Touch	0.342		0.105	0.447	No
	Left Tilt	0.106		0.105	0.211	No
	Right Touch	0.388		0.105	0.493	No
	Right Tilt	0.082		0.105	0.187	No
Body-worn	Rear	0.794	0.156		0.950	No
	Front	0.773	0.091		0.864	No
	Edge 4	0.225	0.141		0.366	No
	Rear	0.794		0.052	0.846	No
	Front	0.773		0.052	0.825	No
	Edge 4	0.225		0.052	0.277	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 5 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 5	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.371	0.157		0.528	No
	Left Tilt	0.251	0.043		0.294	No
	Right Touch	0.428	0.259		0.687	No
	Right Tilt	0.283	0.093		0.376	No
Head	Left Touch	0.371		0.105	0.476	No
	Left Tilt	0.251		0.105	0.356	No
	Right Touch	0.428		0.105	0.533	No
	Right Tilt	0.283		0.105	0.388	No
Body-worn	Rear	0.585	0.156		0.741	No
	Front	0.497	0.091		0.588	No
	Edge 4	0.312	0.141		0.453	No
	Rear	0.585		0.052	0.637	No
	Front	0.497		0.052	0.549	No
	Edge 4	0.312		0.052	0.364	No
50%RB						
Head	Left Touch	0.385	0.157		0.542	No
	Left Tilt	0.250	0.043		0.293	No
	Right Touch	0.458	0.259		0.717	No
	Right Tilt	0.268	0.093		0.361	No
Head	Left Touch	0.385		0.105	0.490	No
	Left Tilt	0.250		0.105	0.355	No
	Right Touch	0.458		0.105	0.563	No
	Right Tilt	0.268		0.105	0.373	No
Body-worn	Rear	0.624	0.156		0.780	No
	Front	0.518	0.091		0.609	No
	Edge 4	0.282	0.141		0.423	No
	Rear	0.624		0.052	0.676	No
	Front	0.518		0.052	0.570	No
	Edge 4	0.282		0.052	0.334	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 7 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 7	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.680	0.157		0.837	No
	Left Tilt	0.230	0.043		0.273	No
	Right Touch	0.947	0.259		1.206	No
	Right Tilt	0.494	0.093		0.587	No
Head	Left Touch	0.680		0.105	0.785	No
	Left Tilt	0.230		0.105	0.335	No
	Right Touch	0.947		0.105	1.052	No
	Right Tilt	0.494		0.105	0.599	No
Body-worn	Rear	1.170	0.156		1.326	No
	Front	1.175	0.091		1.266	No
	Edge 4	0.548	0.141		0.689	No
	Rear	1.170		0.052	1.222	No
	Front	1.175		0.052	1.227	No
	Edge 4	0.548		0.052	0.600	No
50%RB						
Head	Left Touch	0.637	0.157		0.794	No
	Left Tilt	0.229	0.043		0.272	No
	Right Touch	0.708	0.259		0.967	No
	Right Tilt	0.463	0.093		0.556	No
Head	Left Touch	0.637		0.105	0.742	No
	Left Tilt	0.229		0.105	0.334	No
	Right Touch	0.708		0.105	0.813	No
	Right Tilt	0.463		0.105	0.568	No
Body-worn	Rear	0.801	0.156		0.957	No
	Front	1.140	0.091		1.231	No
	Edge 4	0.816	0.141		0.957	No
	Rear	0.801		0.052	0.853	No
	Front	1.140		0.052	1.192	No
	Edge 4	0.816		0.052	0.868	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio"

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 12 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 12	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.222	0.157		0.379	No
	Left Tilt	0.168	0.043		0.211	No
	Right Touch	0.231	0.259		0.490	No
	Right Tilt	0.152	0.093		0.245	No
Head	Left Touch	0.222		0.105	0.327	No
	Left Tilt	0.168		0.105	0.273	No
	Right Touch	0.231		0.105	0.336	No
	Right Tilt	0.152		0.105	0.257	No
Body-worn	Rear	0.395	0.156		0.551	No
	Front	0.285	0.091		0.376	No
	Edge 4	0.229	0.141		0.370	No
	Rear	0.395		0.052	0.447	No
	Front	0.285		0.052	0.337	No
	Edge 4	0.229		0.052	0.281	No
50%RB						
Head	Left Touch	0.255	0.157		0.412	No
	Left Tilt	0.179	0.043		0.222	No
	Right Touch	0.150	0.259		0.409	No
	Right Tilt	0.251	0.093		0.344	No
Head	Left Touch	0.255		0.105	0.360	No
	Left Tilt	0.179		0.105	0.284	No
	Right Touch	0.150		0.105	0.255	No
	Right Tilt	0.251		0.105	0.356	No
Body-worn	Rear	0.438	0.156		0.594	No
	Front	0.361	0.091		0.452	No
	Edge 4	0.252	0.141		0.393	No
	Rear	0.438		0.052	0.490	No
	Front	0.361		0.052	0.413	No
	Edge 4	0.252		0.052	0.304	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 17 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 17	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.236	0.157		0.393	No
	Left Tilt	0.189	0.043		0.232	No
	Right Touch	0.230	0.259		0.489	No
	Right Tilt	0.139	0.093		0.232	No
Head	Left Touch	0.236		0.105	0.341	No
	Left Tilt	0.189		0.105	0.294	No
	Right Touch	0.230		0.105	0.335	No
	Right Tilt	0.139		0.105	0.244	No
Body-worn	Rear	0.368	0.156		0.524	No
	Front	0.296	0.091		0.387	No
	Edge 4	0.219	0.141		0.360	No
	Rear	0.368		0.052	0.420	No
	Front	0.296		0.052	0.348	No
	Edge 4	0.219		0.052	0.271	No
50%RB						
Head	Left Touch	0.262	0.157		0.419	No
	Left Tilt	0.187	0.043		0.230	No
	Right Touch	0.272	0.259		0.531	No
	Right Tilt	0.162	0.093		0.255	No
Head	Left Touch	0.262		0.105	0.367	No
	Left Tilt	0.187		0.105	0.292	No
	Right Touch	0.272		0.105	0.377	No
	Right Tilt	0.162		0.105	0.267	No
Body-worn	Rear	0.447	0.156		0.603	No
	Front	0.357	0.091		0.448	No
	Edge 4	0.273	0.141		0.414	No
	Rear	0.447		0.052	0.499	No
	Front	0.357		0.052	0.409	No
	Edge 4	0.273		0.052	0.325	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Sum of the SAR for LTE Band 66 & Wi-Fi & BT:

RF Exposure Conditions	Test Position	Simultaneous Transmission Scenario			Σ1-g SAR (W/kg)	SPLSR (Yes/No)
		LTE Band 66	Wi-Fi DTS Band	Bluetooth		
1RB						
Head	Left Touch	0.383	0.157		0.540	No
	Left Tilt	0.236	0.043		0.279	No
	Right Touch	0.401	0.259		0.660	No
	Right Tilt	0.184	0.093		0.277	No
Head	Left Touch	0.383		0.105	0.488	No
	Left Tilt	0.236		0.105	0.341	No
	Right Touch	0.401		0.105	0.506	No
	Right Tilt	0.184		0.105	0.289	No
Body-worn	Rear	0.939	0.156		1.095	No
	Front	0.640	0.091		0.731	No
	Edge 4	0.209	0.141		0.350	No
	Rear	0.939		0.052	0.991	No
	Front	0.640		0.052	0.692	No
	Edge 4	0.209		0.052	0.261	No
50%RB						
Head	Left Touch	0.343	0.157		0.500	No
	Left Tilt	0.231	0.043		0.274	No
	Right Touch	0.565	0.259		0.824	No
	Right Tilt	0.186	0.093		0.279	No
Head	Left Touch	0.343		0.105	0.448	No
	Left Tilt	0.231		0.105	0.336	No
	Right Touch	0.565		0.105	0.670	No
	Right Tilt	0.186		0.105	0.291	No
Body-worn	Rear	0.786	0.156		0.942	No
	Front	0.706	0.091		0.797	No
	Edge 4	0.169	0.141		0.310	No
	Rear	0.786		0.052	0.838	No
	Front	0.706		0.052	0.758	No
	Edge 4	0.169		0.052	0.221	No

Note:

- According to KDB 447498 D01 General RF Exposure Guidance, when the simultaneous transmission SAR is less than 1.6 W/kg, SPLSR assessment is not required.
- SPLSR mean is "The SAR to Peak Location Separation Ratio "

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



APPENDIX A. SAR SYSTEM CHECK DATA

Test Laboratory: AGC Lab

Date: Jul. 27,2021

System Check Head 750 MHz

DUT: Dipole 750 MHz Type: SID 750


Communication System CW; Communication System Band: D750 (750.0 MHz); Duty Cycle: 1:1; Conv.F=5.18
Frequency: 750 MHz; Medium parameters used: $f = 750$ MHz; $\sigma = 0.88$ mho/m; $\epsilon_r = 42.61$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C):21.4, Liquid temperature (°C): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 750MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 750MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

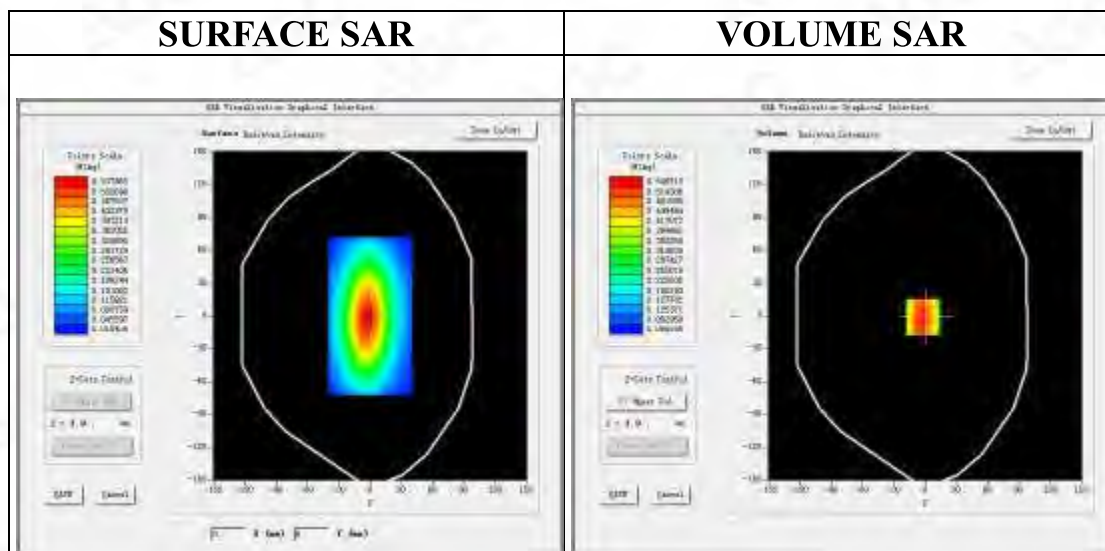

Maximum location: X=-2.00, Y=-1.00

SAR Peak: 0.74 W/kg

SAR 10g (W/Kg)	0.365135
SAR 1g (W/Kg)	0.549485



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



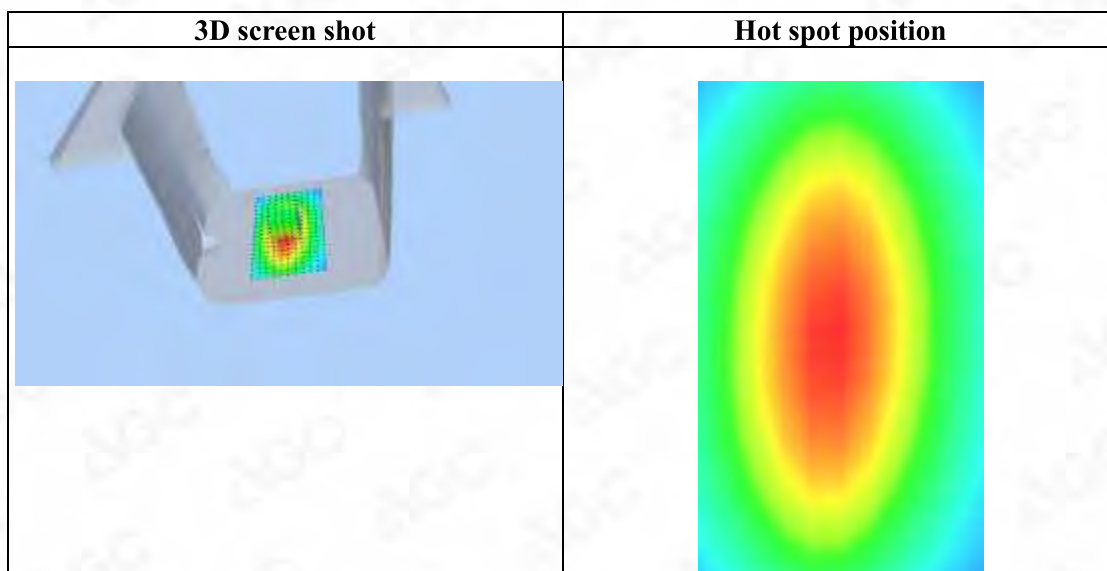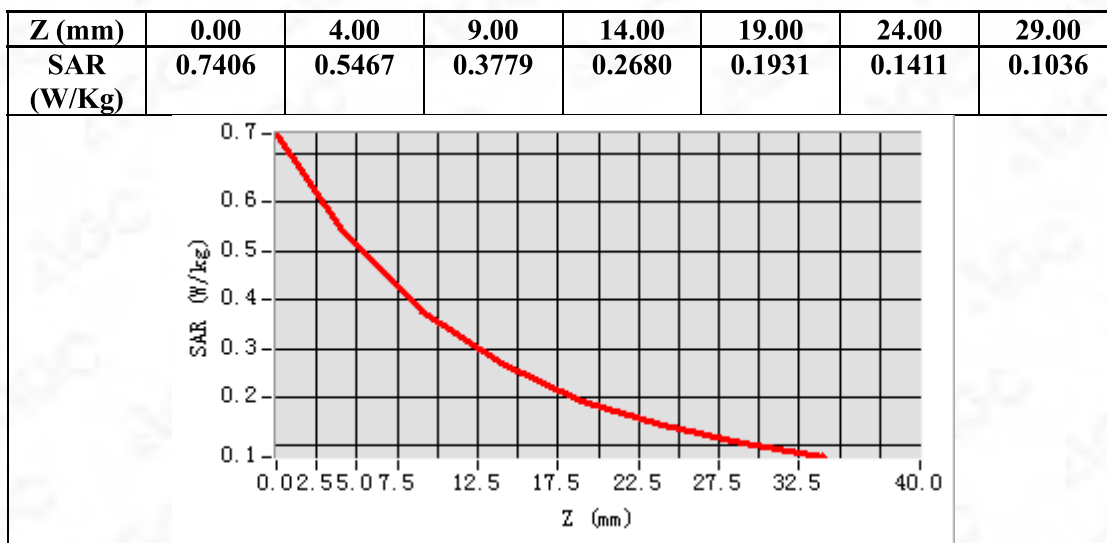

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab

Date: Jul. 24,2021

System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.24

Frequency: 835 MHz; Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.91 \text{ mho/m}$; $\epsilon_r = 42.37$; $\rho = 1000 \text{ kg/m}^3$;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature ($^{\circ}\text{C}$):21.4, Liquid temperature ($^{\circ}\text{C}$): 21.2

SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

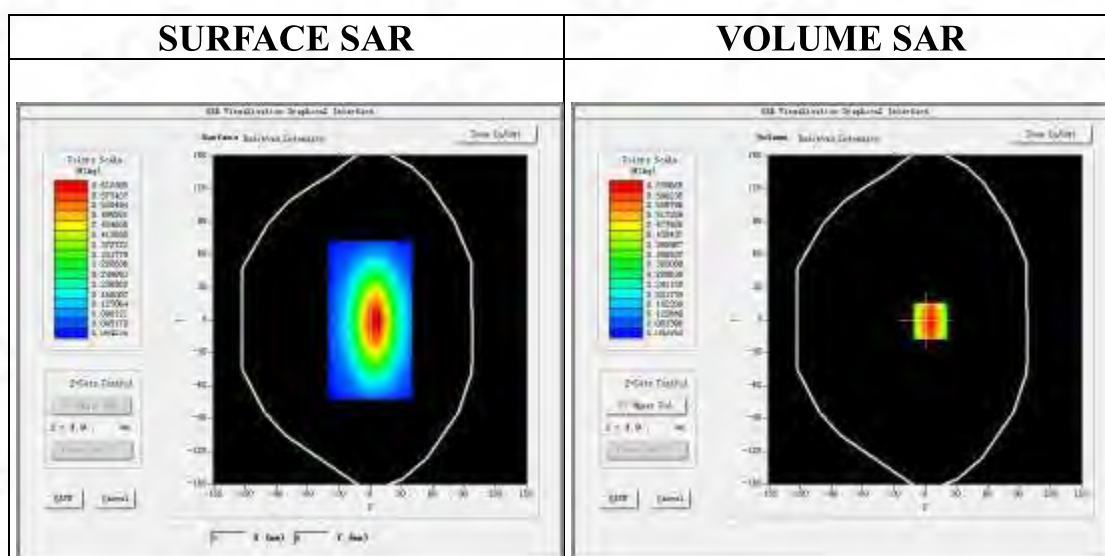

Maximum location: X=5.00, Y=-1.00

SAR Peak: 0.90 W/kg

SAR 10g (W/Kg)	0.389287
SAR 1g (W/Kg)	0.613615



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



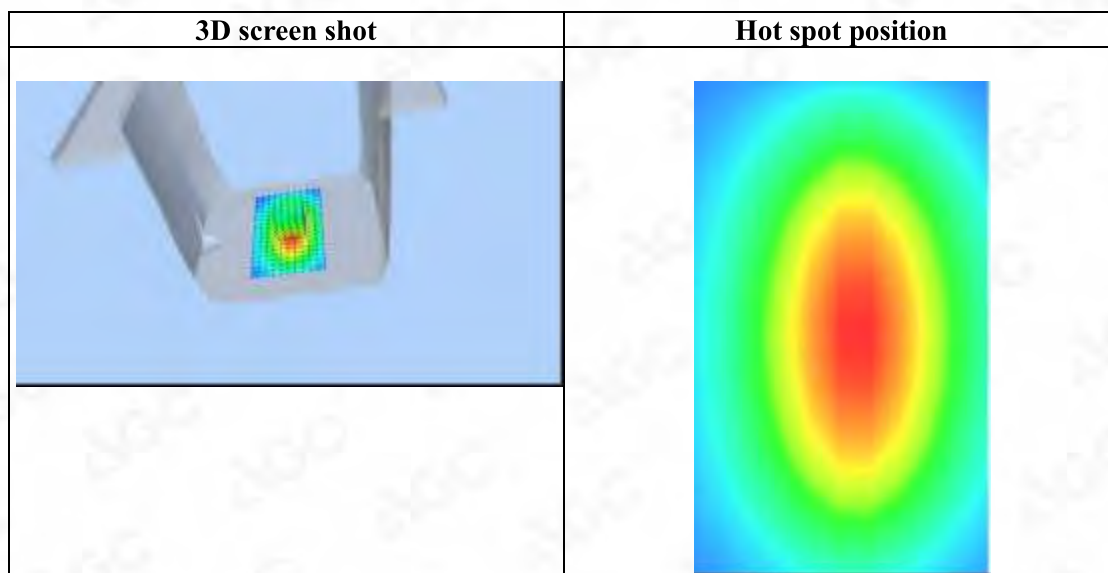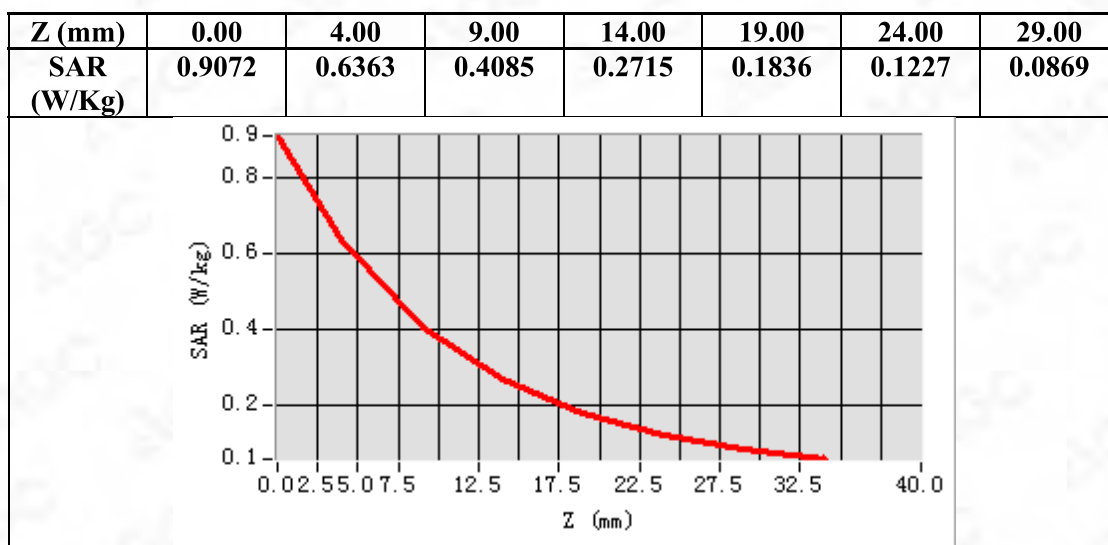

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab

Date: Aug. 02,2021

System Check Head 835 MHz

DUT: Dipole 835 MHz Type: SID 835

Communication System CW; Communication System Band: D835 (835.0 MHz); Duty Cycle: 1:1; Conv.F=5.24

Frequency: 835 MHz; Medium parameters used: $f = 835$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 40.61$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):21.3, Liquid temperature (°C): 21.1

SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 835MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 835MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

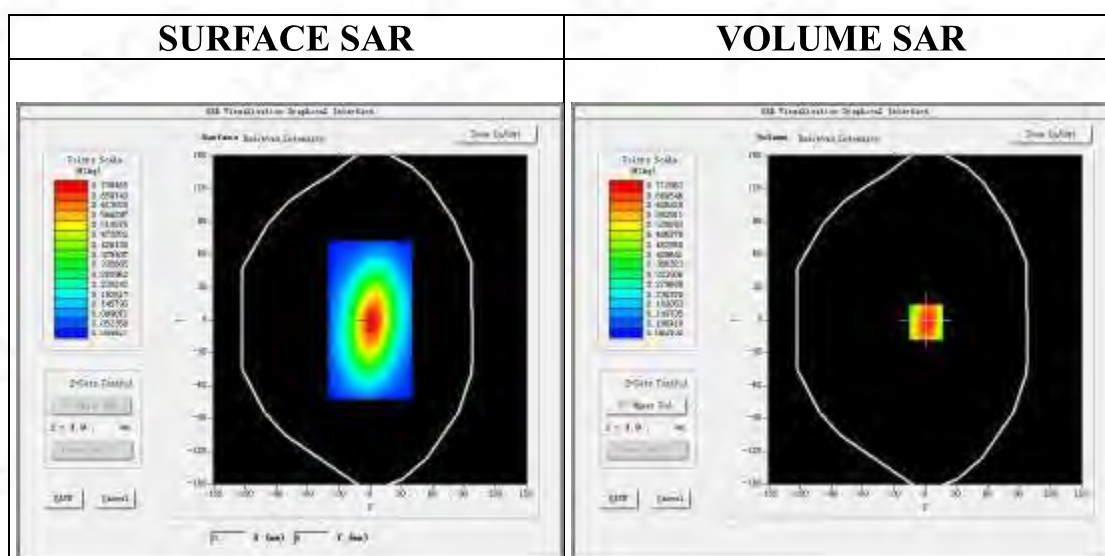

Maximum location: X=1.00, Y=-2.00

SAR Peak: 0.99 W/kg

SAR 10g (W/Kg)	0.385483
SAR 1g (W/Kg)	0.623841



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



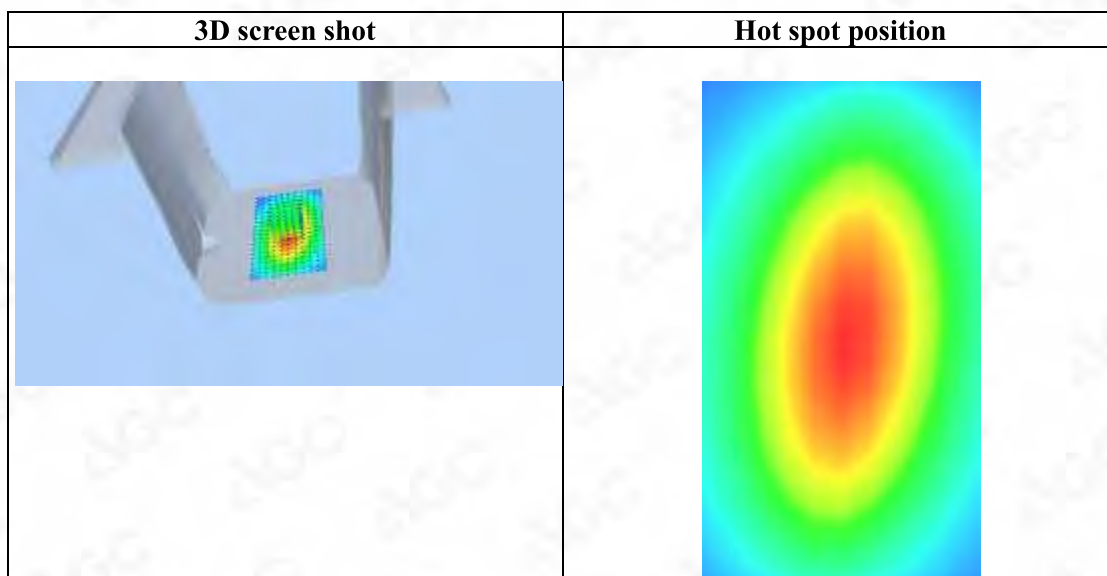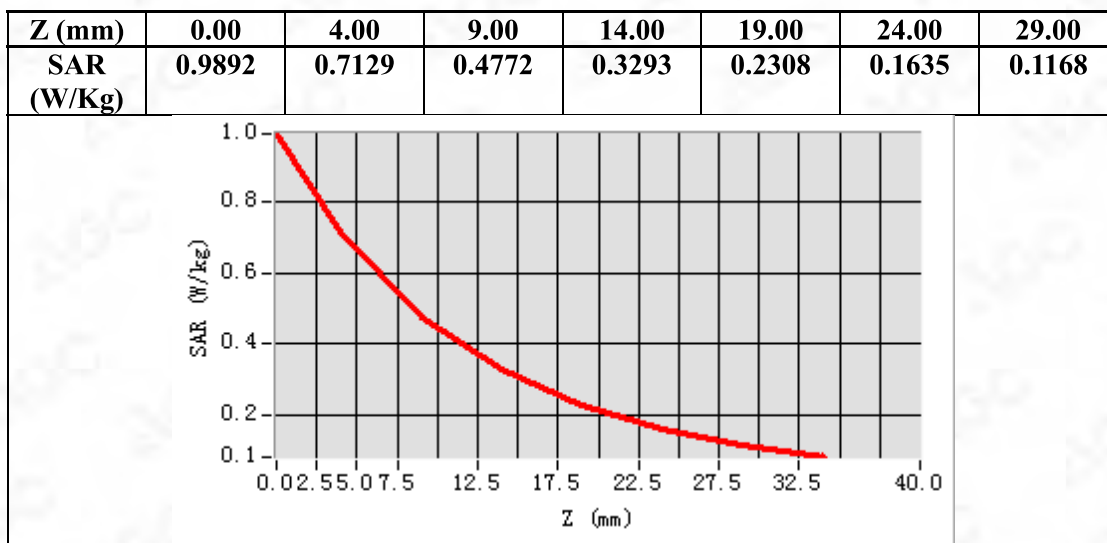

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab
System Check Head 1750MHz

Date: Jul. 30,2021

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.56
Frequency: 1750 MHz; Medium parameters used: $f = 1750\text{MHz}$; $\sigma = 1.42 \text{ mho/m}$; $\epsilon_r = 39.71$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 21.5, Liquid temperature ($^{\circ}\text{C}$): 21.3


SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$

Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

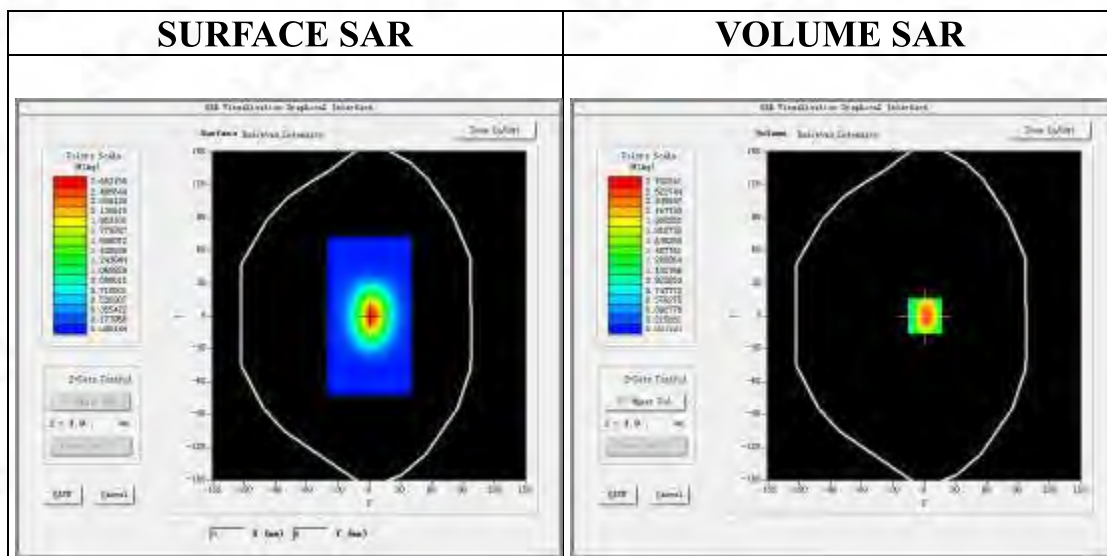

Maximum location: X=1.00, Y=0.00

SAR Peak: 4.41 W/kg

SAR 10g (W/Kg)	1.290127
SAR 1g (W/Kg)	2.556493



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



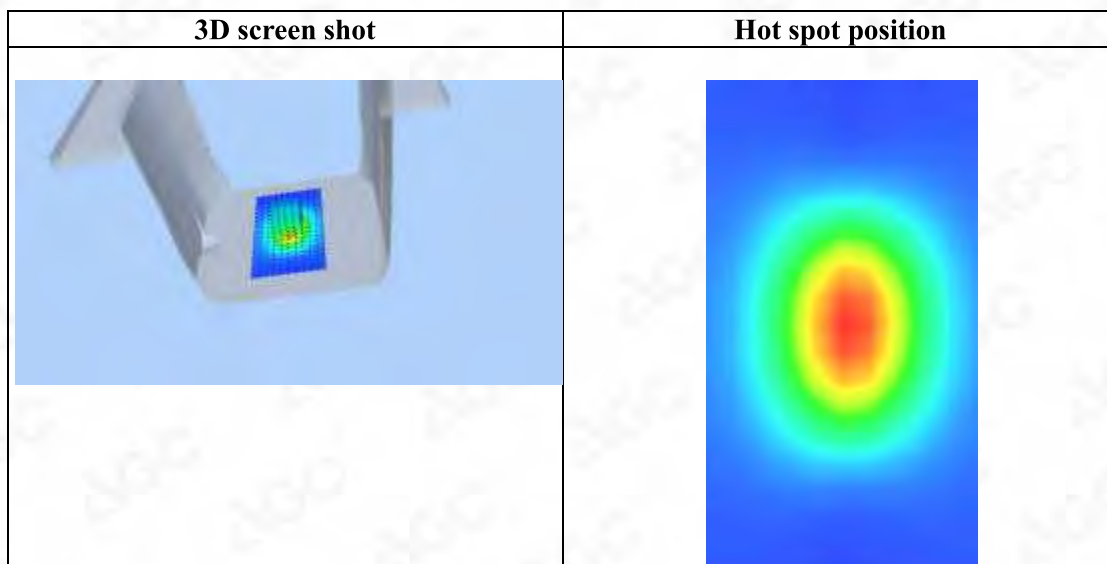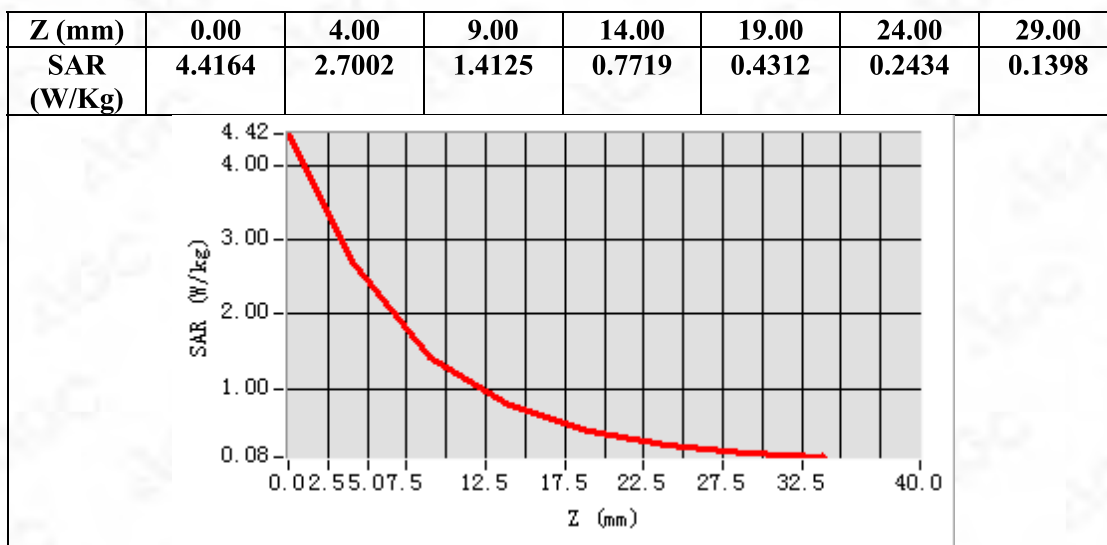

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab
System Check Head 1750MHz

Date: Aug. 04,2021

DUT: Dipole 1800 MHz; Type: SID 1800

Communication System: CW; Communication System Band: D1700 (1750.0 MHz); Duty Cycle:1:1; Conv.F=4.56
Frequency: 1750 MHz; Medium parameters used: $f = 1750\text{MHz}$; $\sigma = 1.37 \text{ mho/m}$; $\epsilon_r = 40.37$; $\rho = 1000 \text{ kg/m}^3$;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature ($^{\circ}\text{C}$): 21.7, Liquid temperature ($^{\circ}\text{C}$): 21.5


SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1750MHz Head/Area Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}$

Configuration/System Check 1750MHz Head/Zoom Scan: Measurement grid: $dx=8\text{mm}, dy=8\text{mm}, dz=5\text{mm}$

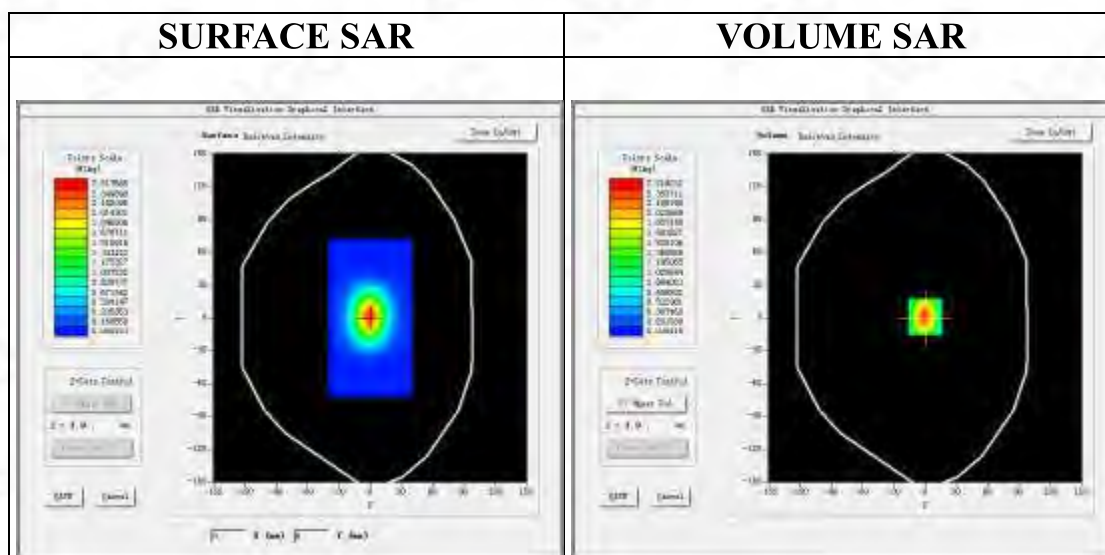

Maximum location: X=0.00, Y=1.00

SAR Peak: 4.04 W/kg

SAR 10g (W/Kg)	1.214385
SAR 1g (W/Kg)	2.341278



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: <http://cn.agc-cert.com/>



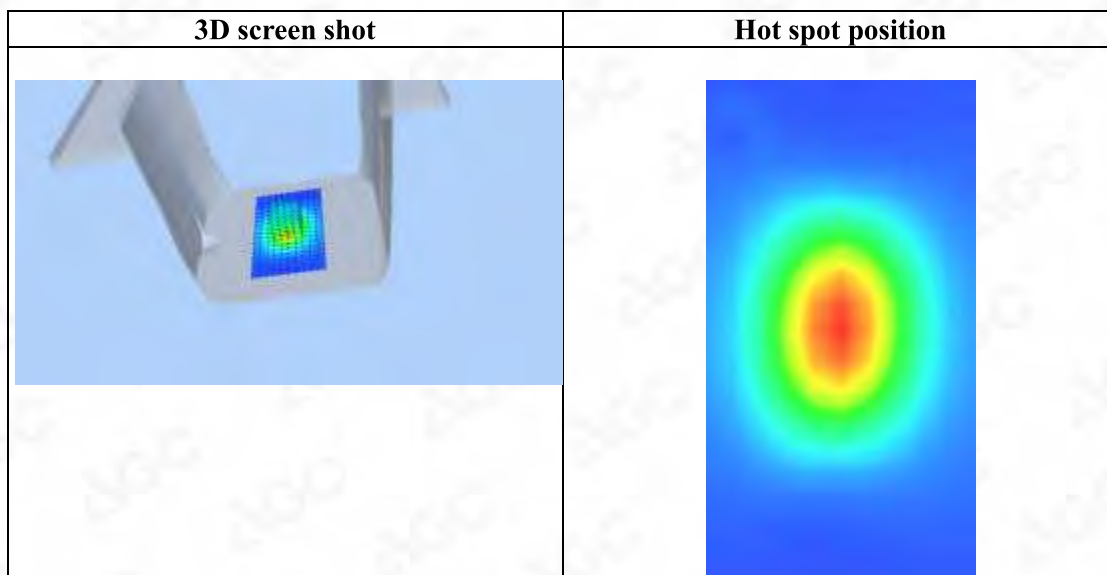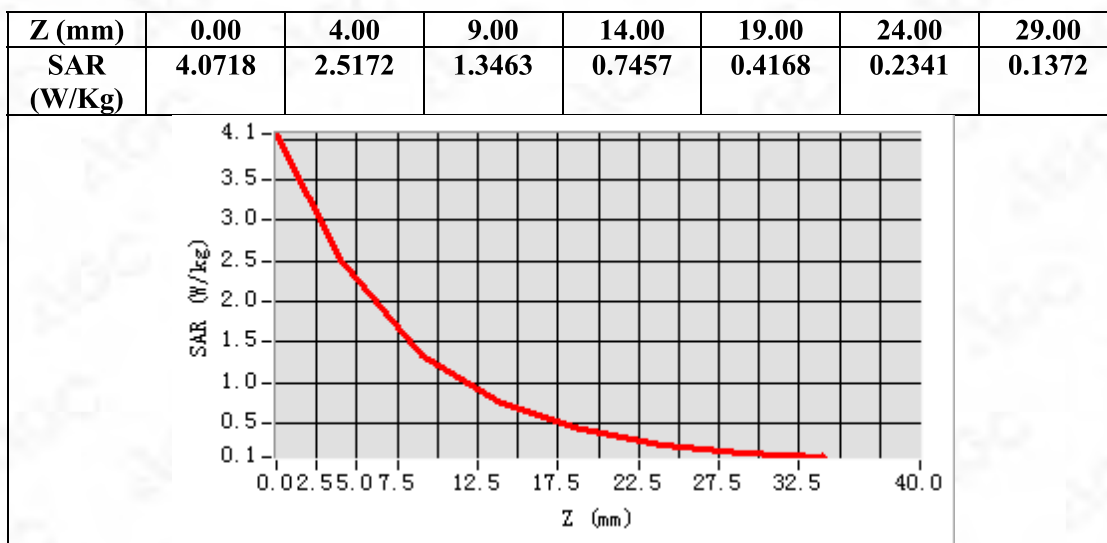

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab
System Check Head 1900MHz

Date: Jul. 25,2021

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.48
Frequency: 1900 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 40.81$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C):21.1, Liquid temperature (°C): 20.8


SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

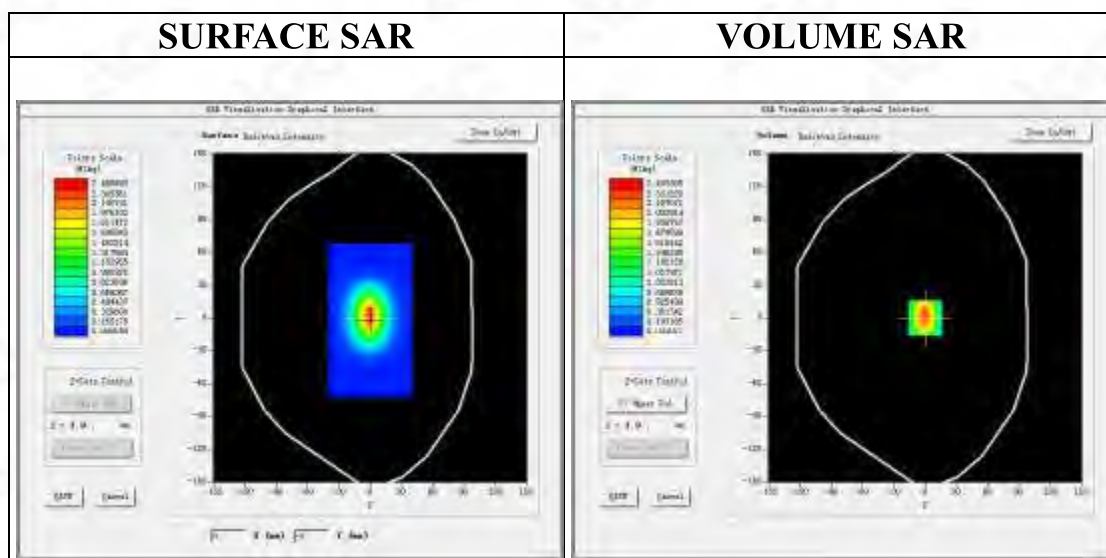

Maximum location: X=0.00, Y=0.00

SAR Peak: 4.06 W/kg

SAR 10g (W/Kg)	1.213863
SAR 1g (W/Kg)	2.362475



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



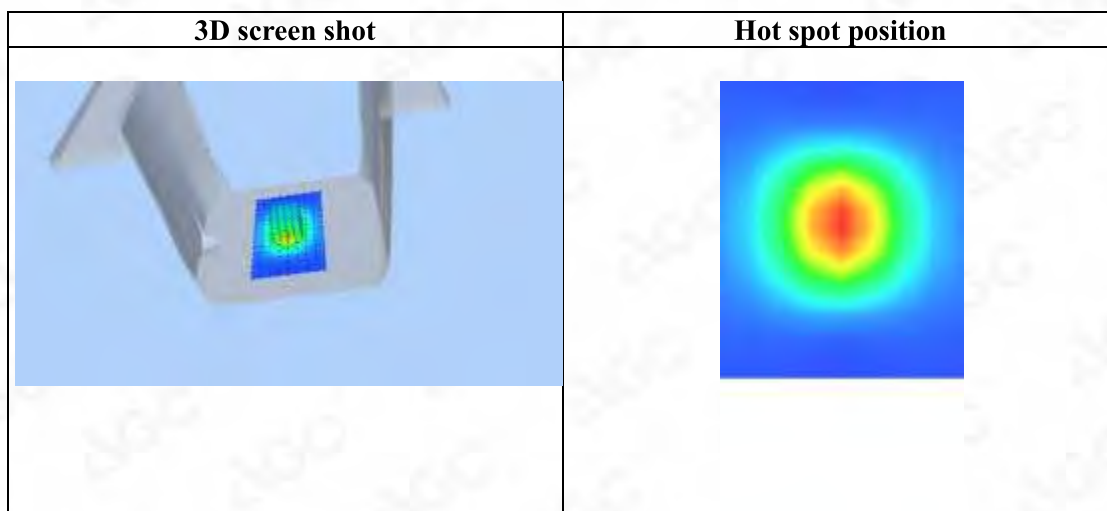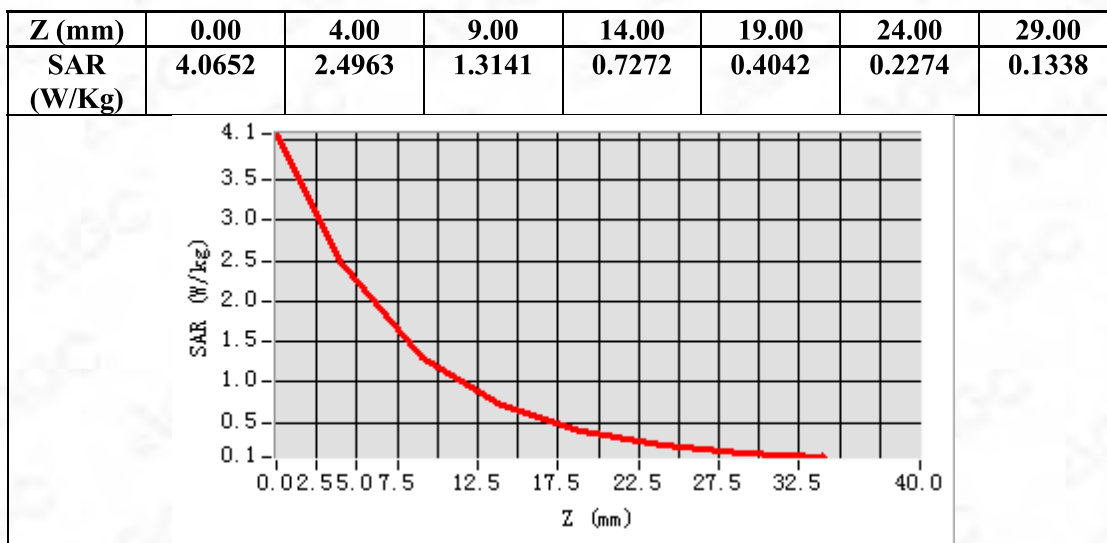

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab
System Check Head 1900MHz

Date: Aug. 03,2021

DUT: Dipole 1900 MHz; Type: SID 1900

Communication System: CW; Communication System Band: D1900 (1900.0 MHz); Duty Cycle:1:1; Conv.F=4.48
Frequency: 1900 MHz; Medium parameters used: $f = 1800$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.51$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C):22.0, Liquid temperature (°C): 21.8


SATIMO Configuration:

Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327

- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 1900MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 1900MHz Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

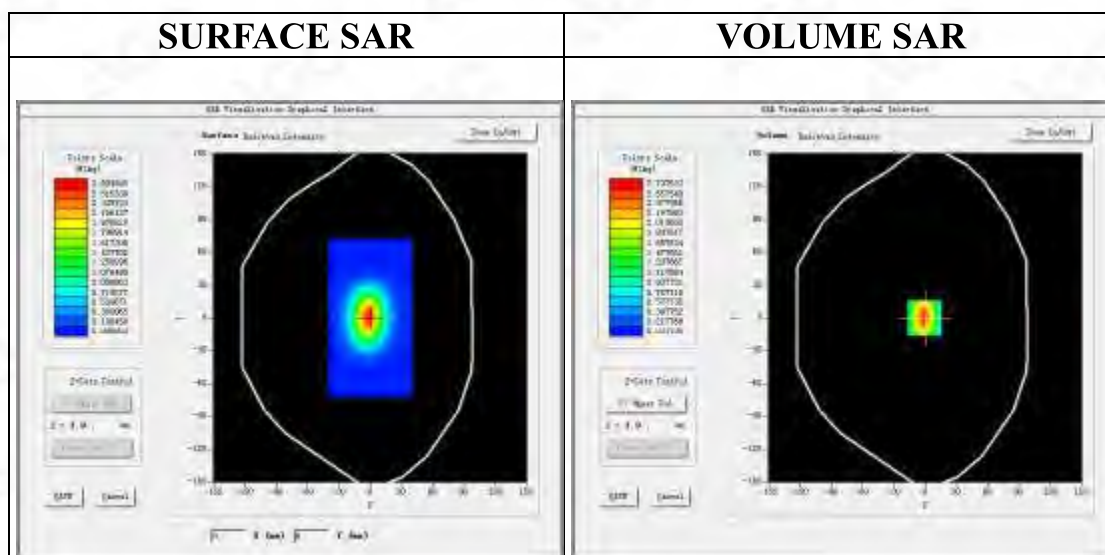

Maximum location: X=-1.00, Y=0.00

SAR Peak: 4.45 W/kg

SAR 10g (W/Kg)	1.283541
SAR 1g (W/Kg)	2.565247



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



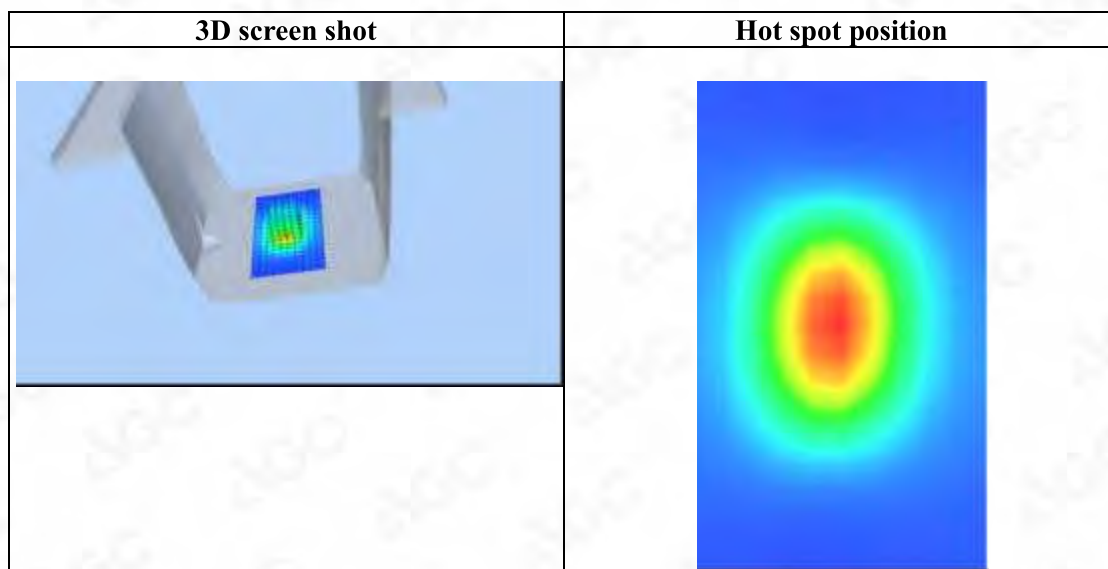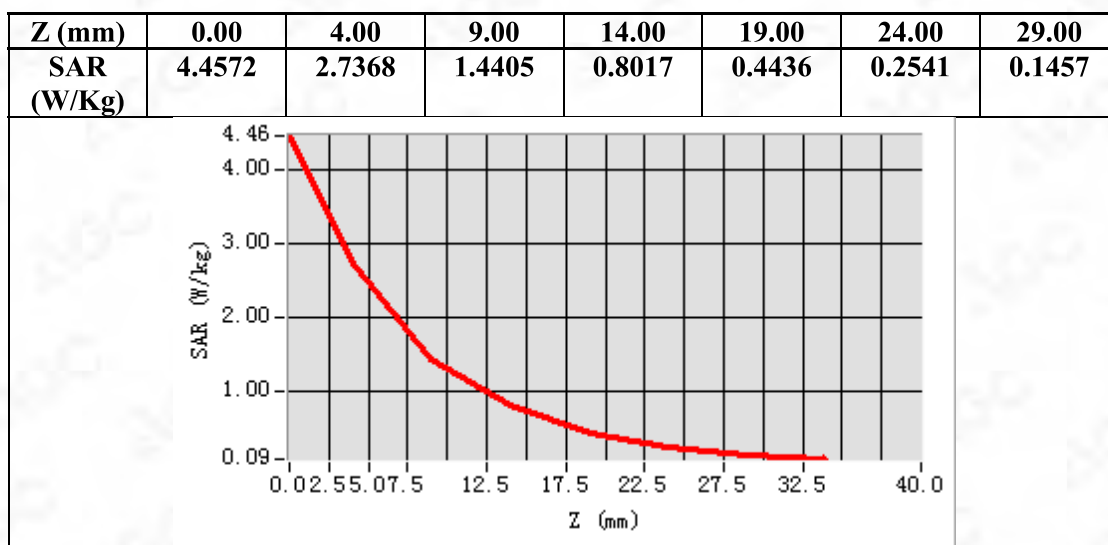

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab

Date: Aug. 05,2021

System Check Head 2450 MHz

DUT: Dipole 2450 MHz Type: SID 2450

Communication System CW; Communication System Band: D2450 (2450.0 MHz); Duty Cycle: 1:1; Conv.F=4.32

Frequency: 2450 MHz; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.49$; $\rho = 1000$ kg/m³ ;

Phantom section: Flat Section; Input Power=18dBm


Ambient temperature (°C):21.5, Liquid temperature (°C): 21.3

SATIMO Configuration

- Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 2450MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm

Configuration/System Check 2450MHz Head/Zoom Scan: Measurement grid: dx=5mm,dy=5mm, dz=5mm

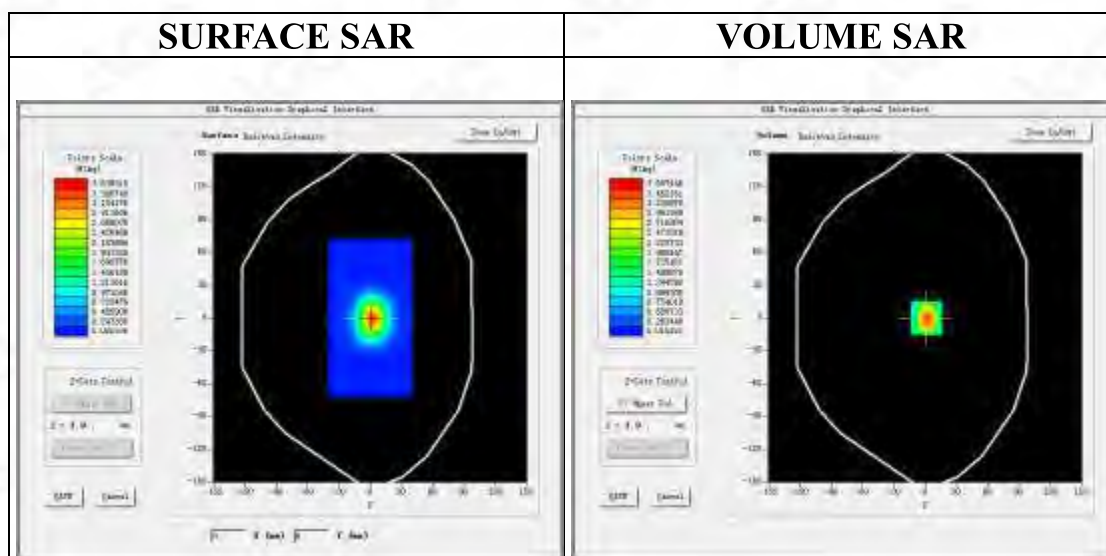

Maximum location: X=1.00, Y=0.00

SAR Peak: 6.39 W/kg

SAR 10g (W/Kg)	1.531287
SAR 1g (W/Kg)	3.413574



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/



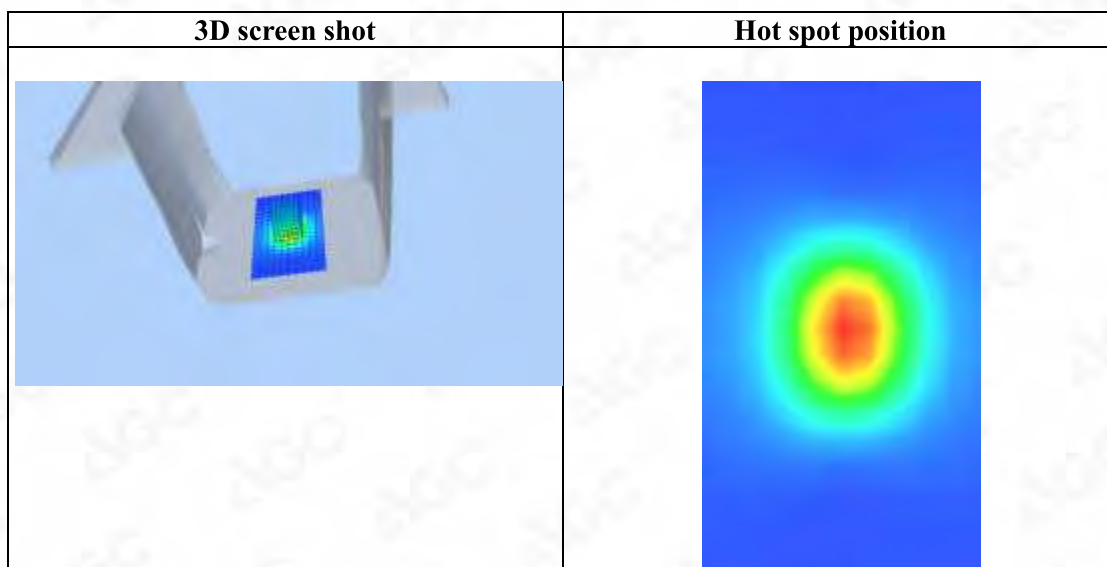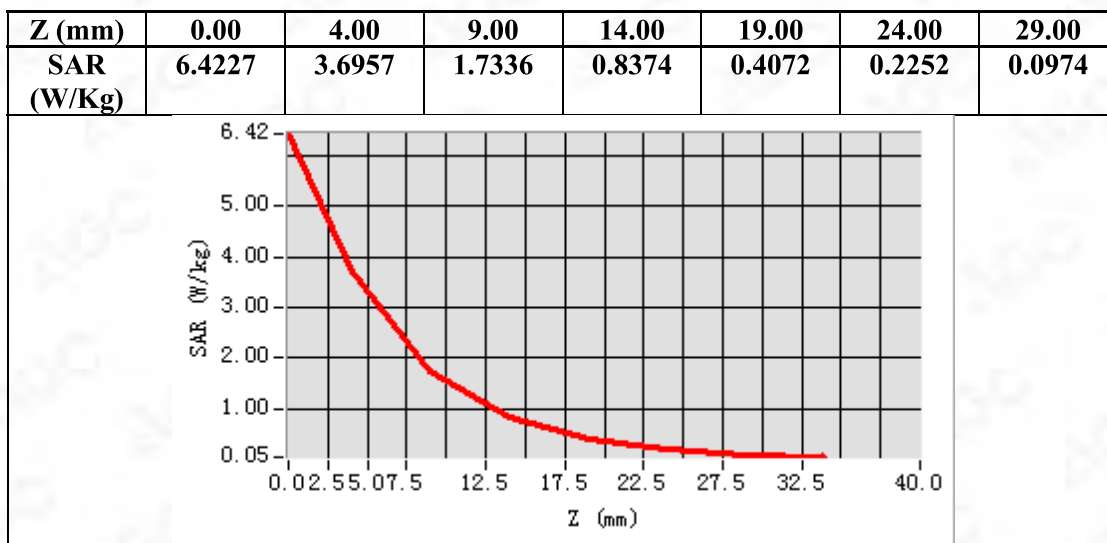

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Test Laboratory: AGC Lab
System Check Head 2600MHz

Date: Jul. 28,2021

DUT: Dipole 2600 MHz; Type: SID 2600


Communication System: CW; Communication System Band: D2600 (2600.0 MHz); Duty Cycle: 1:1; Conv.F=3.87
Frequency:2600 MHz; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 39.14$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section; Input Power=18dBm
Ambient temperature (°C): 21.6, Liquid temperature (°C): 21.3

SATIMO Configuration:

- Probe: SSE5; Calibrated: Dec. 17,2020; Serial No.: SN 03/18 EP327
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Phantom: SAM twin phantom
- Measurement SW: OpenSAR V4_02_32

Configuration/System Check 2600 Head/Area Scan: Measurement grid: dx=8mm,dy=8mm

Configuration/System Check 2600 Head/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm

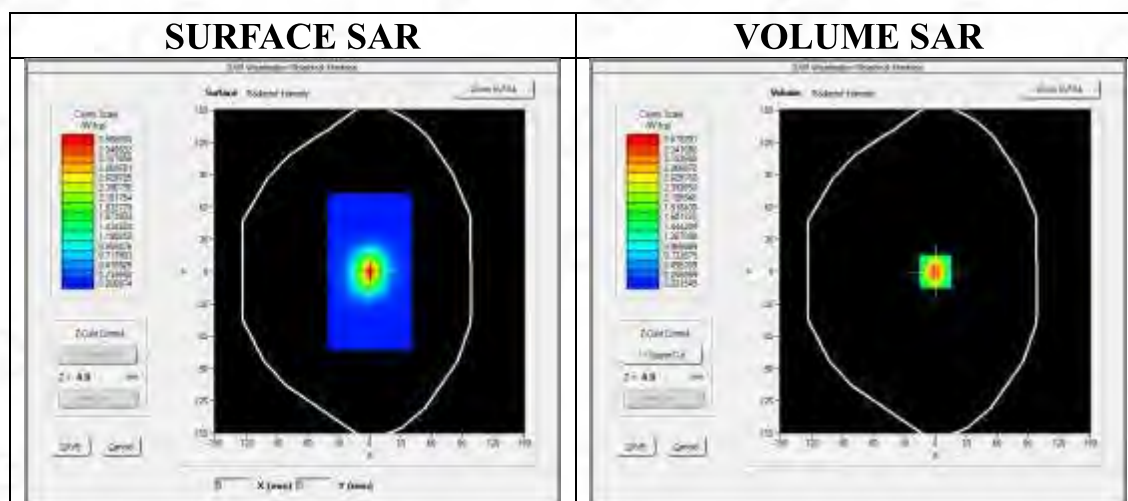

Maximum location: X=0.00, Y=0.00

SAR Peak: 5.99 W/kg

SAR 10g (W/Kg)	1.517243
SAR 1g (W/Kg)	3.466754

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agc-cert.com Web: http://cn.agc-cert.com/

