



FCC TEST REPORT

FCC ID:2A2LL-FV2000

Report Number..... : ZKT-241122L16323E-5

Date of Test..... Nov. 16, 2024~ Nov. 19, 2024

Date of issue : Nov. 20, 2024

Total number of pages 105

Test Result : PASS

Testing Laboratory..... : **Shenzhen ZKT Technology Co., Ltd.**

Address : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : **FJ Dynamics Co., Ltd.**

Address : Floor 21, Das Tower, No. 28, 1st South Keji Road, High-tech Zone, Yuehai Subdistrict, Nanshan District, Shenzhen, China

Manufacturer's name : **FJ Dynamics Co., Ltd.**

Address : Floor 21, Das Tower, No. 28, 1st South Keji Road, High-tech Zone, Yuehai Subdistrict, Nanshan District, Shenzhen, China

Test specification:

Standard : FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013

Test procedure..... : /

Non-standard test method : N/A

Test Report Form No. : TRF-EL-110_V0

Test Report Form(s) Originator : ZKT Testing

Master TRF : Dated: 2020-01-06

This device described above has been tested by ZKT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ZKT, this document may be altered or revised by ZKT, personal only, and shall be noted in the revision of the document.

Product name..... : **Robotic Lawn Mower**

Trademark : 

Model/Type reference : FV2000

Ratings..... : DC 24V

**Testing procedure and testing location:****Testing Laboratory.....: Shenzhen ZKT Technology Co., Ltd.****Address.....: 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China****Tested by (name + signature): Jim.Liu****Reviewer (name + signature).....: Jackson.Fang****Approved (name + signature): Lake Xie**



Table of Contents

	Page
1. VERSION	5
2. SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	8
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	9
3.5EQUIPMENTS LIST FOR ALL TEST ITEMS	10
4. EMC EMISSION TEST	11
4.1 CONDUCTED EMISSION MEASUREMENT	11
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	11
4.1.2 TEST PROCEDURE	11
4.1.3 DEVIATION FROM TEST STANDARD	11
4.1.4 TEST SETUP	12
4.1.5 EUT OPERATING CONDITIONS	12
4.2.1 RADIATED EMISSION LIMITS	15
4.2.2 TEST PROCEDURE	16
4.2.3 DEVIATION FROM TEST STANDARD	16
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 TEST RESULTS	17
5.RADIATED BAND EMISSIONMEASUREMENT	32
5.1 TEST REQUIREMENT:	32
5.2 TEST PROCEDURE	32
5.3 DEVIATION FROM TEST STANDARD	32
5.4 TEST SETUP	33
5.5 EUT OPERATING CONDITIONS	33
5.6 TEST RESULT	34
6.POWER SPECTRAL DENSITY TEST	37
6.1 APPLIED PROCEDURES / LIMIT	37
6.2 TEST PROCEDURE	37
6.3 DEVIATION FROM STANDARD	37
6.4 TEST SETUP	37
6.5 EUT OPERATION CONDITIONS	37
6.6 TEST RESULT	38



7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH	47
7.1 APPLIED PROCEDURES / LIMIT	47
7.2 TEST PROCEDURE	47
7.3 DEVIATION FROM STANDARD	47
7.4 TEST SETUP	47
7.5 EUT OPERATION CONDITIONS	47
7.6 TEST RESULT	48
8. PEAK OUTPUT POWER TEST	66
8.1 APPLIED PROCEDURES/LIMIT	66
8.2 TEST PROCEDURE	66
8.3 DEVIATION FROM STANDARD	66
8.4 TEST SETUP	66
8.5 EUT OPERATION CONDITIONS	66
8.6 TEST RESULT	67
9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	68
9.1 APPLICABLE STANDARD	68
9.2 TEST PROCEDURE	68
9.3 DEVIATION FROM STANDARD	68
9.4 TEST SETUP	68
9.5 EUT OPERATION CONDITIONS	68
9.6 TEST RESULTS	68
10. DUTY CYCLE	100
10.1 APPLIED PROCEDURES / LIMIT	100
10.2 DEVIATION FROM STANDARD	100
10.3 TEST SETUP	100
11. ANTENNA REQUIREMENT	104
12. TEST SETUP PHOTO	105
13. EUT CONSTRUCTIONAL DETAILS	105
11. TEST SETUP PHOTO	错误!未定义书签。
12. EUT CONSTRUCTIONAL DETAILS	错误!未定义书签。



1. VERSION

Report No.	Version	Description	Approved
ZKT-241122L16323E-5	Rev.01	Initial issue of report	Nov. 20, 2024



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.247) , Subpart C			
Standard Section	Test Item	Result	Remark
FCC part 15.203/15.247 (c)	Antenna requirement	PASS	
FCC part 15.207	AC Power Line Conducted Emission	PASS	
FCC part 15.247 (b)(3)	Conducted Peak Output Power	PASS	
FCC part 15.247 (a)(2)	Channel Bandwidth& 99% OCB	PASS	
FCC part 15.247 (e)	Power Spectral Density	PASS	
FCC part 15.247(d)	Band Edge	PASS	
FCC part 15.205/15.209	Spurious Emission	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen ZKT Technology Co., Ltd.

Add. : 1/F, No. 101, Building B, No. 6, Tangwei Community Industrial Avenue, Fuhai Street, Bao'an District, Shenzhen, China

FCC Test Firm Registration Number: 692225

Designation Number: CN1299

IC Registered No.: 27033

CAB identifier: CN0110

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9KHz-30MHz)	U=4.5dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission(6GHz-40GHz)	U=5.0dB
5	Conducted disturbance	U=3.2dB
6	RF Band Edge	U=1.68dB
7	RF power conducted	U=1.86dB
8	RF conducted Spurious Emission	U=2.2dB
9	RF Occupied Bandwidth	U=1.8KHz
10	RF Power Spectral Density	U=1.75dB
11	humidity uncertainty	U=5.3%
12	Temperature uncertainty	U=0.59°C



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Robotic Lawn Mower
Model No.:	FV2000
Model Different.:	N/A
Serial No.:	N/A
Sample ID	ZKT-241122L16323
Sample(s) Status:	Engineer sample
Channel numbers:	802.11b/802.11g /802.11n(HT20)/ 802.11ax(HT20)
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum(DSSS) 802.11g/802.11n(HT20)/ 802.11ax(HT20) Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type and Antenna gain:	802.11b/g/n/ax: FPC Antenna Antenna gain: 3.5dBi
Worst Case:	2.4G WIFI 802.11n20
Power supply:	Input: DC 24V
SWITCHING POWER ADAPTER:	Input:100-240VAC,50/60Hz,MAX 5A Output:24VDC,7.5A,180W

Operation Frequency each of channel							
Channel	Frequency	Chann el	Frequency	Chann el	Frequency	Chann el	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n(HT20) / 802.11ax(HT20)	/
Lowest channel	2412MHz	/
Middle channel	2437MHz	/
Highest channel	2462MHz	/

3.2 DESCRIPTION OF TEST MODES




Transmitting mode	Keep the EUT in continuously transmitting mode
Remark: During the test, the duty cycle >98%, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11ax(HT20)
Data rate	1Mbps	6Mbps	6.5Mbps	6.5Mbps

Test Software	MobaXterm.exe
Power level setup	14

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Conducted Emission



Radiated Emission



Conducted Spurious



3.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

Item	Shielded Type	Ferrite Core	Length	Note
/	/	/	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



3.5EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	KEYSIGHT	9020A	MY55370835	Sep. 29, 2024	Sep. 28, 2025
2	Spectrum Analyzer (10kHz-39.9GHz)	R&S	FSQ	100363	Sep. 30, 2024	Sep. 29, 2025
3	EMI Test Receiver (9kHz-7GHz)	R&S	ESCI7	101169	Sep. 29, 2024	Sep. 28, 2025
4	Bilog Antenna (30MHz-1500MHz)	Schwarzbeck	VULB9168	00877	Sep. 30, 2024	Sep. 29, 2025
5	Horn Antenna (1GHz-18GHz)	Agilent	AH-118	071145	Sep. 30, 2024	Sep. 29, 2025
6	Horn Antenna (15GHz-40GHz)	A.H.System	SAS-574	588	Sep. 30, 2024	Sep. 29, 2025
7	Loop Antenna	TESEQ	HLA6121	58357	Oct. 11, 2024	Oct. 10, 2025
8	Amplifier (30-1000MHz)	EM Electronics	EM330 Amplifier	060747	Sep. 29, 2024	Sep. 28, 2025
9	Amplifier (1GHz-26.5GHz)	Agilent	8449B	3008A00315	Sep. 29, 2024	Sep. 28, 2025
10	Amplifier (18GHz -40GHz)	Tonscend	DLE-161	097	Sep. 30, 2024	Sep. 29, 2025
11	Test Cable	N/A	R-01	N/A	Sep. 30, 2024	Sep. 29, 2025
12	Test Cable	N/A	R-02	N/A	Sep. 30, 2024	Sep. 29, 2025
13	Test Cable	N/A	R-03	N/A	Sep. 30, 2024	Sep. 29, 2025
14	D.C. Power Supply	LongWei	TPR-6405D	N/A	\	\
15	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\
16	Turntable	MF	MF-7802BS	N/A	\	\
17	Antenna tower	MF	MF-7802BS	N/A	\	\

Conducted emissions Test

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	LISN	R&S	ENV216	101471	Sep. 30, 2024	Sep. 29, 2025
2	LISN	CYBERTEK	EM5040A	E1850400149	Sep. 30, 2024	Sep. 29, 2025
3	Test Cable	N/A	C-01	N/A	Sep. 30, 2024	Sep. 29, 2025
4	Test Cable	N/A	C-02	N/A	Sep. 30, 2024	Sep. 29, 2025
5	Test Cable	N/A	C-03	N/A	Sep. 30, 2024	Sep. 29, 2025
6	EMI Test Receiver	R&S	ESCI3	101393	Sep. 29, 2024	Sep. 28, 2025
7	Triple-Loop Antenna	N/A	RF300	9194	Sep. 29, 2024	Sep. 28, 2025
8	Absorbing Clamp	DZ	ZN23201	15034	Oct. 10, 2024	Oct. 09, 2025
9	EMC Software	Frad	EZ-EMC	Ver.EMC-CO N 3A1.1	\	\



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.

4.1.2 TEST PROCEDURE


- The EUT was placed 0.1 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation



4.1.4 TEST SETUP

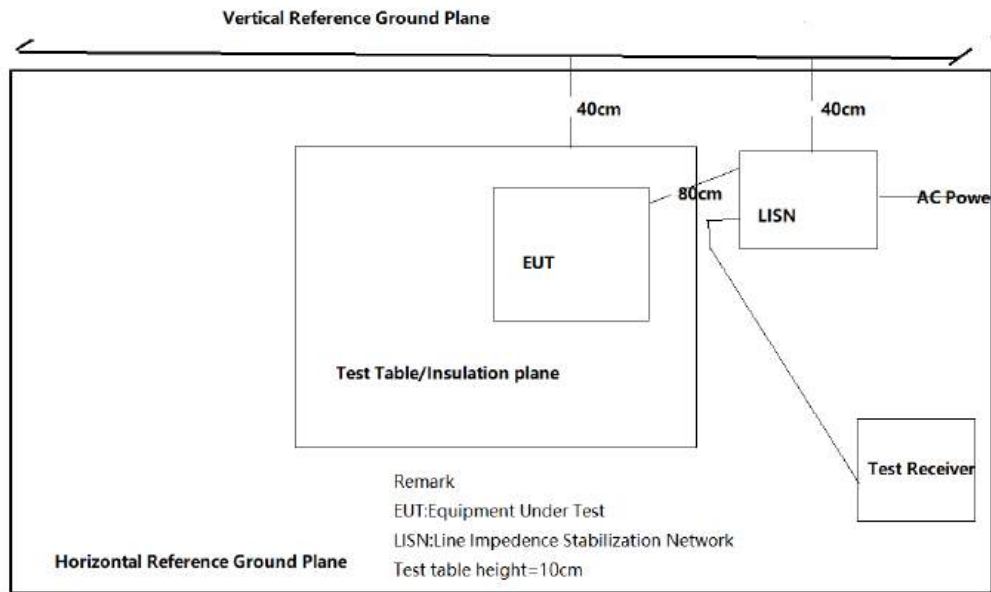

4.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.



4.1.6 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	L
Test Voltage:	AC 120V/60Hz		

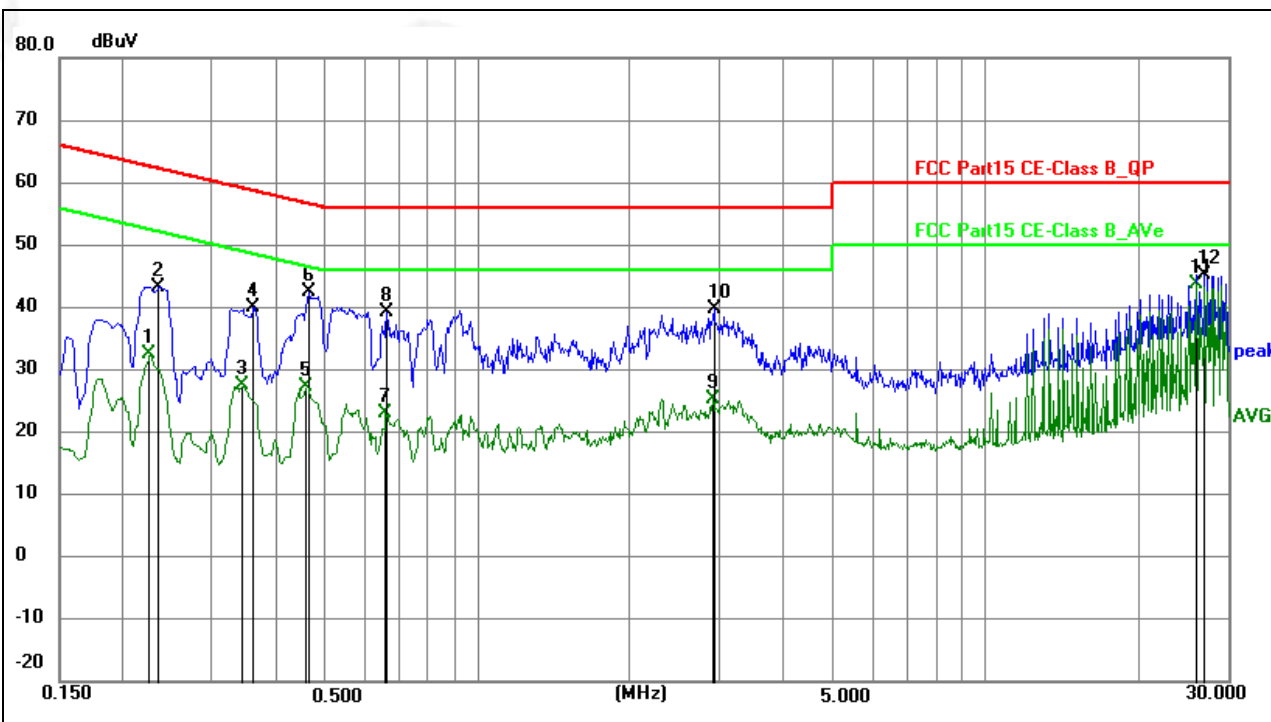


No.↵	Frequency↵	Reading↵	Correct↵	Result↵	Limit↵	Margin↵	Remark↵
↵	(MHz)↵	(dBuV)↵	(dB)↵	(dBuV)↵	(dBuV)↵	(dB)↵	↵
1↵	0.2265↵	12.43↵	20.04↵	32.47↵	52.58↵	-20.11↵	AVG↵
2↵	0.2355↵	23.16↵	20.07↵	43.23↵	62.25↵	-19.02↵	peak↵
3↵	0.3435↵	7.31↵	20.20↵	27.51↵	49.12↵	-21.61↵	AVG↵
4↵	0.3615↵	19.91↵	20.17↵	40.08↵	58.69↵	-18.61↵	peak↵
5↵	0.4605↵	7.26↵	20.03↵	27.29↵	46.68↵	-19.39↵	AVG↵
6↵	0.4650↵	22.50↵	20.03↵	42.53↵	56.60↵	-14.07↵	peak↵
7↵	0.6585↵	3.07↵	20.07↵	23.14↵	46.00↵	-22.86↵	AVG↵
8↵	0.6630↵	19.24↵	20.07↵	39.31↵	56.00↵	-16.69↵	peak↵
9↵	2.9085↵	5.30↵	19.98↵	25.28↵	46.00↵	-20.72↵	AVG↵
10↵	2.9175↵	19.85↵	19.98↵	39.83↵	56.00↵	-16.17↵	peak↵
11↵	26.0700↵	23.05↵	20.58↵	43.63↵	50.00↵	-6.37↵	AVG↵
12↵	27.0015↵	24.78↵	20.52↵	45.30↵	60.00↵	-14.70↵	peak↵

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



Temperature :	26°C	Relative Humidity:	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz		

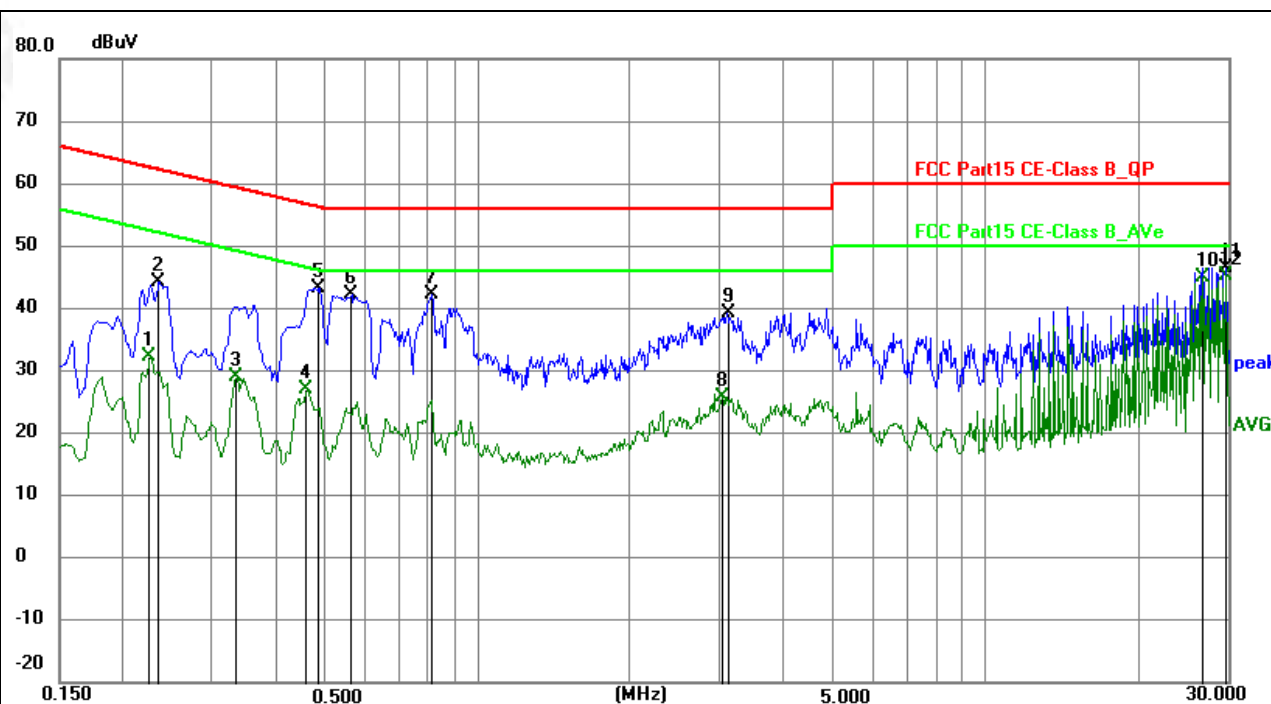

No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dB)	
1	0.2265	12.22	20.04	32.26	52.58	-20.32	AVG
2	0.2355	24.19	20.07	44.26	62.25	-17.99	peak
3	0.3345	8.68	20.22	28.90	49.34	-20.44	AVG
4	0.4605	7.07	20.03	27.10	46.68	-19.58	AVG
5	0.4875	23.25	20.01	43.26	56.21	-12.95	peak
6	0.5639	22.11	20.03	42.14	56.00	-13.86	peak
7	0.8115	22.10	20.04	42.14	56.00	-13.86	peak
8	3.0390	5.85	19.98	25.83	46.00	-20.17	AVG
9	3.1065	19.23	19.98	39.21	56.00	-16.79	peak
10	26.7000	24.52	20.54	45.06	50.00	-4.94	AVG
11	29.8050	26.21	20.34	46.55	60.00	-13.45	peak
12	29.8050	24.82	20.34	45.16	50.00	-4.84	AVG

Notes:

- 1.An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2.Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3.Measurement Level = Reading level + Correct Factor



4.2 RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

4.2.1 RADIATED EMISSION LIMITS

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change from table 0.8 meter to 1.5 meter (Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

4.2.3 DEVIATION FROM TEST STANDARD

No deviation


4.2.4 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

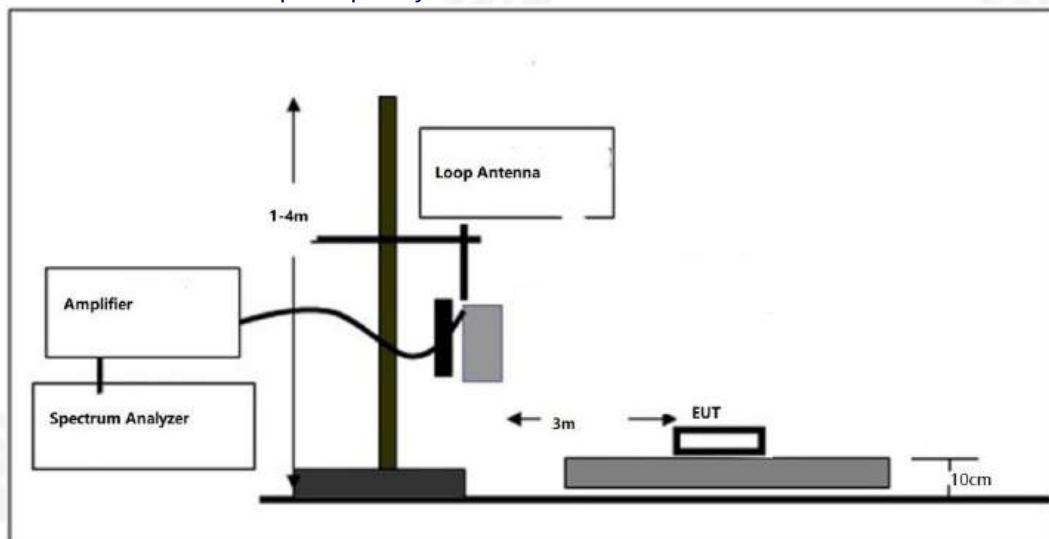




(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

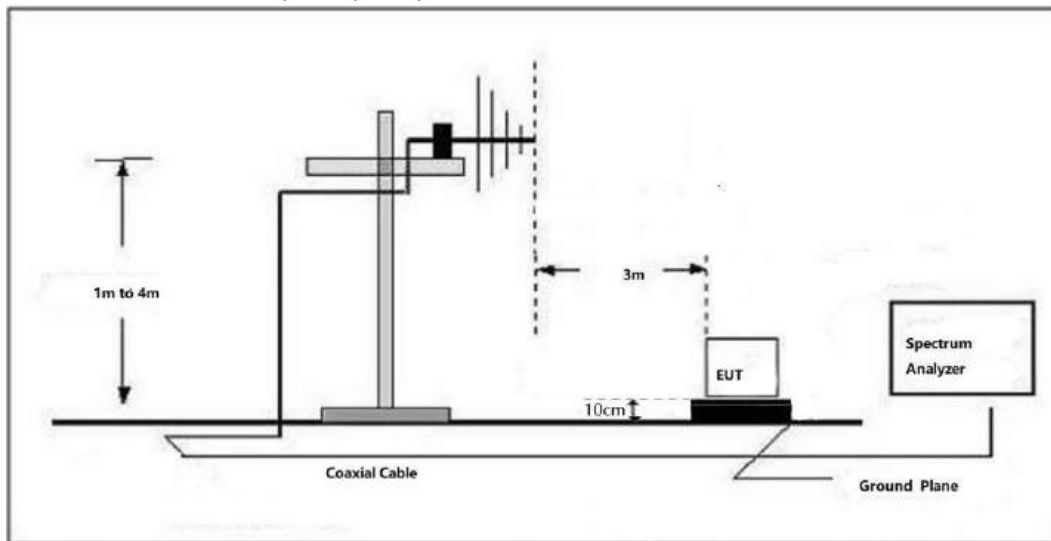

(C) Radiated Emission Test-Up Frequency Above 1GHz

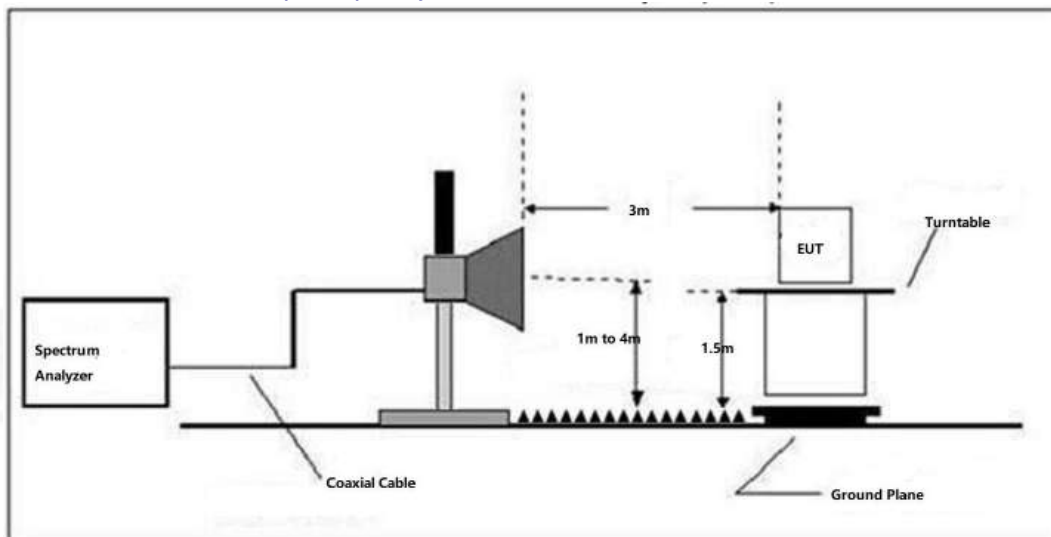

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 TEST RESULTS


Between 9KHz – 30MHz

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o) & RSS-Gen 6.13, the test result no need to reported.




Between 30MHz – 1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 24V	Test Mode	Working

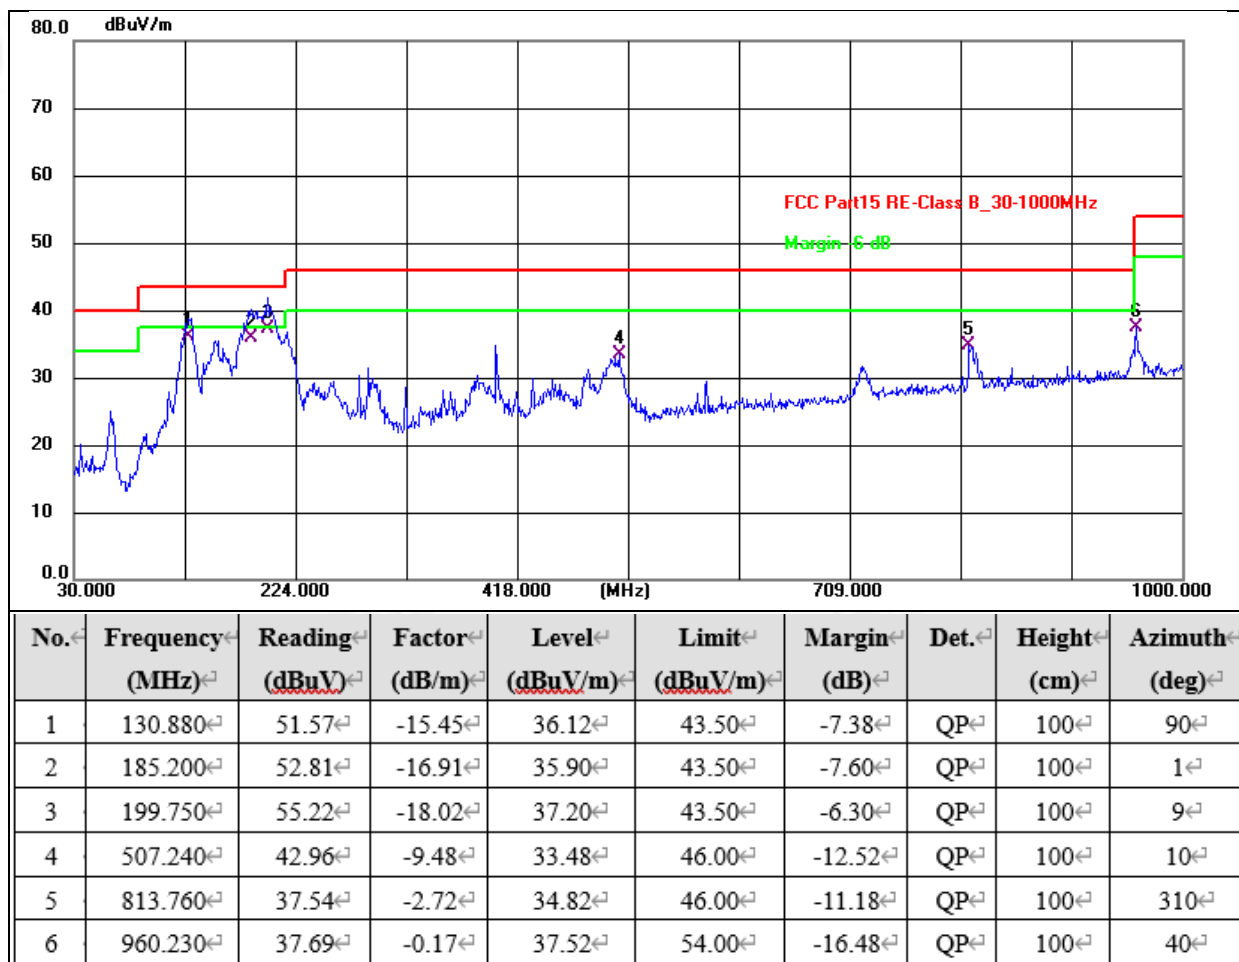



Temperature:	26℃	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 24V	Test Mode	Working

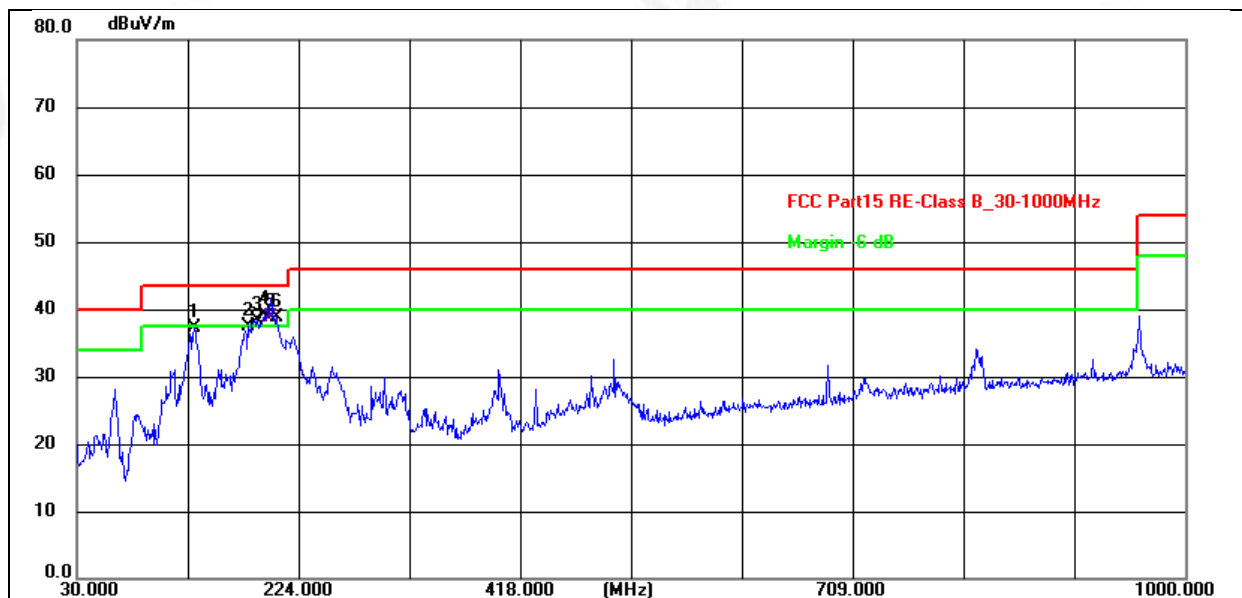

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Det.	Height (cm)	Azimuth (deg)
1	132.820	52.53	-15.34	37.19	43.50	-6.31	QP	100	95
2	180.350	53.81	-16.40	37.41	43.50	-6.09	QP	100	17
3	188.110	55.62	-17.20	38.42	43.50	-5.08	QP	100	2
4	193.930	56.86	-17.65	39.21	43.50	-4.29	QP	100	14
5	199.750	56.73	-18.02	38.71	43.50	-4.79	QP	199	306
6	204.600	56.69	-17.89	38.80	43.50	-4.70	QP	100	35

Remarks:

- 1.Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
- 2.The emission levels of other frequencies are very lower than the limit and not show in test report.
- 3.The test data shows only the worst case 802.11n20.



1GHz~25GHz
ANT1

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	52.11	30.55	5.77	24.66	51.99	74.00	-22.01	PK
V	4824.00	43.42	30.55	5.77	24.66	43.30	54.00	-10.70	AV
V	7236.00	51.79	30.33	6.32	24.55	52.33	74.00	-21.67	PK
V	7236.00	43.13	30.33	6.32	24.55	43.67	54.00	-10.33	AV
V	9648.00	49.17	30.85	7.45	24.69	50.46	74.00	-23.54	PK
V	9648.00	44.27	30.85	7.45	24.69	45.56	54.00	-8.44	AV
V	12060.00	52.59	31.02	8.99	25.57	56.13	74.00	-17.87	PK
V	12060.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV
H	4824.00	50.75	30.55	5.77	24.66	50.63	74.00	-23.37	PK
H	4824.00	43.71	30.55	5.77	24.66	43.59	54.00	-10.41	AV
H	7236.00	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
H	7236.00	42.63	30.33	6.32	24.55	43.17	54.00	-10.83	AV
H	9648.00	51.90	30.85	7.45	24.69	53.19	74.00	-20.81	PK
H	9648.00	43.45	30.85	7.45	24.69	44.74	54.00	-9.26	AV
H	12060.00	51.89	31.02	8.99	25.57	55.43	74.00	-18.57	PK
H	12060.00	43.95	31.02	8.99	25.57	47.49	54.00	-6.51	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	52.91	30.55	5.77	24.66	52.79	74.00	-21.21	PK
V	4874.00	44.11	30.55	5.77	24.66	43.99	54.00	-10.01	AV
V	7311.00	52.96	30.33	6.32	24.55	53.50	74.00	-20.50	PK
V	7311.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
V	9748.00	50.83	30.85	7.45	24.69	52.12	74.00	-21.88	PK
V	9748.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
V	12185.00	53.03	31.02	8.99	25.57	56.57	74.00	-17.43	PK
V	12185.00	44.71	31.02	8.99	25.57	48.25	54.00	-5.75	AV
H	4874.00	51.34	30.55	5.77	24.66	51.22	74.00	-22.78	PK
H	4874.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
H	7311.00	49.76	30.33	6.32	24.55	50.30	74.00	-23.70	PK
H	7311.00	42.89	30.33	6.32	24.55	43.43	54.00	-10.57	AV
H	9748.00	51.25	30.85	7.45	24.69	52.54	74.00	-21.46	PK
H	9748.00	42.83	30.85	7.45	24.69	44.12	54.00	-9.88	AV
H	12185.00	52.05	31.02	8.99	25.57	55.59	74.00	-18.41	PK
H	12185.00	44.23	31.02	8.99	25.57	47.77	54.00	-6.23	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	51.67	30.55	5.77	24.66	51.55	74.00	-22.45	PK
V	4924.00	43.39	30.55	5.77	24.66	43.27	54.00	-10.73	AV
V	7386.00	52.65	30.33	6.32	24.55	53.19	74.00	-20.81	PK
V	7386.00	44.20	30.33	6.32	24.55	44.74	54.00	-9.26	AV
V	9848.00	51.06	30.85	7.45	24.69	52.35	74.00	-21.65	PK
V	9848.00	43.04	30.85	7.45	24.69	44.33	54.00	-9.67	AV
V	12310.00	52.72	31.02	8.99	25.57	56.26	74.00	-17.74	PK
V	12310.00	42.62	31.02	8.99	25.57	46.16	54.00	-7.84	AV
H	4924.00	54.67	30.55	5.77	24.66	54.55	74.00	-19.45	PK
H	4924.00	44.00	30.55	5.77	24.66	43.88	54.00	-10.12	AV
H	7386.00	53.25	30.33	6.32	24.55	53.79	74.00	-20.21	PK
H	7386.00	43.08	30.33	6.32	24.55	43.62	54.00	-10.38	AV
H	9848.00	49.57	30.85	7.45	24.69	50.86	74.00	-23.14	PK
H	9848.00	44.01	30.85	7.45	24.69	45.30	54.00	-8.70	AV
H	12310.00	52.04	31.02	8.99	25.57	55.58	74.00	-18.42	PK
H	12310.00	42.97	31.02	8.99	25.57	46.51	54.00	-7.49	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	50.77	30.55	5.77	24.66	50.65	74.00	-23.35	PK
V	4824.00	43.18	30.55	5.77	24.66	43.06	54.00	-10.94	AV
V	7236.00	52.18	30.33	6.32	24.55	52.72	74.00	-21.28	PK
V	7236.00	43.12	30.33	6.32	24.55	43.66	54.00	-10.34	AV
V	9648.00	53.82	30.85	7.45	24.69	55.11	74.00	-18.89	PK
V	9648.00	43.06	30.85	7.45	24.69	44.35	54.00	-9.65	AV
V	12060.00	50.44	31.02	8.99	25.57	53.98	74.00	-20.02	PK
V	12060.00	43.43	31.02	8.99	25.57	46.97	54.00	-7.03	AV
H	4824.00	50.75	30.55	5.77	24.66	50.63	74.00	-23.37	PK
H	4824.00	43.03	30.55	5.77	24.66	42.91	54.00	-11.09	AV
H	7236.00	51.82	30.33	6.32	24.55	52.36	74.00	-21.64	PK
H	7236.00	43.20	30.33	6.32	24.55	43.74	54.00	-10.26	AV
H	9648.00	53.32	30.85	7.45	24.69	54.61	74.00	-19.39	PK
H	9648.00	43.35	30.85	7.45	24.69	44.64	54.00	-9.36	AV
H	12060.00	54.04	31.02	8.99	25.57	57.58	74.00	-16.42	PK
H	12060.00	43.23	31.02	8.99	25.57	46.77	54.00	-7.23	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.91	30.55	5.77	24.66	51.79	74.00	-22.21	PK
V	4874.00	44.54	30.55	5.77	24.66	44.42	54.00	-9.58	AV
V	7311.00	51.68	30.33	6.32	24.55	52.22	74.00	-21.78	PK
V	7311.00	43.61	30.33	6.32	24.55	44.15	54.00	-9.85	AV
V	9748.00	51.23	30.85	7.45	24.69	52.52	74.00	-21.48	PK
V	9748.00	43.22	30.85	7.45	24.69	44.51	54.00	-9.49	AV
V	12185.00	55.28	31.02	8.99	25.57	58.82	74.00	-15.18	PK
V	12185.00	43.03	31.02	8.99	25.57	46.57	54.00	-7.43	AV
H	4874.00	54.19	30.55	5.77	24.66	54.07	74.00	-19.93	PK
H	4874.00	42.92	30.55	5.77	24.66	42.80	54.00	-11.20	AV
H	7311.00	52.00	30.33	6.32	24.55	52.54	74.00	-21.46	PK
H	7311.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
H	9748.00	52.73	30.85	7.45	24.69	54.02	74.00	-19.98	PK
H	9748.00	43.27	30.85	7.45	24.69	44.56	54.00	-9.44	AV
H	12185.00	54.74	31.02	8.99	25.57	58.28	74.00	-15.72	PK
H	12185.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2462MHz									
V	4924.00	52.40	30.55	5.77	24.66	52.28	74.00	-21.72	PK
V	4924.00	43.92	30.55	5.77	24.66	43.80	54.00	-10.20	AV
V	7386.00	52.84	30.33	6.32	24.55	53.38	74.00	-20.62	PK
V	7386.00	42.86	30.33	6.32	24.55	43.40	54.00	-10.60	AV
V	9848.00	52.29	30.85	7.45	24.69	53.58	74.00	-20.42	PK
V	9848.00	43.71	30.85	7.45	24.69	45.00	54.00	-9.00	AV
V	12310.00	51.39	31.02	8.99	25.57	54.93	74.00	-19.07	PK
V	12310.00	43.37	31.02	8.99	25.57	46.91	54.00	-7.09	AV
H	4924.00	51.62	30.55	5.77	24.66	51.50	74.00	-22.50	PK
H	4924.00	43.56	30.55	5.77	24.66	43.44	54.00	-10.56	AV
H	7386.00	50.31	30.33	6.32	24.55	50.85	74.00	-23.15	PK
H	7386.00	42.86	30.33	6.32	24.55	43.40	54.00	-10.60	AV
H	9848.00	54.82	30.85	7.45	24.69	56.11	74.00	-17.89	PK
H	9848.00	43.67	30.85	7.45	24.69	44.96	54.00	-9.04	AV
H	12310.00	53.15	31.02	8.99	25.57	56.69	74.00	-17.31	PK
H	12310.00	43.40	31.02	8.99	25.57	46.94	54.00	-7.06	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case.



1GHz~25GHz
ANT2

802.11b

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	52.40	30.55	5.77	24.66	52.28	74.00	-21.72	PK
V	4824.00	44.20	30.55	5.77	24.66	44.08	54.00	-9.92	AV
V	7236.00	51.59	30.33	6.32	24.55	52.13	74.00	-21.87	PK
V	7236.00	43.38	30.33	6.32	24.55	43.92	54.00	-10.08	AV
V	9648.00	49.68	30.85	7.45	24.69	50.97	74.00	-23.03	PK
V	9648.00	44.72	30.85	7.45	24.69	46.01	54.00	-7.99	AV
V	12060.00	53.22	31.02	8.99	25.57	56.76	74.00	-17.24	PK
V	12060.00	43.94	31.02	8.99	25.57	47.48	54.00	-6.52	AV
H	4824.00	50.69	30.55	5.77	24.66	50.57	74.00	-23.43	PK
H	4824.00	43.67	30.55	5.77	24.66	43.55	54.00	-10.45	AV
H	7236.00	53.65	30.33	6.32	24.55	54.19	74.00	-19.81	PK
H	7236.00	42.85	30.33	6.32	24.55	43.39	54.00	-10.61	AV
H	9648.00	51.36	30.85	7.45	24.69	52.65	74.00	-21.35	PK
H	9648.00	43.93	30.85	7.45	24.69	45.22	54.00	-8.78	AV
H	12060.00	51.32	31.02	8.99	25.57	54.86	74.00	-19.14	PK
H	12060.00	43.76	31.02	8.99	25.57	47.30	54.00	-6.70	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	53.15	30.55	5.77	24.66	53.03	74.00	-20.97	PK
V	4874.00	43.99	30.55	5.77	24.66	43.87	54.00	-10.13	AV
V	7311.00	52.20	30.33	6.32	24.55	52.74	74.00	-21.26	PK
V	7311.00	43.02	30.33	6.32	24.55	43.56	54.00	-10.44	AV
V	9748.00	51.61	30.85	7.45	24.69	52.90	74.00	-21.10	PK
V	9748.00	43.26	30.85	7.45	24.69	44.55	54.00	-9.45	AV
V	12185.00	54.00	31.02	8.99	25.57	57.54	74.00	-16.46	PK
V	12185.00	44.80	31.02	8.99	25.57	48.34	54.00	-5.66	AV
H	4874.00	52.52	30.55	5.77	24.66	52.40	74.00	-21.60	PK
H	4874.00	43.93	30.55	5.77	24.66	43.81	54.00	-10.19	AV
H	7311.00	50.35	30.33	6.32	24.55	50.89	74.00	-23.11	PK
H	7311.00	42.88	30.33	6.32	24.55	43.42	54.00	-10.58	AV
H	9748.00	51.77	30.85	7.45	24.69	53.06	74.00	-20.94	PK
H	9748.00	42.56	30.85	7.45	24.69	43.85	54.00	-10.15	AV
H	12185.00	51.88	31.02	8.99	25.57	55.42	74.00	-18.58	PK
H	12185.00	43.21	31.02	8.99	25.57	46.75	54.00	-7.25	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampli fier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	51.18	30.55	5.77	24.66	51.06	74.00	-22.94	PK
V	4924.00	43.19	30.55	5.77	24.66	43.07	54.00	-10.93	AV
V	7386.00	51.98	30.33	6.32	24.55	52.52	74.00	-21.48	PK
V	7386.00	44.45	30.33	6.32	24.55	44.99	54.00	-9.01	AV
V	9848.00	51.07	30.85	7.45	24.69	52.36	74.00	-21.64	PK
V	9848.00	43.25	30.85	7.45	24.69	44.54	54.00	-9.46	AV
V	12310.00	51.55	31.02	8.99	25.57	55.09	74.00	-18.91	PK
V	12310.00	42.28	31.02	8.99	25.57	45.82	54.00	-8.18	AV
H	4924.00	54.70	30.55	5.77	24.66	54.58	74.00	-19.42	PK
H	4924.00	44.04	30.55	5.77	24.66	43.92	54.00	-10.08	AV
H	7386.00	52.87	30.33	6.32	24.55	53.41	74.00	-20.59	PK
H	7386.00	43.37	30.33	6.32	24.55	43.91	54.00	-10.09	AV
H	9848.00	49.43	30.85	7.45	24.69	50.72	74.00	-23.28	PK
H	9848.00	44.09	30.85	7.45	24.69	45.38	54.00	-8.62	AV
H	12310.00	51.63	31.02	8.99	25.57	55.17	74.00	-18.83	PK
H	12310.00	42.59	31.02	8.99	25.57	46.13	54.00	-7.87	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case.



802.11g

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	50.53	30.55	5.77	24.66	50.41	74.00	-23.59	PK
V	4824.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
V	7236.00	51.85	30.33	6.32	24.55	52.39	74.00	-21.61	PK
V	7236.00	43.90	30.33	6.32	24.55	44.44	54.00	-9.56	AV
V	9648.00	53.72	30.85	7.45	24.69	55.01	74.00	-18.99	PK
V	9648.00	43.74	30.85	7.45	24.69	45.03	54.00	-8.97	AV
V	12060.00	51.33	31.02	8.99	25.57	54.87	74.00	-19.13	PK
V	12060.00	43.01	31.02	8.99	25.57	46.55	54.00	-7.45	AV
H	4824.00	51.00	30.55	5.77	24.66	50.88	74.00	-23.12	PK
H	4824.00	43.32	30.55	5.77	24.66	43.20	54.00	-10.80	AV
H	7236.00	52.15	30.33	6.32	24.55	52.69	74.00	-21.31	PK
H	7236.00	43.39	30.33	6.32	24.55	43.93	54.00	-10.07	AV
H	9648.00	52.79	30.85	7.45	24.69	54.08	74.00	-19.92	PK
H	9648.00	43.54	30.85	7.45	24.69	44.83	54.00	-9.17	AV
H	12060.00	53.77	31.02	8.99	25.57	57.31	74.00	-16.69	PK
H	12060.00	43.86	31.02	8.99	25.57	47.40	54.00	-6.60	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.93	30.55	5.77	24.66	51.81	74.00	-22.19	PK
V	4874.00	44.52	30.55	5.77	24.66	44.40	54.00	-9.60	AV
V	7311.00	51.78	30.33	6.32	24.55	52.32	74.00	-21.68	PK
V	7311.00	43.56	30.33	6.32	24.55	44.10	54.00	-9.90	AV
V	9748.00	50.01	30.85	7.45	24.69	51.30	74.00	-22.70	PK
V	9748.00	43.09	30.85	7.45	24.69	44.38	54.00	-9.62	AV
V	12185.00	54.56	31.02	8.99	25.57	58.10	74.00	-15.90	PK
V	12185.00	42.35	31.02	8.99	25.57	45.89	54.00	-8.11	AV
H	4874.00	54.94	30.55	5.77	24.66	54.82	74.00	-19.18	PK
H	4874.00	43.27	30.55	5.77	24.66	43.15	54.00	-10.85	AV
H	7311.00	51.89	30.33	6.32	24.55	52.43	74.00	-21.57	PK
H	7311.00	43.72	30.33	6.32	24.55	44.26	54.00	-9.74	AV
H	9748.00	52.58	30.85	7.45	24.69	53.87	74.00	-20.13	PK
H	9748.00	43.91	30.85	7.45	24.69	45.20	54.00	-8.80	AV
H	12185.00	53.97	31.02	8.99	25.57	57.51	74.00	-16.49	PK
H	12185.00	44.18	31.02	8.99	25.57	47.72	54.00	-6.28	AV



Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
High Channel:2462MHz									
V	4924.00	53.30	30.55	5.77	24.66	53.18	74.00	-20.82	PK
V	4924.00	43.61	30.55	5.77	24.66	43.49	54.00	-10.51	AV
V	7386.00	53.26	30.33	6.32	24.55	53.80	74.00	-20.20	PK
V	7386.00	43.61	30.33	6.32	24.55	44.15	54.00	-9.85	AV
V	9848.00	52.61	30.85	7.45	24.69	53.90	74.00	-20.10	PK
V	9848.00	43.63	30.85	7.45	24.69	44.92	54.00	-9.08	AV
V	12310.00	51.20	31.02	8.99	25.57	54.74	74.00	-19.26	PK
V	12310.00	43.79	31.02	8.99	25.57	47.33	54.00	-6.67	AV
H	4924.00	51.66	30.55	5.77	24.66	51.54	74.00	-22.46	PK
H	4924.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
H	7386.00	50.38	30.33	6.32	24.55	50.92	74.00	-23.08	PK
H	7386.00	43.92	30.33	6.32	24.55	44.46	54.00	-9.54	AV
H	9848.00	54.88	30.85	7.45	24.69	56.17	74.00	-17.83	PK
H	9848.00	44.03	30.85	7.45	24.69	45.32	54.00	-8.68	AV
H	12310.00	52.83	31.02	8.99	25.57	56.37	74.00	-17.63	PK
H	12310.00	43.19	31.02	8.99	25.57	46.73	54.00	-7.27	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case.



802.11n20 (ANT1+ANT2)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.15	30.55	5.77	24.66	54.03	74.00	-19.97	PK
V	4824.00	43.07	30.55	5.77	24.66	42.95	54.00	-11.05	AV
V	7236.00	50.10	30.33	6.32	24.55	50.64	74.00	-23.36	PK
V	7236.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	9648.00	50.82	30.85	7.45	24.69	52.11	74.00	-21.89	PK
V	9648.00	44.62	30.85	7.45	24.69	45.91	54.00	-8.09	AV
V	12060.00	52.92	31.02	8.99	25.57	56.46	74.00	-17.54	PK
V	12060.00	42.73	31.02	8.99	25.57	46.27	54.00	-7.73	AV
H	4824.00	50.19	30.55	5.77	24.66	50.07	74.00	-23.93	PK
H	4824.00	42.69	30.55	5.77	24.66	42.57	54.00	-11.43	AV
H	7236.00	52.28	30.33	6.32	24.55	52.82	74.00	-21.18	PK
H	7236.00	43.28	30.33	6.32	24.55	43.82	54.00	-10.18	AV
H	9648.00	52.11	30.85	7.45	24.69	53.40	74.00	-20.60	PK
H	9648.00	43.02	30.85	7.45	24.69	44.31	54.00	-9.69	AV
H	12060.00	52.28	31.02	8.99	25.57	55.82	74.00	-18.18	PK
H	12060.00	43.84	31.02	8.99	25.57	47.38	54.00	-6.62	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.83	30.55	5.77	24.66	51.71	74.00	-22.29	PK
V	4874.00	43.22	30.55	5.77	24.66	43.10	54.00	-10.90	AV
V	7311.00	52.53	30.33	6.32	24.55	53.07	74.00	-20.93	PK
V	7311.00	44.03	30.33	6.32	24.55	44.57	54.00	-9.43	AV
V	9748.00	51.15	30.85	7.45	24.69	52.44	74.00	-21.56	PK
V	9748.00	42.25	30.85	7.45	24.69	43.54	54.00	-10.46	AV
V	12185.00	52.56	31.02	8.99	25.57	56.10	74.00	-17.90	PK
V	12185.00	43.17	31.02	8.99	25.57	46.71	54.00	-7.29	AV
H	4874.00	51.22	30.55	5.77	24.66	51.10	74.00	-22.90	PK
H	4874.00	43.32	30.55	5.77	24.66	43.20	54.00	-10.80	AV
H	7311.00	53.43	30.33	6.32	24.55	53.97	74.00	-20.03	PK
H	7311.00	43.86	30.33	6.32	24.55	44.40	54.00	-9.60	AV
H	9748.00	50.08	30.85	7.45	24.69	51.37	74.00	-22.63	PK
H	9748.00	44.83	30.85	7.45	24.69	46.12	54.00	-7.88	AV
H	12185.00	54.34	31.02	8.99	25.57	57.88	74.00	-16.12	PK
H	12185.00	43.54	31.02	8.99	25.57	47.08	54.00	-6.92	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	52.47	30.55	5.77	24.66	52.35	74.00	-21.65	PK
V	4924.00	42.10	30.55	5.77	24.66	41.98	54.00	-12.02	AV
V	7386.00	52.82	30.33	6.32	24.55	53.36	74.00	-20.64	PK
V	7386.00	43.21	30.33	6.32	24.55	43.75	54.00	-10.25	AV
V	9848.00	54.92	30.85	7.45	24.69	56.21	74.00	-17.79	PK
V	9848.00	43.66	30.85	7.45	24.69	44.95	54.00	-9.05	AV
V	12310.00	51.63	31.02	8.99	25.57	55.17	74.00	-18.83	PK
V	12310.00	43.89	31.02	8.99	25.57	47.43	54.00	-6.57	AV
H	4924.00	53.15	30.55	5.77	24.66	53.03	74.00	-20.97	PK
H	4924.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
H	7386.00	49.41	30.33	6.32	24.55	49.95	74.00	-24.05	PK
H	7386.00	42.62	30.33	6.32	24.55	43.16	54.00	-10.84	AV
H	9848.00	52.06	30.85	7.45	24.69	53.35	74.00	-20.65	PK
H	9848.00	43.69	30.85	7.45	24.69	44.98	54.00	-9.02	AV
H	12310.00	53.79	31.02	8.99	25.57	57.33	74.00	-16.67	PK
H	12310.00	42.02	31.02	8.99	25.57	45.56	54.00	-8.44	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case.



802.11ax20 (ANT1+ANT2)

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel:2412MHz									
V	4824.00	54.69	30.55	5.77	24.66	54.57	74.00	-19.43	PK
V	4824.00	43.28	30.55	5.77	24.66	43.16	54.00	-10.84	AV
V	7236.00	50.42	30.33	6.32	24.55	50.96	74.00	-23.04	PK
V	7236.00	43.91	30.33	6.32	24.55	44.45	54.00	-9.55	AV
V	9648.00	50.64	30.85	7.45	24.69	51.93	74.00	-22.07	PK
V	9648.00	44.44	30.85	7.45	24.69	45.73	54.00	-8.27	AV
V	12060.00	53.20	31.02	8.99	25.57	56.74	74.00	-17.26	PK
V	12060.00	43.27	31.02	8.99	25.57	46.81	54.00	-7.19	AV
H	4824.00	50.61	30.55	5.77	24.66	50.49	74.00	-23.51	PK
H	4824.00	42.60	30.55	5.77	24.66	42.48	54.00	-11.52	AV
H	7236.00	52.79	30.33	6.32	24.55	53.33	74.00	-20.67	PK
H	7236.00	43.32	30.33	6.32	24.55	43.86	54.00	-10.14	AV
H	9648.00	51.92	30.85	7.45	24.69	53.21	74.00	-20.79	PK
H	9648.00	42.91	30.85	7.45	24.69	44.20	54.00	-9.80	AV
H	12060.00	52.78	31.02	8.99	25.57	56.32	74.00	-17.68	PK
H	12060.00	43.34	31.02	8.99	25.57	46.88	54.00	-7.12	AV

Polar (H/V)	Frequency	Meter Reading	Pre-amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Middle Channel:2437MHz									
V	4874.00	51.71	30.55	5.77	24.66	51.59	74.00	-22.41	PK
V	4874.00	43.93	30.55	5.77	24.66	43.81	54.00	-10.19	AV
V	7311.00	52.77	30.33	6.32	24.55	53.31	74.00	-20.69	PK
V	7311.00	44.30	30.33	6.32	24.55	44.84	54.00	-9.16	AV
V	9748.00	51.69	30.85	7.45	24.69	52.98	74.00	-21.02	PK
V	9748.00	42.45	30.85	7.45	24.69	43.74	54.00	-10.26	AV
V	12185.00	52.59	31.02	8.99	25.57	56.13	74.00	-17.87	PK
V	12185.00	42.61	31.02	8.99	25.57	46.15	54.00	-7.85	AV
H	4874.00	51.17	30.55	5.77	24.66	51.05	74.00	-22.95	PK
H	4874.00	43.37	30.55	5.77	24.66	43.25	54.00	-10.75	AV
H	7311.00	54.28	30.33	6.32	24.55	54.82	74.00	-19.18	PK
H	7311.00	44.43	30.33	6.32	24.55	44.97	54.00	-9.03	AV
H	9748.00	50.04	30.85	7.45	24.69	51.33	74.00	-22.67	PK
H	9748.00	44.94	30.85	7.45	24.69	46.23	54.00	-7.77	AV
H	12185.00	53.80	31.02	8.99	25.57	57.34	74.00	-16.66	PK
H	12185.00	43.15	31.02	8.99	25.57	46.69	54.00	-7.31	AV



Polar (H/V)	Frequency	Meter Reading	Pre-ampl ifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detect or Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
High Channel:2462MHz									
V	4924.00	52.23	30.55	5.77	24.66	52.11	74.00	-21.89	PK
V	4924.00	42.14	30.55	5.77	24.66	42.02	54.00	-11.98	AV
V	7386.00	53.17	30.33	6.32	24.55	53.71	74.00	-20.29	PK
V	7386.00	43.55	30.33	6.32	24.55	44.09	54.00	-9.91	AV
V	9848.00	54.76	30.85	7.45	24.69	56.05	74.00	-17.95	PK
V	9848.00	43.77	30.85	7.45	24.69	45.06	54.00	-8.94	AV
V	12310.00	51.95	31.02	8.99	25.57	55.49	74.00	-18.51	PK
V	12310.00	43.63	31.02	8.99	25.57	47.17	54.00	-6.83	AV
H	4924.00	53.10	30.55	5.77	24.66	52.98	74.00	-21.02	PK
H	4924.00	43.84	30.55	5.77	24.66	43.72	54.00	-10.28	AV
H	7386.00	49.74	30.33	6.32	24.55	50.28	74.00	-23.72	PK
H	7386.00	42.91	30.33	6.32	24.55	43.45	54.00	-10.55	AV
H	9848.00	52.08	30.85	7.45	24.69	53.37	74.00	-20.63	PK
H	9848.00	44.31	30.85	7.45	24.69	45.60	54.00	-8.40	AV
H	12310.00	53.56	31.02	8.99	25.57	57.10	74.00	-16.90	PK
H	12310.00	41.93	31.02	8.99	25.57	45.47	54.00	-8.53	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The test data shows only the worst case.



5. RADIATED BAND EMISSION MEASUREMENT

5.1 TEST REQUIREMENT:

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above	Peak	1MHz	3MHz	Peak
	1GHz	Average	1MHz	3MHz	Average

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE

Above 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could bestopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dBmargin would be re-tested one by one using peak, quasi-peak or average method as specified and then reportedin a data sheet.
- Test the EUT in the lowest channel,the Highest channel

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported


5.3 DEVIATION FROM TEST STANDARD

No deviation



5.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

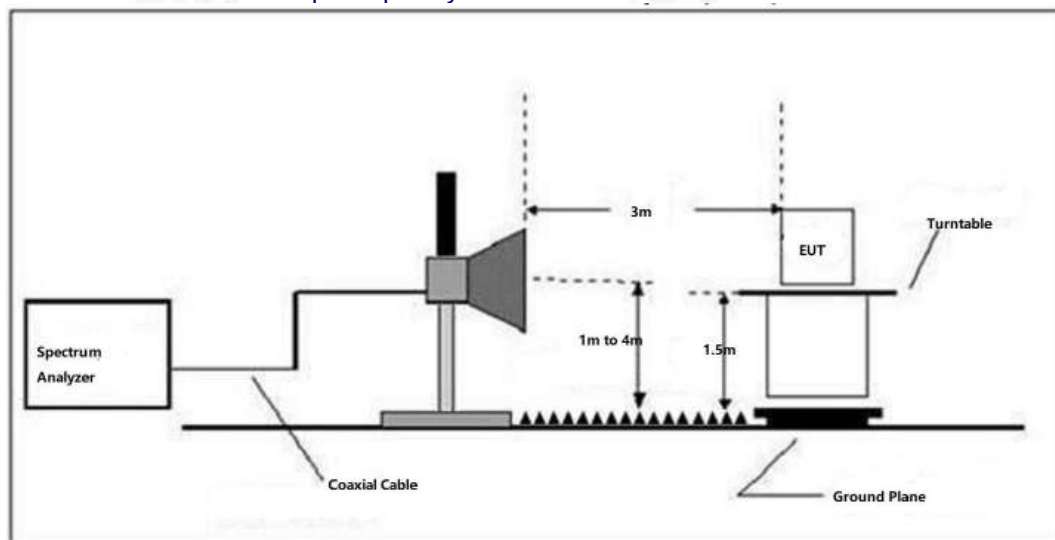

5.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



5.6 TEST RESULT

ANT1

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	54.08	30.22	4.85	23.98	52.69	74.00	PK	PASS
	H	2390.00	44.39	30.22	4.85	23.98	43.00	54.00	AV	PASS
	H	2400.00	54.63	30.22	4.85	23.98	53.24	74.00	PK	PASS
	H	2400.00	43.93	30.22	4.85	23.98	42.54	54.00	AV	PASS
	V	2390.00	53.19	30.22	4.85	23.98	51.80	74.00	PK	PASS
	V	2390.00	44.53	30.22	4.85	23.98	43.14	54.00	AV	PASS
	V	2400.00	52.70	30.22	4.85	23.98	51.31	74.00	PK	PASS
	V	2400.00	43.04	30.22	4.85	23.98	41.65	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	54.55	30.22	4.85	23.98	53.16	74.00	PK	PASS
	H	2483.50	44.58	30.22	4.85	23.98	43.19	54.00	AV	PASS
	H	2500.00	54.46	30.22	4.85	23.98	53.07	74.00	PK	PASS
	H	2500.00	45.49	30.22	4.85	23.98	44.10	54.00	AV	PASS
	V	2483.50	52.92	30.22	4.85	23.98	51.53	74.00	PK	PASS
	V	2483.50	44.39	30.22	4.85	23.98	43.00	54.00	AV	PASS
	V	2500.00	54.12	30.22	4.85	23.98	52.73	74.00	PK	PASS
	V	2500.00	44.72	30.22	4.85	23.98	43.33	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	53.48	30.22	4.85	23.98	52.09	74.00	PK	PASS
	H	2390.00	44.52	30.22	4.85	23.98	43.13	54.00	AV	PASS
	H	2400.00	54.83	30.22	4.85	23.98	53.44	74.00	PK	PASS
	H	2400.00	44.79	30.22	4.85	23.98	43.40	54.00	AV	PASS
	V	2390.00	52.33	30.22	4.85	23.98	50.94	74.00	PK	PASS
	V	2390.00	44.17	30.22	4.85	23.98	42.78	54.00	AV	PASS
	V	2400.00	54.31	30.22	4.85	23.98	52.92	74.00	PK	PASS
	V	2400.00	45.10	30.22	4.85	23.98	43.71	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	54.37	30.22	4.85	23.98	52.98	74.00	PK	PASS
	H	2483.50	43.98	30.22	4.85	23.98	42.59	54.00	AV	PASS
	H	2500.00	54.43	30.22	4.85	23.98	53.04	74.00	PK	PASS
	H	2500.00	45.23	30.22	4.85	23.98	43.84	54.00	AV	PASS
	V	2483.50	55.43	30.22	4.85	23.98	54.04	74.00	PK	PASS
	V	2483.50	44.32	30.22	4.85	23.98	42.93	54.00	AV	PASS
	V	2500.00	53.08	30.22	4.85	23.98	51.69	74.00	PK	PASS
	V	2500.00	43.42	30.22	4.85	23.98	42.03	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limi										



ANT2

	Polar (H/V)	Frequenc y (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission level (dBuV/m)	Limit (dBuV /m)	Detec tor Type	Result
802.11b	Low Channel 2412MHz									
	H	2390.00	53.25	30.22	4.85	23.98	51.86	74.00	PK	PASS
	H	2390.00	44.34	30.22	4.85	23.98	42.95	54.00	AV	PASS
	H	2400.00	54.16	30.22	4.85	23.98	52.77	74.00	PK	PASS
	H	2400.00	44.01	30.22	4.85	23.98	42.62	54.00	AV	PASS
	V	2390.00	53.93	30.22	4.85	23.98	52.54	74.00	PK	PASS
	V	2390.00	45.54	30.22	4.85	23.98	44.15	54.00	AV	PASS
	V	2400.00	53.69	30.22	4.85	23.98	52.30	74.00	PK	PASS
	V	2400.00	44.16	30.22	4.85	23.98	42.77	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	55.03	30.22	4.85	23.98	53.64	74.00	PK	PASS
	H	2483.50	43.40	30.22	4.85	23.98	42.01	54.00	AV	PASS
	H	2500.00	53.15	30.22	4.85	23.98	51.76	74.00	PK	PASS
	H	2500.00	44.36	30.22	4.85	23.98	42.97	54.00	AV	PASS
	V	2483.50	52.25	30.22	4.85	23.98	50.86	74.00	PK	PASS
	V	2483.50	45.37	30.22	4.85	23.98	43.98	54.00	AV	PASS
	V	2500.00	55.49	30.22	4.85	23.98	54.10	74.00	PK	PASS
	V	2500.00	45.06	30.22	4.85	23.98	43.67	54.00	AV	PASS
802.11g	Low Channel 2412MHz									
	H	2390.00	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	H	2390.00	43.25	30.22	4.85	23.98	41.86	54.00	AV	PASS
	H	2400.00	54.44	30.22	4.85	23.98	53.05	74.00	PK	PASS
	H	2400.00	43.78	30.22	4.85	23.98	42.39	54.00	AV	PASS
	V	2390.00	52.49	30.22	4.85	23.98	51.10	74.00	PK	PASS
	V	2390.00	44.35	30.22	4.85	23.98	42.96	54.00	AV	PASS
	V	2400.00	55.08	30.22	4.85	23.98	53.69	74.00	PK	PASS
	V	2400.00	45.02	30.22	4.85	23.98	43.63	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.65	30.22	4.85	23.98	52.26	74.00	PK	PASS
	H	2483.50	45.06	30.22	4.85	23.98	43.67	54.00	AV	PASS
	H	2500.00	54.60	30.22	4.85	23.98	53.21	74.00	PK	PASS
	H	2500.00	43.93	30.22	4.85	23.98	42.54	54.00	AV	PASS
	V	2483.50	55.03	30.22	4.85	23.98	53.64	74.00	PK	PASS
	V	2483.50	43.21	30.22	4.85	23.98	41.82	54.00	AV	PASS
	V	2500.00	53.96	30.22	4.85	23.98	52.57	74.00	PK	PASS
	V	2500.00	44.62	30.22	4.85	23.98	43.23	54.00	AV	PASS

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limi



802.11n20 (MIMO)

802.11n20	Low Channel 2412MHz									
	H	2390.00	53.07	30.22	4.85	23.98	51.68	74.00	PK	PASS
	H	2390.00	45.13	30.22	4.85	23.98	43.74	54.00	AV	PASS
	H	2400.00	53.76	30.22	4.85	23.98	52.37	74.00	PK	PASS
	H	2400.00	45.72	30.22	4.85	23.98	44.33	54.00	AV	PASS
	V	2390.00	53.37	30.22	4.85	23.98	51.98	74.00	PK	PASS
	V	2390.00	46.00	30.22	4.85	23.98	44.61	54.00	AV	PASS
	V	2400.00	53.18	30.22	4.85	23.98	51.79	74.00	PK	PASS
	V	2400.00	43.80	30.22	4.85	23.98	42.41	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	52.90	30.22	4.85	23.98	51.51	74.00	PK	PASS
	H	2483.50	45.18	30.22	4.85	23.98	43.79	54.00	AV	PASS
	H	2500.00	54.01	30.22	4.85	23.98	52.62	74.00	PK	PASS
	H	2500.00	44.54	30.22	4.85	23.98	43.15	54.00	AV	PASS
	V	2483.50	53.70	30.22	4.85	23.98	52.31	74.00	PK	PASS
	V	2483.50	44.51	30.22	4.85	23.98	43.12	54.00	AV	PASS
	V	2500.00	54.43	30.22	4.85	23.98	53.04	74.00	PK	PASS
	V	2500.00	44.14	30.22	4.85	23.98	42.75	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										

802.11ax20 (MIMO)

802.11ax20	Low Channel 2412MHz									
	H	2390.00	52.99	30.22	4.85	23.98	51.60	74.00	PK	PASS
	H	2390.00	44.51	30.22	4.85	23.98	43.12	54.00	AV	PASS
	H	2400.00	53.88	30.22	4.85	23.98	52.49	74.00	PK	PASS
	H	2400.00	45.82	30.22	4.85	23.98	44.43	54.00	AV	PASS
	V	2390.00	53.65	30.22	4.85	23.98	52.26	74.00	PK	PASS
	V	2390.00	44.76	30.22	4.85	23.98	43.37	54.00	AV	PASS
	V	2400.00	53.14	30.22	4.85	23.98	51.75	74.00	PK	PASS
	V	2400.00	43.20	30.22	4.85	23.98	41.81	54.00	AV	PASS
	High Channel 2462MHz									
	H	2483.50	53.68	30.22	4.85	23.98	52.29	74.00	PK	PASS
	H	2483.50	44.26	30.22	4.85	23.98	42.87	54.00	AV	PASS
	H	2500.00	52.49	30.22	4.85	23.98	51.10	74.00	PK	PASS
	H	2500.00	44.08	30.22	4.85	23.98	42.69	54.00	AV	PASS
	V	2483.50	52.82	30.22	4.85	23.98	51.43	74.00	PK	PASS
	V	2483.50	44.37	30.22	4.85	23.98	42.98	54.00	AV	PASS
	V	2500.00	53.49	30.22	4.85	23.98	52.10	74.00	PK	PASS
	V	2500.00	43.36	30.22	4.85	23.98	41.97	54.00	AV	PASS
Remark:										
1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit										



6. POWER SPECTRAL DENSITY TEST

Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01DTS Meas Guidancev05r02

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8dBm/3kHz	2400-2483.5	PASS


6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

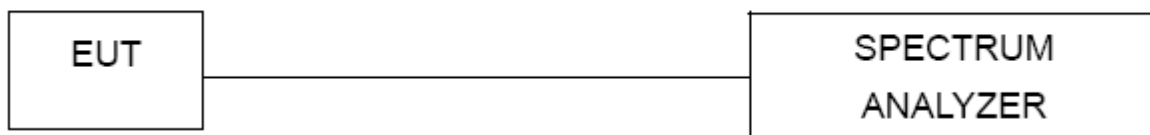

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



6.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 24V
Test Mode :	TX Mode		

TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-9.75	≤8.00	PASS
	Ant2	2412	-9.25	≤8.00	PASS
	Ant1	2437	-8.21	≤8.00	PASS
	Ant2	2437	-9.96	≤8.00	PASS
	Ant1	2462	-9.54	≤8.00	PASS
	Ant2	2462	-8.98	≤8.00	PASS
11G	Ant1	2412	-11.26	≤8.00	PASS
	Ant2	2412	-11.27	≤8.00	PASS
	Ant1	2437	-10.98	≤8.00	PASS
	Ant2	2437	-12.45	≤8.00	PASS
	Ant1	2462	-12.11	≤8.00	PASS
	Ant2	2462	-12.23	≤8.00	PASS
11N20MIMO	Ant1	2412	-15.36	≤8.00	PASS
	Ant2	2412	-23.11	≤8.00	PASS
	total	2412	-14.69	≤7.49	PASS
	Ant1	2437	-14.96	≤8.00	PASS
	Ant2	2437	-23.24	≤8.00	PASS
	total	2437	-14.36	≤7.49	PASS
	Ant1	2462	-15.87	≤8.00	PASS
	Ant2	2462	-23.25	≤8.00	PASS
	total	2462	-15.14	≤7.49	PASS
11AX20MIMO	Ant1	2412	-15.81	≤8.00	PASS
	Ant2	2412	-15.97	≤8.00	PASS
	total	2412	-12.88	≤7.49	PASS
	Ant1	2437	-16.48	≤8.00	PASS
	Ant2	2437	-16.55	≤8.00	PASS
	total	2437	-13.50	≤7.49	PASS
	Ant1	2462	-16.4	≤8.00	PASS
	Ant2	2462	-16.34	≤8.00	PASS
	total	2462	-13.36	≤7.49	PASS

Remark:

Directional gain = GANT + Array Gain=3.5 dBi+3.01 dBi =6.51 dBi;

Array Gain = 10 log(NANT/NSS) dB (NANT=2;NSS=1)

Limit[dBm/3kHz]=8.00- (Directional gain -6dB) when Directional gain ≥6dB



TEST GRAPHS

11B Ant1 2412



11B Ant2 2412



11B Ant1 2437



11B Ant2 2437




11B Ant1 2462



11B Ant2 2462



11G Ant1 2412

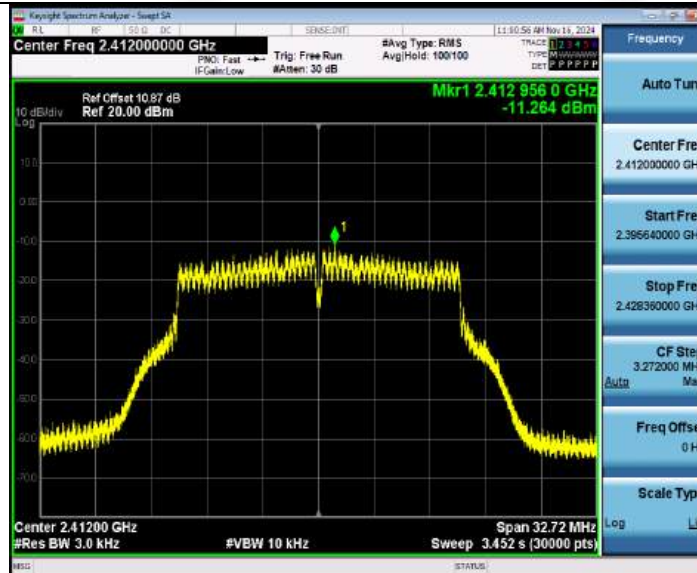


11G_Ant2_2412



11G_Ant1_2437



11G_Ant2_2437

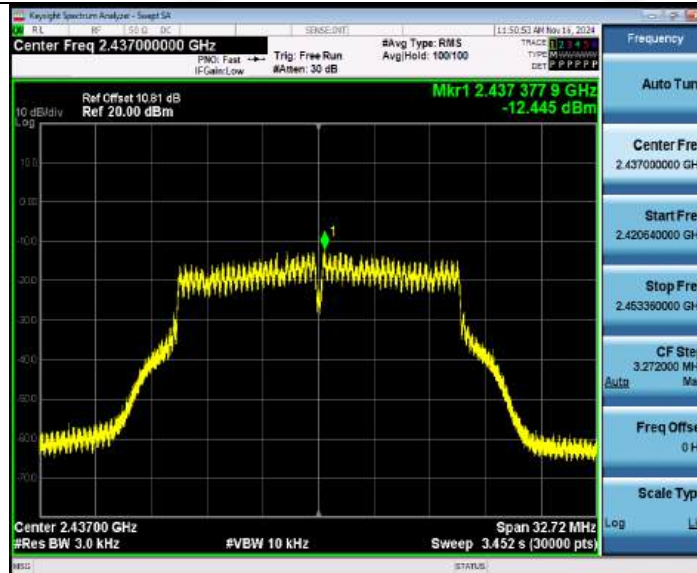


11G_Ant1_2462




11G_Ant2_2462




11N20MIMO_Ant1_2412

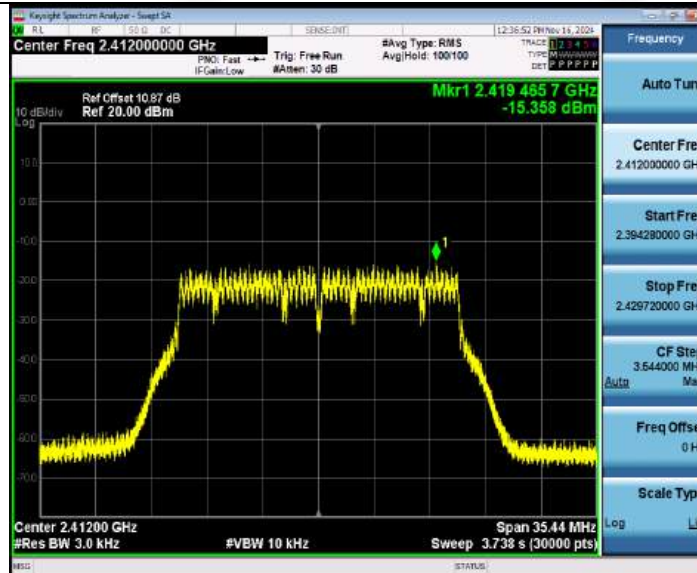


11N20MIMO_Ant2_2412

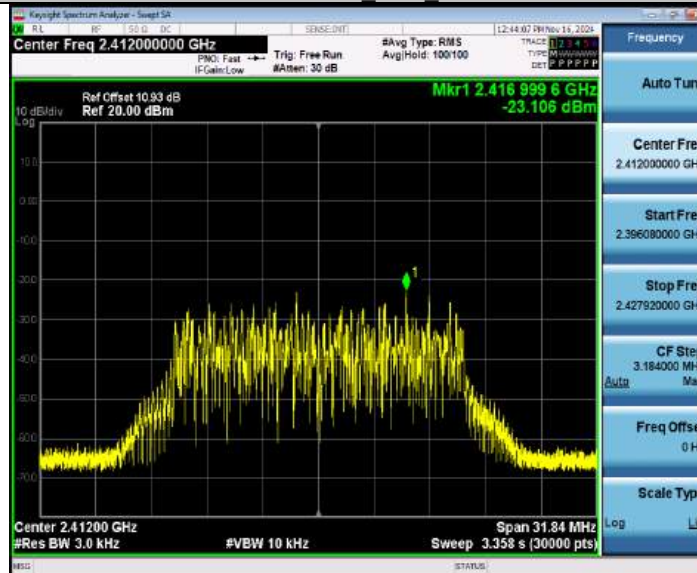


11N20MIMO_Ant1_2437

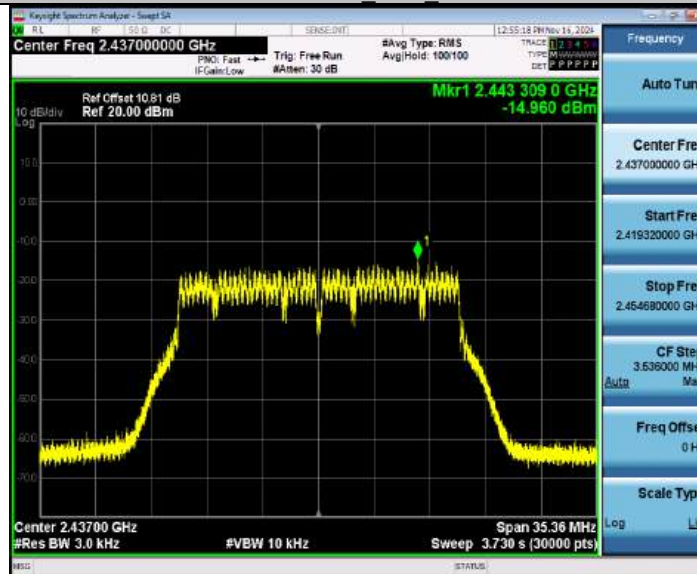


11N20MIMO_Ant2_2437

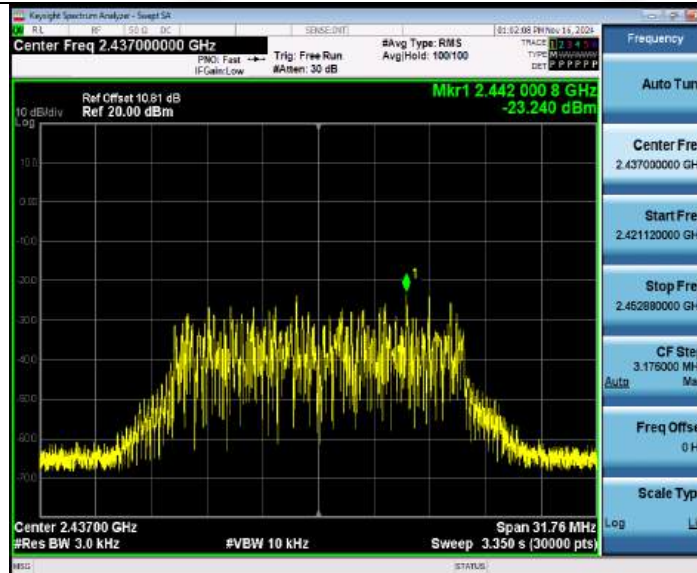


11N20MIMO_Ant1_2462

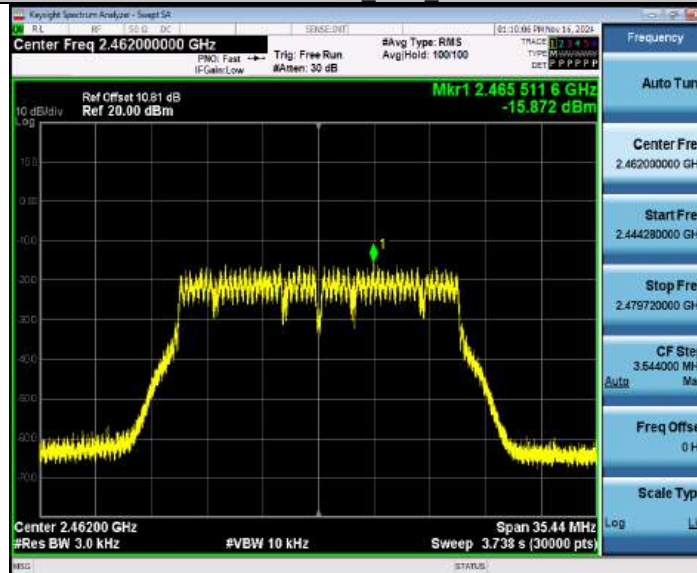


11N20MIMO_Ant2_2462

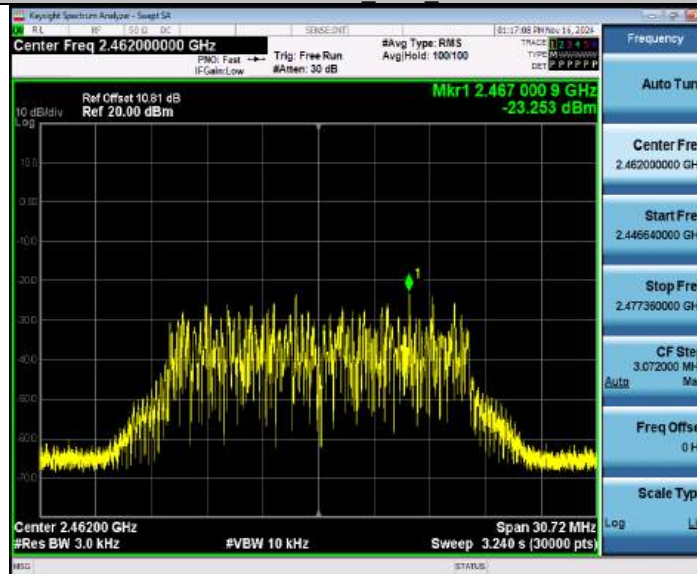

11AX20MIMO_Ant1_2412

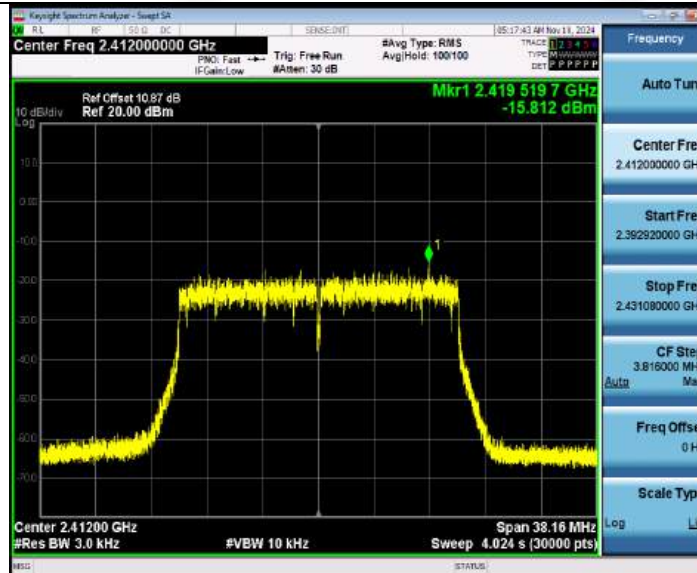


11AX20MIMO_Ant2_2412

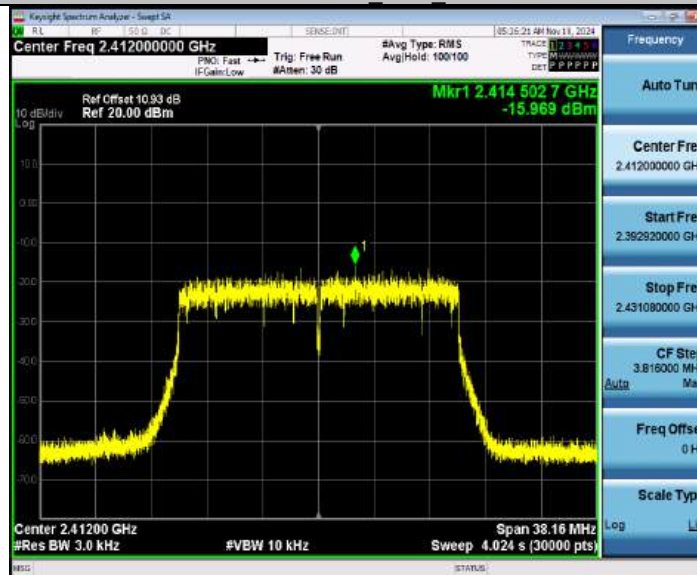


11AX20MIMO_Ant1_2437




11AX20MIMO_Ant2_2437

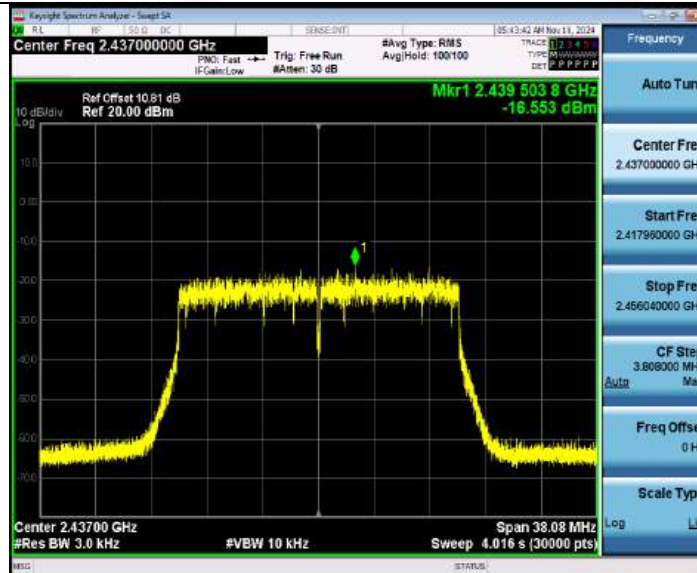

11AX20MIMO_Ant1_2462

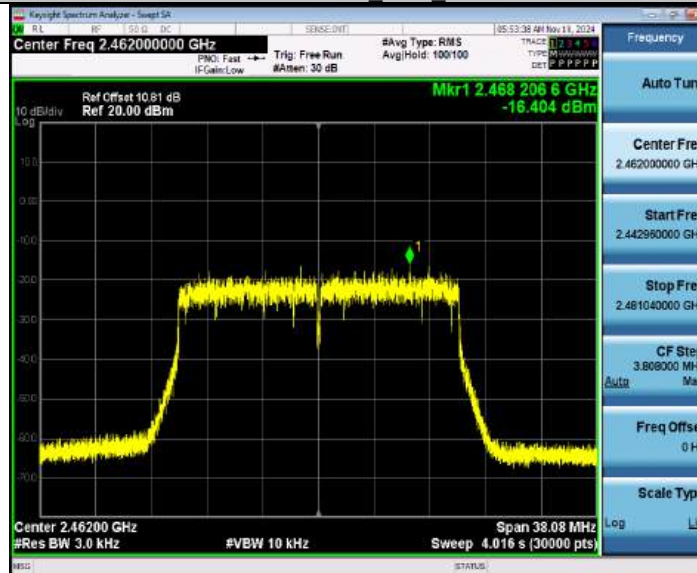

11AX20MIMO_Ant2_2462

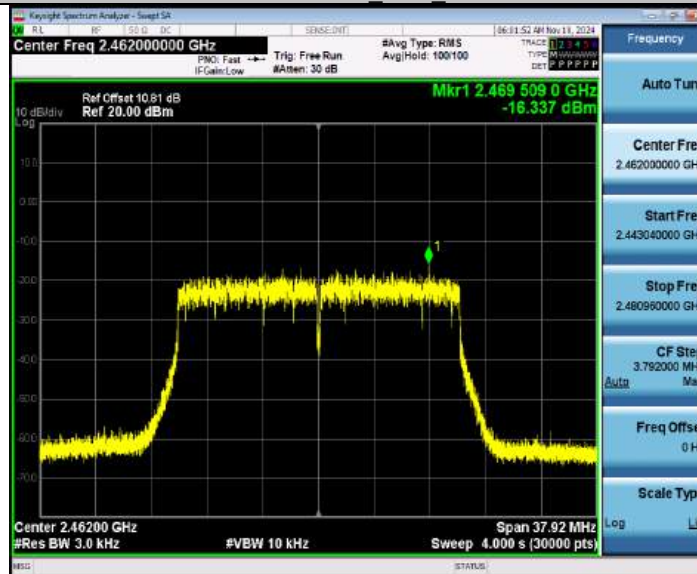



7. CHANNEL BANDWIDTH& 99% OCCUPY BANDWIDTH

Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01DTS Meas Guidancev05r02

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

7.2 TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



7.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 24V
Test Mode :	TX Mode		

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	-6dB Occupy Bandwidth [MHz]
11B	Ant1	2412	12.079	7.560
	Ant2	2412	11.956	7.080
	Ant1	2437	12.062	8.040
	Ant2	2437	11.967	7.520
	Ant1	2462	12.080	7.560
	Ant2	2462	11.944	7.560
11G	Ant1	2412	17.160	16.360
	Ant2	2412	17.238	16.360
	Ant1	2437	17.167	16.320
	Ant2	2437	17.218	16.360
	Ant1	2462	17.148	16.360
	Ant2	2462	17.178	16.360
11N20MIMO	Ant1	2412	18.161	17.720
	Ant2	2412	17.037	15.920
	Ant1	2437	18.138	17.680
	Ant2	2437	17.225	15.880
	Ant1	2462	18.174	17.720
	Ant2	2462	16.931	15.360
11AX20MIMO	Ant1	2412	19.112	19.080
	Ant2	2412	19.164	19.080
	Ant1	2437	19.084	19.080
	Ant2	2437	19.209	19.040
	Ant1	2462	19.126	19.040
	Ant2	2462	19.105	18.960



Test plot as follows:
OCB





11B Ant2 2437



11B Ant1 2462



11B Ant2 2462



11G_Ant1_2412



11G_Ant2_2412



11G_Ant1_2437



11G_Ant2_2437



11G_Ant1_2462



11G_Ant2_2462



11N20MIMO_Ant1_2412



11N20MIMO_Ant2_2412



11N20MIMO_Ant1_2437



11N20MIMO_Ant2_2437



11N20MIMO_Ant1_2462



11N20MIMO_Ant2_2462



11AX20MIMO_Ant1_2412



11AX20MIMO_Ant2_2412



11AX20MIMO_Ant1_2437



11AX20MIMO_Ant2_2437



11AX20MIMO_Ant1_2462



11AX20MIMO_Ant2_2462





-6dB Occupy Bandwidth





11B Ant1 2462



11B Ant2 2462



11G Ant1 2412



11G Ant2 2412



11G Ant1 2437



11G Ant2 2437



11G Ant1 2462



11G Ant2 2462



11N20MIMO Ant1 2412



11N20MIMO Ant2 2412



11N20MIMO Ant1 2437



11N20MIMO Ant2 2437




11N20MIMO Ant1 2462



11N20MIMO Ant2 2462



11AX20MIMO Ant1 2412

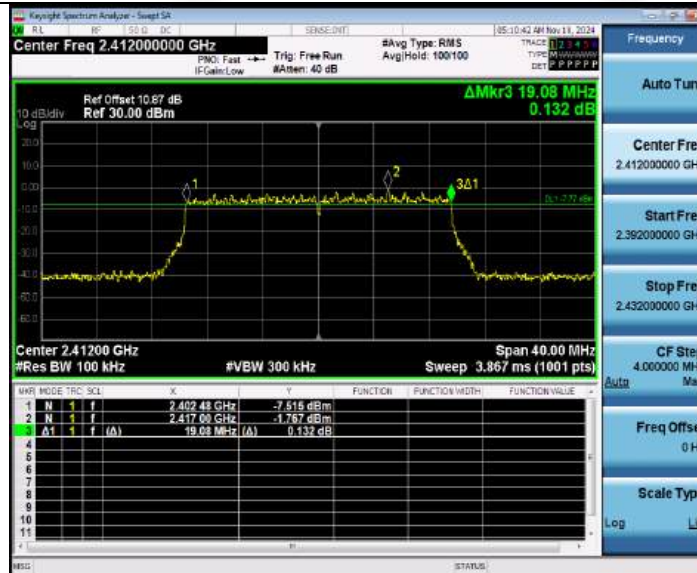

11AX20MIMO_Ant2_2412




11AX20MIMO_Ant1_2437



11AX20MIMO_Ant2_2437



11AX20MIMO_Ant1_2462

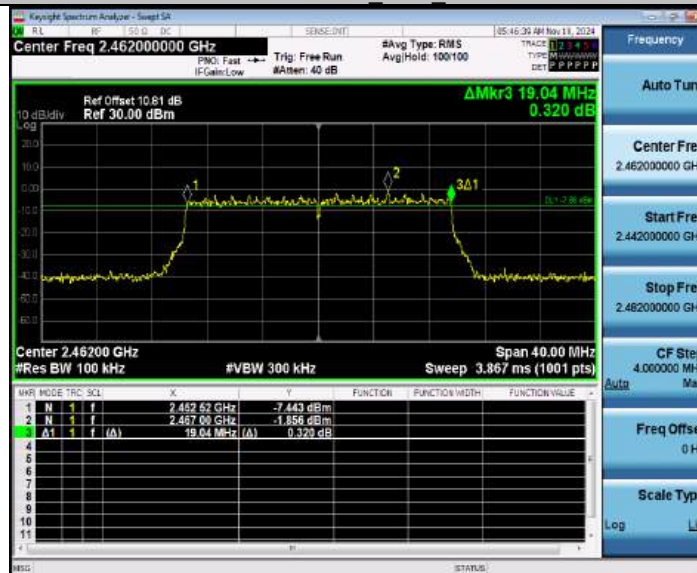

11AX20MIMO_Ant2_2462





8. PEAK OUTPUT POWER TEST

Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01DTS Meas Guidancev05r02

8.1 APPLIED PROCEDURES/LIMIT

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

8.2 TEST PROCEDURE

- The EUT was directly connected to the Power meter

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



8.6 TEST RESULT

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Test Voltage :	DC 24V

Test Mode	Antenna	Frequency [MHz]	Peak Power [dBm]	Result [dBm]	Limit [dBm]	Eirp [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	13.85	13.85	≤30.00	17.35	≤36.00	PASS
	Ant2	2412	13.45	13.45	≤30.00	16.95	≤36.00	PASS
	Ant1	2437	14.05	14.05	≤30.00	17.55	≤36.00	PASS
	Ant2	2437	13.26	13.26	≤30.00	16.76	≤36.00	PASS
	Ant1	2462	14.08	14.08	≤30.00	17.58	≤36.00	PASS
	Ant2	2462	13.76	13.76	≤30.00	17.26	≤36.00	PASS
11G	Ant1	2412	19.12	19.12	≤30.00	22.62	≤36.00	PASS
	Ant2	2412	19.07	19.07	≤30.00	22.57	≤36.00	PASS
	Ant1	2437	19.08	19.08	≤30.00	22.58	≤36.00	PASS
	Ant2	2437	18.33	18.33	≤30.00	21.83	≤36.00	PASS
	Ant1	2462	18.88	18.88	≤30.00	22.38	≤36.00	PASS
	Ant2	2462	18.62	18.62	≤30.00	22.12	≤36.00	PASS
11N20MIMO	Ant1	2412	17.17	17.17	≤30.00	20.67	≤36.00	PASS
	Ant2	2412	14.77	14.77	≤30.00	18.27	≤36.00	PASS
	total	2412	---	19.14	≤30.00	22.64	≤35.49	PASS
	Ant1	2437	17.11	17.11	≤30.00	20.61	≤36.00	PASS
	Ant2	2437	14.53	14.53	≤30.00	18.03	≤36.00	PASS
	total	2437	---	19.02	≤30.00	22.52	≤35.49	PASS
	Ant1	2462	17.03	17.03	≤30.00	20.53	≤36.00	PASS
	Ant2	2462	14.57	14.57	≤30.00	18.07	≤36.00	PASS
	total	2462	---	18.98	≤30.00	22.48	≤35.49	PASS
11AX20MIMO	Ant1	2412	17.47	17.47	≤30.00	20.97	≤36.00	PASS
	Ant2	2412	17.59	17.59	≤30.00	21.09	≤36.00	PASS
	total	2412	---	20.54	≤30.00	24.04	≤35.49	PASS
	Ant1	2437	17.20	17.20	≤30.00	20.7	≤36.00	PASS
	Ant2	2437	17.43	17.43	≤30.00	20.93	≤36.00	PASS
	total	2437	---	20.33	≤30.00	23.83	≤35.49	PASS
	Ant1	2462	17.34	17.34	≤30.00	20.84	≤36.00	PASS
	Ant2	2462	17.40	17.40	≤30.00	20.9	≤36.00	PASS
	total	2462	---	20.38	≤30.00	23.88	≤35.49	PASS

Remark: The results obtained include the antenna gain factor.

Directional gain = GANT + Array Gain=3.5 dBi+0 dBi =3.5 dBi;

Array Gain = 0 dB (i.e., no array gain) for NANT ≤4; (NANT=2)



9. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01DTS Meas Guidancev05r02

9.1 APPLICABLE STANDARD

in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in§15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2 TEST PROCEDURE

Using the following spectrum analyzer setting:

- A) Set the RBW = 100KHz.
- B) Set the VBW = 300KHz.
- C) Sweep time = auto couple.
- D) Detector function = peak.
- E) Trace mode = max hold.
- F) Allow trace to fully stabilize.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP



9.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

9.6 TEST RESULTS




Test plot as follows:





11B_Ant2_High_2462

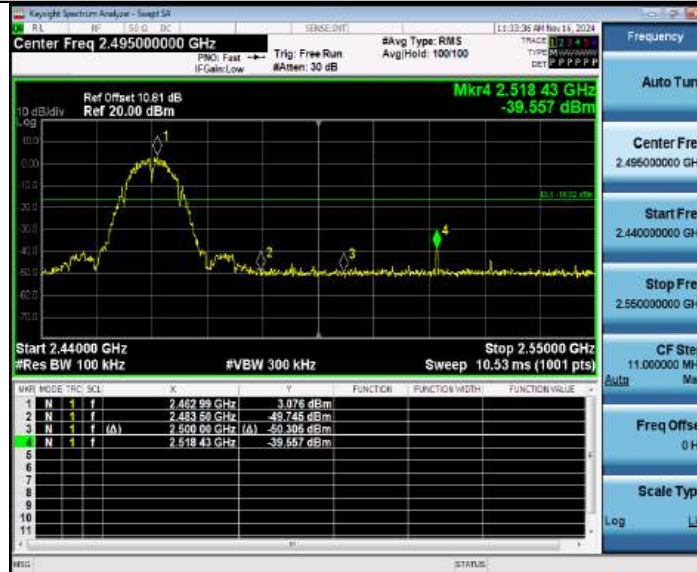

11G_Ant1_Low_2412




11G_Ant2_Low_2412



11G_Ant1_High_2462



11G Ant2 High 2462

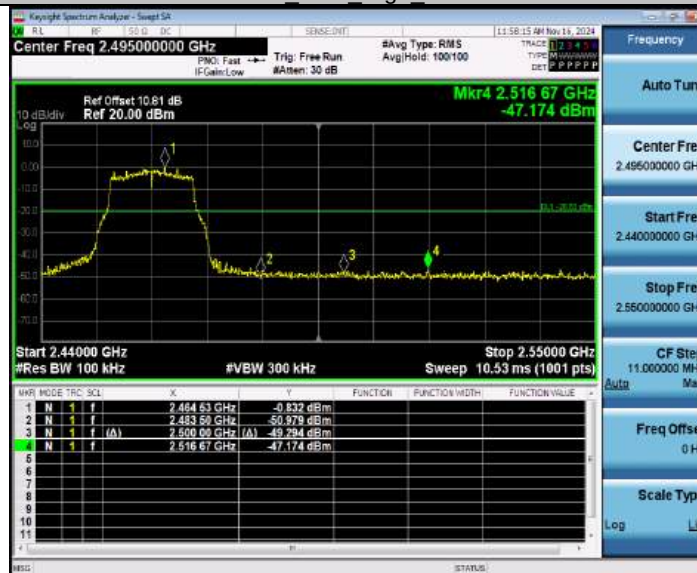


11N20MIMO Ant1 Low 2412



11N20MIMO Ant2 Low 2412



11N20MIMO Ant1 High 2462

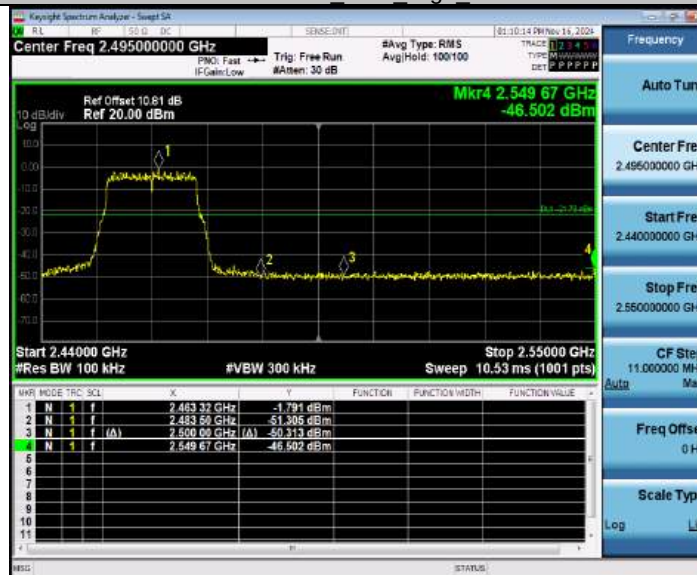

11N20MIMO Ant2 High 2462




11AX20MIMO Ant1 Low 2412



11AX20MIMO_Ant2_Low_2412



11AX20MIMO_Ant1_High_2462

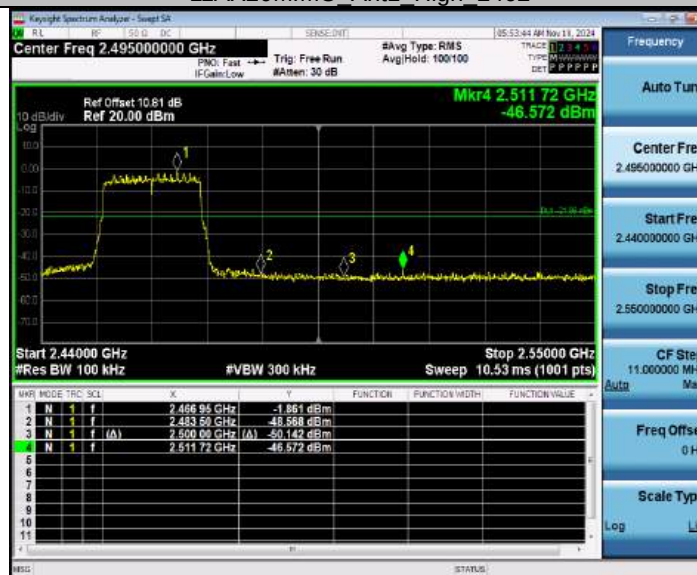


11AX20MIMO_Ant2_High_2462





Test plot as follows:



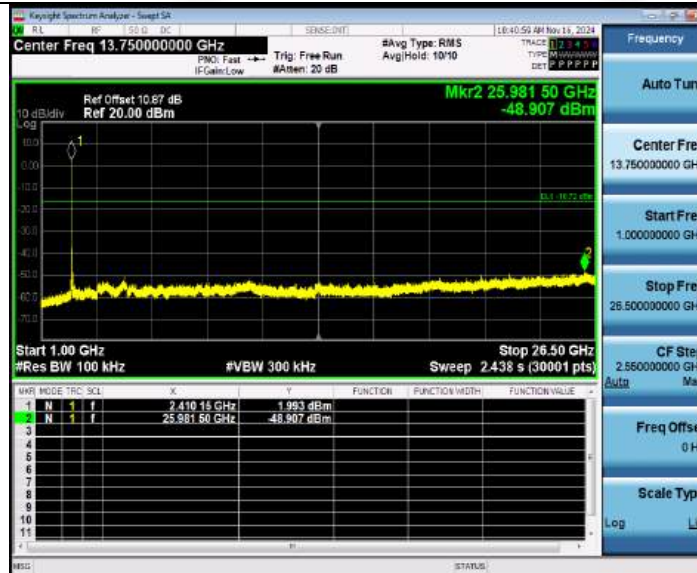


11B_Ant2_2412_0-Reference



11B_Ant2_2412_30-1000




11B_Ant2_2412_1000-26500

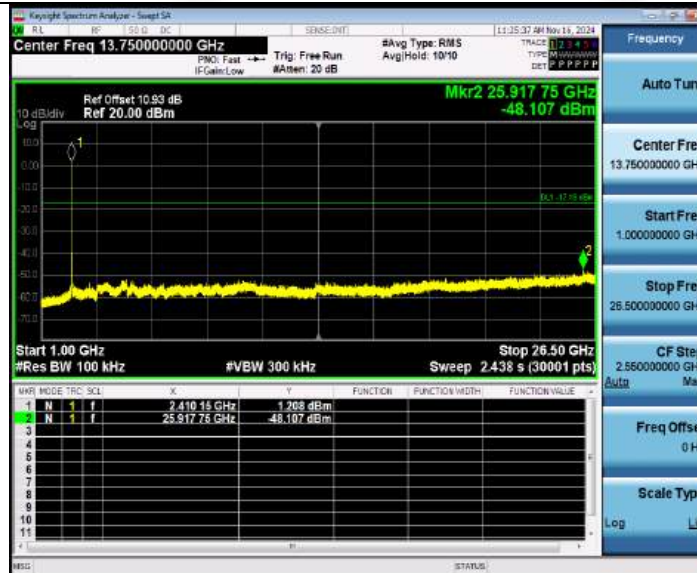


11B_Ant1_2437_0-Reference



11B_Ant1_2437_30-1000

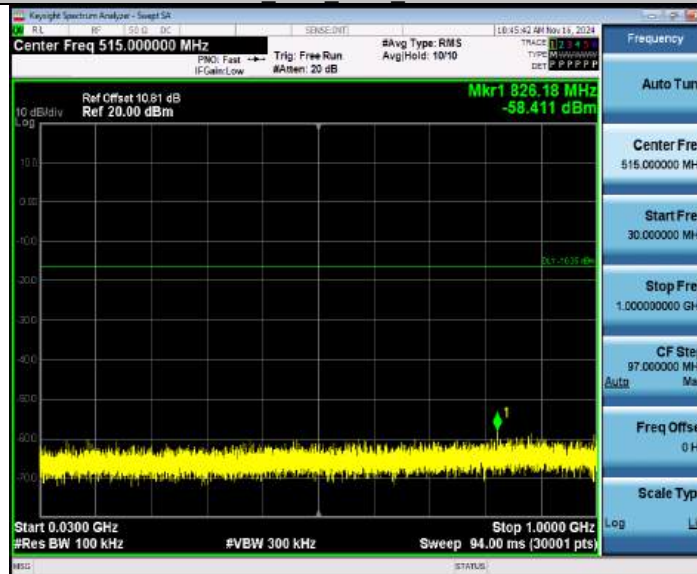

11B_Ant1_2437_1000-26500

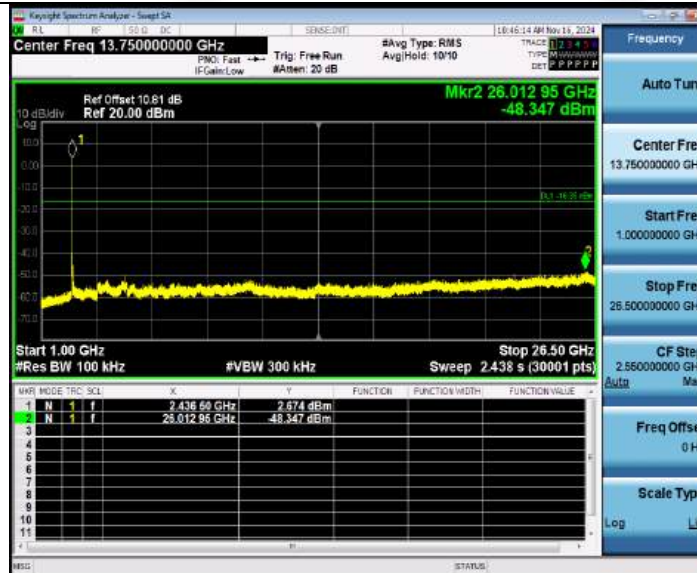


11B_Ant2_2437_0-Reference



11B_Ant2_2437_30-1000



11B_Ant2_2437_1000-26500

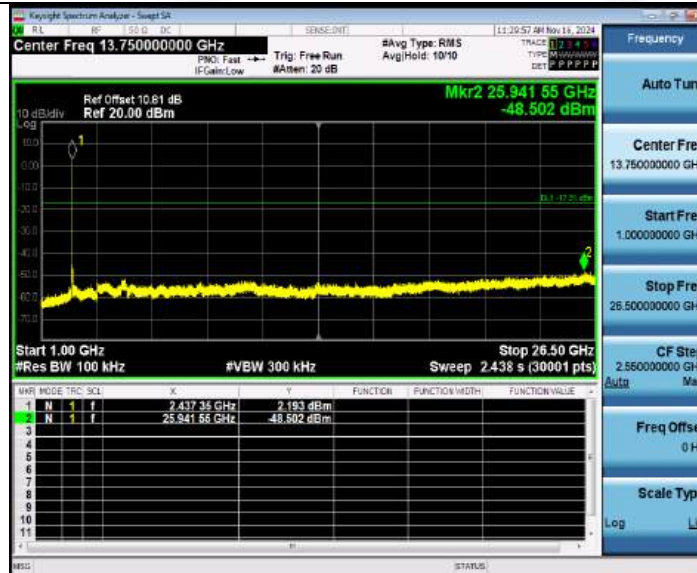


11B_Ant1_2462_0-Reference



11B_Ant1_2462_30-1000



11B_Ant1_2462_1000-26500

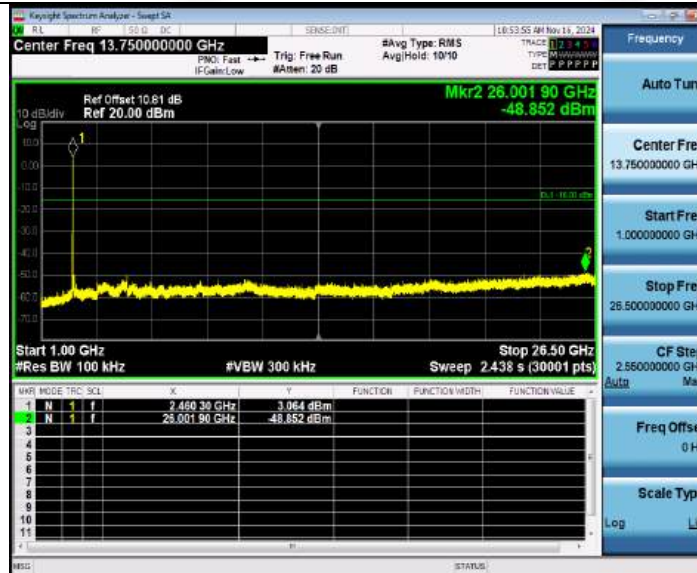


11B_Ant2_2462_0-Reference



11B_Ant2_2462_30-1000



11B_Ant2_2462_1000-26500

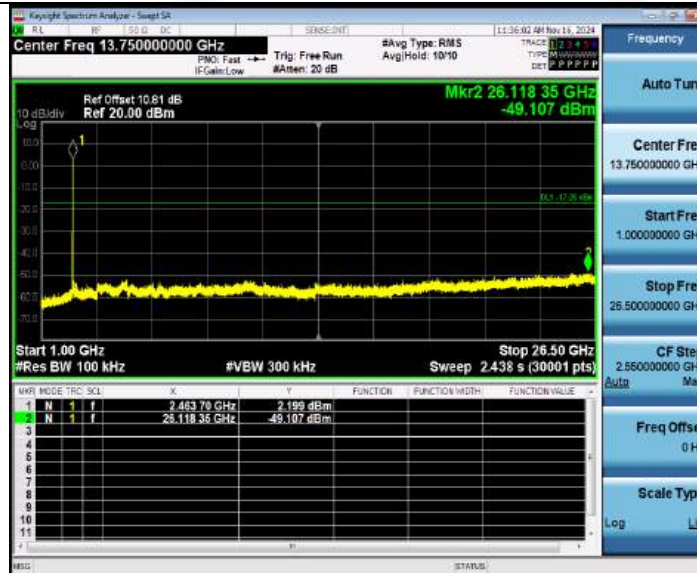


11G_Ant1_2412_0-Reference



11G_Ant1_2412_30-1000



11G_Ant1_2412_1000-26500

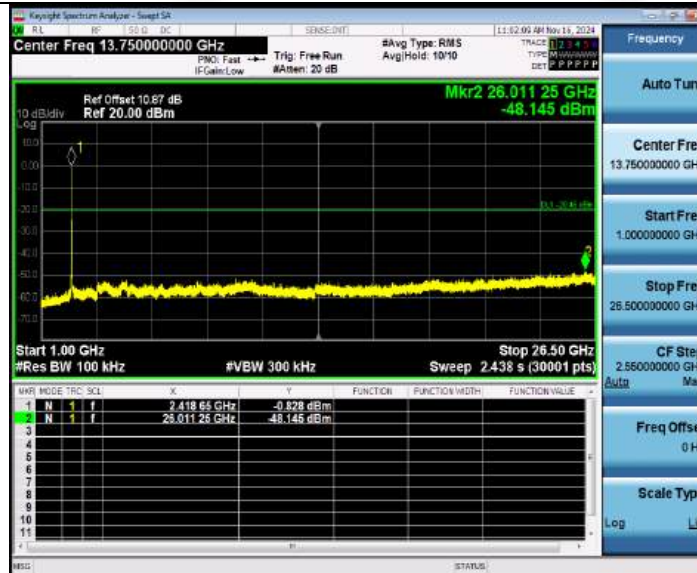


11G_Ant2_2412_0-Reference



11G_Ant2_2412_30-1000



11G_Ant2_2412_1000-26500

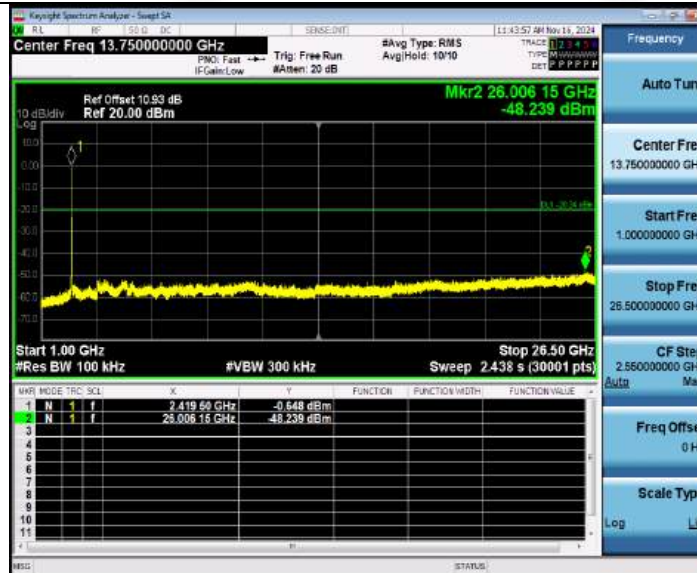


11G_Ant1_2437_0-Reference



11G_Ant1_2437_30-1000




11G_Ant1_2437_1000-26500

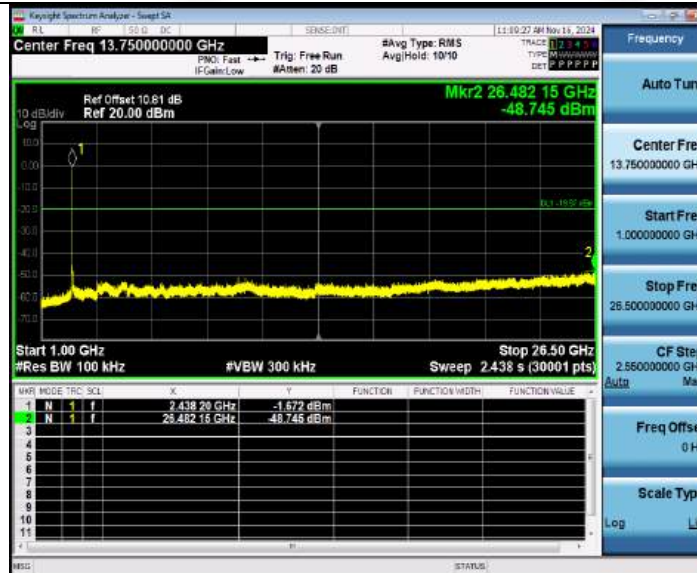


11G_Ant2_2437_0-Reference



11G_Ant2_2437_30-1000

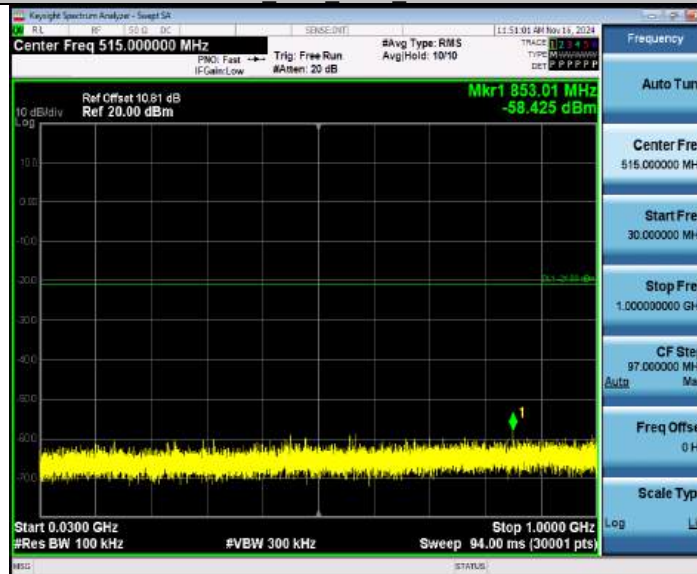

11G_Ant2_2437_1000-26500

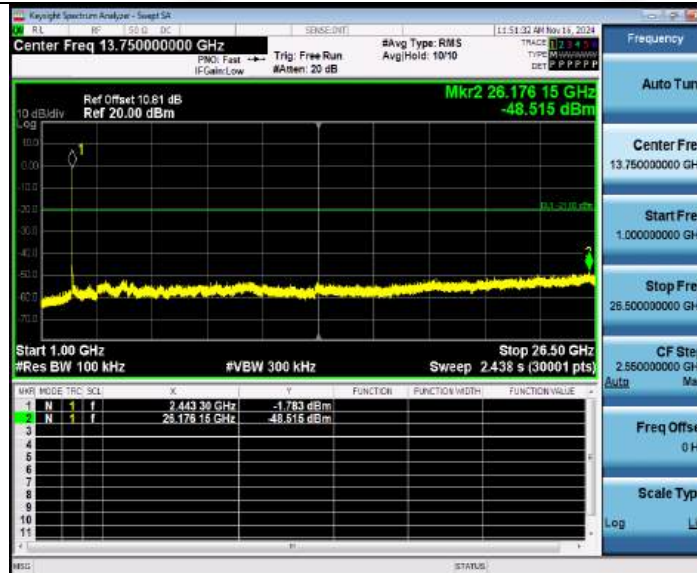


11G_Ant1_2462_0-Reference



11G_Ant1_2462_30-1000



11G_Ant1_2462_1000-26500

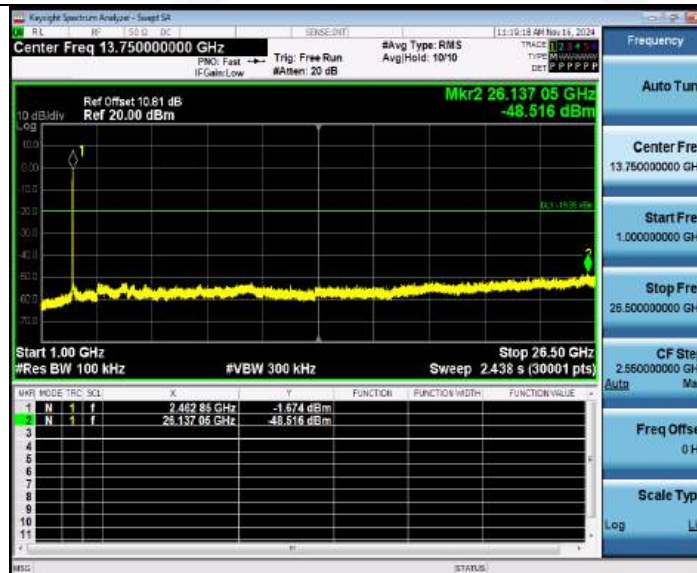


11G_Ant2_2462_0-Reference



11G_Ant2_2462_30-1000



11G_Ant2_2462_1000-26500

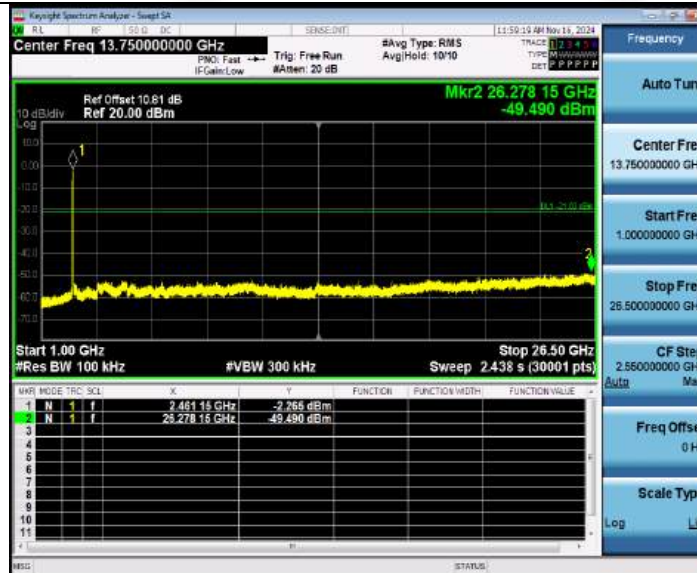


11N20MIMO_Ant1_2412_0-Reference



11N20MIMO_Ant1_2412_30-1000



11N20MIMO_Ant1_2412_1000-26500

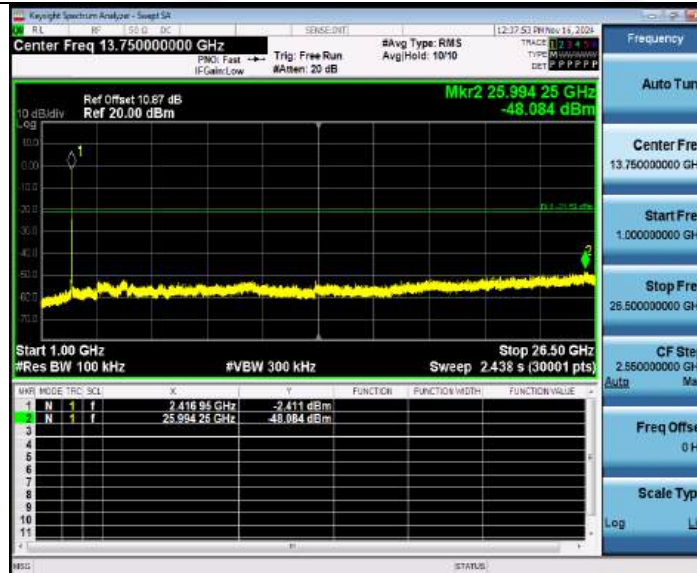


11N20MIMO_Ant2_2412_0-Reference



11N20MIMO_Ant2_2412_30-1000



11N20MIMO_Ant2_2412_1000-26500

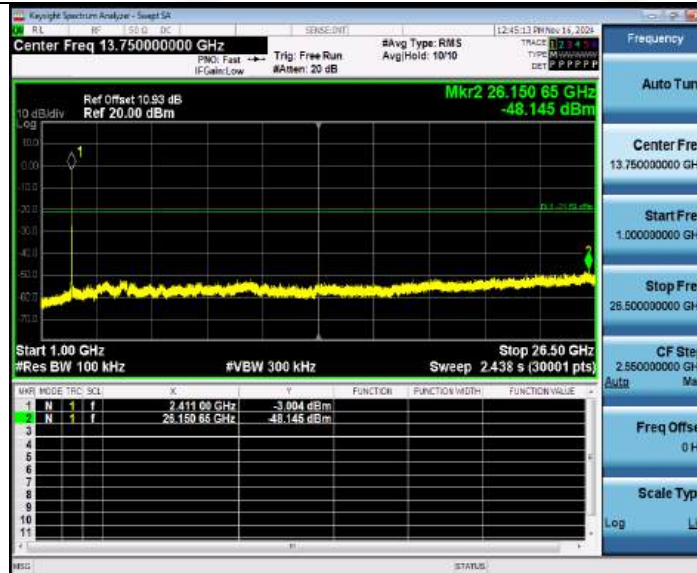


11N20MIMO_Ant1_2437_0-Reference



11N20MIMO_Ant1_2437_30-1000



11N20MIMO_Ant1_2437_1000-26500

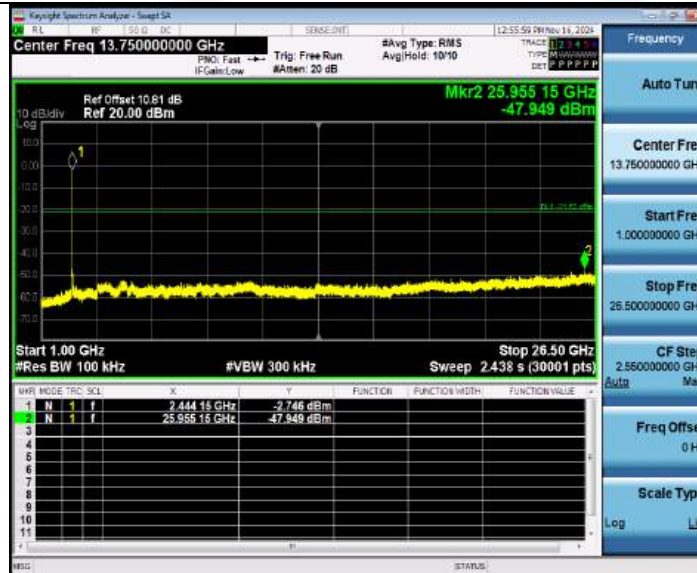


11N20MIMO_Ant2_2437_0-Reference



11N20MIMO_Ant2_2437_30-1000



11N20MIMO_Ant2_2437_1000-26500

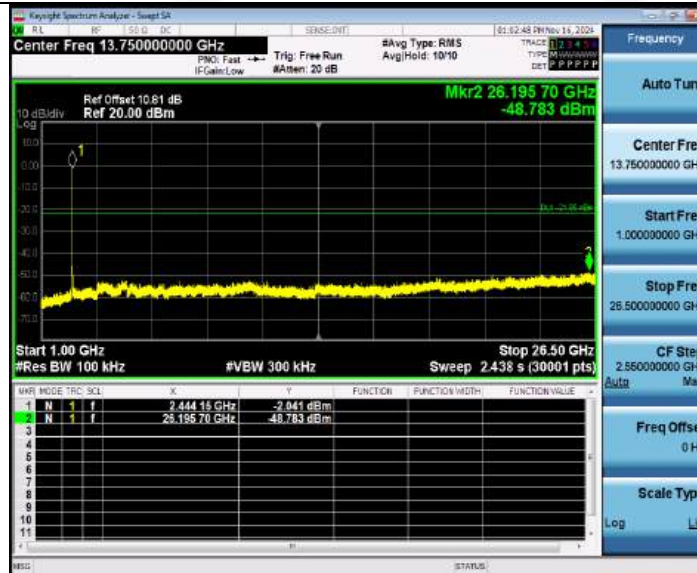


11N20MIMO_Ant1_2462_0-Reference



11N20MIMO_Ant1_2462_30-1000



11N20MIMO_Ant1_2462_1000-26500

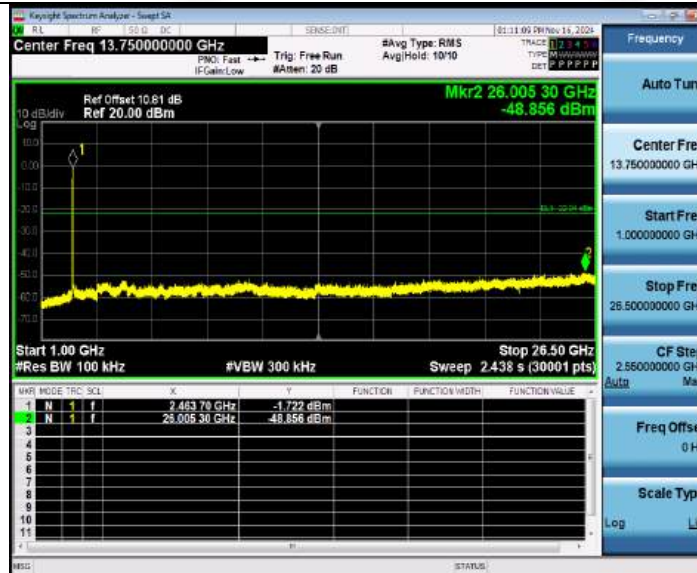


11N20MIMO_Ant2_2462_0-Reference



11N20MIMO_Ant2_2462_30-1000



11N20MIMO_Ant2_2462_1000-26500

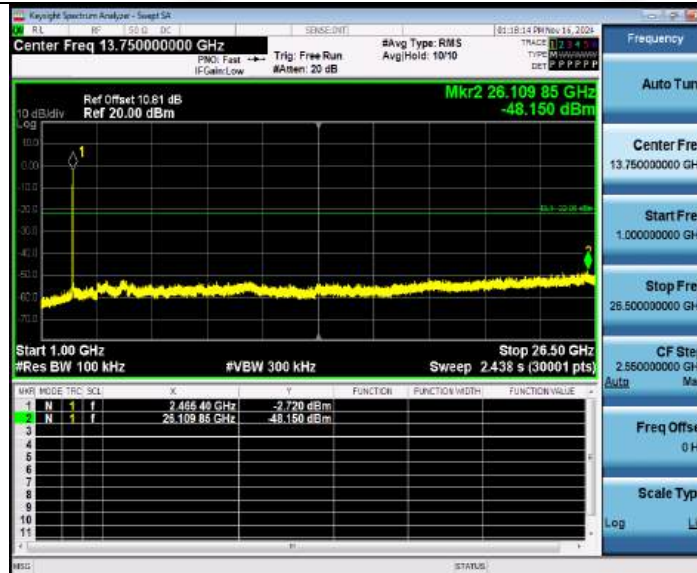


11AX20MIMO_Ant1_2412_0-Reference



11AX20MIMO_Ant1_2412_30-1000



11AX20MIMO_Ant1_2412_1000-26500

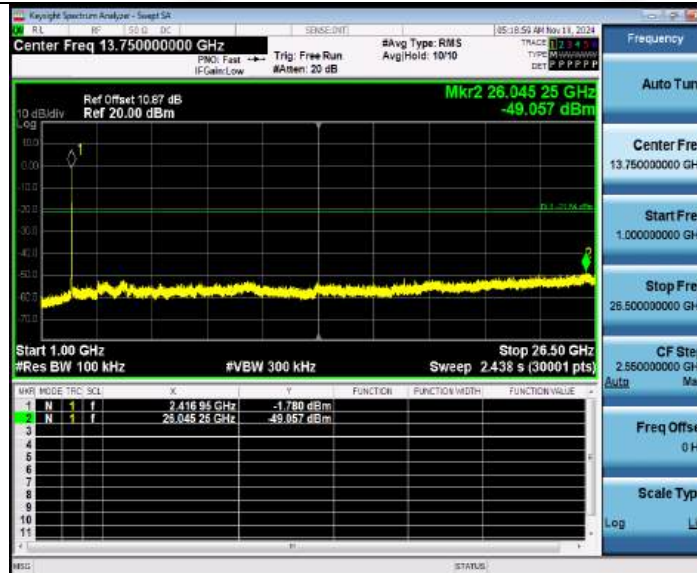


11AX20MIMO_Ant2_2412_0-Reference



11AX20MIMO_Ant2_2412_30-1000



11AX20MIMO_Ant2_2412_1000-26500

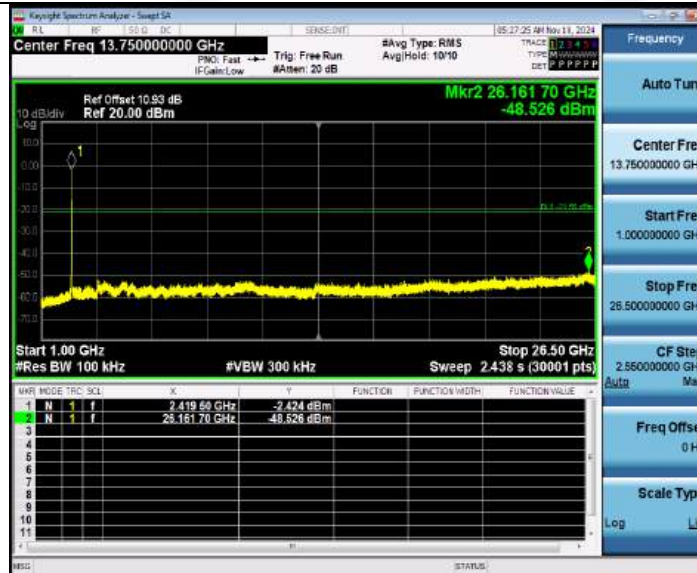


11AX20MIMO_Ant1_2437_0-Reference



11AX20MIMO_Ant1_2437_30~1000



11AX20MIMO_Ant1_2437_1000~26500

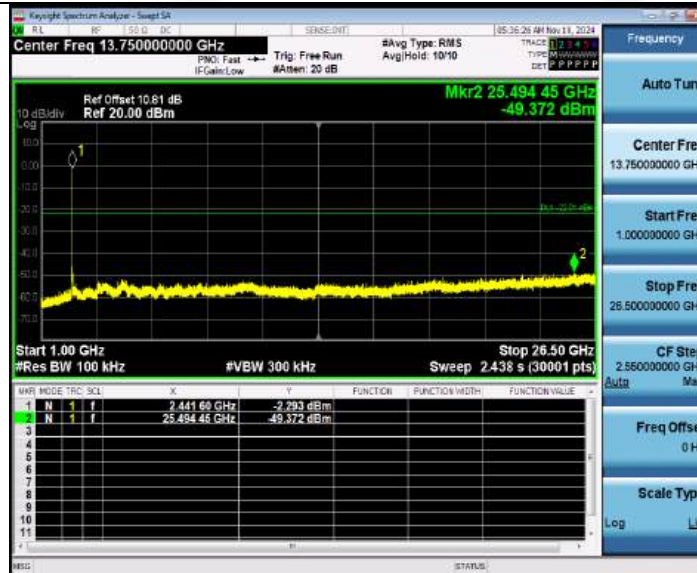


11AX20MIMO_Ant2_2437_0-Reference



11AX20MIMO_Ant2_2437_30~1000



11AX20MIMO_Ant2_2437_1000~26500

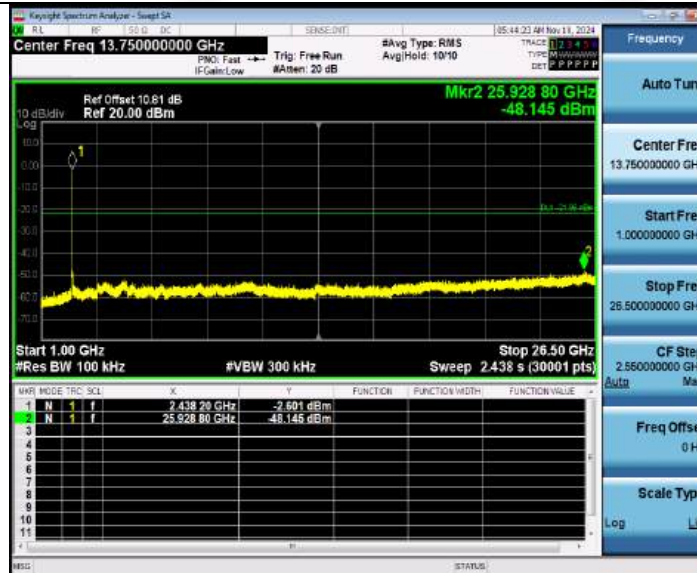


11AX20MIMO_Ant1_2462_0-Reference



11AX20MIMO_Ant1_2462_30-1000




11AX20MIMO_Ant1_2462_1000-26500

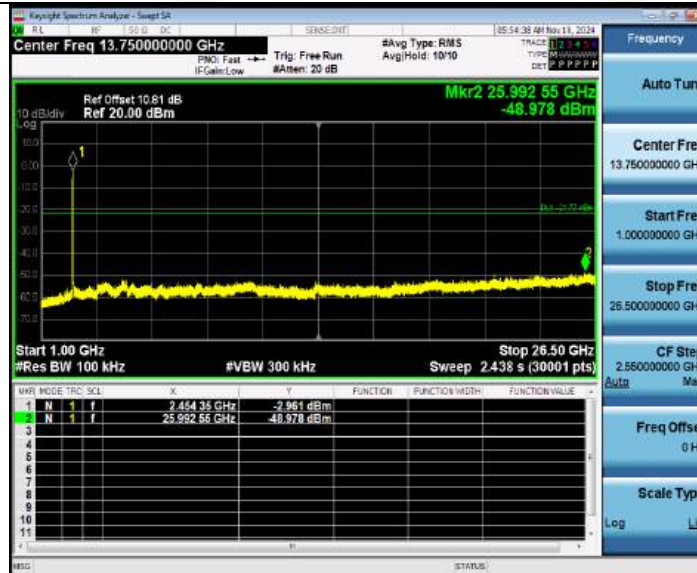


11AX20MIMO_Ant2_2462_0-Reference



11AX20MIMO_Ant2_2462_30-1000

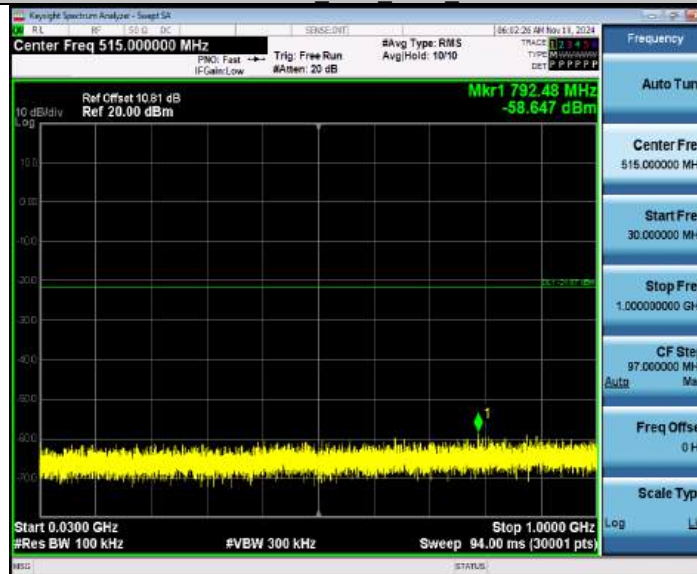

11AX20MIMO_Ant2_2462_1000-26500

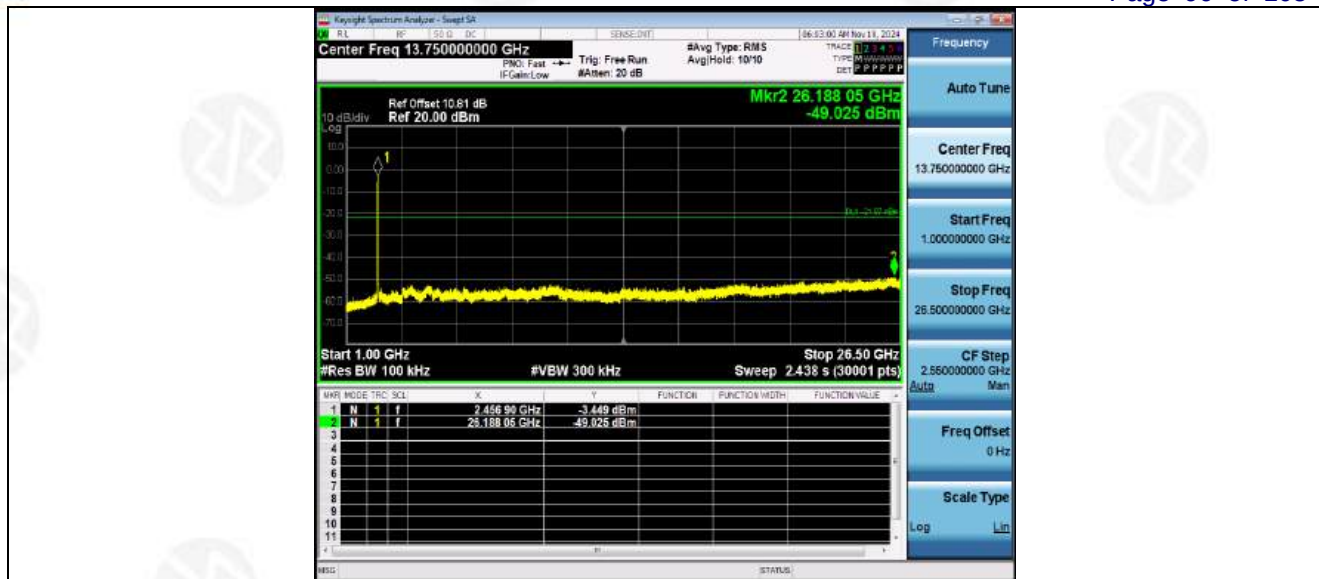



10. DUTY CYCLE

Test Method:	ANSI C63.10:2013
--------------	------------------

10.1 APPLIED PROCEDURES / LIMIT

Measurements of duty cycle and transmission duration shall be performed using one of the following techniques:

- a) A diode detector and an oscilloscope that together have a sufficiently short response time to permit accurate measurements of the ON and OFF times of the transmitted signal.
- b) The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:
 - 1) Set the center frequency of the instrument to the center frequency of the transmission.
 - 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
 - 3) Set $VBW \geq RBW$. Set detector = peak or average.
 - 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

10.2 DEVIATION FROM STANDARD


No deviation.

10.3 TEST SETUP



10.4 TEST RESULTS

Mode	Frequency (MHz)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Result
802.11b ant 1	2412	98.82	0.052	Pass
802.11g ant 1	2412	98.83	0.051	Pass
802.11n20 ant 1	2437	93.33	0.300	Pass
802.11n40 ant 1	2462	93.29	0.302	Pass

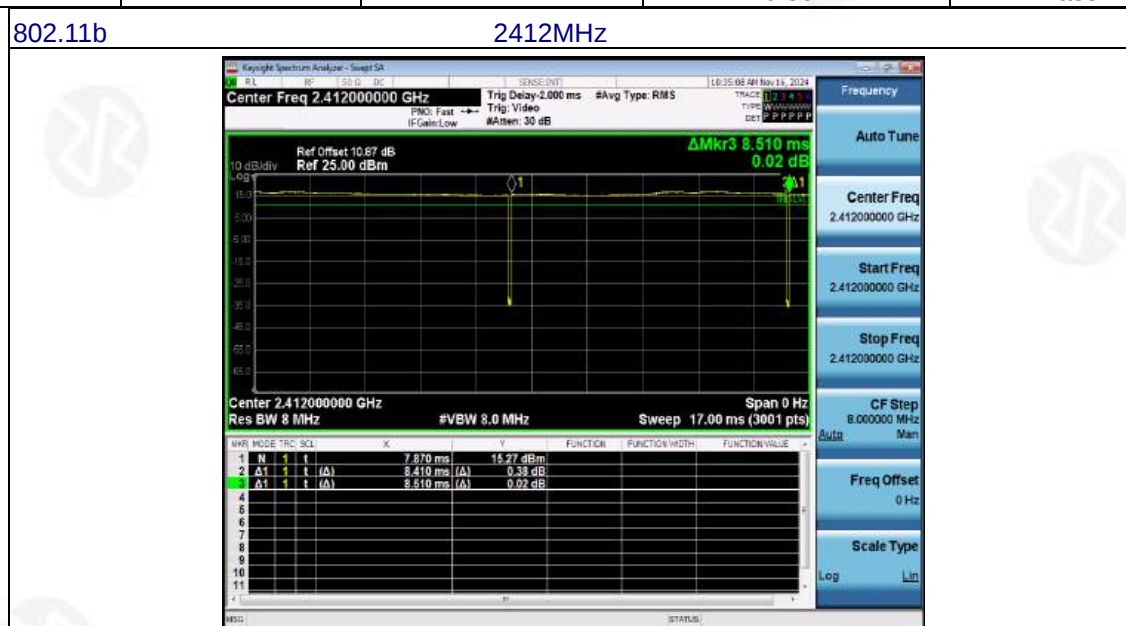



802.11g

2412MHz



802.11n20


2437MHz





802.11ax20

2462MHz

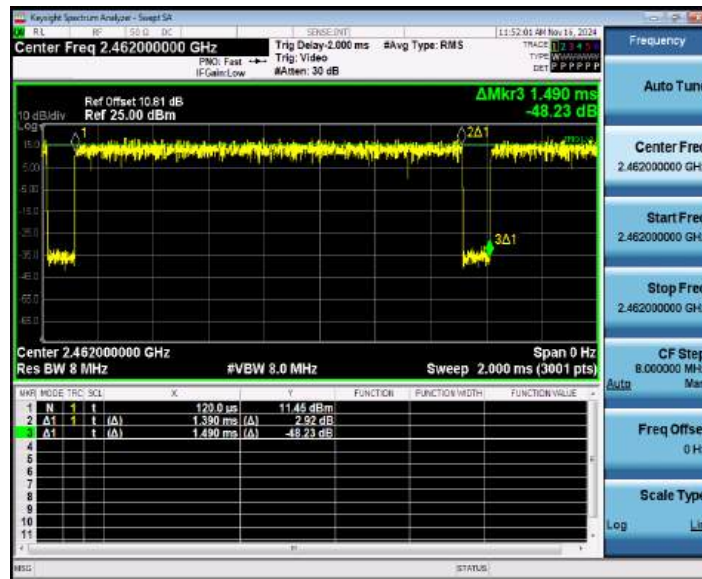

Note: All channel and ant have been tested, and the report only reflects the worst case data.
Duty Cycle= Ton /Total*100%
Duty Cycle Correction Factor = 10log (1/Duty Cycle)



11. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi. A transmitter can only be sold or operated with antennas with which it was approved.	
EUT Antenna:	
The antenna is FPC Antenna, the best case gain of the antenna is 3.5dBi, reference to the appendix II for details	



12. TEST SETUP PHOTO

Reference to the appendix I for details.

13. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****