

SPECIFICATION FOR APPROVAL

Manufacture Company:

Shenzhen Zhiyuan Internet Technology Co., Ltd

Address:

Building E, 5th Floor, Zone C, Guancheng High tech Park,
West Guangyue 1st Road, Lou Village, Xinhu Street,
Guangming District, Shenzhen, China

Model: YS020-0003


Electrical Specifications

Frequency Range	2400MHZ
VSWR	≤ 2.0
GAIN	2DBI
Input Impedance	50 Ω



Mechanical Specifications

Antenna Color	BLACK
Input connector	SMA-MALE PIN
Cable length	106mm
Working Temperature	-40°C ~ +85°C
Working Humidity	20~80%

size parameter:

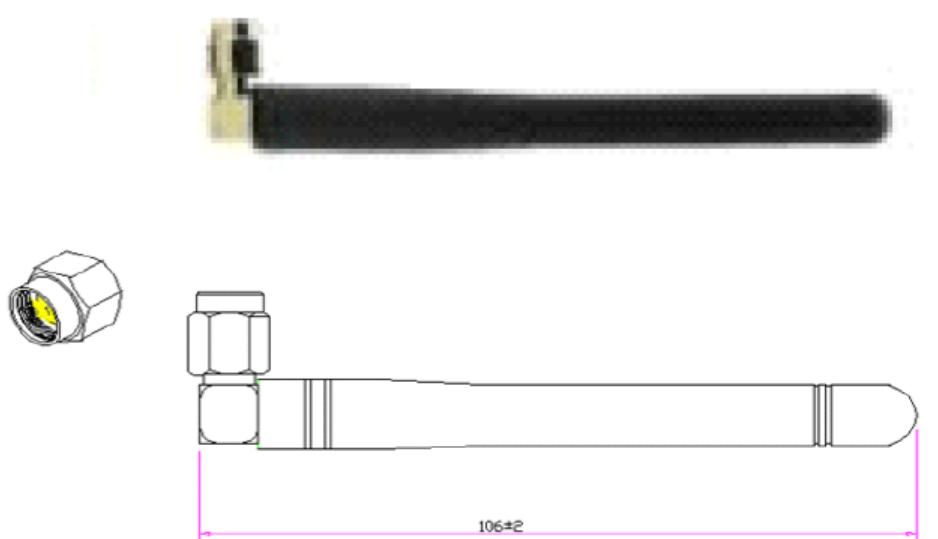

test chart:

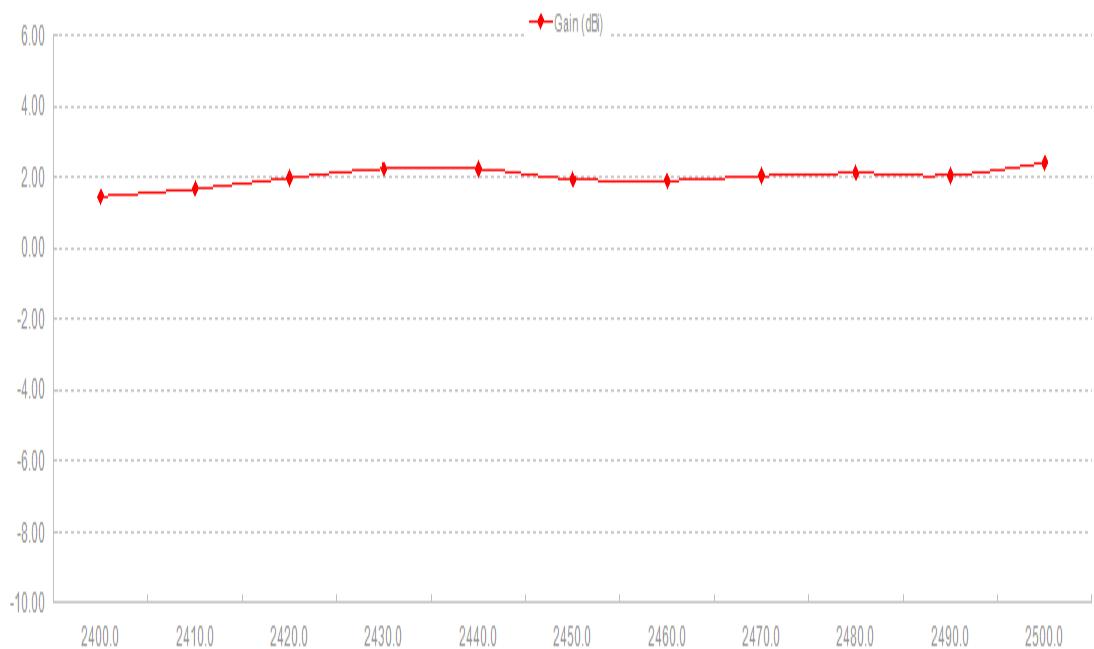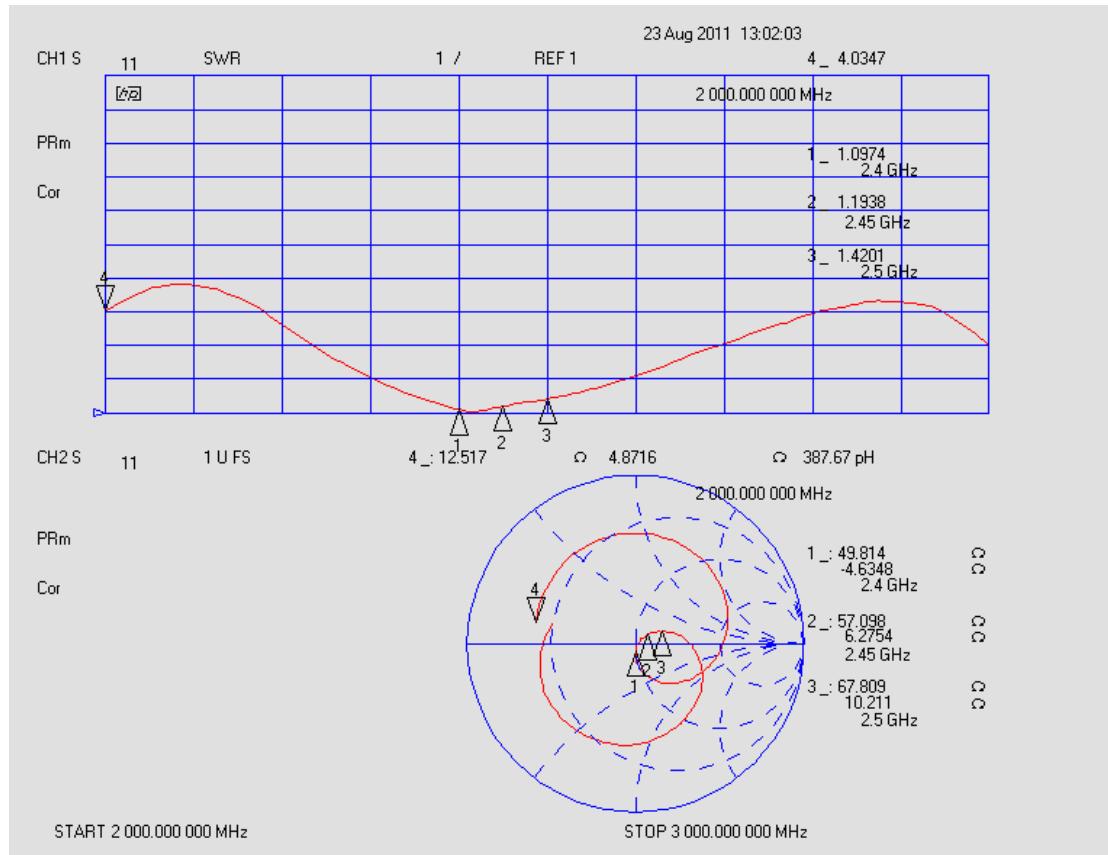

Frequency ID	1	2	3	4	5	6	7	8	9	10	11
Frequency (MHz)	2400.0	2410.0	2420.0	2430.0	2440.0	2450.0	2460.0	2470.0	2480.0	2490.0	2500.0
Point Values											
Ant. Port Input Pwr. (dBm)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Tot. Rad. Pwr. (dBm)	-2.69	-2.52	-2.23	-2.04	-1.95	-2.28	-2.44	-2.49	-2.60	-2.83	-2.45
Peak EIRP (dBm)	1.46	1.67	1.98	2.24	2.24	1.94	1.91	2.04	2.12	2.05	2.41
Directivity (dBi)	4.15	4.19	4.21	4.28	4.19	4.22	4.36	4.52	4.72	4.87	4.86
Efficiency (dB)	-2.69	-2.52	-2.23	-2.04	-1.95	-2.28	-2.44	-2.49	-2.60	-2.83	-2.45
Efficiency (%)	53.80	56.00	59.80	62.50	63.80	59.20	57.00	56.40	55.00	52.20	56.90
Gain (dBi)	1.46	1.67	1.98	2.24	2.24	1.94	1.91	2.04	2.12	2.05	2.41
NHPRP $\pm \frac{\pi}{4}$ (dBm)	-3.69	-3.36	-2.92	-2.52	-2.55	-2.92	-3.24	-3.47	-3.56	-3.59	-2.96
NHPRP $\pm \frac{\pi}{6}$ (dBm)	-4.35	-4.03	-3.59	-3.20	-3.23	-3.60	-3.92	-4.14	-4.22	-4.26	-3.65
NHPRP $\pm \frac{\pi}{8}$ (dBm)	-4.96	-4.64	-4.21	-3.82	-3.85	-4.21	-4.53	-4.75	-4.83	-4.88	-4.29
Upper Hem. PRP (dBm)	-5.17	-4.93	-4.58	-4.35	-4.22	-4.52	-4.66	-4.67	-4.76	-4.96	-4.55
Lower Hem. PRP (dBm)	-6.30	-6.22	-6.01	-5.89	-5.85	-6.22	-6.43	-6.51	-6.65	-6.93	-6.61
Upper Hem. PRP (%)	30.38	32.14	34.79	36.77	37.80	35.31	34.18	34.09	33.41	31.88	35.06
Lower Hem. PRP (%)	23.45	23.85	25.03	25.78	26.03	23.90	22.78	22.33	21.60	20.29	21.82

