



HAC T-COIL SIGNAL TEST REPORT

FCC 47 CFR § 20.19
ANSI C63.19-2019

For
SMARTPHONE

FCC ID: BCG-E8687A
Model Name: A3297

Report Number: 14982482-S2V1
Issue Date: 8/19/2024

Prepared for
APPLE INC.
1 APPLE PARK WAY
CUPERTINO, CA 95014-2084

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 319-4000
FAX: (510) 661-0888



Revision History

Rev.	Date	Revisions	Revised By
V1	8/19/2024	Initial Issue	--

Table of Contents

1. Attestation of Test Results	4
2. Test Methodology	5
3. Facilities and Accreditation	5
4. Test Equipment and Uncertainty.....	6
4.1. Test Equipment	6
4.1.1. Base Station Simulator Software and Firmware	7
4.2. Measurement Uncertainty	8
5. Test Procedures for all Technologies.....	9
5.1. Test Procedure for T-Coil signal per ANSI C63.19-2019, §6	9
5.2. Reference Input Levels per ANSI C63.19-2019, §6.....	11
5.3. Over the Top (OTT)	12
6. Calibrations & Gain Measurements	12
6.1. Calibration of AM1DVx Probe.....	12
6.1.1. Calibration Setup.....	12
6.1.2. Sensor Angle Alignment.....	12
6.1.3. System Response Calibration.....	12
6.2. AMMI Audio Output Calibration.....	12
6.3. Codec / System Delay Measurements	13
6.4. Compute Gain Settings	13
7. T-coil Measurement Criteria.....	14
7.1. Frequency Response	14
7.2. Coupling Mode Requirements.....	15
7.3. Desired ABM Signal and Undesired ABM Field Requirements.....	16
7.3.1. Non-2G GSM Operating modes.....	16
7.3.2. 2G GSM Operating modes.....	16
8. Device Under Test.....	17
8.1. Air Interfaces and Operating Mode	17
9. Investigations (Antenna, Codec, & Air Interface)	19
9.1. CMRS	21
9.1.1. Antenna Investigation.....	21
9.1.2. Codec Investigation.....	22
9.1.3. Air Interface Investigation.....	24
10. HAC (T-coil) Test Results.....	26
10.1. Worst Case T-Coil Test Plot(s).....	28
Appendix.....	30
Appendix A: T-Coil Setup Photo	30
Appendix B: T-Coil Test Plots	30
Appendix C: T-Coil Probe Certificates	30

1. Attestation of Test Results

Applicant Name	APPLE, INC.
FCC ID	BCG-E8687A
Model Name	A3297
Applicable Standards	FCC 47 CFR § 20.19 ANSI C63.19-2019
Date Tested	6/20/2024 to 8/16/2024
Test Results	Pass

UL Verification Services Inc. assessed the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment assessed can demonstrate compliance with the requirements as documented in this report.

This report contains data provided by the customer which can impact the validity of results. UL Verification Services Inc. is only responsible for the validity of results after the integration of the data provided by the customer.

The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. All samples assessed were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not considered unless noted otherwise.

This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are noted in the revisions section. Any alteration of this document not conducted by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the U.S. Government, or any agency of the U.S. government.

Approved & Released By: 	Prepared By: 
Devin Chang Senior Laboratory Engineer UL Verification Services Inc.	Coltyce Sanders Staff Laboratory Engineer UL Verification Services Inc.

2. Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.19-2019 Methods of Measurement of Compatibility Between Wireless Communications Devices and Hearing Aids and FCC published procedure:

KDB 285076 D01 HAC Guidance v06r04

KDB 285076 D02 T-Coil testing for CMRS IP v04

KDB 285076 D03 HAC FAQ v01r06

In addition to the above, the following guidance was used:

TCB workshop updates:

- TCB Workshop October 2022; Publication Update & Administrative Notes (Publication Update: 285076 D01 & D04)
- TCB Workshop October 2022; Federal Communications Commission Hearing Aid Compatibility Updates
- TCB Workshop April 2023; Publication Update & Administrative Notes (Publications Since Oct Workshop: 285076 HAC Update)
- TCB Workshop October 2023; Publication Update & Administrative Notes (Publication Update: 285076 09/29/2023: HAC Guidance blanket)
- TCB Workshop April 2024; HAC Updates (Handset Configuration)

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at

47266 Benicia Street
SAR Lab 11

UL Verification Services Inc. is accredited by A2LA, Certificate Number 0751.05

The Test Lab Conformity Assessment Body Identifier (CABID)

Location	CABID	Company Number
47173 Benicia Street, Fremont, CA, 94538 UNITED STATES	US0104	2324A
47266 Benicia Street, Fremont, CA, 94538 UNITED STATES		

4. Test Equipment and Uncertainty

4.1. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations and is traceable to recognized national standards.

Lab Equipment

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Magnetic Field Probe	SPEAG	AM1DV3	3083	1/8/2025
Data Acquisition Electronics	SPEAG	DAE4	1352	11/15/2024
AMMI	SPEAG	SE UMS 010 BB	1113	N/A
DAC	Sound Devices	USBPre 2	HB1420133009	N/A
DAC	Yellow tech	YT4211	22000115	N/A
Amplifier	KROHN-HITE	7500	926	N/A
Switch	TP-Link	TL-SG1024D	13688100415	N/A
Support Device	APPLE	iMAC	PT867513	N/A
Support Device	APPLE	MacBook Pro	HRP119301	N/A
Thermometer	TRACEABLE	6530CC	181073773	1/31/2025
Radio Communication Tester	R&S	CMW 500	125236-eS	2/19/2025
Radio Communication Tester	R&S	CMX 500	101156-bz	3/18/2025
Up/Down Converter	R&S	CMW-Z800A	100198-XW	02/28/2025

4.1.1. Base Station Simulator Software and Firmware

The following software/firmware was used to simulate the VoLTE, VoNR (5G NR) and VoWiFi server for CMRS testing using R&S CMW500 and CMX500 base station simulators.

Technology	Firmware	License Key	Software Name
VoLTE	V3.8.10 for LTE	KS500	LTE FDD R8 SIG BASIC
		KS550	LTE TDD R8 SIG BASIC
	V3.8.10 for Audio	KA100	IP APPL ENABLING IPv4
		KA150	IP APPL ENABLING IPv6
		KAA20	IP APPL IMS BASIC
		KM050	DATA APPL MEAS
		KS104	EVS SPEECH CODEC
VoNR - 5G NR (FR1)	V7.70.0.116 for 5G NR	CMX-KS600B	NR SIG BASIC FSET1
		CMX-KS600M	NR SIG MEDIUM FSET1
		CMX-KS600X	NR SIG XPERT FSET1
		CMX-KS601B	NR SIG BASIC FSET2
		CMX-KS601M	NR SIG MEDIUM FSET2
		CMX-KS601X	NR SIG XPERT FSET2
		CMX-KS610B	NR SIG BASIC FSET3
		CMX-KS610M	NR SIG MEDIUM FSET3
		CMX-KS610X	NR SIG XPERT FSET3
		CMX-KS611B	NR SIG BASIC FSET4
		CMX-KS611M	NR SIG MEDIUM FSET4
		CMX-KS611X	NR SIG XPERT FSET4
		CMX-KS612B-CMX-KS612B	NR SIG EXT. BASIC FSET5
		CMX-KS612M-CMX-KS612M	NR SIG EXT. MEDIUM FSET5
		CMX-KS612X-CMX-KS612X	NR SIG EXT. EXPERT FSET5
		CMX-KS617B-CMX-KS617B	NR SIG EXT. BASIC FSET6
		CMX-KS617M-CMX-KS617M	NR SIG EXT. MEDIUM FSET6
		CMX-KS617X-CMX-KS617X	NR SIG EXT. EXPERT FSET6
VoWiFi	V3.8.20 for WLAN	KS650	WLAN A/B/G SIG BASIC
		KS651	WLAN N SIG BASIC
		KS656	WLAN IEEE 802.11ac
		KS657	WLAN IEEE 802.11ax
	V3.8.10 for Audio	KA100	IP APPL ENABLING IPv4
		KA150	IP APPL ENABLING IPv6
		KAA20	IP APPL IMS BASIC
		KM050	DATA APPL MEAS
		KS104	EVS SPEECH CODEC

4.2. Measurement Uncertainty

Uncertainty of Audio Band Magnetic Measurements							
Error Description	Uncertainty Values (±%)	Probe Dist.	Div.	(c _i) ABMd	c _i ABMu	Std. Uncertainty	
						ABMd (±%)	ABMu (±%)
Probe Sensitivity							
Reference Level	3.0	N	1	1	1	3.0	3.0
AMCC Geometry	0.4	R	√3	1	1	0.2	0.2
AMCC Current	1.0	R	√3	1	1	0.6	0.6
Probe Positioning during Calibration	0.1	R	√3	1	1	0.1	0.1
Noise Contribution	0.7	R	√3	0.0143	1	0.0	0.4
Frequency Slope	5.9	R	√3	0.1	1.0	0.3	3.5
Probe System							
Repeatability / Drift	1.0	R	√3	1	1	0.6	0.6
Linearity / Dynamic Range	0.6	R	√3	1	1	0.4	0.4
Acoustic Noise	1.0	R	√3	0.1	1	0.1	0.6
Probe Angle	1.0	R	√3	1	1	0.6	0.6
Spectral Processing	0.9	R	√3	1	1	0.5	0.5
Integration Time	0.6	N	1	1	5	0.6	3.0
Field Disturbation	0.2	R	√3	1	1	0.1	0.1
Test Signal							
Reference Signal Spectral Response	0.6	R	√3	0	1	0.0	0.4
Positioning							
Probe Positioning	1.9	R	√3	1	1	1.1	1.1
Phantom Thickness	0.9	R	√3	1	1	0.5	0.5
DUT Positioning	1.9	R	√3	1	1	1.1	1.1
External Contributions							
RF Interference	0.0	R	√3	1	0.3	0.0	0.0
Test Signal Variation	2.0	R	√3	1	1	1.2	1.2
Combined Uncertainty							
Combined Std. Uncertainty (ABM field)						3.9	6.0
Expanded Std. Uncertainty (%)						7.8	11.9
Notes:							
1. N - Nomal							
2. R - Rectangular							
3. Div. - Divisor used to obtain standard uncertainty							
4. ABMd - Desired ABM Signal							
5. ABMu - Undesired ABM Field							

5. Test Procedures for all Technologies

5.1. Test Procedure for T-Coil signal per ANSI C63.19-2019, §6

This subclause describes the procedures used to measure the ABM (T-Coil) performance of the WD. Measurements shall be performed over a measurement area 50 mm square, in the measurement plane, as specified in Annex A.3. The measurement area shall be scanned with a uniform measurement point spacing of $2.0 \text{ mm} \pm 0.5 \text{ mm}$ in each X-Y axis of the plane, yielding 676 measurement points with approximately even spacing throughout the area.

Optionally, measurement point spacing may be increased to 4 mm, with interpolation employed to yield the required 676 equivalent measurement points distributed uniformly over the 50 mm square measurement area. Interpolated points shall be derived from the average of the linear representations of the field strengths of the nearest two or four equidistant measured points. The area of measurement is increased to a 52 mm square so that edge rows and columns of the required 50 mm square can be either measured or interpolated, with none extrapolated.

In addition to measuring the desired ABM signal levels, the weighted magnitude of the unintended signal shall also be determined. Weighting of the unintended and undesired ABM field shall be by the spectral and temporal weighting described in Annex D.4 through D.6.

In order to assure that the required signal quality is measured, the measurement of the intended signal and the measurement of the unintended signal shall be made at the same locations. Measurements shall not include undesired influence from the WD's RF field; therefore, use of a coaxial connection to a base station simulator or non-radiating load might be necessary. However, even then with a coaxial connection to a base station simulator or non-radiating load there could still be RF leakage from the WD, which could interfere with the desired measurement. Pre-measurement checks should be made to avoid this possibility. All measurements shall be done with the WD operating on battery power with an appropriate normal speech audio signal input level given in Table 6.1. If the device display can be turned off during a phone call, then that may be done during the measurement as well. If tested with the display in the off state this shall be documented in the test report.

Measurements shall be performed with the probe coil oriented in the transverse direction, as illustrated in Annex A.3, that is, aligned in the plane of the measurement area and perpendicular to the long dimension of the WD. A multi-stage sequence consists of first measuring the field strength of the desired T-Coil signal (desired ABM signal) that is useful to a hearing aid T-Coil at each specified measurement point. The undesired magnetic component (undesired ABM field) is then measured in the same transverse orientation at each of the same measurement points. At a single location only, taken at or near the highest desired ABM signal reading, the desired ABM signal frequency response shall be determined in a third measurement stage. The flowchart in Figure 6.3 illustrates this three-stage process.

To minimize the need to test every WD operating mode to the telecoil requirements of Clause 6, it is permissible to exclude some subset of supported configurations. For a given WD, every mode that supports voice communication shall be considered for telecoil testing. However, if it can be demonstrated that a certain configuration will not be the worst-case telecoil configuration, such configurations may be excluded from the full telecoil scans of 6.4.¹ For example, operating modes may be pre-screened by scanning for both desired ABM signal and undesired ABM field at a lower measurement point density than the final scans, thus saving considerable testing time by eliminating configurations that are excellent performers from more detailed testing for worst-case. In any case, the specific methods and criteria used to determine which configurations are excluded for a WD shall be explicitly stated and justified in the test report. To be considered for exclusion from telecoil testing, operating modes shall also be shown to pass the frequency response requirements of 6.6.3.

Many factors could affect telecoil test results. RF power level and amplitude modulation characteristics as well as the specific current paths within the WD associated with the RF output stage(s), the display, and processing circuitry could affect the undesired ABM field. Audio codec implementation and acoustic receiver characteristics could also affect the desired ABM signal). Therefore, any justifications for exclusions should be thorough documented. If an operating mode is under user control and instructions on how to place the WD in a less interfering condition is in the user instructions, those instructions may be followed in configuring the device for testing.

The following steps summarize the basic test flow for determining desired ABM signal and undesired ABM field. These steps assume that a sine wave or narrowband 1/3 octave signal can be used for the measurement of desired

¹ The allowance to not test all modes does not remove the requirement that all modes meet the requirements of this standard if a claim of compliance is to be made. What is allowed is a reduction of testing, where there is a good basis for believing that testing that is performed demonstrates the compliance of all possible operating modes.


ABM signal level. An alternative procedure, yielding equivalent results, using a broadband excitation is described in 6.5.

- a) A validation of the test setup and instrumentation shall be performed. This may be done using a TMFS or Helmholtz Coil. Measure the emissions and confirm that they are within tolerance of the expected values.
- b) Confirm that equipment that requires calibration has been calibrated, and that the noise level meets the requirements given in 6.3.2.
- c) Position the WD in the test setup and connect the WD RF connector to a base station simulator or a non-radiating load (if necessary to control RF interference in the measurement equipment) as shown in Figure 6.1 or Figure 6.2.
- d) The drive level to the WD is set such that the reference input level specified in Table 6.1 is input to the base station simulator (or manufacturer's test mode equivalent) in the 1 kHz, 1/3 octave band. This drive level shall be used for the T-Coil signal test (desired ABM signal) at $f = 1$ kHz. Either a sine wave at 1025 Hz, or a voice-like signal, band-limited to the 1 kHz 1/3 octave, as specified in 6.4.3, shall be used for the reference audio signal. If interference is found at 1025 Hz an alternative nearby reference audio signal frequency may be used.² The same drive level will be used for the desired ABM signal frequency response measurements at each 1/3 octave band center frequency. The WD volume control may be set at any level up to maximum, provided that a signal at any frequency at maximum modulation would not result in clipping or signal overload.
- e) At each measurement location over the measurement area and in the transverse orientation, measure and record the desired 1 kHz T-Coil magnetic signal (desired ABM signal) as described in Step c).
- f) At or near a location representing a maximum in the just-measured desired ABM signal, measure and record the desired T-Coil magnetic signals (desired ABM signal at f_i) as described in 6.4.5.2 in each individual ISO 266:1975 R10 standard 1/3 octave band. The desired audio band input frequency (f_i) shall be centered in each 1/3 octave band maintaining the same drive level as determined in Step c), and the reading taken for that band.³ Equivalent methods of determining the frequency response may also be employed, such as fast Fourier transform (FFT) analysis using noise excitation or input–output comparison using simulated speech. The full-band integrated or half-band integrated probe output, as described in D.9, may be used, as long as the appropriate calibration curve is applied to the measured result, so as to yield an accurate measurement of the field magnitude. (The resulting measurement shall be an accurate measurement in dB(A/m).) Compare the frequency response found to the requirements of 6.6.3.
- g) At the same locations measured in Step d), measure and record the undesired broadband audio magnetic signal (undesired ABM field) with no audio signal applied (or digital zero applied, if appropriate) using the specified spectral weighting, the half-band integrator followed by the temporal weighting.
- h) Calculate and record the location and number of the measurement points that satisfy both the minimum desired ABM signal level and the maximum undesired ABM field level specified in 6.6.2. Compare this to the requirements in 6.6.4 and record the result.
- i) Calculate and record the location and number of the measurement points that satisfy the maximum undesired ABM field level and distribution requirements specified in 6.6.4.

² The 1025 Hz frequency was selected rather than 1 kHz because a 1 kHz reference frequency could interfere with emission harmonics or test equipment fundamental frequencies.

³ See 6.4.5.2 and 6.4.5.4 for details.

Test Setup Diagram

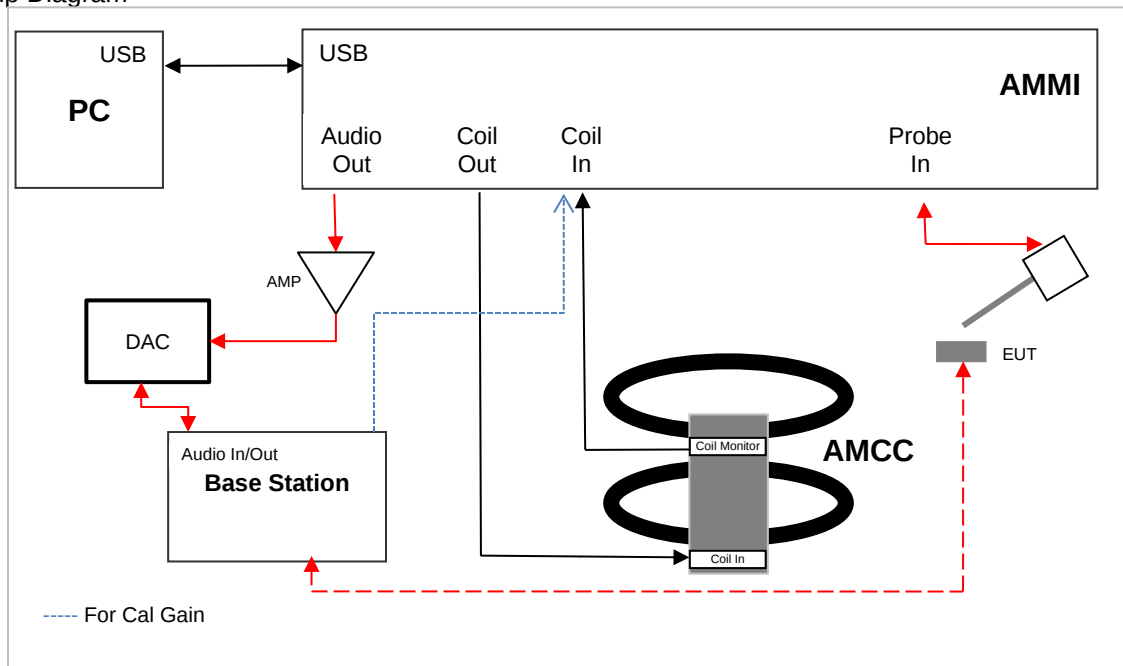**Note(s):**

For Audio OUT, an amplifier was added to amplify signal to meet DAC specifications.

5.2. Reference Input Levels per ANSI C63.19-2019, §6

The following reference input levels (Figure 6.1) that correlate to a normal speech input level shall be used for the standard transmission protocols.⁴

Table 6.1 - Normal speech input levels

Standard	Protocol	Input (dBm0)
TIA-2000	CDMA	-18
TIA/EIA-136	TDMA (50 Hz)	-18
J-STD-007	GSM (217 Hz)	-16
T1/T1P1/3GPP (See Note 1)	UMTS (WCDMA)	-16
iDEN ^a	TDMA (22 Hz and 11 Hz)	-18
VoIP ^a (See Note 2)	Voice over Internet Protocol	-16

NOTE 1 - For UMTS (Universal Mobile Telecommunications System), refer to 3GPP TS26.131 and TS26.132 (<http://www.3gpp.org>).

NOTE 2 - VoIP is used in this table as a general term specifying a group of voice services that use -16 dBm0 as their normal acoustic level. The group includes a variety of voice services, including Voice-over-LTE (VoLTE), Voice-over-IP-multimedia-subsystem (VoIMS), Voice-over-Wi-Fi (VoWiFi) and similar services. For 3G, LTE, and WLAN terminals used for Commercial Mobile Radio Service (CMRS) based telephony, refer to 3GPP TS26.131 and TS26.132.

^a The manufacturer shall establish that -16 dBm0 is the normal acoustic level in order to place it in this category.

For protocols not listed in Table 6.1, use the normal speech input level per the relevant specifications for that air interface.

⁴ The intent of this subclause is to provide a nominal level speech input independent of air interface and measure the magnetic response in a normal use condition without requiring an acoustic reference. The nominal level speech signals in 6.4.3.2 will result in acoustic speech levels that are mutually consistent and also span a range including 94 dB SPL, as shown in the examples below. This is intended to allow the operator to set WD adjustable volume controls as needed to produce a sufficient desired magnetic level (desired ABM signal) based on intended usage. When measuring with the specified nominal speech input level of -16 dBm0 for GSM, a GSM phone shall not exceed a receive loudness rating (RLR) of -13 dB at maximum volume setting. However, at a nominal volume control setting with the same -16 dBm0 input, a GSM phone shall have an RLR of at least 2 dB $\pm$ 3 dB. An RLR of 2 dB $\pm$ 3 dB corresponds to a sound pressure level of 84 dB $\pm$ 3 dB SPL, assuming an earpiece frequency response that is flat over the frequency bands specified as per ITU-T Recommendation P.79. An RLR of -13 dB corresponds to a sound pressure level of 99 dB SPL, assuming an earpiece frequency response that is flat over the frequency bands specified as per ITU-T Recommendation P.79. When measuring with the specified nominal speech input level of -18 dBm0 for CDMA, a CDMA phone with volume control set to the midpoint should provide an RLR of 2 dB $\pm$ 5 dB. The CTIA (Rev. 3.21, 2003) CDMA test plan (V1.2) does not specifically place an upper limit on RLR. References: ITU-T Recommendation P.79. Calculation of loudness ratings for telephone handsets. Cellular Telecommunications Industry Association Performance Evaluation Standard for 800 MHz AMPS and Cellular/PCS CDMA Dual Mode Wireless Subscriber Stations.

5.3. Over the Top (OTT)

This device supports VoIP via a preinstalled application that uses the FaceTime service, using ACC-ELD as its only codec. VoIP capabilities require HAC assessment when voice calls are supported over the cellular data connection via pre-installed VoIP applications. Per the manufacturer, FaceTime audio is disabled via SW code for this model. Therefore, OTT testing is not required.

6. Calibrations & Gain Measurements

Calibrations and Gain measurements are performed using guidance from SPEAG's *DASY6/8 Module HAC System Handbook §7.3*.

6.1. Calibration of AM1DVx Probe

For correct measurement of the audio-band magnetic field, the AM1DVx probe must first be calibrated. The calibration is performed in the Helmholtz Audio Magnetic Calibration Coil (AMCC).

6.1.1. Calibration Setup

During the calibration procedure, the system is set as described below:

- the AMMI is powered on and connected to the DASY6/8 PC via USB.
- the AMMI COIL OUT port is connected to the AMCC COIL IN.
- the AMMI COIL IN port is connected to the AMCC COIL MONITOR.
- the AM1DVx probe is mounted on the robot.

6.1.2. Sensor Angle Alignment

The sensor angle relative to the robot arm depends on several factors: probe connector angle, Data Acquisition Electronics (DAE) connector angle, use of a Quick Adaptor Change System (QACS). In DASY6/8, the sensor angle is assessed automatically during the alignment phase.

The alignment procedure consists of rotating the probe in the AMCC for angle within the $[0^\circ - 360^\circ]$ in 10° steps. The sensor angle is defined as the angle giving the maximum H-field response for the sensor. The angle corresponds to the sensor in the axial direction (same orientation as the AMCC field).

Note: The calibration must be repeated after any change in the measurement instrumentation, especially when the probe / DAE has been remounted on the robot.

6.1.3. System Response Calibration

The sensitivity and frequency response of the AM1DVx probe is calibrated over the $[50\text{Hz} - 10\text{kHz}]$ frequency range using a multi-sine signal. The sines are at the center frequency of each 1/3 octave band.

The measurement is performed in the AMCC with the probe sensor in axial orientation. The Coil In channel of the Audio Magnetic Measurement Instrument (AMMI) measures the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMMI. In parallel, the Probe In channel measures the amplified signal picked up by the probe coil. The sensitivity of the probe in $\text{V}/(\text{A}/\text{m})$ is defined as the voltage ratio at 1 kHz. The frequency response in dB is defined as the ratio between the voltages in each 1/3 octave band normalized to the 1 kHz ratio.

The obtained sensitivity is compared to the one from the probe configuration file for verification purposes. A warning is issued if the deviation exceeds 2 %.

6.2. AMMI Audio Output Calibration

The audio output calibration of the AMMI is performed as described below:

- Connect Audio Out to Coil In on the AMMI and click on Calibrate.
- Click on the Calibrate button.
- Once calibration is complete, re-establish the cabling illustrated in Test Setup Diagram §5.1.

6.3. Codec / System Delay Measurements

Codec / system delay measurements are calculated using the guidance from SPEAG's *DASY6/8 Module HAC System Handbook §7.3.2.4*:

- A time delay might occur in the audio signal path (latency of the codec, Windows settings ...). For accurate measurements, the system must consider this delay, and shift in time the probe readings accordingly.
- Module HAC features automated measurement of the delay. The assessed delay will then be used for the subsequent desired ABM signal level and undesired ABM field level measurements.
- The delay is measured by pressing the Assess Delay button under the Scan Control section of the Measurement tab. The system must be ready to measure, and the DUT must be transmitting in the desired test mode.
- A scan with reduced resolution will be performed and the delay will be assessed at the measured maximum.
- This measurement must be repeated after every change in the hardware setup, or when a different DUT / Codec is used.

6.4. Compute Gain Settings

Gain settings are computed using the following procedure:

- Define the Scan Type as Signal in the Scan Type section.
- Specify the Input Level and Codec Delay in the Base Station Simulator Settings.
 - Input level refers to full scale input level equivalent to 3.14 dBm0.
 - Input level of 1V is used for R&S CMW500 Base Station Simulator.
 - Input level of 1V is used for R&S CMX500
 - The codec delay can be measured automatically using the procedure described above in §6.3 above.
- Enter the desired speech level in dBm0. Refer to §5.2 for applicable Reference Input Levels.
- Specify the audio file and the measurement duration to be used for the area and frequency response scans.
 - Use Audio file 48k_voice_1kHz_1s.wav for ABMd and ABMu measurements.
 - Use Audio file 48k_voice_300-3000_2s.wav for Frequency Response measurements.
- Click on Compute Gain Settings. The properties of the audio file, such as the bandwidth compensation factor (BWC), peak value, etc. will be automatically computed. In addition, the audio file scaling (also called gain) will be calculated. A popup is displayed in case the resulting gain exceeds the AMMI dynamic range.

Computed Gain settings for each supported technology for CMRS evaluations is illustrated in the table below:

SAR 11


Computed Gain Settings						
Technology	Signal Type	Speech Level (dBm0)	Peak to Full Scale (dB)	Peak to RMS Scale (dB)	BWC (dB)	Scaling (Gain) (dB)
GSM	Voice 1 kHz	-16.0	-0.37	15.74	0.07	-12.47
	Voice 300-3kHz	-16.0	0	21.57	10.81	-6.64
W-CDMA	Voice 1 kHz	-16.0	-0.37	15.74	0.07	-12.5
	Voice 300-3kHz	-16.0	0	21.57	10.81	-6.67
VoLTE	Voice 1 kHz	-16.0	-0.37	15.74	0.07	-12.48
	Voice 300-3kHz	-16.0	0	21.57	10.81	-6.65
VoNR	Voice 1 kHz	-16.0	-0.37	15.74	0.07	-12.47
	Voice 300-3kHz	-16.0	0	21.57	10.81	-6.63
VoWiFi	Voice 1 kHz	-16.0	-0.37	15.74	0.07	-11.02
	Voice 300-3kHz	-16.0	0	21.57	10.81	-5.19

7. T-coil Measurement Criteria

7.1. Frequency Response


The frequency response of the magnetic field, measured in 1/3 octave bands, shall follow the response curve specified in this subclause, over the frequency range 300 Hz to 3 kHz.

Figure 6.4 and Figure 6.5 provide the boundaries for the specified frequency. These response curves are for true field strength measurements of the T-Coil signal. Thus the 6 dB/octave probe response has been corrected from the raw readings.

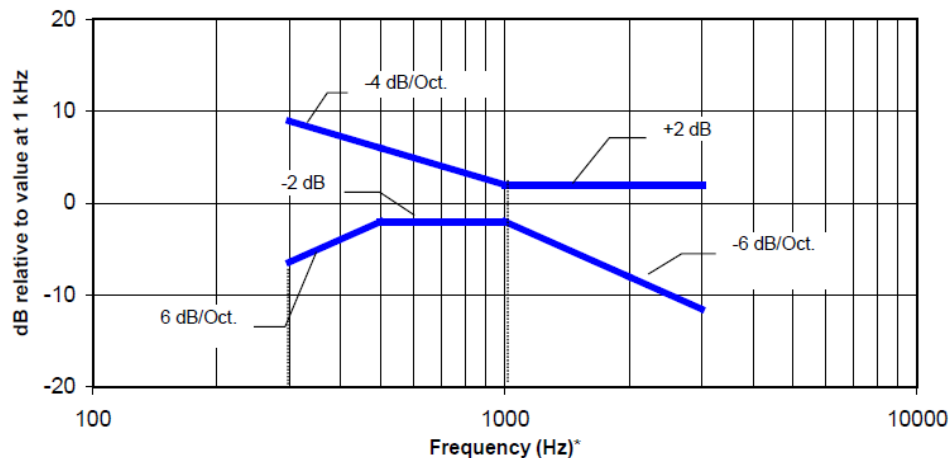

NOTE—Frequency response is between 300 Hz and 3 kHz.

Figure 6.4—Magnetic field frequency response for WDs with a maximum field ≤ -15 dB(A/m) at 1 kHz

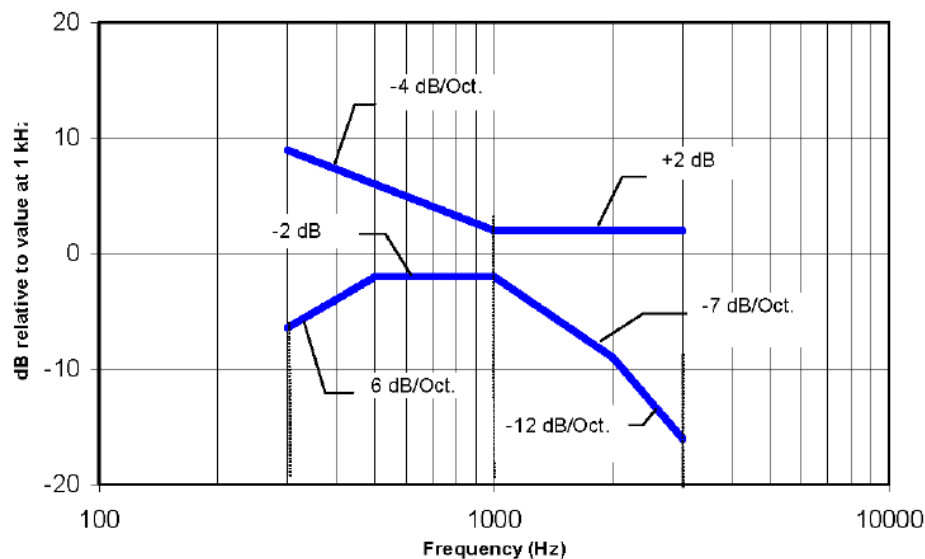

NOTE—Frequency response is between 300 Hz and 3000 Hz.

Figure 6.5—Magnetic field frequency response for WDs with a maximum field that exceeds -15 dB(A/m) at 1 kHz

7.2. Coupling Mode Requirements

In order to comply with the requirements for T-Coil use, a WD's tested operating modes shall simultaneously meet the requirements for minimum desired ABM signal level and maximum undesired ABM field contained in this subclause at the minimum specified number of scanned locations.


When measured as specified in this standard, there are two groups of qualifying measurement points:

Primary group: A qualifying measurement point shall have its T-Coil signal, desired ABM signal, ≥ -18 dB(A/m) at 1 kHz, in a 1/3 octave band filter. These measurements shall be made with the WD operating at a reference input level as specified in Table 6.1. Simultaneously, the qualifying measurement point shall have its weighted magnetic noise, undesired ABM field ≤ -38 dB(A/m).

Secondary group: A qualifying measurement point shall have its weighted magnetic noise, undesired ABM field ≤ -38 dB(A/m). This group inherently includes all the members of the primary group.

These levels are designed to be compatible with hearing aids that produce the same acoustic output level for either an acoustic input level of 65 dB SPL or a magnetic input level of -25 dB(A/m) (56.2 mA/m)⁵ at either 1.0 kHz or 1.6 kHz. The hearing aid operational measurements are performed per ANSI S3.22-2014.

Measurement locations and reference plane to be used for the T-coil measurements.

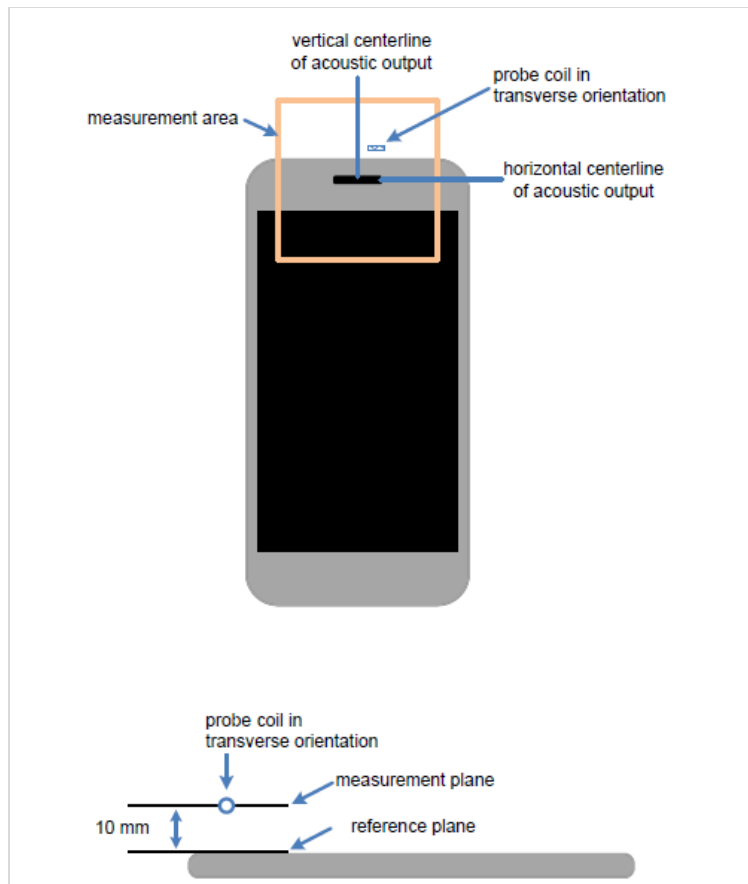

⁵ IEC 60118-1 refers to hearing aid output being the same for an acoustic input of 70 dB SPL and a magnetic input of 100 mA/m. Thus 31.6 mA/m is equivalent to an acoustic input of 60 dB SPL, and an acoustic input of 65 dB SPL is equivalent to 56.2 mA/m.

7.3. Desired ABM Signal and Undesired ABM Field Requirements

For a WD that is expected to operate primarily in radio access technologies that include 2G GSM for legacy support, the WD shall be qualified for telecoil compatibility one of two ways:

- The DUT shall be rated for telecoil use for all other voice operating modes, exclusive of 2G GSM, according to the criteria of §6.6.4.2 of ANSI C63.19 2019.
- If the DUT is to be rated for telecoil use in its 2G GSM operating modes, these modes shall be qualified according to the criteria of §6.6.4.3 of ANSI C63.19 2019.

7.3.1. Non-2G GSM Operating modes

The goal of this requirement is to ensure an adequate area where desired ABM signal is sufficiently strong to be heard clearly and a larger area where undesired ABM field is sufficiently low as to avoid undue annoyance. Qualifying measurement points shall fulfill the coupling mode requirements; both the primary and secondary group requirements shall be met:

- The primary group shall include at least 75 measurement points.
 - The secondary group shall include at least 300 contiguous measurement points.
- Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

7.3.2. 2G GSM Operating modes

For 2G GSM operating mode(s), the qualifying measurement points shall fulfil the coupling mode requirements; both the primary and secondary group requirements shall be met:

- The primary group shall include at least 25 measurement points.
 - The secondary group shall include at least 125 contiguous measurement points.
- Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

8. Device Under Test

Normal operation	Held to head		
Back Cover	The Back Cover is not removable		
Test sample information	S/N DW5G97PX4D	IMEI N/A	Notes HAC Sample

8.1. Air Interfaces and Operating Mode

All air interfaces which support voice capabilities over a managed CMRS voice service, were evaluated.

Air Interface	Bands (MHz)	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Mode ³	Power Reduction	Audio Codecs Evaluated ¹
GSM	850	VO	Yes	Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	CMRS	Mode A	N/A	EFR, AMR-NB & AMR-WB
	1900						N/A	
	GPRS/EDGE	DT/VD	Yes	Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	FaceTime ⁴	Mode A	N/A	N/A
W-CDMA (UMTS)	850	VO	Yes	Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	CMRS	Mode A	N/A	AMR-NB & AMR-WB
	1700							
	1900	VD	Yes	Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	FaceTime ⁴	Mode A	N/A	N/A
LTE - FDD	HSPA							
	700 (B12/13/17)	VD	Yes	5G NR, Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	CMRS FaceTime ⁴	Mode A	N/A	AMR-NB, AMR-WB & EVS
	850 (B5/26)							
	1700 (B4/66)							
	1900 (B2/25)							
	2300 (B30)							
LTE - TDD	2500 (B7)							
	2600 (B41)	VD	Yes	5G NR, Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	CMRS FaceTime ⁴	Mode A	N/A	AMR-NB, AMR-WB & EVS
	3600 (B48)							
5G NR(FR1) FDD	700 (n12)	VD	Yes ²	LTE, Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	CMRS FaceTime ⁴	Mode A	N/A	AMR-NB, AMR-WB & EVS
	850 (n5/n26)							
	1700 (n66/n70)							
	1900 (n2/n25)							
	2300 (n30)							
5G NR(FR1) TDD	2500 (n7)							
	2600 (n41)	VD	Yes ²	LTE, Wi-Fi, BT, NB U-NII, 802.15.4 & 802.15.4ab NB	CMRS FaceTime ⁴	Mode A	N/A	AMR-NB, AMR-WB & EVS
	3500 (n77 Block A)							
	3700 (n48)							
	3900 (n77 Block C)							

Type
VO: Legacy Cellular Voice Service
DT: Digital Transport only (no voice)
VD: IP Voice Service over Digital Transport
CMRS: Commercial Mobile Radio Service

Note(s):

- For protocols not listed in Table 6.1 of ANSI C63.19-2019, the average speech level of -20 dBm0 was used. Refer to §5.2 for reference input levels.
- 5G NR (VoNR) is supported: manufacturer states that 5G NR (VoNR) uses the same protocol, Codec(s) and bitrates as LTE (VoLTE).
- For all air interfaces, the maximum held-to-head output power was used for T-Coil evaluations. The maximum held-to-head output power is Mode A for WWAN operating modes and Power State 1 Mode A for WLAN operating modes. Refer to §9 & §10 for T-Coil evaluations.
- Per the manufacturer, FaceTime audio is disabled via SW code for this model. Therefore, OTT testing is not required.

Air Interfaces and Operating Modes

Air Interface	Bands (MHz)	Type	C63.19 Tested	Simultaneous Transmitter	Name of Voice Service	Power Mode ³	Power Reduction	Audio Codecs Evaluated ¹							
Wi-Fi	2450	VD	Yes	WWAN, NB U-NII & 802.15.4ab	CMRS FaceTime ⁴	Power State 1 Mode A	N/A	AMR-NB, AMR-WB & EVS							
	U-NII-1														
	U-NII-2A														
	U-NII-2C														
	U-NII-3	VD	Yes	WWAN, BT, 802.15.4, & 802.15.4ab NB	CMRS FaceTime ⁴	Power State 1 Mode A	N/A	AMR-NB, AMR-WB & EVS							
	U-NII-5 (VLP, SP, LPI)														
	U-NII-6 (LPI)								VD	No ²	WWAN, BT, 802.15.4, & 802.15.4ab NB	CMRS FaceTime ⁴	N/A	N/A	AMR-NB, AMR-WB & EVS
	U-NII-7 (VLP, SP, LPI)														
	U-NII-8 (LPI)														
NB U-NII	5200 (U-NII-1)	DT	N/A	WWAN, Wi-Fi 2.4 GHz	N/A	N/A	N/A	N/A							
	5800 (U-NII-3)														
802.15ab NB	5800 (U-NII-3)	DT	N/A	WWAN, BT, 802.15.4 & Wi-Fi ²	N/A	N/A	N/A	N/A							
802.15.4	2450	DT	N/A	WWAN, 802.15.4ab NB & Wi-Fi 5/6G	N/A	N/A	N/A	N/A							
BT	2.4GHz	DT	N/A	WWAN, 802.15.4ab NB & Wi-Fi 5/6G	N/A	N/A	N/A	N/A							
NFC	13	DT	N/A	WWAN, BT, Wi-Fi 2.4G, Wi-Fi 5/6G, 802.15.4	N/A	N/A	N/A	N/A							
UWB (Ultra-Wideband)	6500	DT	N/A	N/A	N/A	N/A	N/A	N/A							
	8000														
Type VO: Legacy Cellular Voice Service DT: Digital Transport only (no voice) VD: IP Voice Service over Digital Transport CMRS: Commercial Mobile Radio Service Note(s): 1. For protocols not listed in Table 6.1 of ANSI C63.19-2019, the average speech level of -20 dBm0 was used. Refer to §5.2 for reference input levels. 2. Supported Frequency > 6GHz. ANSI C63,19 2019 only requires HAC evaluations for Technologies/Frequencies < 6GHz. 3. For all air interfaces, the maximum held-to-head output power was used for T-Coil evaluations. The maximum held-to-head output power is Mode A for WWAN operating modes and Power State 1 Mode A for WLAN operating modes. Refer to §9 & §10 for T-Coil evaluations. 4. Per the manufacturer, FaceTime audio is disabled via SW code for this model. Therefore, OTT testing is not required.															

9. Investigations (Antenna, Codec, & Air Interface)

In order to comply with the requirements for T-Coil use, a WD's tested operating modes shall simultaneously meet the requirements for minimum desired ABM signal level and maximum undesired ABM field contained in this subclause at the minimum specified number of scanned locations.

When measured as specified in this standard, there are two groups of qualifying measurement points:

Primary group: A qualifying measurement point shall have its T-Coil signal, desired ABM signal, ≥ -18 dB(A/m) at 1 kHz, in a 1/3 octave band filter. These measurements shall be made with the WD operating at a reference input level as specified in Table 6.1. Simultaneously, the qualifying measurement point shall have its weighted magnetic noise, undesired ABM field ≤ -38 dB(A/m).

Secondary group: A qualifying measurement point shall have its weighted magnetic noise, undesired ABM field ≤ -38 dB(A/m). This group inherently includes all the members of the primary group.

2G GSM Operating modes

For 2G GSM operating mode(s), the qualifying measurement points shall fulfil the coupling mode requirements; both the primary and secondary group requirements shall be met:

- The primary group shall include at least 25 measurement points.
- The secondary group shall include at least 125 contiguous measurement points.

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

Non-2G GSM Operating modes

Qualifying measurement points shall fulfill the coupling mode requirements; both the primary and secondary group requirements shall be met:

- The primary group shall include at least 75 measurement points.
- The secondary group shall include at least 300 contiguous measurement points.

Additionally, to avoid an oddly shaped area of low noise, the secondary group shall include at least one longitudinal column of at least 10 contiguous qualifying points and at least one transverse row containing at least 15 contiguous qualifying points.

5G NR Operating modes

The DUT supports 5G NR, Voice over New Radio (VoNR). Per the manufacturer, 5G NR (VoNR) uses the same protocol, Codec(s) and bitrates as LTE (VoLTE). Investigations were performed on LTE (VoLTE) and the worst-case Port/Antenna/Codec/Air Interface configurations from LTE (VoLTE) was used for 5G NR (VoNR) evaluations. Refer to §10 for 5G NR (VoNR) evaluations.

All Operating modes

For all air interfaces, the maximum held-to-head output power was used for T-Coil evaluations. The maximum held-to-head output power is Mode A for WWAN operating modes and Power State 1 Mode A for WLAN operating modes. Refer to §9 & §10 for T-Coil evaluations.

The worst-case configuration is determined by the lowest margin of Primary Group Contiguous Points. The margin Primary Group Contiguous Points is calculated by subtracting the Primary Group points coupling mode requirement (25 for GSM modes and 75 for non-GSM modes) from the measured Primary Group Contiguous Points. The lowest margin of Primary Group Contiguous Points will be highlighted in each table.

For WWAN technologies, the DUT utilizes an Antenna - Port mapping feature. A Port is a collection (cluster) of antennas. Once the Port and Frequency Band has been selected, the transmitting Antenna is auto selected. Below is a description of the Port - Antenna mapping for the DUT.

Port	Frequency Band	Antenna
A	LB	1
	LMB	1
	MBHB	1
	UHB	7
B	LB	2
	LMB	2
	MBHB	2
	UHB	8
C	MBHB	3
	UHB	9
D	MBHB	4
	UHB	4

LB = Lower Band (617 MHz - 960 MHz)

LMB = Lower - Mid Band (1427 MHz - 1700 MHz)

MBHB = Mid Band - High Band (1710 MHz - 2960 MHz)

UHB = Ultra High Band (3300 MHz - 4200 MHz)

An investigation was performed to determine the worst-case Port for each Licensed technology. All subsequent measurements were determined by this investigation.

The device supports four (4) WLAN Tx antennas:

Antenna	Technology
3 (Lower)	Wi-Fi 2.4GHz
	Bluetooth
4 (Upper)	Wi-Fi 2.4GHz
	Bluetooth
5 (Lower)	Wi-Fi 5GHz
	Bluetooth
6 (Upper)	Wi-Fi 5GHz
	Bluetooth

An investigation was performed to determine the worst-case WLAN Antenna. All subsequent measurements were determined by this investigation.

9.1. CMRS

9.1.1. Antenna Investigation

Mode:	Channel and Frequency	Bandwidth (Data Rate)	Power Mode	Port/Antenna	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
GSM 1900 Voice Coder Speechcodec Low	661 1880 MHz	N/A	Mode A	A (ANT 1)	Transverse	Pass	-56.37	270	632	26	26	245	507
				B (ANT 2)	Transverse	Pass	-56.37	259	620	26	26	234	495
				C (ANT 3)	Transverse	Pass	-56.37	262	621	26	26	237	496
				D (ANT 4)	Transverse	Pass	-56.37	242	603	26	26	217	478
W-CDMA BII Rel. 99 AMR-NB: 4.75 kbps	9400 1880 MHz	N/A	Mode A	A (ANT 1)	Transverse	Pass	-56.37	363	675	26	26	288	375
				B (ANT 2)	Transverse	Pass	-56.37	343	655	26	26	268	355
				C (ANT 3)	Transverse	Pass	-56.37	358	670	26	26	283	370
				D (ANT 4)	Transverse	Pass	-56.37	343	654	26	26	268	354
LTE Band 25 QPSK RB 1/0 AMR-NB: 4.75 kbps	26365 1882.5 MHz	20 MHz	Mode A	A (ANT 1)	Transverse	Pass	-56.45	360	675	26	26	285	375
				B (ANT 2)	Transverse	Pass	-56.45	358	675	26	26	283	375
				C (ANT 3)	Transverse	Pass	-56.45	358	675	26	26	283	375
				D (ANT 4)	Transverse	Pass	-56.45	358	675	26	26	283	375
LTE Band 41 QPSK RB 1/0 AMR-NB: 4.75 kbps	40620 2593 MHz	20 MHz	Mode A	A (ANT 1)	Transverse	Pass	-56.45	356	666	26	26	281	366
				B (ANT 2)	Transverse	Pass	-56.45	305	607	26	26	230	307
				C (ANT 3)	Transverse	Pass	-56.45	295	595	26	26	220	295
				D (ANT 4)	Transverse	Pass	-56.45	213	506	26	26	138	206
802.11b AMR-NB: 4.75 kbps	6 2437 MHz	DSSS 1 Mbps 20 MHz BW	Power State 1 Mode A	ANT 3	Transverse	Pass	-56.18	345	672	26	26	270	372
				ANT 4	Transverse	Pass	-56.18	347	673	26	26	272	373
802.11a AMR-NB: 4.75 kbps	36 5180 MHz	BPSK 6 Mbps 20 MHz BW	Power State 1 Mode A	ANT 5	Transverse	Pass	-56.18	351	675	26	26	276	375
				ANT 6	Transverse	Pass	-56.18	349	675	26	26	274	375

Note(s):

- PORT D (ANT 4) has been determined to be the worst-case antenna for GSM.
- PORT D (ANT 4) has been determined to be the worst-case antenna for W-CDMA.
- PORT D (ANT 4) has been determined to be the worst-case antenna for LTE-FDD.
- PORT D (ANT 4) has been determined to be the worst-case antenna for LTE-TDD.
- ANT 3 has been determined to be the worst-case antenna for Wi-Fi 2.4 GHz.
- ANT 6 has been determined to be the worst-case antenna for Wi-Fi 5 GHz.

9.1.2. Codec Investigation

An investigation between the various codec configurations (Low/Mid/High bit rates for Narrowband, Wideband and EVS) was performed to determine the worst-case bit rates for each voice service type. The table below compares the varying codec configurations. A codec investigation was performed on one band of each W-CDMA, LTE FDD, LTE TDD, Wi-Fi 2.4GHz and Wi-Fi 5GHz.

W-CDMA Codec Investigation

W-CDMA Codec Investigation													
Band/Channel/ Bandwidth	Power Mode	Port/Antenna	Orientation	Codec	Bitrate (kbps)	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
W-CDMA BII Rel. 99 Ch. 9400 1880 MHz	Mode A	D (ANT 4)	Transverse	AMR-NB	4.75	Pass	-56.48	397	673	26	26	322	373
					7.4	Pass	-56.48	397	672	26	26	322	372
					12.2	Pass	-56.48	403	673	26	26	328	373
				AMR-WB	6.6	Pass	-56.48	288	673	26	26	213	373
					15.85	Pass	-56.48	302	673	26	26	227	373
					23.85	Pass	-56.48	302	673	26	26	227	373

Note(s):

- For W-CDMA, it is observed that 6.60 kbps is the worst-case bit rate.

VoLTE Codec Investigation

VoLTE Codec Investigation													
Band/Channel/ Bandwidth	Power Mode	Port/Antenna	Orientation	Codec	Bitrate (kbps)	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
LTE Band 25 CH. 26365 QPSK RB 1/0 20 MHz BW	Mode A	D (ANT 4)	Transverse	AMR-NB	4.75	Pass	-56.48	374	650	26	26	299	350
					7.4	Pass	-56.48	386	654	26	26	311	354
					12.2	Pass	-56.48	388	654	26	26	313	354
				AMR-WB	6.6	Pass	-56.48	275	652	26	26	200	352
					15.85	Pass	-56.48	288	655	26	26	213	355
					23.85	Pass	-56.48	288	652	26	26	213	352
				EVS	5.9	Pass	-56.48	285	648	26	26	210	348
					9.6	Pass	-56.48	387	649	26	26	312	349
					24.4	Pass	-56.48	389	648	26	26	314	348
LTE Band 41 CH. 40620 QPSK RB 1/0 20 MHz BW	Mode A	D (ANT 4)	Transverse	AMR-NB	4.75	Pass	-56.25	348	634	26	26	273	334
					7.4	Pass	-56.25	346	631	26	26	271	331
					12.2	Pass	-56.25	240	506	25	26	165	206
				AMR-WB	6.6	Pass	-56.25	158	507	26	26	83	207
					15.85	Pass	-56.25	167	506	26	26	92	206
					23.85	Pass	-56.25	166	504	26	26	91	204
				EVS	5.9	Pass	-56.25	155	497	26	26	80	197
					9.6	Pass	-56.25	245	508	26	26	170	208
					24.4	Pass	-56.25	243	506	26	26	168	206

Note(s):

- For LTE-FDD, it is observed that 6.60 kbps is the worst-case bit rate.
- For LTE-TDD, it is observed that 5.90 kbps is the worst-case bit rate.

VoWiFi Codec Investigation

VoWiFi-Fi Codec Investigation													
Band/Channel/ Bandwidth	Power Mode	Antenna	Orientation	Codec	Bitrate (kbps)	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
DSSS 1 Mbps Ch. 6 20 MHz BW	Mode A	ANT 3	Transverse	AMR-NB	4.75	Pass	-56.18	345	672	26	26	270	372
					7.4	Pass	-56.18	353	676	26	26	278	376
					12.2	Pass	-56.18	359	676	26	26	284	376
				AMR-WB	6.6	Pass	-56.39	291	673	26	26	216	373
					15.85	Pass	-56.39	304	672	26	26	229	372
					23.85	Pass	-56.39	304	672	26	26	229	372
				EVS	5.9	Pass	-56.39	290	673	26	26	215	373
					9.6	Pass	-56.18	368	676	26	26	293	376
					24.4	Pass	-56.18	365	676	26	26	290	376
BPSK 802.11a Ch. 36 6 Mbps	Mode A	ANT 6	Transverse	AMR-NB	4.75	Pass	-56.18	349	675	26	26	274	375
					7.4	Pass	-56.18	349	675	26	26	274	375
					12.2	Pass	-56.18	359	675	26	26	284	375
				AMR-WB	6.6	Pass	-56.39	294	676	26	26	219	376
					15.85	Pass	-56.39	307	676	26	26	232	376
					23.85	Pass	-56.39	307	676	26	26	232	376
				EVS	5.9	Pass	-56.39	323	676	26	26	248	376
					9.6	Pass	-56.18	370	675	26	26	295	375
					24.4	Pass	-56.18	365	675	26	26	290	375

Note(s):

- For Wi-Fi 2.4 GHz, it is observed that 5.90 kbps is the worst-case bit rate.
- For Wi-Fi 5 GHz, it is observed that 6.60 kbps is the worst-case bit rate.

9.1.3. Air Interface Investigation

A limited set of bands/channels/bandwidths were evaluated to confirm that there is no effect to the ABM levels when changing the band/channel/bandwidth.

W-CDMA Air Interface Investigation

W-CDMA Air Interface Investigation												
Mode:	Power Mode	Port/Antenna	Channel and Frequency	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
W-CDMA Band II Rel. 99 AMR-WB: 6.6 kbps	Mode A	D (ANT 4)	9262 1852.4 MHz	Transverse	Pass	-56.48	291	674	26	26	216	374
			9400 1880.0 MHz	Transverse	Pass	-56.48	288	673	26	26	213	373
			9538 1907.6 MHz	Transverse	Pass	-56.48	289	672	26	26	214	372

Note(s):

- For all subsequent tests for W-CDMA, middle channel was used in conjunction with the worst-case bit rate found in §9.1.2.

VoLTE Air Interface Investigation

VoLTE Air Interface Investigation															
Mode:	Bandwidth	Power Mode	Port/Antenna	Channel and Frequency	RB Allocation		Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
LTE Band 25 QPSK AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	26365 1882.5 MHz	1	0	Transverse	Pass	-56.48	275	652	26	26	200	352
					100	0	Transverse	Pass	-56.25	282	673	26	26	207	373
LTE Band 25 16QAM AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	26365 1882.5 MHz	1	0	Transverse	Pass	-56.25	282	675	26	26	207	375
LTE Band 25 64QAM AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	26365 1882.5 MHz	1	0	Transverse	Pass	-56.25	282	675	26	26	207	375
LTE Band 25 256QAM AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	26365 1882.5 MHz	1	0	Transverse	Pass	-56.25	281	674	26	26	206	374
LTE Band 25 QPSK AMR-WB: 6.6 kbps	1.4 MHz	Mode A	D (ANT 4)	26365 1882.5 MHz	1	0	Transverse	Pass	-56.25	276	672	26	26	201	372
LTE Band 41 QPSK EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1	0	Transverse	Pass	-56.25	155	497	26	26	80	197
					100	0	Transverse	Pass	-56.25	174	518	26	26	99	218
LTE Band 41 16QAM EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1	0	Transverse	Pass	-56.25	187	532	26	26	112	232
LTE Band 41 64QAM EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1	0	Transverse	Pass	-56.25	194	547	26	26	119	247
LTE Band 41 256QAM EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1	0	Transverse	Pass	-56.25	198	564	26	26	123	264
LTE Band 41 QPSK EVS: 5.9 kbps	5 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1	0	Transverse	Pass	-56.25	169	520	26	26	94	220

Note(s):

- For all subsequent tests for LTE-FDD, middle channel, QPSK modulation, and 1% RB size and low RB allocation was used in conjunction with the worst-case bit rate found in §9.1.2.
- For all subsequent tests for LTE-TDD, middle channel, QPSK modulation, and 1% RB size and low RB allocation was used in conjunction with the worst-case bit rate found in §9.1.2.

VoWiFi Air Interface Investigation

VoWiFi Air Interface Investigation														
Mode:	Channel and Frequency	Power Mode	Antenna	Modulation/Index	Data Rate	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin
802.11b EVS: 5.9 kbps	6 2437 MHz	Power State 1 Mode A	ANT 3	DSSS	1 Mbps	Transverse	Pass	-56.39	290	673	26	26	215	373
				CCK	5.5 Mbps	Transverse	Pass	-56.39	312	673	26	26	237	373
					11 Mbps	Transverse	Pass	-56.39	301	672	26	26	226	372
802.11g EVS: 5.9 kbps	6 2437 MHz	Power State 1 Mode A	ANT 3	DSSS	1 Mbps	Transverse	Pass	-56.39	298	676	26	26	223	376
802.11n EVS: 5.9 kbps	6 2437 MHz	Power State 1 Mode A	ANT 3	MCS0	6.5 Mbps	Transverse	Pass	-56.39	314	676	26	26	239	376
802.11ax EVS: 5.9 kbps	6 2437 MHz	Power State 1 Mode A	ANT 3	MCS0	7.3 Mbps	Transverse	Pass	-56.39	311	676	26	26	236	376
802.11a AMR-WB: 6.6 kbps	36 5180 MHz	Power State 1 Mode A	ANT 6	BPSK	6 Mbps	Transverse	Pass	-56.39	294	676	26	26	219	376
				QPSK	18 Mbps	Transverse	Pass	-56.39	293	676	26	26	218	376
				64QAM	54 Mbps	Transverse	Pass	-54.06	254	676	26	26	179	376
802.11n 20 MHz AMR-WB: 6.6 kbps	36 5180 MHz	Power State 1 Mode A	ANT 6	MCS7	65 Mbps	Transverse	Pass	-54.06	253	676	26	26	178	376
802.11n 40 MHz AMR-WB: 6.6 kbps	36 5190 MHz	Power State 1 Mode A	ANT 6	MCS7	135 Mbps	Transverse	Pass	-54.06	253	676	26	26	178	376
802.11ac 20 MHz AMR-WB: 6.6 kbps	36 5180 MHz	Power State 1 Mode A	ANT 6	MCS8	78 Mbps	Transverse	Pass	-54.06	255	676	26	26	180	376
802.11ac 40 MHz AMR-WB: 6.6 kbps	36 5190 MHz	Power State 1 Mode A	ANT 6	MCS9	180 Mbps	Transverse	Pass	-54.06	253	676	26	26	178	376
802.11ac 80 MHz AMR-WB: 6.6 kbps	42 5210 MHz	Power State 1 Mode A	ANT 6	MCS9	390 Mbps	Transverse	Pass	-54.06	253	676	26	26	178	376
802.11ac 160 MHz AMR-WB: 6.6 kbps	50 5250 MHz	Power State 1 Mode A	ANT 6	MCS9	780 Mbps	Transverse	Pass	-54.06	252	676	26	26	177	376
802.11ax 20 MHz AMR-WB: 6.6 kbps	36 5180 MHz	Power State 1 Mode A	ANT 6	MCS11	143 Mbps	Transverse	Pass	-54.06	251	676	26	26	176	376
802.11ax 40 MHz AMR-WB: 6.6 kbps	36 5190 MHz	Power State 1 Mode A	ANT 6	MCS11	287 Mbps	Transverse	Pass	-54.06	250	676	26	26	175	376
802.11ax 80 MHz AMR-WB: 6.6 kbps	42 5210 MHz	Power State 1 Mode A	ANT 6	MCS11	600 Mbps	Transverse	Pass	-54.06	253	676	26	26	178	376
802.11ax 160 MHz AMR-WB: 6.6 kbps	50 5250 MHz	Power State 1 Mode A	ANT 6	MCS11	1201 Mbps	Transverse	Pass	-54.06	253	676	26	26	178	376

Note(s):

- For all subsequent tests for Wi-Fi 2.4 GHz, 802.11b DSSS 1 Mbps was used in conjunction with the worst-case bit rate found in §9.1.2.
 - 802.11be has the same max output power, supports the same channel BWs (20MHz) and multiplexing as 802.11ax. Therefore, 802.11ax test results are representative of 802.11be.
- For all subsequent tests for Wi-Fi 5 GHz, 802.11ax HE40 MHz MCS11 287 Mbps was used in conjunction with the worst-case bit rate found in §9.1.2.
 - 802.11be has the same max output power, supports the same channel BWs (20/40/80/160MHz) and multiplexing as 802.11ax. Therefore, 802.11ax test results are representative of 802.11be.

10. HAC (T-coil) Test Results

Antenna, Codec (bit rates) and Air Interface investigations were conducted on CMRS voice services. The worst-case antenna, codec (bit rate) and air interface configurations were used for final T-Coil testing. Please refer to tables below for final T-Coil Test Results.

GSM/W-CDMA Test Results

Mode:	Channel and Frequency	Power Mode	Port/Antenna	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin	Plot Page #
GSM 850 Voice Coder Speechcodec Low	190 836.6 MHz	Mode A	B (ANT 2)	Transverse	Pass	-56.48	358	630	26	26	333	505	1 - 2
GSM 1900 Voice Coder Speechcodec Low	661 1880 MHz	Mode A	D (ANT 4)	Transverse	Pass	-56.48	350	623	26	26	325	498	3 - 4
W-CDMA Band II Rel. 99 AMR-WB: 6.6 kbps	9400 1880 MHz	Mode A	D (ANT 4)	Transverse	Pass	-56.48	288	673	26	26	213	373	5 - 6
W-CDMA Band IV Rel. 99 AMR-WB: 6.6 kbps	1413 1732.6 MHz	Mode A	D (ANT 4)	Transverse	Pass	-56.48	287	672	26	26	212	372	7 - 8
W-CDMA Band V Rel. 99 AMR-WB: 6.6 kbps	4183 836.6 MHz	Mode A	B (ANT 2)	Transverse	Pass	-56.48	290	673	26	26	215	373	9 - 10

LTE (VoLTE) Test Results

Mode:	Bandwidth (Data Rate)	Power Mode	Port/Antenna	Channel and Frequency	RB Allocation	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin	Plot Page #
LTE Band 7 QPSK AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	21100 2535 MHz	1 0	Transverse	Pass	-56.25	277	676	26	26	202	376	11 - 12
LTE Band 12 QPSK AMR-WB: 6.6 kbps	10 MHz	Mode A	B (ANT 2)	23095 707.5 MHz	1 0	Transverse	Pass	-56.25	273	674	26	26	198	374	13 - 14
LTE Band 13 QPSK AMR-WB: 6.6 kbps	10 MHz	Mode A	B (ANT 2)	23230 782 MHz	1 0	Transverse	Pass	-56.25	267	665	26	26	192	365	15 - 16
LTE Band 25 QPSK AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	26365 1882.5 MHz	1 0	Transverse	Pass	-56.48	275	652	26	26	200	352	17 - 18
LTE Band 26 QPSK AMR-WB: 6.6 kbps	15 MHz	Mode A	B (ANT 2)	26865 831.5 MHz	1 0	Transverse	Pass	-56.25	278	676	26	26	203	376	19 - 20
LTE Band 30 QPSK AMR-WB: 6.6 kbps	10 MHz	Mode A	D (ANT 4)	27710 2310 MHz	1 0	Transverse	Pass	-56.25	277	676	26	26	202	376	21 - 22
LTE Band 41 PC3 QPSK EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1 0	Transverse	Pass	-56.25	155	497	26	26	80	197	23 - 24
LTE Band 41 PC2 QPSK EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	40620 2593 MHz	1 0	Transverse	Pass	-56.25	250	645	26	26	175	345	25 - 26
LTE Band 48 PC3 QPSK EVS: 5.9 kbps	20 MHz	Mode A	D (ANT 4)	55990 3625 MHz	1 0	Transverse	Pass	-56.25	292	666	26	26	217	366	27 - 28
LTE Band 66 QPSK AMR-WB: 6.6 kbps	20 MHz	Mode A	D (ANT 4)	132322 1745 MHz	1 0	Transverse	Pass	-56.25	272	673	26	26	197	373	29 - 30

5G NR (VoNR) Test Results

Mode:	Bandwidth (Data Rate)	SCS (kHz)	Power Mode	Port/Antenna	Channel and Frequency	RB Allocation	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin	Plot Page #
NR Band n12 $\pi/2$ BPSK AMR-WB: 6.6 kbps	15 MHz	15	Mode A	B (ANT 2)	141500 707.5 MHz	1 1	Transverse	Pass	-54.06	252	665	26	26	177	365	31 - 32
NR Band n25 $\pi/2$ BPSK AMR-WB: 6.6 kbps	40 MHz	15	Mode A	D (ANT 4)	376500 1882.5 MHz	1 1	Transverse	Pass	-54.06	255	668	26	26	180	368	33 - 34
NR Band n30 $\pi/2$ BPSK AMR-WB: 6.6 kbps	10 MHz	15	Mode A	D (ANT 4)	462000 2310 MHz	1 1	Transverse	Pass	-54.06	255	669	26	26	180	369	35 - 36
NR Band n41 PC3 $\pi/2$ BPSK AMR-WB: 6.6 kbps	100 MHz	30	Mode A	D (ANT 4)	518598 2592.99 MHz	1 1	Transverse	Pass	-54.06	248	661	26	26	173	361	37 - 38
NR Band n41 PC2 $\pi/2$ BPSK EVS: 5.9 kbps	100 MHz	30	Mode A	D (ANT 4)	518598 2592.99 MHz	1 1	Transverse	Pass	-54.06	245	658	26	26	170	358	39 - 40
NR Band n77 Block C PC2 $\pi/2$ BPSK AMR-WB: 6.6 kbps	100 MHz	30	Mode A	D (ANT 4)	657734 3866.01 MHz	1 1	Transverse	Pass	-54.06	262	619	26	26	187	319	41 - 42

Note(s):

The DUT supports 5G NR, Voice over New Radio (VoNR). Per the manufacturer, 5G NR (VoNR) uses the same protocol, Codec(s) and bitrates as LTE (VoLTE). Investigations were performed on LTE (VoLTE) and the worst-case Port/Antenna/Codec/Air Interface configurations from LTE (VoLTE) was used for 5G NR (VoNR) evaluations. A limited set of 5G NR (VoNR) bands were evaluated to confirm 5G NR (VoNR) compliance.

- At least one 5G NR (VoNR)-FDD LB, MB and HB were evaluated.
- At least one 5G NR (VoNR)-TDD HB and UIHB were evaluated.

Wi-Fi (VoWiFi) Test Results

Mode:	Channel and Frequency	Data Rate	Power Mode	Antenna	Orientation	Frequency Response	Ambient Noise dB(A/m)	Primary Group Contiguous Pts	Secondary Group Contiguous Pts	Secondary Group Max Longitudinal	Secondary Group Max Transverse	Primary Group Contiguous Pts Margin	Secondary Group Contiguous Pts Margin	Plot Page #
802.11b EVS: 5.9 kbps	6 2437 MHz	DSSS 1 Mbps	Power State 1 Mode A	ANT 3	Transverse	Pass	-56.39	290	673	26	26	215	373	43 - 44
802.11ax 40 MHz AMR-WB: 6.6 kbps	38 5190 MHz	MCS11 287 Mbps	Power State 1 Mode A	ANT 6	Transverse	Pass	-54.06	250	676	26	26	175	376	45 - 46
	54 5270 MHz	MCS11 287 Mbps	Power State 1 Mode A	ANT 6	Transverse	Pass	-54.06	249	676	26	26	174	376	47 - 48
	102 5510 MHz	MCS11 287 Mbps	Power State 1 Mode A	ANT 6	Transverse	Pass	-54.06	248	674	26	26	173	374	49 - 50
	151 5755 MHz	MCS11 287 Mbps	Power State 1 Mode A	ANT 6	Transverse	Pass	-54.06	250	676	26	26	175	376	51 - 52
802.11ax 20 MHz AMR-WB: 6.6 kbps	1 5955 MHz	MCS11 143 Mbps	Power State 1 Mode A	ANT 6	Transverse	Pass	-56.39	249	676	26	26	174	376	53 - 54

10.1. Worst Case T-Coil Test Plot(s)

UL Verification Services Inc. SAR Lab 11

Date/Time: August 14, 2024 at 02:33

T-Coil Signal Test Report: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)

Device Under Test

Manufacturer	Model	Dimensions [mm]	Speaker Position [mm]
		146.2 x 71.8 x 7.5	144.3

Hardware Setup

Probe Name	Probe Calibration Date	DAE Name	DAE Calibration Date
AM1DV3 - 3083	January 08, 2024	DAE4 Sn1352	November 15, 2023

Communication Systems


Band Name	Communication Systems Name	Channel	Frequency [MHz]
Band 41, E-UTRA/TDD PC3	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	40620	2593.0

Grid Settings

Extent X [mm]	Extent Y [mm]	Step X [mm]	Step Y [mm]	Distance [mm]
52.0	52.0	6.0	6.0	10.0

Results


Audio File	Measurement Duration [s]	Margin Upper Bound [dB]	Margin Lower Bound [dB]
48k_voice_300-3000_2s.wav	2.0	0.96	2.0

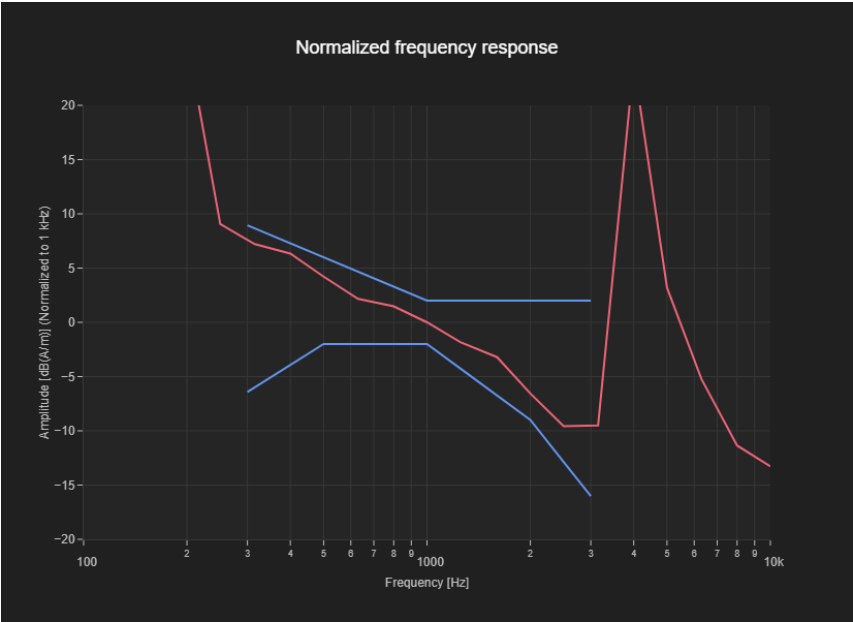

T-Coil Coupling Mode Test Report:

Results

Primary Group Contiguous Point Count	Secondary Group Point Count	Secondary Group Max Longitudinal	Secondary Group Max Transverse
155	497	26	26

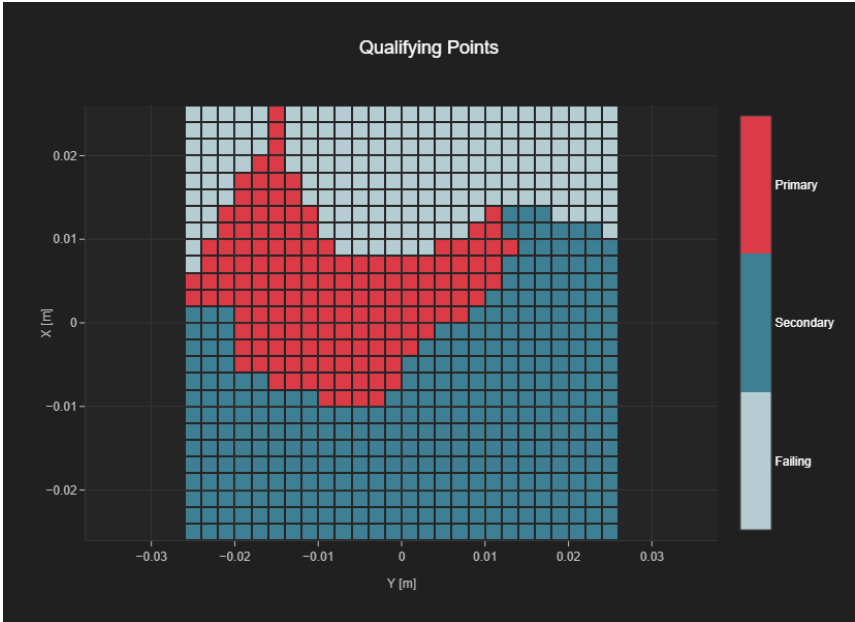

Appendix

Refer to separated files for the following appendixes.

Appendix A: T-Coil Setup Photo

Appendix B: T-Coil Test Plots

Appendix C: T-Coil Probe Certificates

END OF REPORT