

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-218-RWD-034

Reception No. : 2107003324

Applicant : FCUNWIRED

Address : #1110, 11F, Byucksan Digital Valley 6-cha, 219, Gasan Digital 1-ro, Geumcheon-gu, Seoul, Korea

Manufacturer : FCUNWIRED

Address : #1110, 11F, Byucksan Digital Valley 6-cha, 219, Gasan Digital 1-ro, Geumcheon-gu, Seoul, Korea

Type of Equipment : Fall prevention Receiver

FCC ID. : 2A2N3-GCPG900

Model Name : GCPG900

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 37 pages (including this page)

Date of Incoming : July 20, 2021


Date of issue : August 12, 2021

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by
/ Sieon Lee / Assistant Manager
ONETECH Corp.

Reviewed by
/ Ha-Ram Lee / Manager
ONETECH Corp.

Approved by
/Ki-Hong, Nam / General Manager
ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY.....	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.4 CONFIGURATION OF TEST SYSTEM.....	11
5.5 ANTENNA REQUIREMENT	11
6. PRELIMINARY TEST	12
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	12
6.2 GENERAL RADIATED EMISSIONS TESTS	12
7. MIMIMUM 6 DB BANDWIDTH	13
7.1 OPERATING ENVIRONMENT	13
7.2 TEST SET-UP	13
7.3 TEST DATE	13
7.4 TEST DATA	14
8. MAXIMUM PEAK OUTPUT POWER.....	16
8.1 OPERATING ENVIRONMENT	16
8.2 TEST SET-UP	16
8.3 TEST DATE	16
8.4 TEST DATA	17
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	19
9.1 OPERATING ENVIRONMENT	19

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	19
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	19
9.4 TEST DATE	20
9.5 TEST DATA FOR CONDUCTED EMISSION.....	21
9.6 TEST DATA FOR RADIATED EMISSION.....	26
9.6.1 Spurious & Harmonic Radiated Emission.....	26
10. PEAK POWER SPECTRUL DENSITY	27
10.1 OPERATING ENVIRONMENT	27
10.2 TEST SET-UP	27
10.3 TEST DATE	27
10.4 TEST DATA	28
11. RADIATED EMISSION TEST	30
11.1 OPERATING ENVIRONMENT	30
11.2 TEST SET-UP	30
11.3 TEST DATE	31
11.4 TEST DATA	32
11.4.1 Test data for 30 MHz ~ 1 GHz	32
11.4.2 Test Data for Below 30 MHz	33
11.4.3 Test Data for above 1 GHz	33
12. CONDUCTED EMISSION TEST.....	34
12.1 OPERATING ENVIRONMENT	34
12.2 TEST SET-UP	34
12.3 TEST DATE	34
12.4 TEST DATA.....	35
13. LIST OF TEST EQUIPMENT	37

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-218-RWD-034	August 12, 2021	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : FCUNWIRED
Address : #1110, 11F, Byucksan Digital Valley 6-cha, 219, Gasan Digital 1-ro, Geumcheon-gu, Seoul, Korea
Contact Person : SEONHO NA / Engineering Manager
Telephone No. : 82-70-7825-0088
FCC ID : 2A2N3-GCPG900
Model Name : GCPG900
Brand Name : -
Serial Number : N/A
Date : August 12, 2021

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Fall prevention Receiver
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2020
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	Met the Limit / PASS
15.203	Antenna Requirement	Met requirement / PASS

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2020. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

3. GENERAL INFORMATION

3.1 Product Description

The FCUNWIRED, Model GCPG900 (referred to as the EUT in this report) is an Fall prevention Receiver, Product specification information described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Fall prevention Receiver
Rated Supply Voltage	DC 3.7 V
OPERATING FREQUENCY	920.5 MHz ~ 923.5 MHz
MODULATION TYPE	CSS
RF OUTPUT POWER	10.96 dBm
NUMBER OF CHANNEL	3 Channel
ANTENNA TYPE	PCB Antenna
ANTENNA GAIN	-0.62 dBi
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	4 MHz, 16 MHz, 32 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	FCUNWIRED	N/A	N/A
Battery	N/A	DTP502030	N/A

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
GCPG900	FCUNWIRED	Fall prevention Receiver (EUT)	-

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 920.5 MHz, 922.0 MHz, and 923.5 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.


-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
900 MHz	51.4	6.0	89.55	0.96

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : 10 * Log(1 / (Duty Cycle / 100))

-. Test Plot

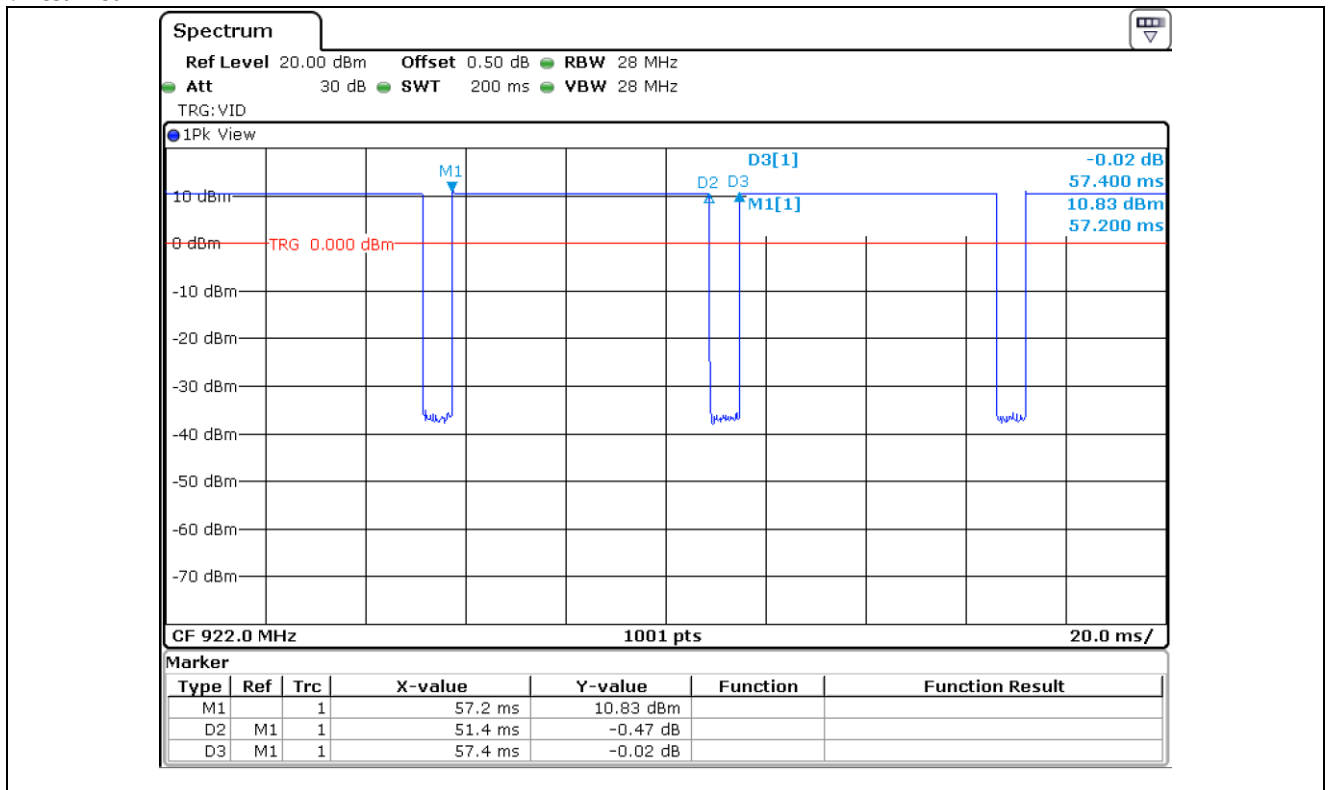

-. Channel List

900 MHz	
Channel	Frequency [MHz]
1	920.5
2	922.0
3	923.5

5.4 Configuration of Test System

Line Conducted Test: The EUT was tested in the Transmitting mode. All supporting equipment were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2020 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is PCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

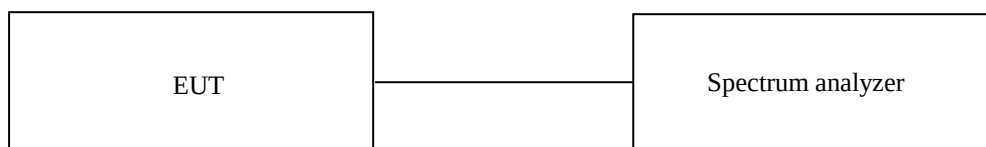

7.3 Test Date


July 22, 2021 ~ August 03, 2021


7.4 Test Data

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (kHz)	LIMIT (kHz)	Margin (kHz)
Low	920.50	626.40	500.00	126.40
Middle	922.00	629.40	500.00	129.40
High	923.50	623.40	500.00	123.40

Remark. Margin = Measured Value - Limit

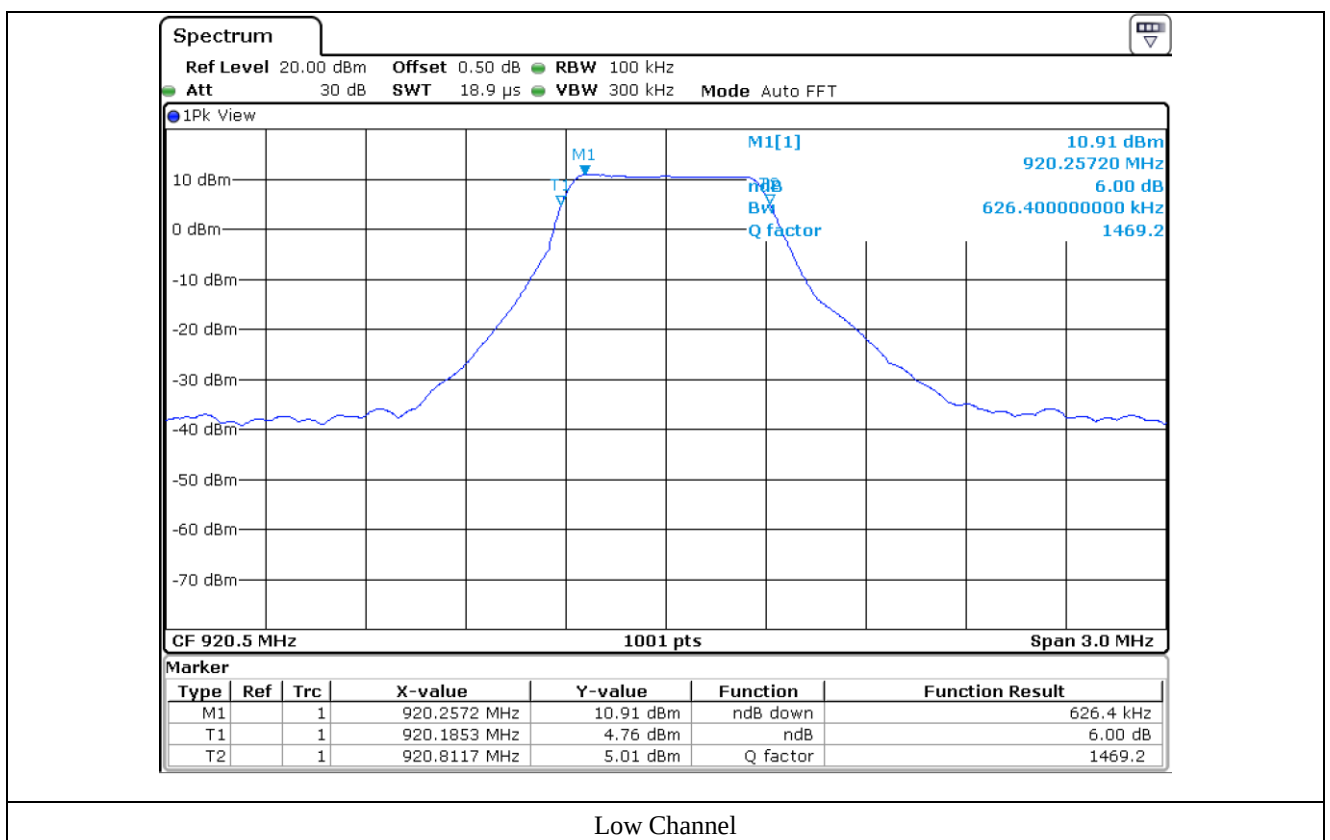

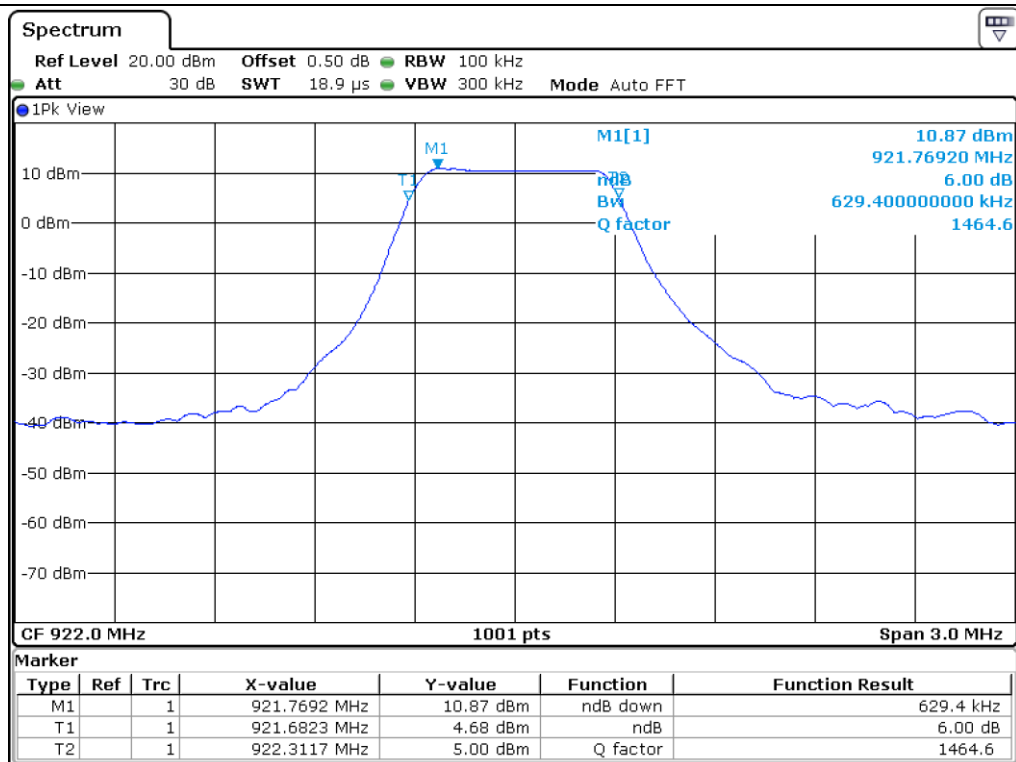

Middle Channel

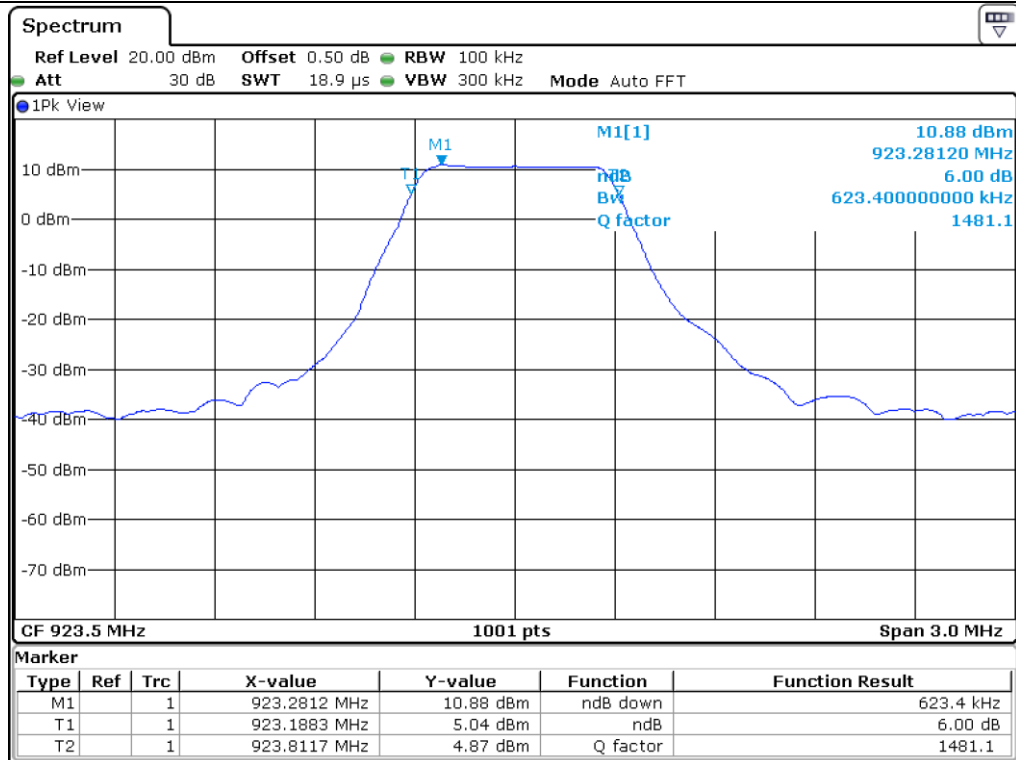

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

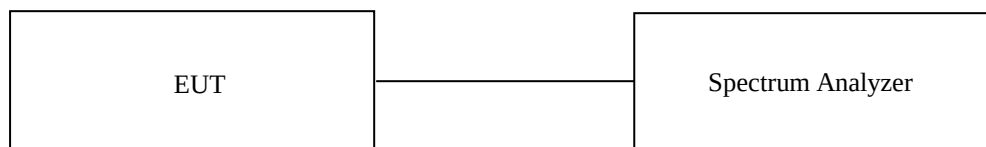

8.3 Test Date


July 22, 2021 ~ August 03, 2021


8.4 Test Data

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth (kHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	920.50	626.40	10.96	30.00	19.04
Middle	922.00	629.40	10.94	30.00	19.06
High	923.50	623.40	10.88	30.00	19.12

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

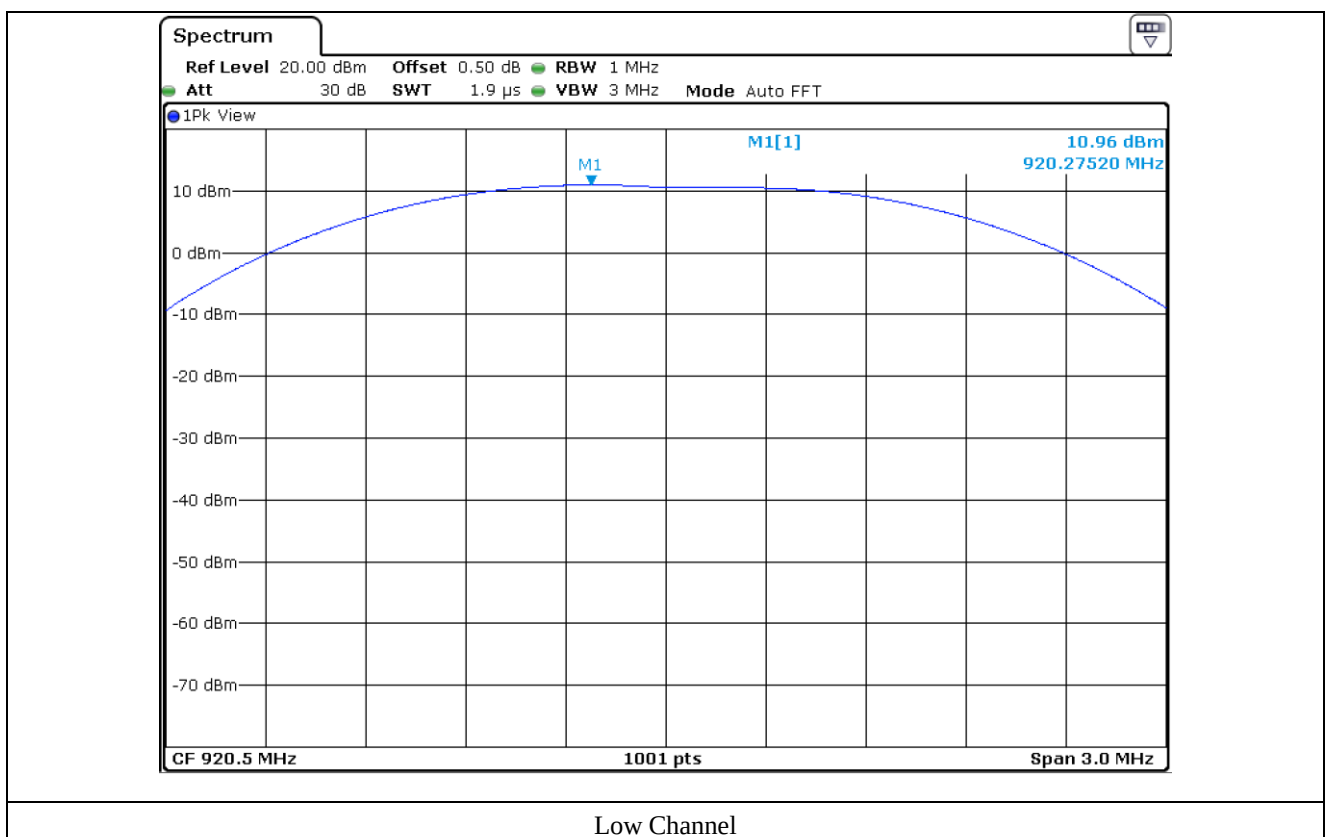

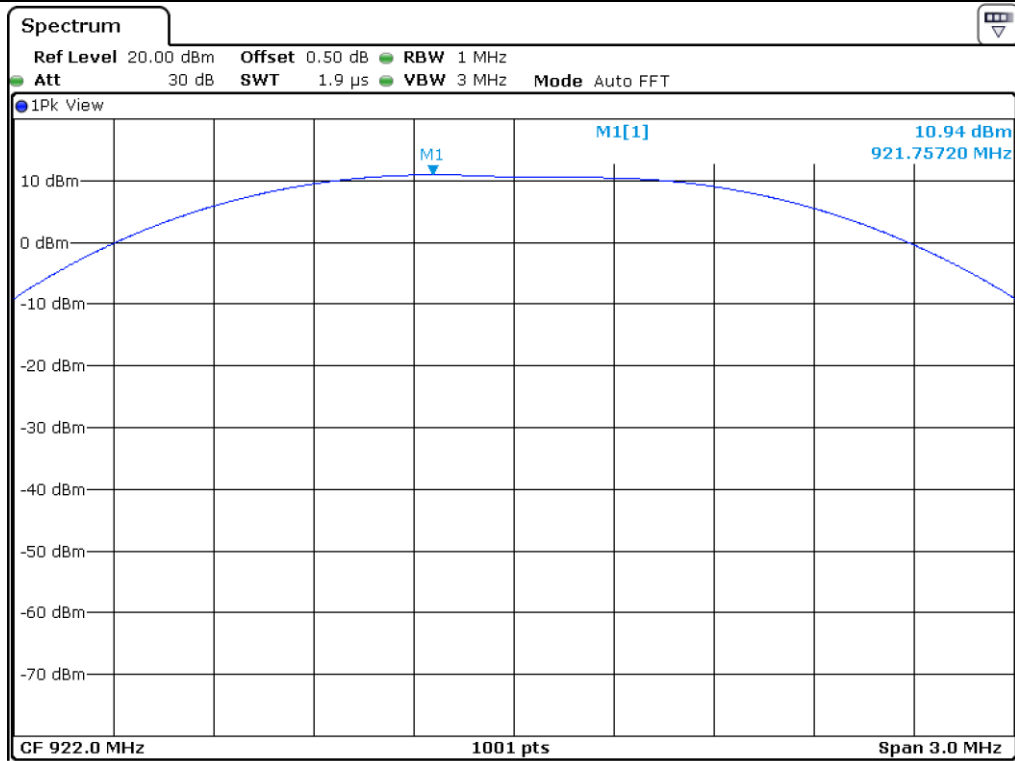

Middle Channel

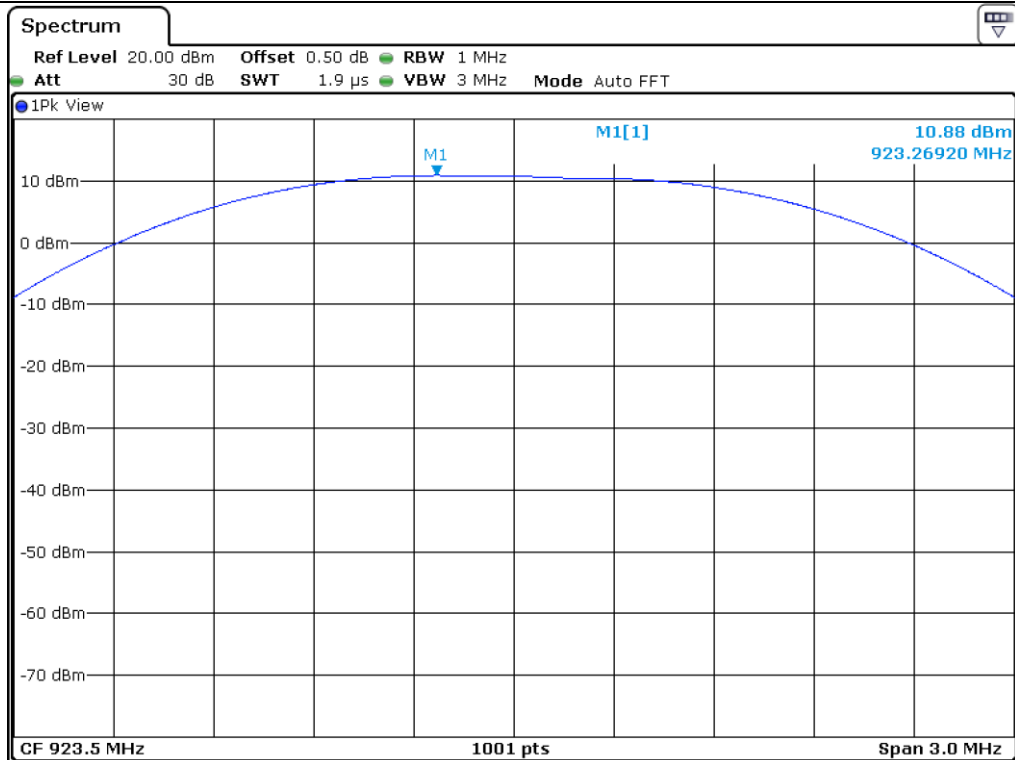

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

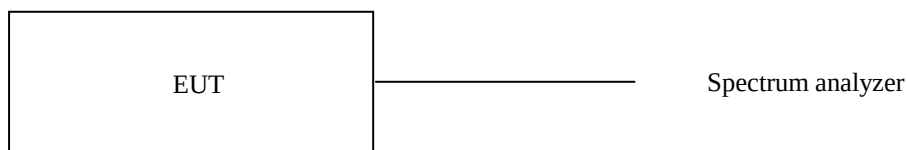


9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 10 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

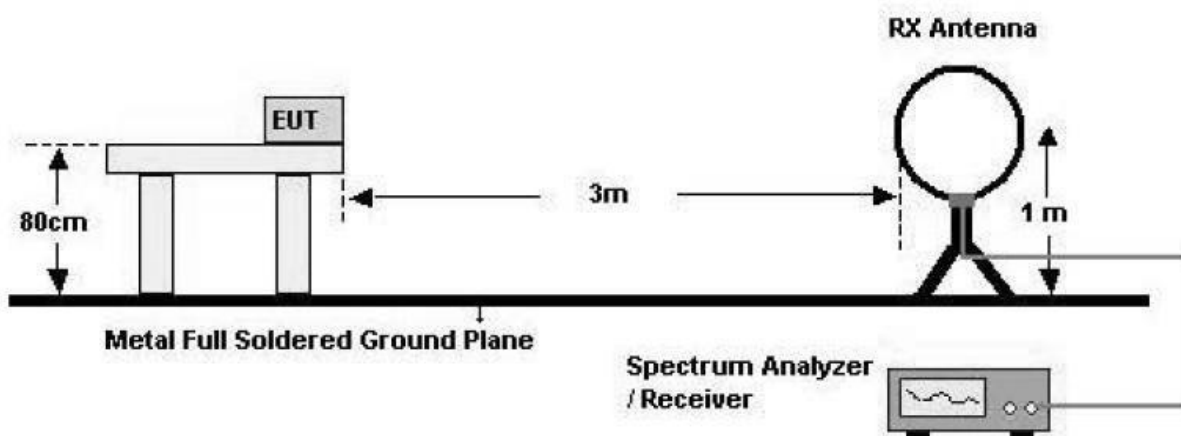

2. 30 MHz - 1 GHz

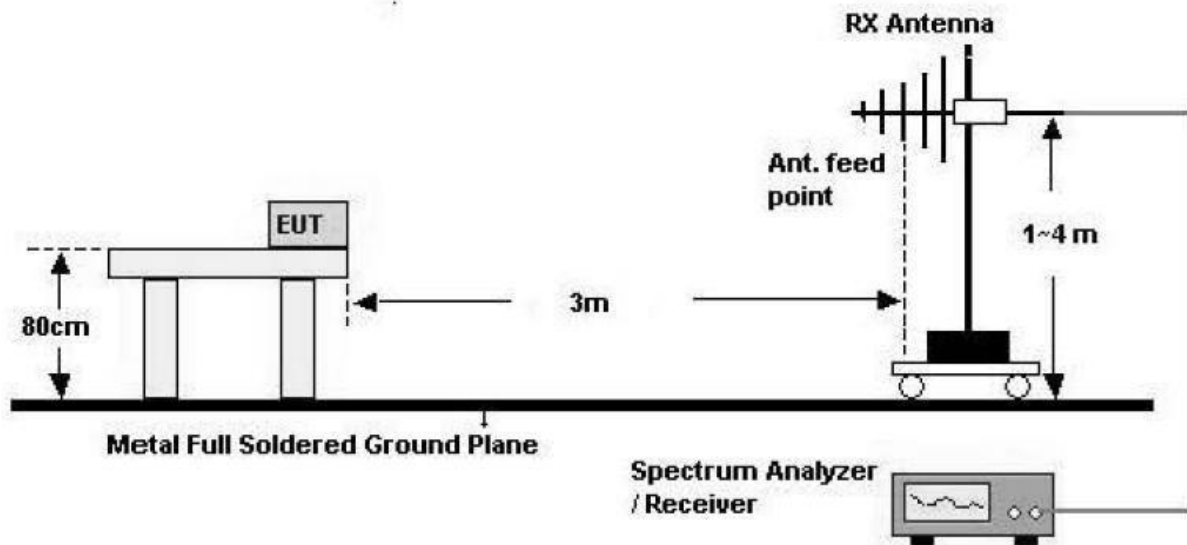


3. Above 1 GHz

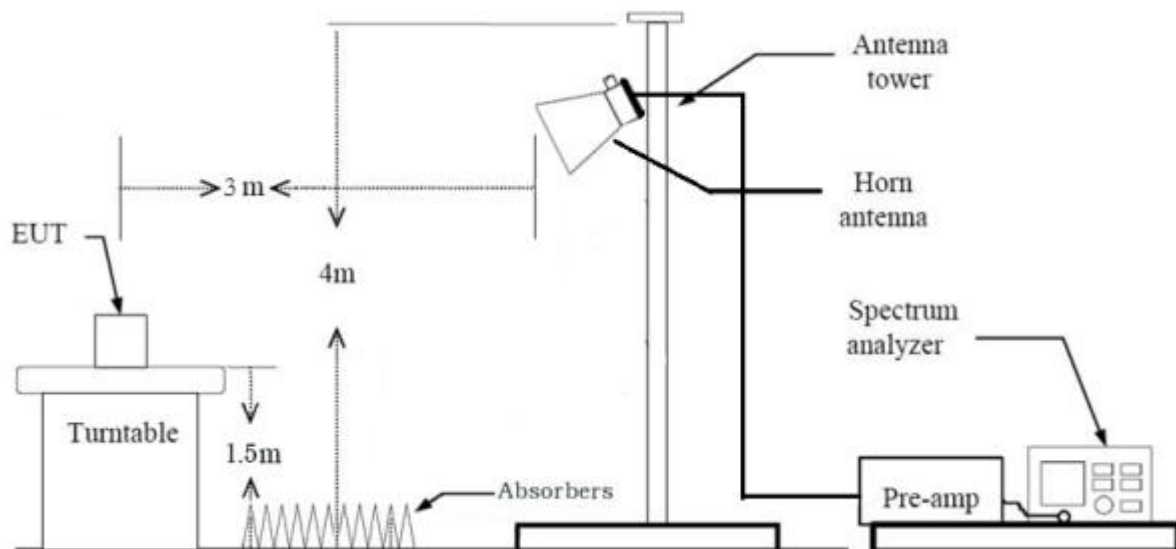

9.4 Test Date

July 22, 2021 ~ August 03, 2021

9.5 Test Data for conducted emission

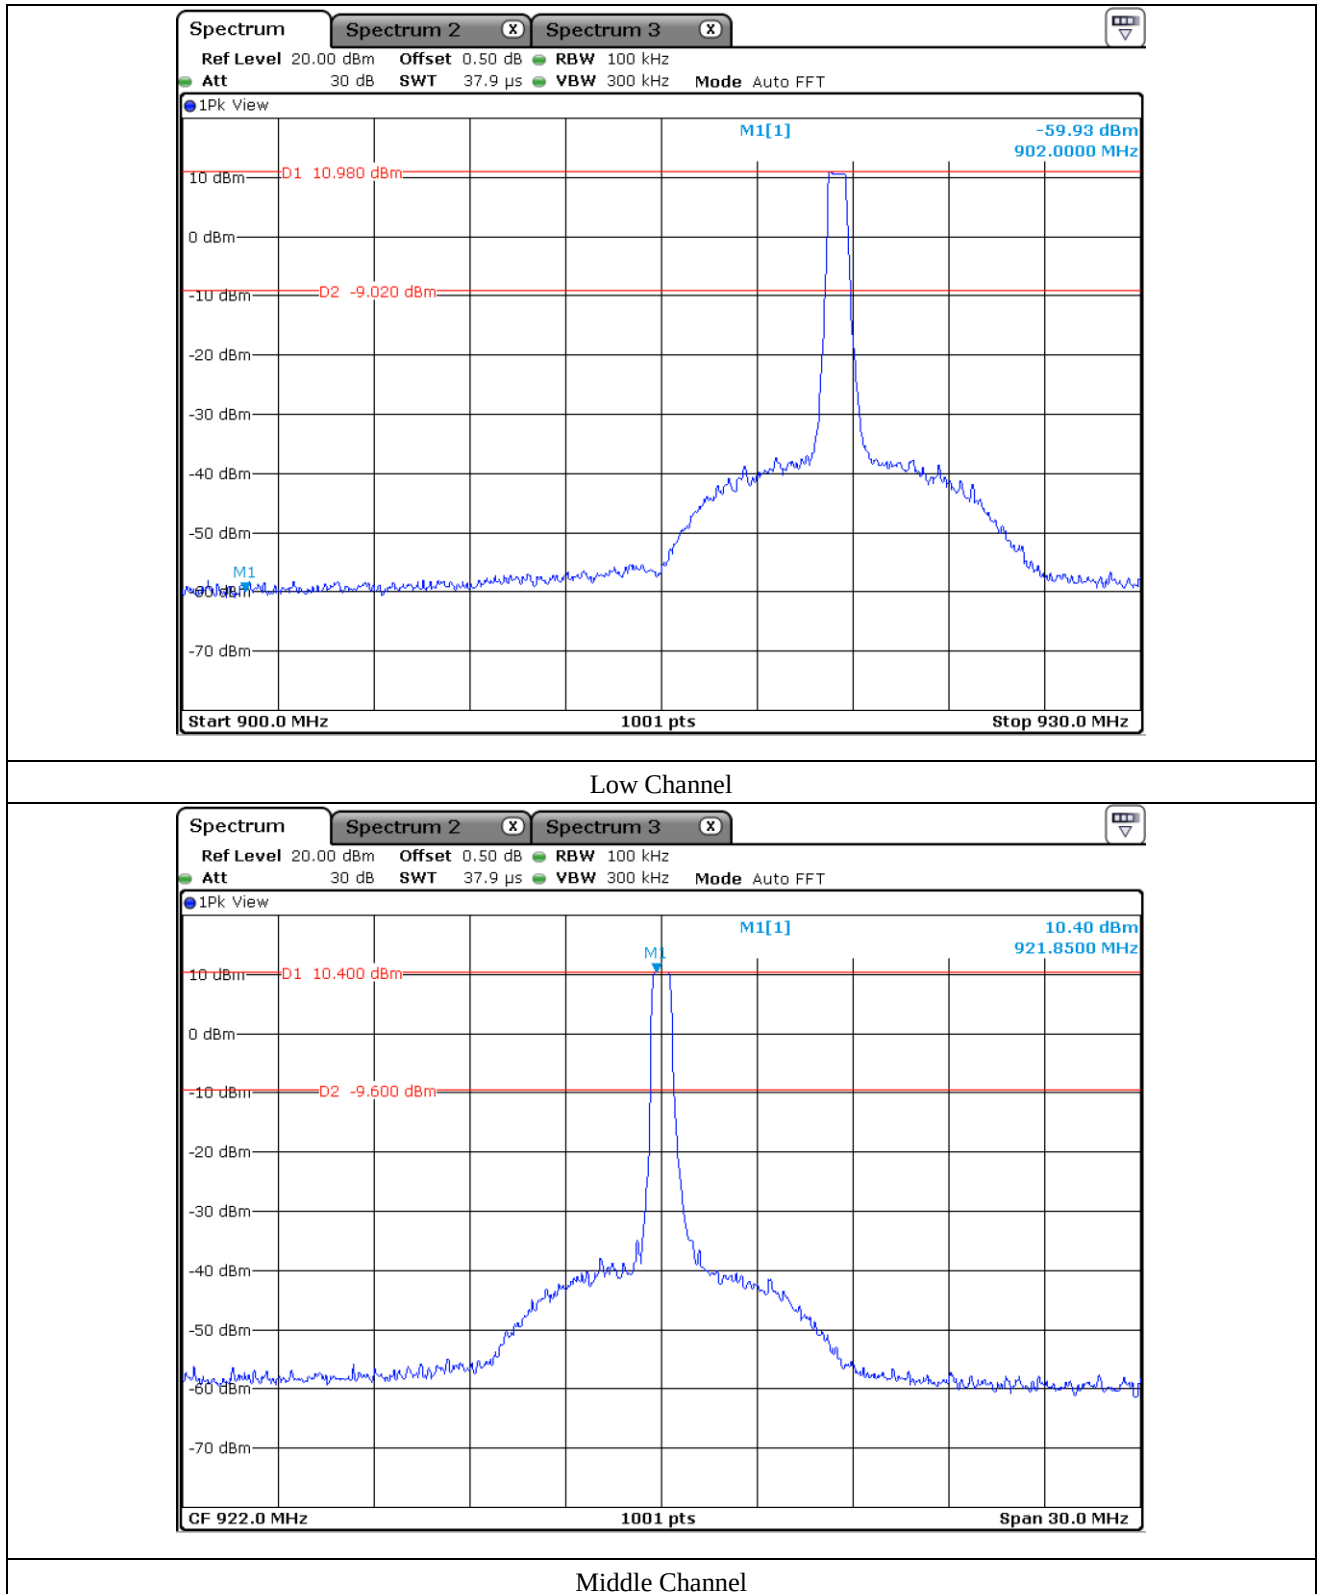


This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

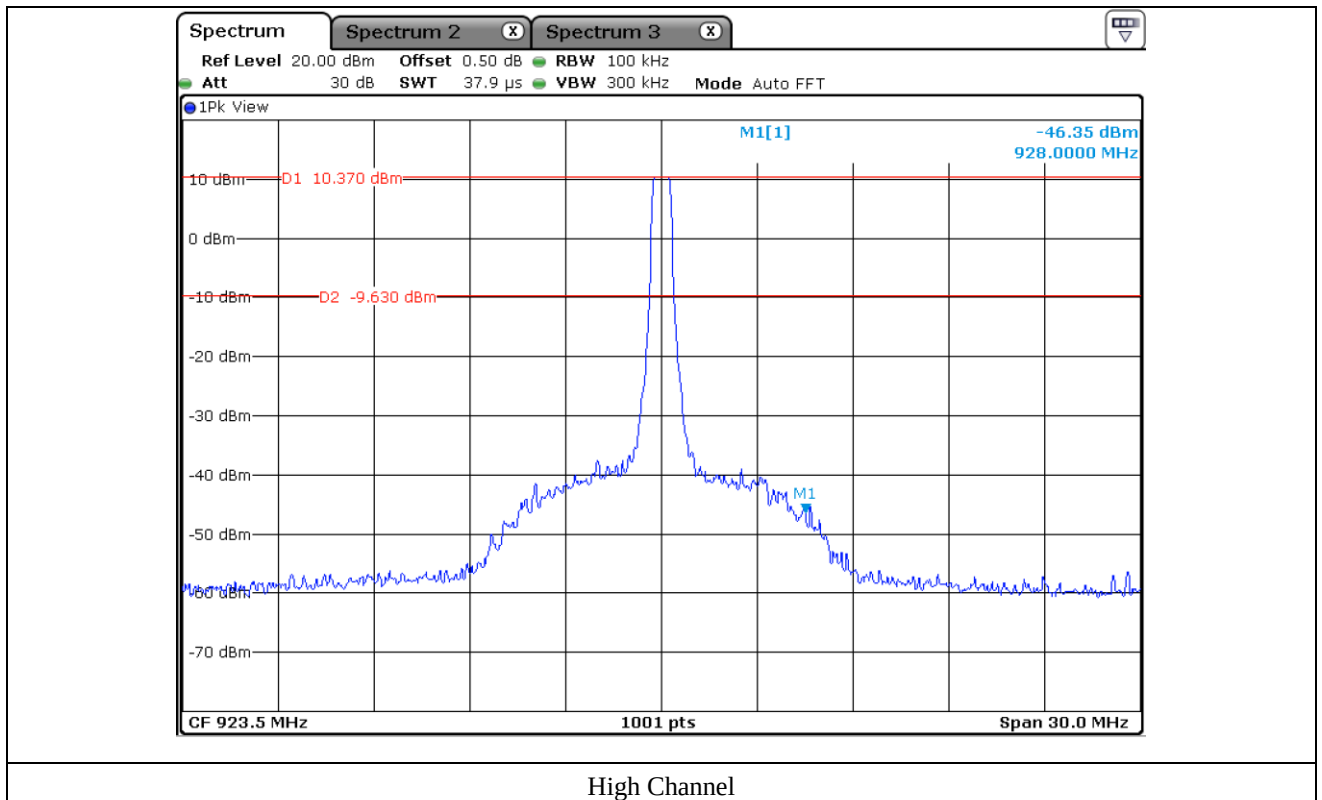

High Channel

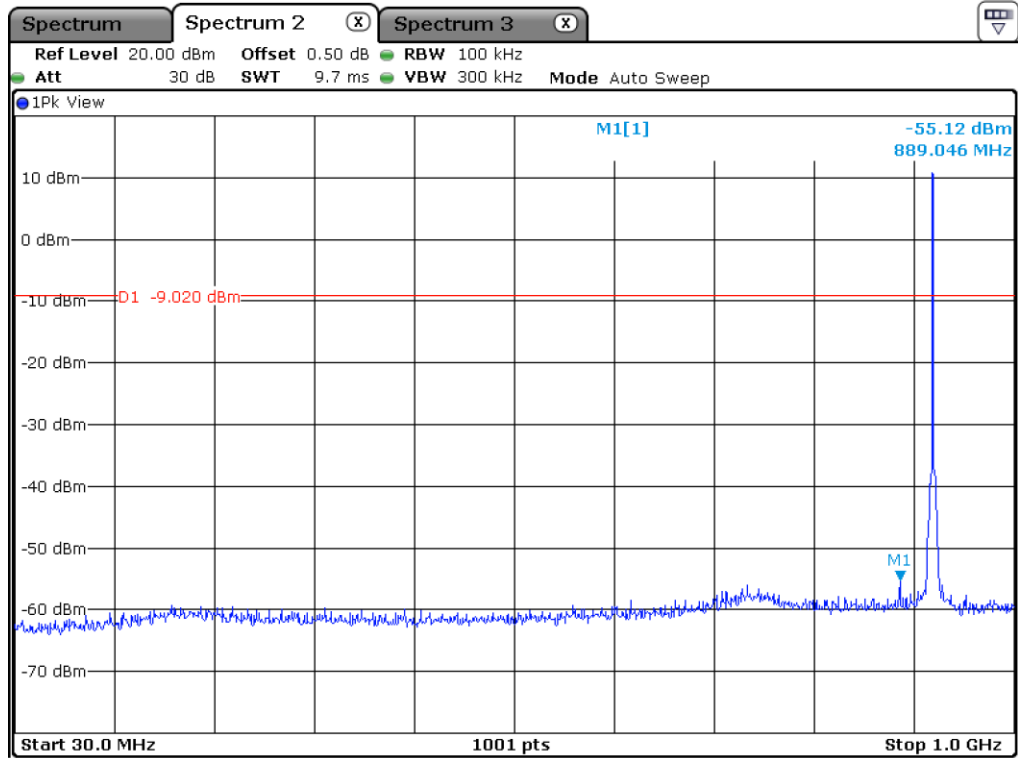

Low Channel

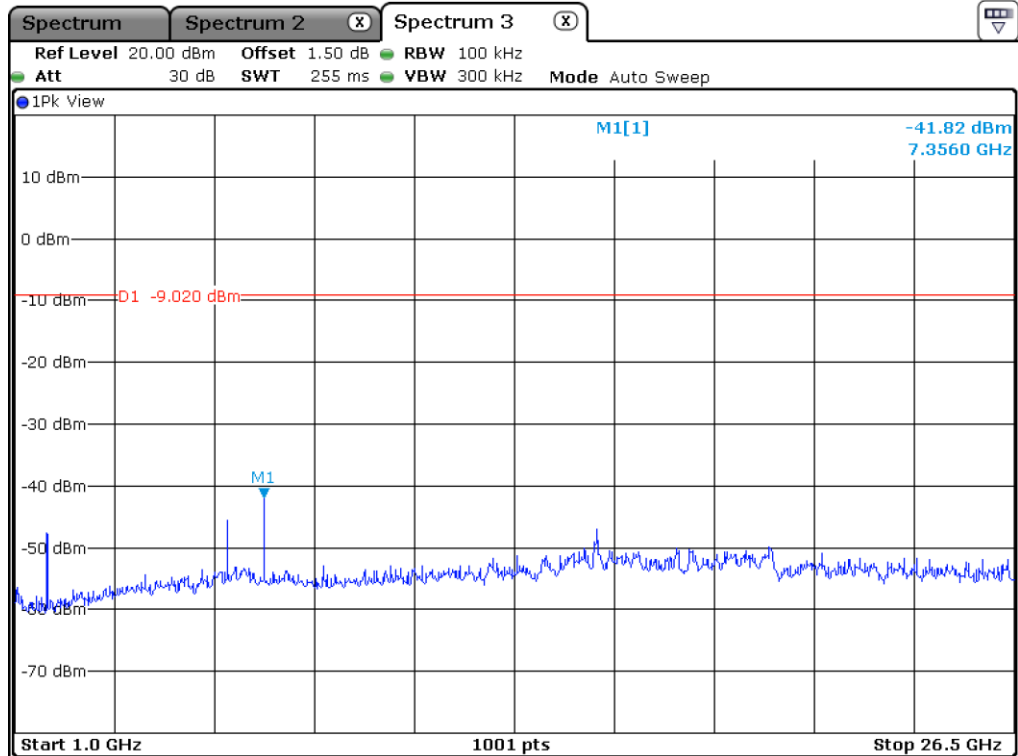


Low Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

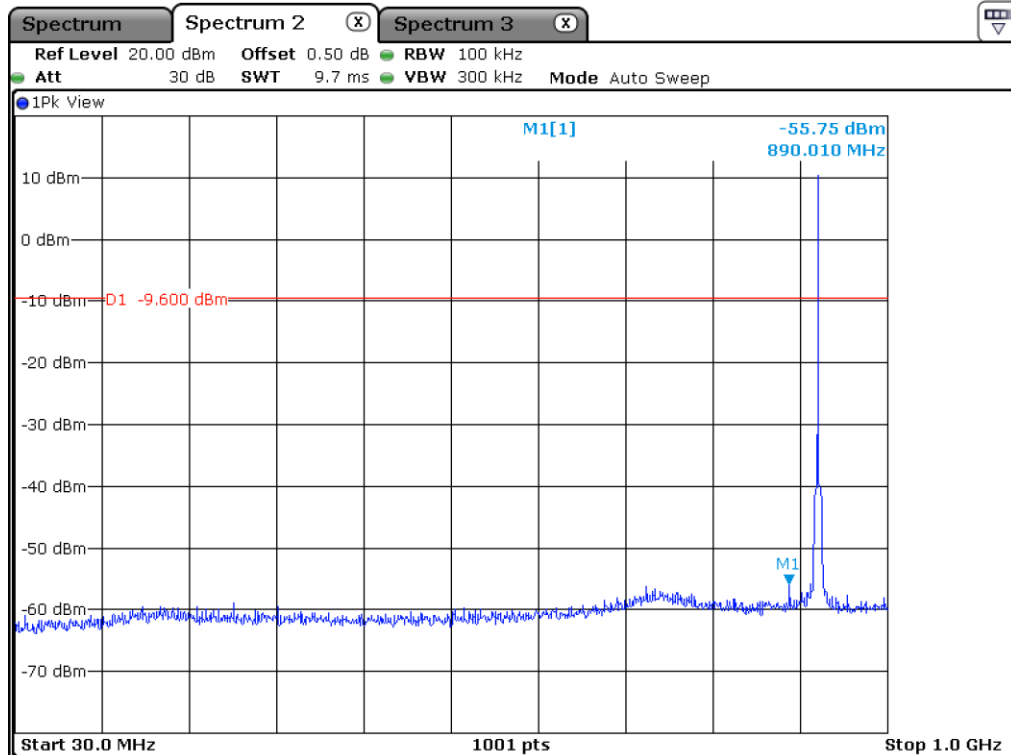

Middle Channel

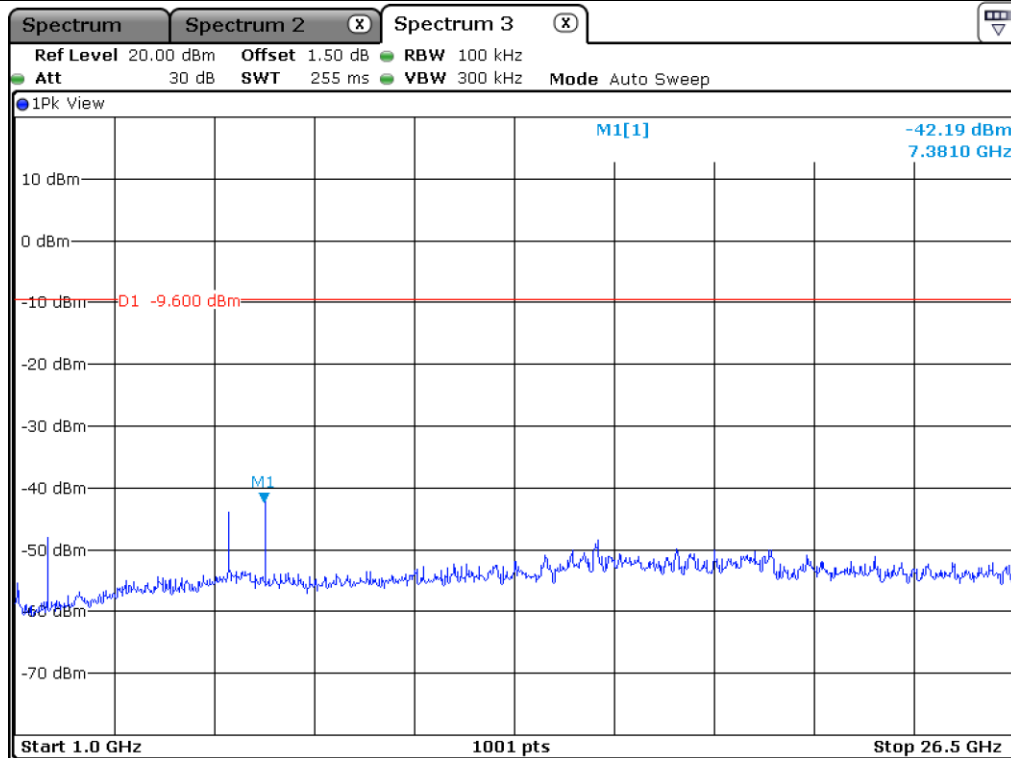


Middle Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

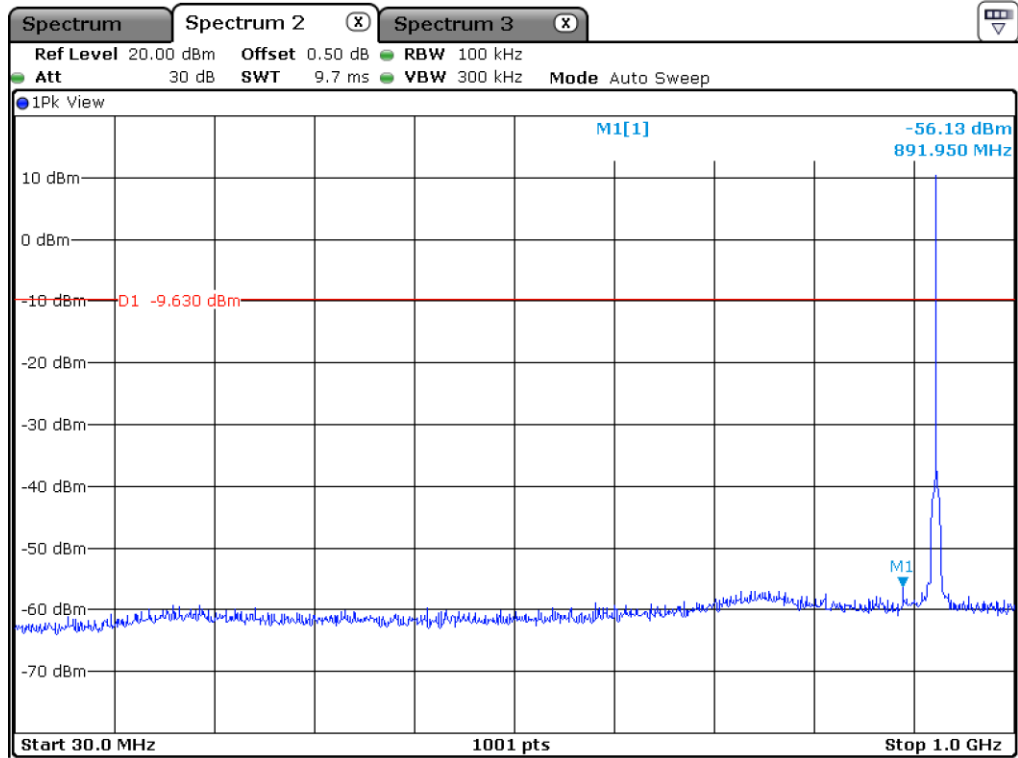

High Channel

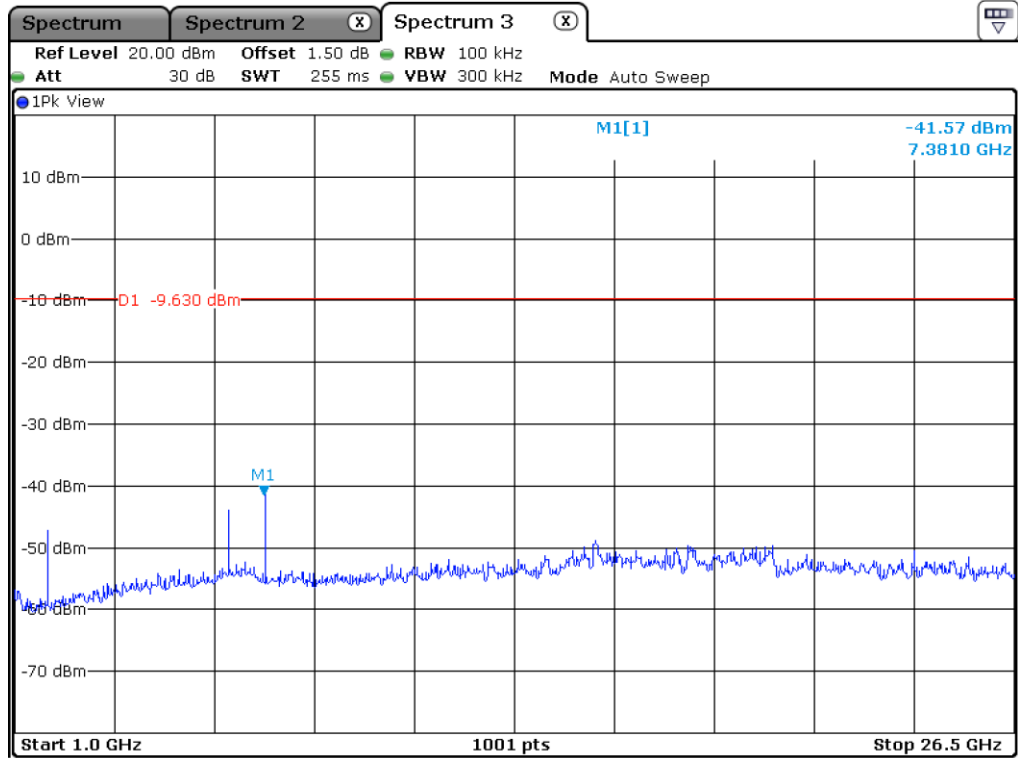

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

9.6 Test data for radiated emission

9.6.1 Spurious & Harmonic Radiated Emission

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 89.55 %
- Result : PASSED

Frequency (MHz)	Reading (dBuV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor(dB)	Total (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1 841.00	58.02	Peak	H	26.10	7.10	46.00	-	45.22	74.00	28.78
1 841.00	51.45	Average	H	26.10	7.10	46.00	0.96	39.61	54.00	14.39
1 841.00	57.95	Peak	V	26.10	7.10	46.00	-	45.15	74.00	28.85
1 841.00	51.26	Average	V	26.10	7.10	46.00	0.96	39.42	54.00	14.58
1 844.00	58.76	Peak	H	26.10	7.10	46.00	-	45.96	74.00	28.04
1 844.00	52.74	Average	H	26.10	7.10	46.00	0.96	40.90	54.00	13.10
1 844.00	58.37	Peak	V	26.10	7.10	46.00	-	45.57	74.00	28.43
1 844.00	52.50	Average	V	26.10	7.10	46.00	0.96	40.66	54.00	13.34
1 847.00	59.27	Peak	H	26.10	7.10	46.00	-	46.47	74.00	27.53
1 847.00	53.95	Average	H	26.10	7.10	46.00	0.96	42.11	54.00	11.89
1 847.00	58.93	Peak	V	26.10	7.10	46.00	-	46.13	74.00	27.87
1 847.00	53.59	Average	V	26.10	7.10	46.00	0.96	41.75	54.00	12.25

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Duty Factor - Amp Gain

10. PEAK POWER SPECTRUL DENSITY


10.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

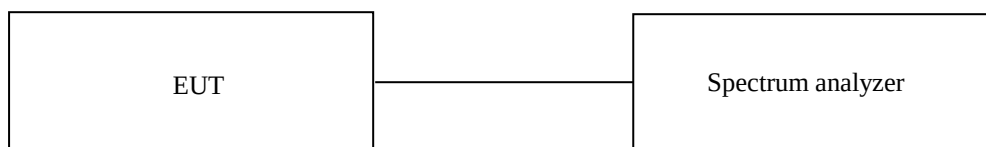

10.3 Test Date

July 22, 2021 ~ August 03, 2021


10.4 Test Data


-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VLAUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	920.50	0.36	8.00	7.64
Middle	922.00	0.32	8.00	7.68
High	923.50	0.26	8.00	7.74

Remark. Margin = Limit – Measured value

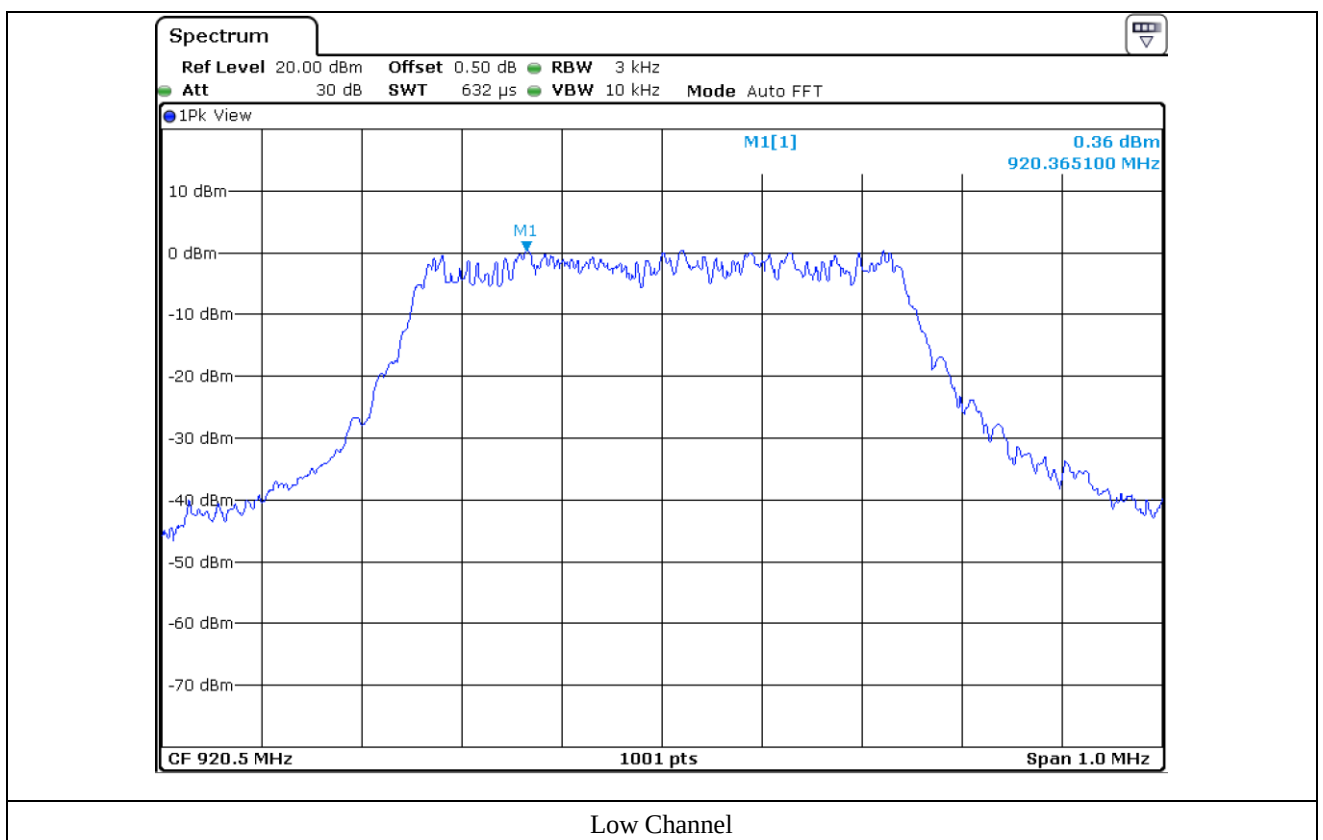

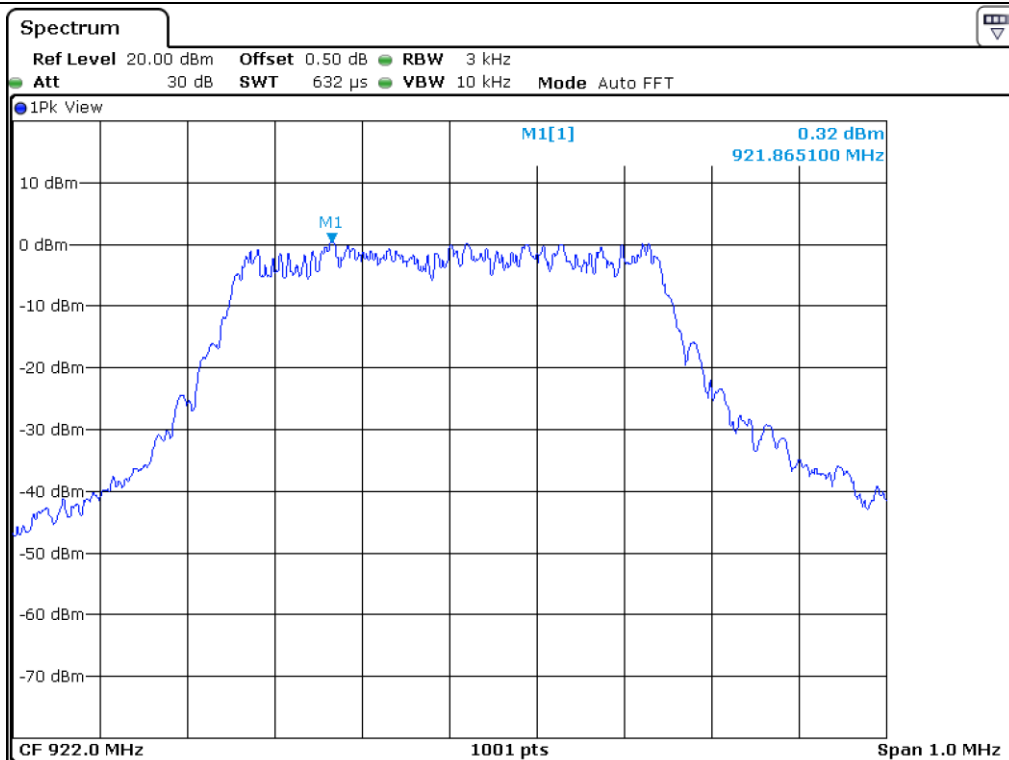

Middle Channel

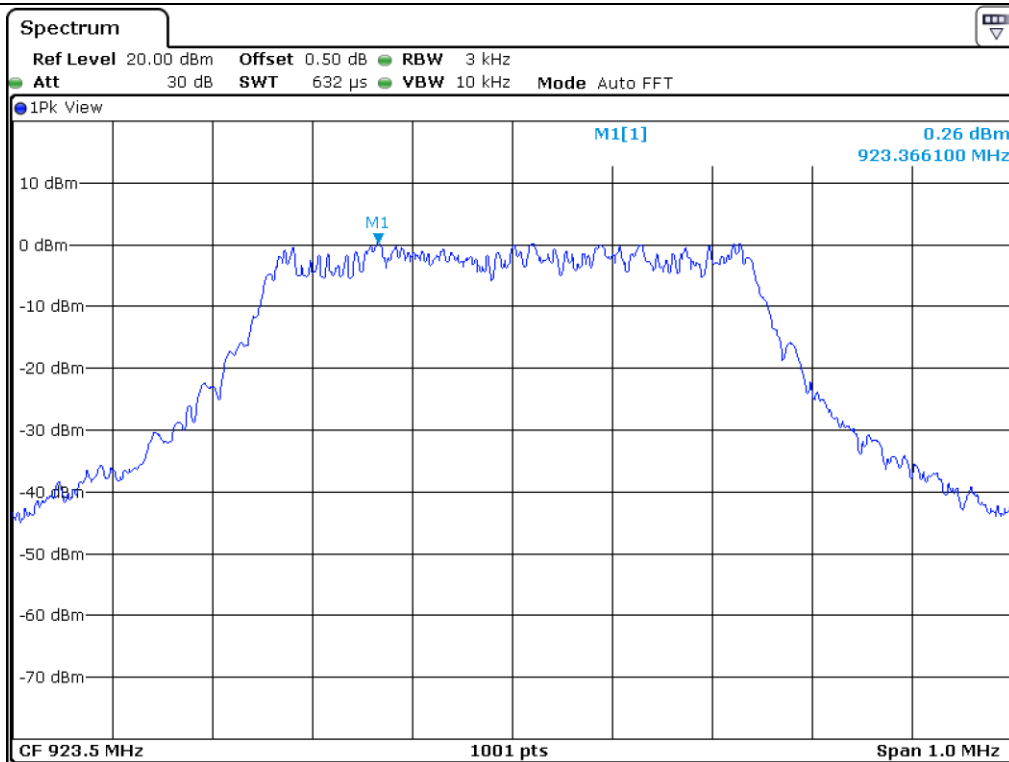

High Channel

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 10 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

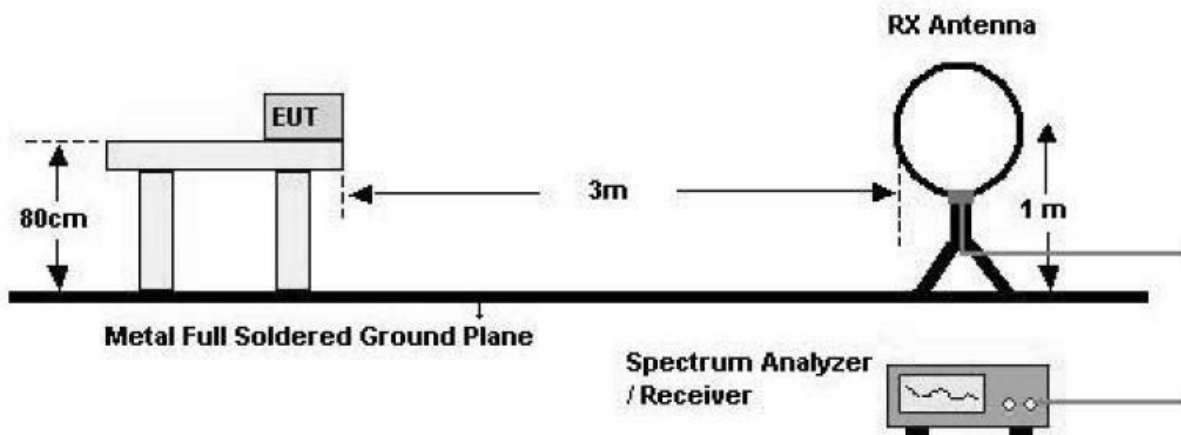

2. 30 MHz - 1 GHz

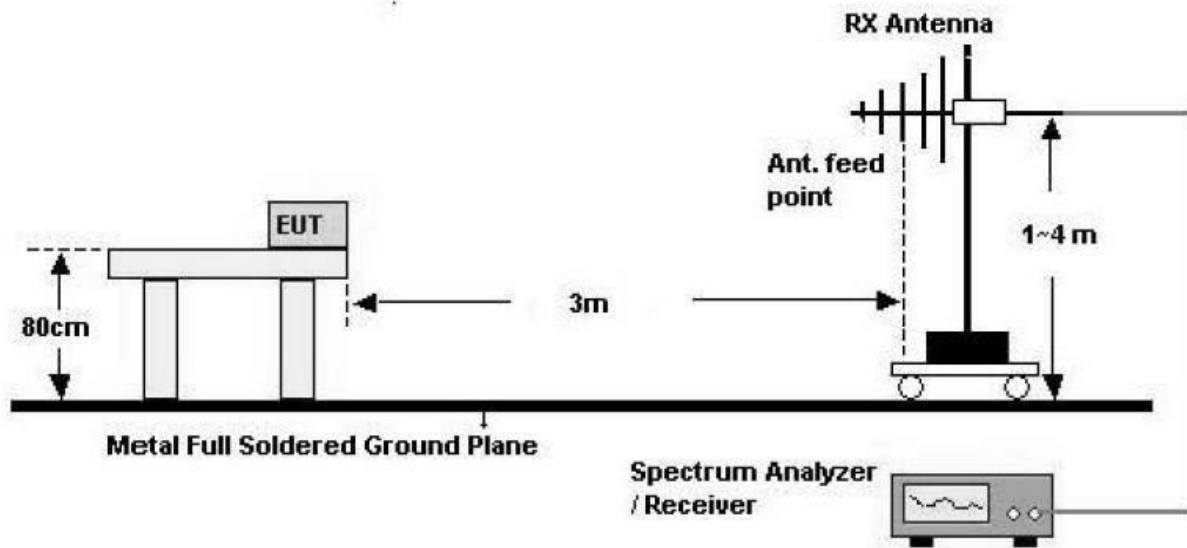

3. Above 1 GHz

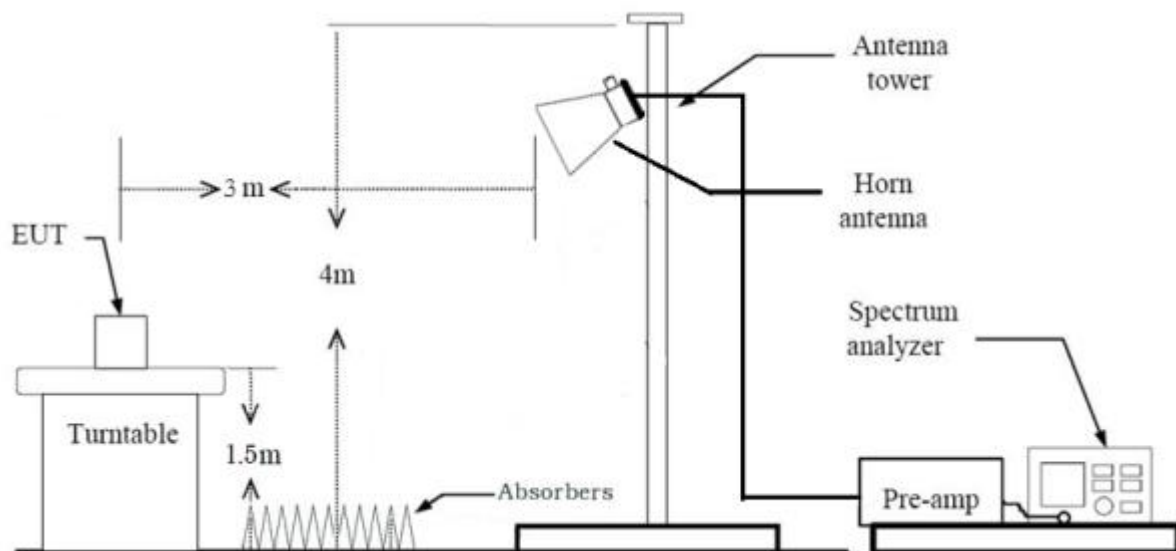

11.3 Test Date

July 22, 2021 ~ August 03, 2021

11.4 Test Data


11.4.1 Test data for 30 MHz ~ 1 GHz

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Fall prevention Receiver

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

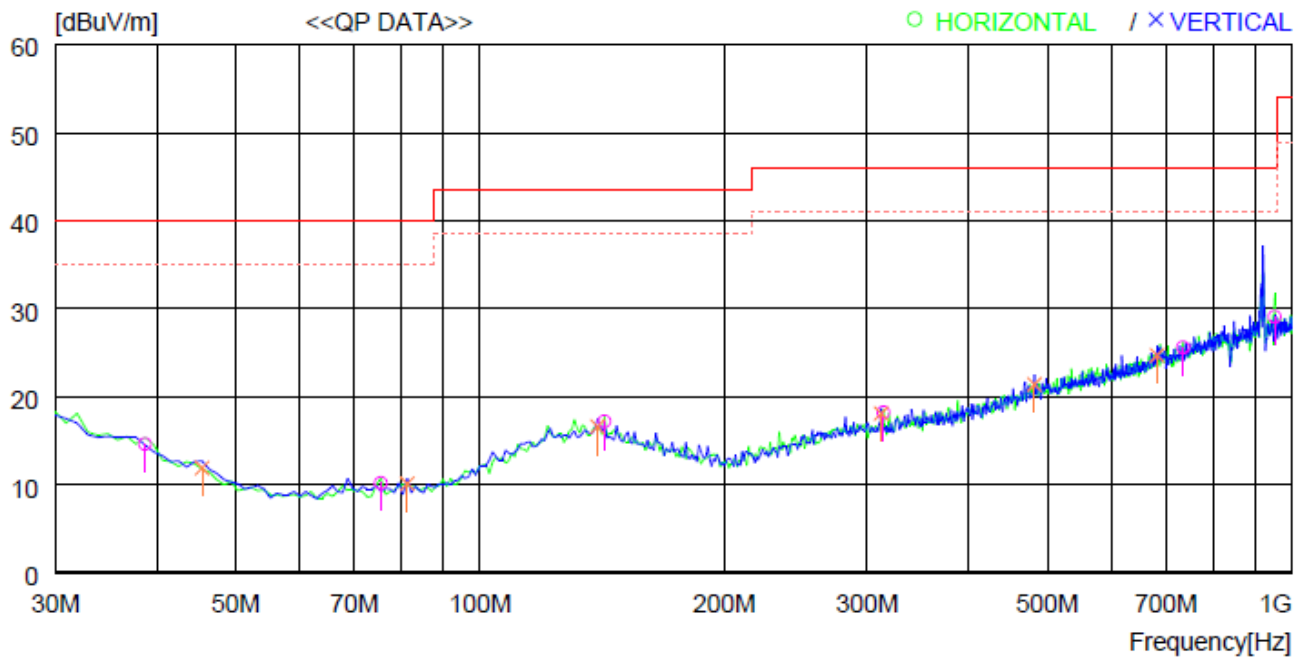

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	38.730	27.5	17.8	1.3	32.0	14.6	40.0	25.4	300	0
2	75.590	27.7	12.9	1.6	32.0	10.2	40.0	29.8	300	0
3	142.520	27.8	19.3	2.1	32.0	17.2	43.5	26.3	200	359
4	314.210	27.7	19.4	3.1	32.0	18.2	46.0	27.8	200	359
5	735.184	26.9	26.1	4.8	32.2	25.6	46.0	20.4	100	0
6	952.457	27.1	28.0	5.4	31.4	29.1	46.0	16.9	200	359
----- Vertical -----										
7	45.520	27.6	15.0	1.4	32.1	11.9	40.0	28.1	100	333
8	81.410	27.4	13.0	1.7	32.0	10.1	40.0	29.9	200	0
9	139.610	27.0	19.5	2.1	32.0	16.6	43.5	26.9	100	340
10	312.270	27.6	19.4	3.1	32.0	18.1	46.0	27.9	400	0
11	482.021	27.2	22.7	3.8	32.3	21.4	46.0	24.6	400	5
12	682.805	27.0	25.4	4.6	32.3	24.7	46.0	21.3	400	0

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

11.4.2 Test Data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.4.3 Test Data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 10 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. CONDUCTED EMISSION TEST

12.1 Operating environment

Temperature : 22 °C
Relative humidity : 46 % R.H.

12.2 Test set-up


The EUT was placed on a wooden table, 0.8 m height above the floor. Power was fed to the EUT through a 50 Ω / 50 μ H + 5 Ω Artificial Mains Network (AMN). The ground plane was electrically bonded to the reference ground system and all power lines were filtered from ambient.

12.3 Test Date

July 22, 2021 ~ August 03, 2021

12.4 Test data

-. Operating mode : Transmitting mode
 -. Channel : Low Channel
 -. Resolution bandwidth : 9 kHz
 -. Frequency range : 0.15 MHz ~ 30 MHz
 -. Tested Line : HOT LINE

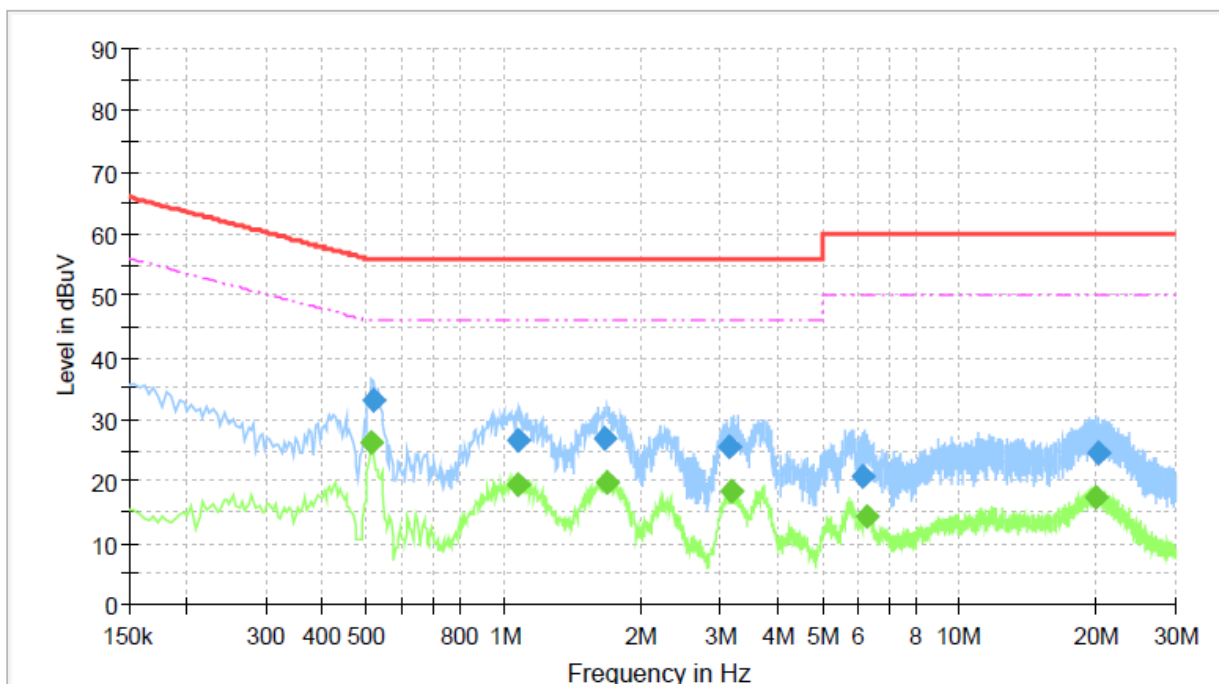

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
6.142	20.83	---	60.00	39.17	9.0	L1	10.12
20.237	24.44	---	60.00	35.56	9.0	L1	10.64
3.134	25.45	---	56.00	30.55	9.0	L1	10.03
1.077	26.56	---	56.00	29.44	9.0	L1	9.97
1.672	27.08	---	56.00	28.92	9.0	L1	10.00
0.516	32.91	---	56.00	23.09	9.0	L1	9.93
20.041	---	17.29	50.00	32.71	9.0	L1	10.64
6.282	---	14.42	50.00	35.58	9.0	L1	10.13
1.073	---	19.45	46.00	26.55	9.0	L1	9.97
0.512	---	26.39	46.00	19.61	9.0	L1	9.93
3.146	---	18.52	46.00	27.49	9.0	L1	10.03
1.684	---	19.92	46.00	26.08	9.0	L1	10.00


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

ONETECH Corp.: 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea (TEL: 82-31-799-9500, FAX: 82-31-799-9599)

- Operating mode : Transmitting mode
- Channel : Low Channel
- Resolution bandwidth : 9 kHz
- Frequency range : 0.15 MHz ~ 30 MHz
- Tested Line : NEUTRAL LINE

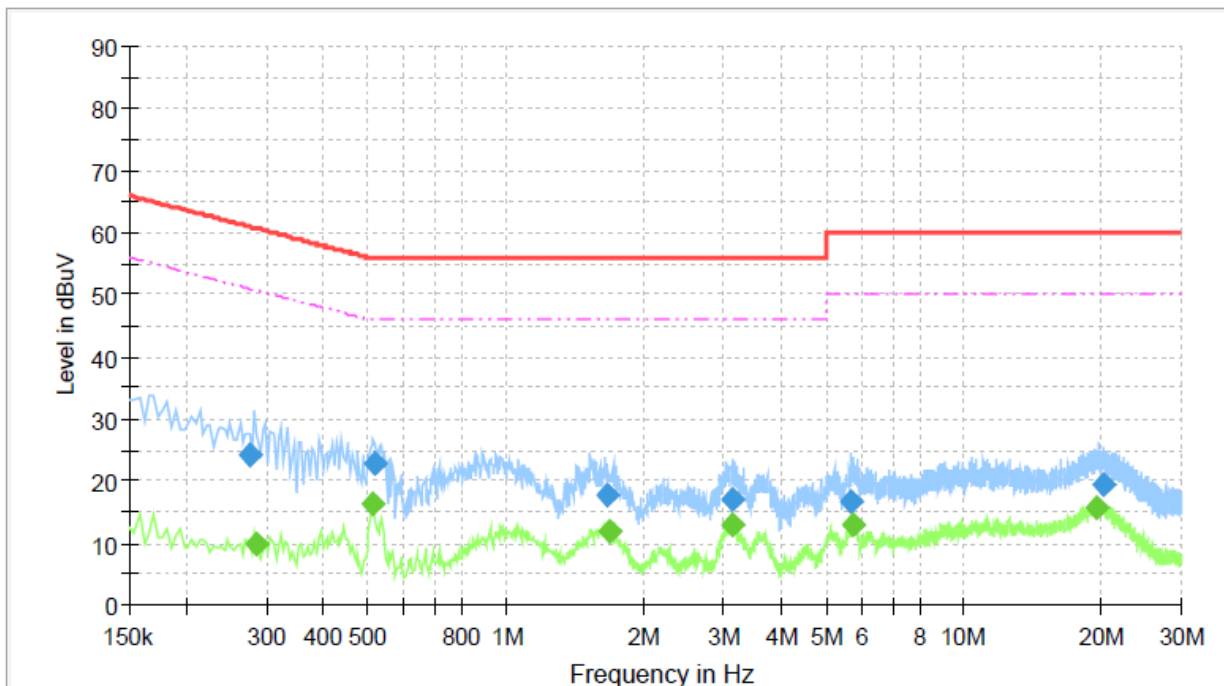

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
5.660	16.65	---	60.00	43.35	9.0	N	10.13
3.116	16.94	---	56.00	39.06	9.0	N	10.06
1.657	17.61	---	56.00	38.39	9.0	N	10.01
20.245	19.29	---	60.00	40.71	9.0	N	10.78
0.516	22.98	---	56.00	33.02	9.0	N	9.94
0.276	24.37	---	60.93	36.56	9.0	N	9.94
0.284	---	9.98	50.69	40.71	9.0	N	9.94
0.512	---	16.49	46.00	29.51	9.0	N	9.94
1.687	---	12.04	46.00	33.96	9.0	N	10.01
3.112	---	12.90	46.00	33.10	9.0	N	10.06
5.724	---	12.99	50.00	37.01	9.0	N	10.14
19.541	---	15.73	50.00	34.27	9.0	N	10.77

Remark: Margin (dB) = Limit – Level (Result)

The emission level in above table is included the transducer factor that means insertion loss (LISN), cable loss and attenuator.

13. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101457	Apr. 16, 2021 (1Y)
ESW	Rohde & Schwarz	EMI Test Receiver	101851	Mar. 23, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2020 (1Y)
SCU18	Rohde & Schwarz	Signal Conditioning unit	102266	Jul. 14, 2021 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
HLP-2008	TDK RF Solutions	Hybrid Antenna	131316	Feb. 27, 2020 (2Y)
AH-118	Com-Power	Horn Antenna	10050061	Oct. 15, 2020 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 24, 2020(2Y)
ESR3	Rohde & Schwarz	EMI Test Receiver	102602	Mar. 15, 2021 (1Y)
ESH3Z2	Rohde & Schwarz	PULSE LIMITER	357.8810.52	Mar. 15, 2021 (1Y)
NSLK8126	Schwarzbeck	LISN	8126404	Mar. 15, 2021 (1Y)
3825/2	EMCO	AMN	9109-1869	Mar. 15, 2021 (1Y)
WRCGV10-860-880-915-935-70ST	Wainwright Instruments GmbH	Band Reject Filter	1	Jul. 14, 2021 (1Y)