

# Honeywell Home

## TUXEDOW Home Automation and Security System

### Quick User Setup Guide

For additional information see the full User Guide [Part Number 800-25177 or higher] available online at: <https://mywebtech.honeywellhome.com>

The TUXEDOW Touchscreen combines control of your home security system and home automation.

Your Home/Security screen is the gateway to your System.

From this screen, you can:


- control your security system
- ▲ control your multi-media applications such as videos and pictures
- ▲ control home automation such as lighting, thermostat, door locks and water valves.

Your Home screen is displayed most of the time and can be customized via the Multimedia application.

Select  to access the Introduction and Training Videos.

#### Weather Forecast

The Weather forecast is displayed on the Home screen. To set the weather forecast for a specific location, select the Weather feature. Select Region **USA**, **Canada** or **Others**. Select **Zip Code** and enter the information on the data entry keyboard and select . **Note:** The Weather option must be enabled.

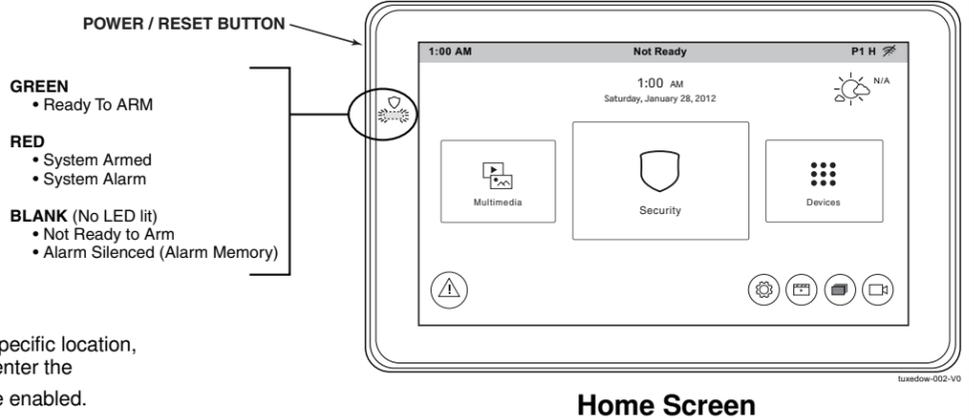

Home Screen

The TUXEDOW Touchscreen can show displays in one of three languages with the default being English. To change the language, select the **Setup**  → and **Disp & Audio**  icons and enter your Authorized Code (if required) and then select from English, French Canadian, and Latin American Spanish.

#### ARMING THE SYSTEM

From the Home Screen:

Select the **Security icon** .

You can arm the system in one of three arming modes: Away, Stay, and Night. Select the **Security icon**.

##### ARM AWAY

**AWAY** – Select to arm when no one is staying on the premises.

##### ARM STAY

**STAY** - Select to arm when you are staying home, but might expect someone to use the entrance door later.

##### ARM NIGHT

**NIGHT** - Select to arm when you are staying home and do not expect anyone to use the entrance door.

**IMPORTANT:** If you return to your home or business and the main burglary sounder is on, DO NOT enter the premises, but call the police from a nearby safe location. If you return to your home or business after an alarm has occurred and the main sounder has shut itself off, the Touchscreen beeps rapidly upon entering, indicating that an alarm has occurred during your absence. **LEAVE IMMEDIATELY and CONTACT THE POLICE** from a nearby safe location.

To disarm the system when already in the premises: select the **Disarm icon**

 and enter your 4-digit user code.

To disarm the system when entering the premises: enter your 4-digit user code.

#### DISARMING THE SYSTEM AND SILENCING ALARMS

To silence Alarms or Trouble conditions: enter your 4-digit user code, select the **Clear** button, then enter your 4-digit user code again.

To test the Alarm, select the **Security**  and **More Choices**  icons.

-Select **Console Mode**  and refer to Control Panel User Guide for procedure.

#### EMERGENCY MESSAGES

An emergency message for fire, police, or medical can be sent to the central monitoring station from the **Emergency** screen. Select the **PANIC** icon (located in the lower left corner of the screen). Select and hold (for at least 2 seconds) the associated alarm icon.



PANIC



SILENT PANIC



FIRE



POLICE



MEDICAL

#### SECURITY

From the Home Screen: Select the **Security icon** .

#### SETUP

Select the **Setup**  and **System Setup icon** .

Select the **System Info icon** .

1. View the latest Software Version, Interface name and MAC Address.

Select the **Setup**  and **System Setup icon** .

1. Select the **Time and Date icon** .
2. Enter an Authorized Code.
  - a) If **Get Time** is selected, the Touchscreen downloads the time/date from the control panel and exits the "Set Time" screen.
  - b) Or, use the slide bar to set the time/date from the **Set Time/Date** screen.
3. Select  to save: A message displays "Time Setting Confirmation", select **Yes** or **No**.

Select the **CS Setup icon** .

1. Enter an Authorized Code to access **ECP Address**, **Options**, **Screen Security**, **Device Events**, **Code Authority** and **Panel Config** and enter the appropriate information for each.
2. Select the **Back**  arrow to return to the previous screen.

Select the **User icon** .

1. Select  to add a User name and enter an Authorized Code for this user.
  - Select  to save User information or select the **Back**  arrow to return to the previous screen.

Select the **Advanced icon** .

1. Enter an Authorized Code to access: **Power Mode Setup**  / **Night Setup** 
  - / **Keypad Reset** .
  - **Power Mode Setup:** Select the desired power save mode (Turn-off Network / Override Display Settings).
  - **Night Setup:** Select the desired night setup mode (Away / Stay / Instant / Maximum / Night).
  - **Keypad Reset:** Processor reset; select **OK** or **Cancel**.

**Touchscreen Reset:** To reset the Touchscreen, press and hold the side Power Button for 3 seconds and then select the "Press here to Reset" message on the screen to start the reset function. The Touchscreen can also be reset by pressing and holding the reset button for approximately 15 seconds until the touchscreen resets automatically.

#### Operating Modes

Select the **Setup** and **Disp & Audio** icons.

1. Enter an Authorized Code.

Select the desired **Operating Mode: Chime Mode or Voice Mode**.

Select a Language: English / French / Spanish.

- Select "Backlight off After" to select the time increment for the backlight to be lit.
  - Select "To Homepage After" to select the time increment for the homepage to be displayed.
  - Select "Auto Slideshow After" to select the time increment for viewing photos.
- Select a **Fahrenheit (°F)** or **Celsius (°C)**.
- Select  **Apply** when done or select the **Back** arrow to return to previous screen.

#### Wi-Fi Setup

Select the **System Wi-Fi icon**  and select a Wi-Fi network from the list to connect to. Or, select  to add the required information and manually connect to the network, and select **Connect**. Or select cancel.

Select the **System Info icon** to obtain the IP Address.

#### AUTOMATION - Devices

First install the device according to the manufacturer's instructions.

Select the **Devices**  and **Scene**  icons. Enter the required device information on the **Z-Wave Device Management** screen. Select **Add**, **Edit** or **Delete** to manage devices.

Select the **Setup**  icon to enter required Z-Wave information and to access options to ADD DEVICE, REMOVE DEVICE, ABORT OPERATION, REMOVE FAILED, DEVICE

SETUP, DEVICE SEARCH. Select the **More**  icon for more options.

See the Full User Guide "Automation Section" for more information.

#### ICON DESCRIPTIONS

ICON	ICON TITLE/FUNCTION
	"Home" - Returns you to the Home screen.
	"Security"- Arm the system and access the three arming modes.
	"Setup" - Accesses System Info, System Setup, System Wi-Fi, Disp & Audio Setup and Brightness / Volume.
	"Devices" - Accesses automation features.
	"Setup" - Accesses the Z-Wave Device Management screen.
	"Scene"- Access the Z-Wave Device Management screen.
	"Multimedia" - Accesses Videos and Images.
	"Wi-Fi" - Accesses Wi-Fi setup options.
	"Disp & Audio Setup" – Accesses Operating Modes, Language, Backlight, Homepage and Slideshow options.
	"Authorized Code" - Enter 4-digit authorized code.
	Adjusts the Touchscreens Brightness and Volume.
	"More"- Access more device automation options.

**NOTE:** If the TUXEDOW touchscreen is defaulted, it will cause Z-Wave modules to default.

## MULTIMEDIA

**Picture Setup:** Insert a media card (Micro SD/SDHC) with up to 1000 stored (jpg, .bmp, .png or .jpeg) photos.

1. Select the **Multimedia**  → **Picture**  icons; then select the **Picture** folder to view.
2. Select a photo and select **Play**  to view pictures in a slide show format.
3. To set a picture as wallpaper, select the **Default/Wallpaper** folder to activate the wallpaper setting.
4. Select the **Picture Info** icon  to view picture information.
5. Select **Back**  to return to the previous screen.

**Video Setup:** Insert a media card (Micro SD/SDHC) with stored (avi, .ts, .mpg, .mp4, .mov, .mkv, or .flv) video files.

1. Select the **Multimedia**  → **Picture**  icons; then select the **Video** folder to view.
2. Select **Play**  to start the selected video file.
3. Select the  icon to view video information.

## TROUBLE ICONS

The Security screen also displays an Icon(s) if a system trouble(s) occurs. If a Trouble Icon is shown, contact your alarm company.



## CARE AND MAINTENANCE

### Routine Care

Treat the components of your security system as you would any other electrical equipment. Do not slam sensor-protected doors or windows. Keep dust from accumulating on the keypad and all protective sensors, particularly on motion sensors and smoke detectors. Keypad case and sensors should be carefully dusted with a dry soft cloth. **Do not spray water or any other fluid on the units.**

### Clean Screen

With the exception of normal cleaning, the keypad is maintenance free.

1. Select the **Setup**  and the **Disp & Audio Setup**  icons.
2. Enter your "Authorized Code", if required.
3. Select the **CLEAN SCREEN** button to disable the keypad for 26 seconds.
4. Select **Continue** to disable the touchscreen.
5. Select **Cancel** to exit.

**Note:** The product should not be disposed of with other household waste. Check for the nearest authorized collection centers or authorized recyclers. The correct disposal of end-of-life equipment will help prevent potential negative consequences for the environment and human health.

### ISED RF Exposure Statement

This device complies with ISED RSS-102 RF exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the IC RSS-102 RF exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation.

Cet appareil est conforme aux limites d'exposition aux rayonnements de la CNR-102 définies pour un environnement non contrôlé. Afin d'éviter la possibilité de dépasser les limites d'exposition aux fréquences radio de la CNR-102, la proximité humaine à l'antenne ne doit pas être inférieure à 20 cm (8 pouces) pendant le fonctionnement normal.

**Warning:** 5G Band 5150-5250MHz is only for indoor use.

**Avertissement:** la bande 5G 5150-5250 MHz est uniquement destinée à une utilisation en intérieur.

## FEDERAL COMMUNICATIONS COMMISSION & ISED STATEMENTS

The user shall not make any changes or modifications to the equipment unless authorized by the Installation Instructions or User's Manual. Unauthorized changes or modifications could void the user's authority to operate the equipment.

### FCC CLASS B STATEMENT

This equipment has been tested to FCC requirements and has been found acceptable for use. The FCC requires the following statement for your information:

This equipment generates and uses radio frequency energy and if not installed and used properly, that is, in strict accordance with the manufacturer's instructions, may cause interference to radio and television reception. It has been type tested and found to comply with the limits for a Class B computing device in accordance with the specifications in Part 15 of FCC Rules, which are designed to provide reasonable protection against such interference in a residential installation. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- If using an indoor antenna, have a quality outdoor antenna installed.
- Reorient the receiving antenna until interference is reduced or eliminated.
- Move the radio or television receiver away from the receiver/control.
- Move the antenna leads away from any wire runs to the receiver/control.
- Plug the receiver/control into a different outlet so that it and the radio or television receiver are on different branch circuits.
- Consult the dealer or an experienced radio/TV technician for help.

### INDUSTRY CANADA CLASS B STATEMENT

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

### FCC / IC STATEMENT

This device complies with Part 15 of the FCC Rules, and ISED's license-exempt RSSs. Operation is subject to the following two conditions: (1) This device may not cause harmful interference (2) This device must accept any interference received, including interference that may cause undesired operation.

Cet appareil est conforme à la partie 15 des règles de la FCC et exempt de licence RSS d'ISED. Son fonctionnement est soumis aux conditions suivantes: (1) Cet appareil ne doit pas causer d'interférences nuisibles. (2) Cet appareil doit accepter toute interférence reçue y compris les interférences causant une réception indésirable.

Responsible Party / Issuer of Supplier's Declaration of Conformity: Honeywell International, 2 Corporate Center Dr., Melville, NY 11747, Ph: 516-577-2000.

## FIRE AND CARBON MONOXIDE ALARM OPERATION

Your fire alarm system and carbon monoxide detector (if installed) is on 24 hours a day, providing continuous protection. In the event of an emergency, the installed smoke, heat, carbon monoxide detectors automatically send signals to your Control/Communicator, triggering a loud interrupted sound from the Touchscreen. An interrupted sound is also produced by optional exterior sounders. **EVACUATE ALL OCCUPANTS FROM THE PREMISES IMMEDIATELY.** Notify your Central Station/Security Company immediately and wait for further instructions.

Wi-Fi® and the Wi-Fi logo are registered trademarks of Wi-Fi Alliance.

	<b>RF EXPOSURE WARNING</b> The TUXEDOW Touchscreen must be installed to provide a separation distance of at least 7.8 in. (20 cm) from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter except in accordance with FCC multi-transmitter product procedures.
	<b>Mise en Garde</b> <b>Exposition aux Fréquences Radio:</b> L'antenne (s) utilisée pour cet émetteur doit être installée à une distance de séparation d'au moins 7,8 pouces (20 cm) de toutes les personnes.

### UL Notes:

- Medical functionality has not been evaluated by UL and may not be used in UL Listed applications.
- Remote arming/disarming/programming is not to be used in UL Listed Installations.
- Multimedia functionality is supplementary only and has not been evaluated by UL.
- Access control functionality has not been evaluated by UL and may not be used in UL Listed applications.
- Web Server/Hosting is not Listed for use in UL installations.
- Z-Wave applications have not been evaluated by UL.
- Camera functionality is supplementary only and has not been evaluated by UL.
- The maximum time delay setting that can be used with this keypad is 15 seconds.
- Connect only keypads to: Aux. + / Aux. - and Data input / Data output.

## Two Year Limited Warranty

### 1. Limited Warranty.

#### a. General

Subject to the terms and conditions of this Limited Warranty and except as provided in Section 1(b), Seller warrants its products to be free from defects in materials and workmanship under normal use and service, normal wear and tear excepted, for 24 months from the manufacture date code; provided, however, that in the event the Buyer presents a proper invoice relating to the purchased product and such invoice bears a date later than the manufacture date, then Seller may at its discretion, reflect the warranty period as commencing at invoice date. Except as required by law, this Limited Warranty is only made to Buyer and may not be transferred to any third party.

Seller shall have no obligation under this Limited Warranty or otherwise if:

- (i) The product is improperly installed, applied or maintained;
- (ii) Installed outside of stated operating parameters, altered or improperly serviced or repaired by anyone other than the Seller/Seller's Authorized Service/Repair Center;
- (iii) Damage is caused by outside natural occurrences, such as lightning, power surges, fire, floods, acts of nature, or the like.

In addition, this Limited Warranty shall not apply to:

- (iv) Defects resulting from unauthorized modification, misuse, vandalism, alterations of serial numbers, other causes unrelated to defective materials or workmanship, or failures related to batteries of any type used in connection with the products sold hereunder.
- Non-Seller branded products are warranted by the third party manufacturer for a period as defined by the third party manufacturer. Seller assigns to the Buyer those warranties and only those warranties extended by such third party manufacturers or vendors for non-Seller branded products. Seller does not itself warrant any non-Seller branded product an sells only on an as is basis.

#### b. Exceptions to Warranty With Respect to Resideo Manufactured Products listed below:

Hardwire Contacts - Seller warrants parts for Hardwire Contacts in accordance with the terms of the above limited warranty for a period of five (5) years from the manufacture date code.

Hardwire PIRs - Seller warrants parts for Hardwire PIRs in accordance with the terms of the above limited warranty for a period of five (5) years from the manufacture date code.

Mobile Internet Device (tablet) - Seller warrants the Mobile Internet Device (tablet) in accordance with the terms of the above limited warranty for a period of one (1) year from date of purchase.

### 2. EXCLUSION OF WARRANTIES, LIMITATION OF LIABILITY

THERE ARE NO WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, OF MERCHANTABILITY, OR FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE, WHICH EXTEND BEYOND THE DESCRIPTION ON THE FACE HEREOF. TO THE FULL EXTENT PERMITTED BY LAW, IN NO CASE SHALL SELLER BE LIABLE TO ANYONE FOR ANY (i) CONSEQUENTIAL, INCIDENTAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES ARISING OUT OF OR RELATING IN ANY WAY TO THE PRODUCT AND/OR FOR BREACH OF THIS OR ANY OTHER WARRANTY OR CONDITION, EXPRESS OR IMPLIED, OR UPON ANY OTHER BASIS OF LIABILITY WHATSOEVER, EVEN IF THE LOSS OR DAMAGE IS CAUSED BY SELLER'S OWN NEGLIGENCE OR FAULT AND EVEN IF SELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH LOSSES OR DAMAGES. Any product description (whether in writing or made orally by Seller or Seller's agents), specifications, samples, models, bulletin, drawings, diagrams, engineering sheets, or similar materials used in connection with the Buyer's order are for the sole purpose of identifying the Seller's products and shall not be construed as an express warranty or condition. Any suggestions by Seller or Seller's agents regarding use, applications, or suitability of the products shall not be construed as an express warranty or condition unless confirmed to be such in writing by Seller. Seller does not represent that the products it sells may not be compromised or circumvented; that the products will prevent any personal injury or property loss by burglary, robbery, fire or otherwise, or that the products will in all cases provide adequate warning or protection. Buyer understands and will cause its customer to understand that a properly installed and maintained alarm may only reduce the risk of a burglary, robbery or fire without warning, but it is not insurance or a guarantee that such will not occur or will not cause or lead to personal injury or property loss. CONSEQUENTLY, SELLER SHALL HAVE NO LIABILITY FOR ANY PERSONAL INJURY, PROPERTY DAMAGE OR OTHER LOSS BASED ON ANY CLAIM AT ALL INCLUDING A CLAIM THE PRODUCT FAILED TO GIVE WARNING. However, if Seller is held liable whether directly or indirectly for any loss or damage with respect to the products it sells, regardless of cause or origin, its maximum liability shall not in any case exceed the purchase price of the product, which shall be fixed as liquidated damages and not as a penalty, and shall be the complete and exclusive remedy against the Seller.

### 3. Limitation on Liability to Buyer's Customers.

Buyer agrees to limit liability to its customers to the fullest extent permitted by law. Buyer acknowledges that Seller shall only be deemed to give consumers of its products such statutory warranties as may be required by law and at no time shall Buyer represent to its customers and/or users of the Seller's products that Seller provides any additional warranties. By accepting the products, to the fullest extent permitted by law, Buyer assumes all liability for, and agrees to indemnify and hold Seller harmless against and defend Seller from, any and all suits, claims, demands, causes of action and judgments relating to damages, whether for personal injury or to personal property, suffered by any person, firm, corporation or business association, including but not limited to, Buyer's customers and/or users of the products because of any failure of the products to detect and/or warn of the danger for which the goods were designed or any other failure of the products whether or not such damages are caused or contributed to by the sole or joint concurring negligence or fault of Seller.

### 4. Returns and Repairs.

Subject to the terms and conditions listed below, during the applicable warranty period, Seller will repair or replace, at its sole option, free of charge any defective products returned prepaid. Seller reserves the right to replace any defective product under warranty with new, refurbished or remanufactured product. In the event you have a problem with any Seller product, please call and request a RETURN MERCHANDISE AUTHORIZATION (RMA) NUMBER from the Service Department. In the USA call 800-573-0154.

Shipping Address: Resideo Security Service Center, 12220 Rojas Drive, Suite 700, El Paso, TX 79936

Be sure to have the model number, serial number, and the nature of the problem available for the customer service representative. Prior authorization MUST be obtained for all returns, exchanges, or credits. ITEMS SHIPPED TO SELLER WITHOUT A CLEARLY IDENTIFIED RMA NUMBER MAY BE REFUSED.

Products returned will be tested to verify the defect. Upon verification of the defect, the product will be repaired, exchanged, or credited to Buyer's account, at the sole discretion of Seller. In the event of replacement, the returned product will be credited to Buyer's account and a new invoice issued for the replacement item. Seller reserves the right to issue a credit only in lieu of replacement. If the product is found to be in good working order or its inability to function properly is a result of user damage or abuse, the product will be returned in the same condition as received unless repair is possible and requested by Buyer and in each case, freight charges will be the responsibility of the Buyer. Repairs of such nature will incur a charge for parts and labor and will proceed only by agreement with Buyer to accept the charge.

Non-Warranty Repair - Buyer will be charged for repairs on out of warranty product. Applicable charges will be calculated and quoted when an RMA number is issued. Charges may vary based on actual product condition. For all non-warranty repairs Buyer will be billed for all parts, labor and shipping costs. Non-warranty repairs are warranted for 90 days from date of repair.

Return for Credit Unused Product - At its option, Seller may accept as a return for credit unused product in its original package and in a condition that could be sold as new provided the product was purchased from Seller no more than thirty (30) days prior to the date of return. Buyer must provide proof of purchase within the preceding thirty (30) days and method of payment. Returns must include all original instructions and packaging within the original box. Special order items are non-returnable (unless otherwise specified by Seller). All returns are subject to a fifteen percent (15%) restocking fee. For non-returnable items, no return privileges apply. Buyer must contact Customer Service and obtain a Return Authorization for Credit (RAC) number. Unauthorized returns are not accepted and will be returned freight collect.

Bad-Out-of-Box Replacement - For products sold through distribution, Resideo will provide the following privileges solely to its direct distributor buyer: Buyer may return a product deemed to be defective within 180 days from the manufacture date code for credit or a replacement product. If the product is found to be in good working order or if the damage or defect is not covered by the scope of the seller's warranty in section 1 above, the product will either be: (i) returned in the same condition as received or (ii) processed as per Buyer's request, and in either event, the freight charges will be the responsibility of the Buyer.

**Governing Law** - If the Buyer acquires the Seller's product in the United States of America, the laws of the State of New York apply to this Limited Warranty.

**Miscellaneous** - Where any term of this Limited Warranty is prohibited by such laws, it shall be null and void, but the remainder of the Limited Warranty shall remain in full force and effect.

## SUPPORT & WARRANTY

For the latest warranty information, please go to:

<https://www.security.honeywellhome.com/hsc/resources/wa/index.html>

For patent information, see <https://www.resideo.com/patent>

**SUPPORT:** For technical support, call 1-800-645-7492 M-F 8:30am to 5pm EST

from  
**resideo**

This product manufactured by Resideo and its affiliates.  
The Honeywell Home Trademark is used under license from  
Honeywell International Inc.

2 Corporate Center Drive, Suite 100  
P.O. Box 9040, Melville, NY 11747  
© 2019 Resideo Technologies, Inc  
[www.resideo.com](http://www.resideo.com)



800-25175 4/19 Rev. A