

1.1.1.1 GPRS


				
GPRS 1 slot				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00	0.041	-0.030	0.041
251	848.80			
GPRS 2 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00	0.073	-0.220	0.077
251	848.80			
GPRS 3 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20	0.057	-0.028	0.057
192	837.00	0.083	0.000	0.083
251	848.80	0.109	0.000	0.109
GPRS 4 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00	0.072	-0.002	0.072
251	848.80			

1.1.1.2 EGPRS, WCDMA, & WCDMA + HSDPA

				
EGPRS 3 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00	0.037	0.103	0.036
251	848.80			
WCDMA 12.2k RMC				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
4132	826.40			
4184	836.40	0.043	-0.215	0.045
4233	846.60			
WCDMA 12.2k RMC + HSDPA				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
4132	826.40			
4184	836.40	0.040	0.000	0.040
4233	846.60			
Notes:				
1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.				
2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.				

1.1.2 SECONDARY PORTRAIT


This position is skipped since the WWAN is disabled at this configuration by a Toshiba software tool.

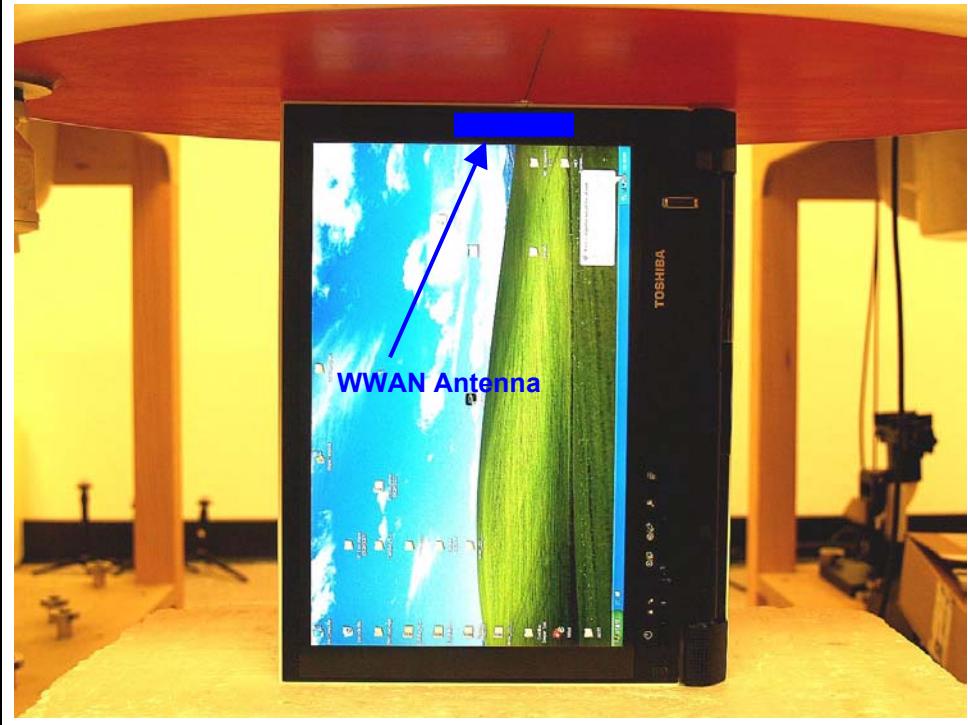

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

1.1.3 PRIMARY LANDSCAPE

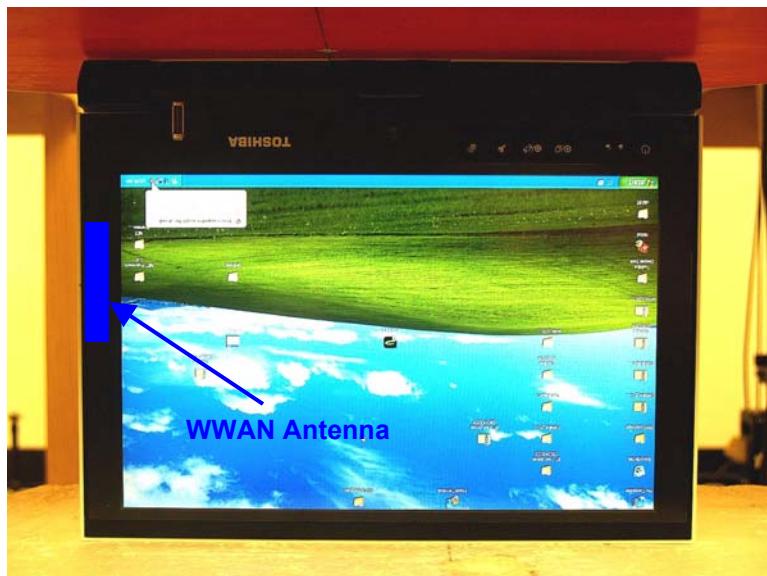

GPRS 3 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00	0.014	0.000	0.014
251	848.80			

Notes:


- 1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) EGPRS, WCDMA and WCDMA + HSDPA modes are skipped since SAR Values are too low.

1.1.4 SECONDARY LANDSCAPE



GPRS 3 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00			
251	848.80	0.068	-0.154	0.070
EGPRS 3 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00			
251	848.80	0.037	0.000	0.037
WCDMA 12.2k RMC				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
4132	826.40			
4184	836.40			
4233	846.60	0.028	0.000	0.028
WCDMA 12.2k RMC + HSDPA				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
4132	826.40			
4184	836.40			
4233	846.60	0.027	0.000	0.027

1.1.5 LAPHELD

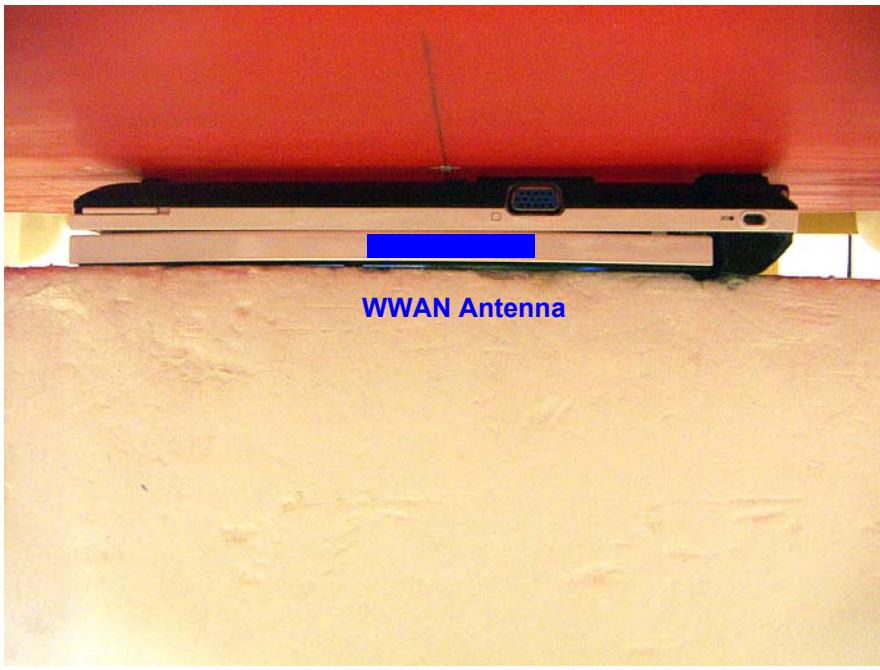

GPRS 3 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20			
192	837.00	0.058	-0.132	0.059
251	848.80			


Notes:

- 1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) EGPRS, WCDMA and WCDMA + HSDPA modes are skipped since SAR Values are too low.

1.2 PCS BAND

1.2.1 PRIMARY PORTRAIT

1.2.1.1 GPRS

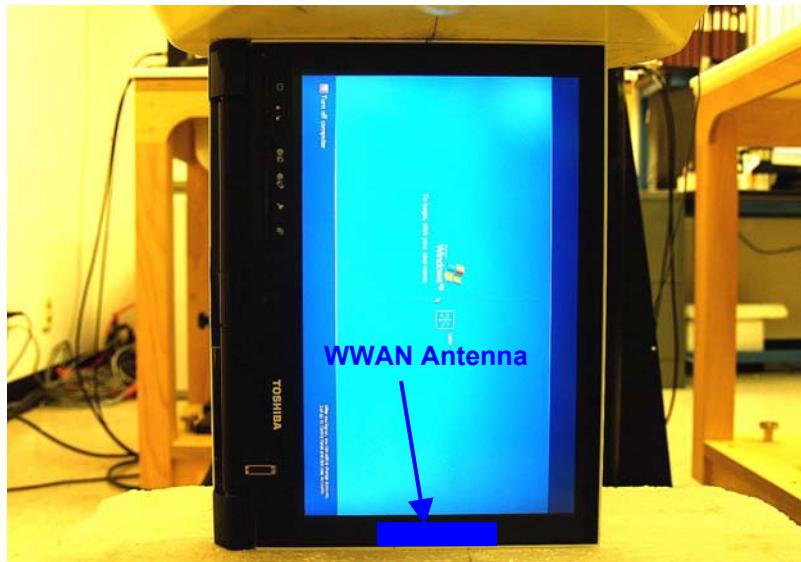


GPRS 1 slot				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.086	0.000	0.086
810	1909.80			
GPRS 2 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.167	-0.167	0.174
810	1909.80			
GPRS 3 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.236	-0.166	0.245
810	1909.80			
GPRS 4 slots				
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20	0.360	-0.190	0.376
661	1880.00	0.313	-0.170	0.325
810	1909.80	0.236	-0.103	0.242

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{-(\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

1.2.1.2 EGPRS, WCDMA, & WCDMA + HSDPA

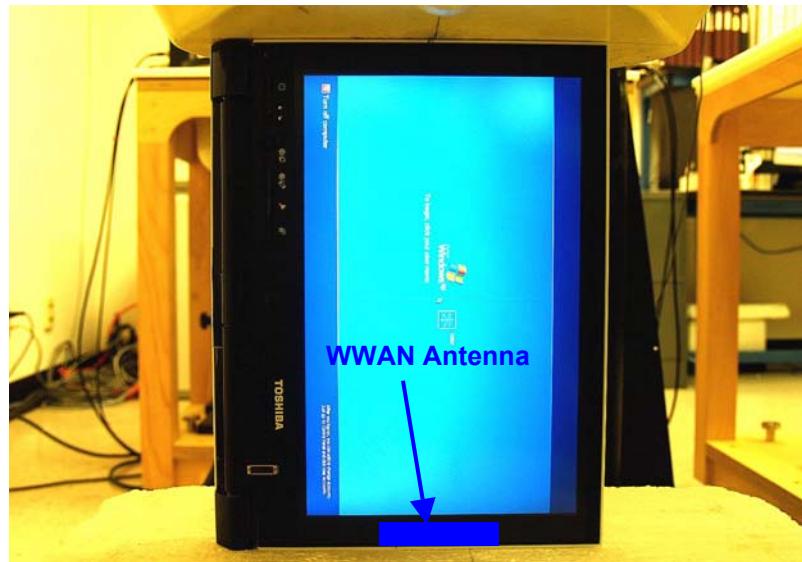

EGPRS 4 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.172	-0.166	0.179
810	1909.80			

WCDMA 12.2k RMC

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40			
9400	1880.00	0.086	-0.171	0.089
9538	1907.60			

WCDMA 12.2k RMC + HSDPA


Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40			
9400	1880.00	0.024	-0.159	0.025
9538	1907.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

1.2.2 SECONDARY PORTRAIT

This position is skipped since the WWAN is disabled at this configuration by a Toshiba software tool.

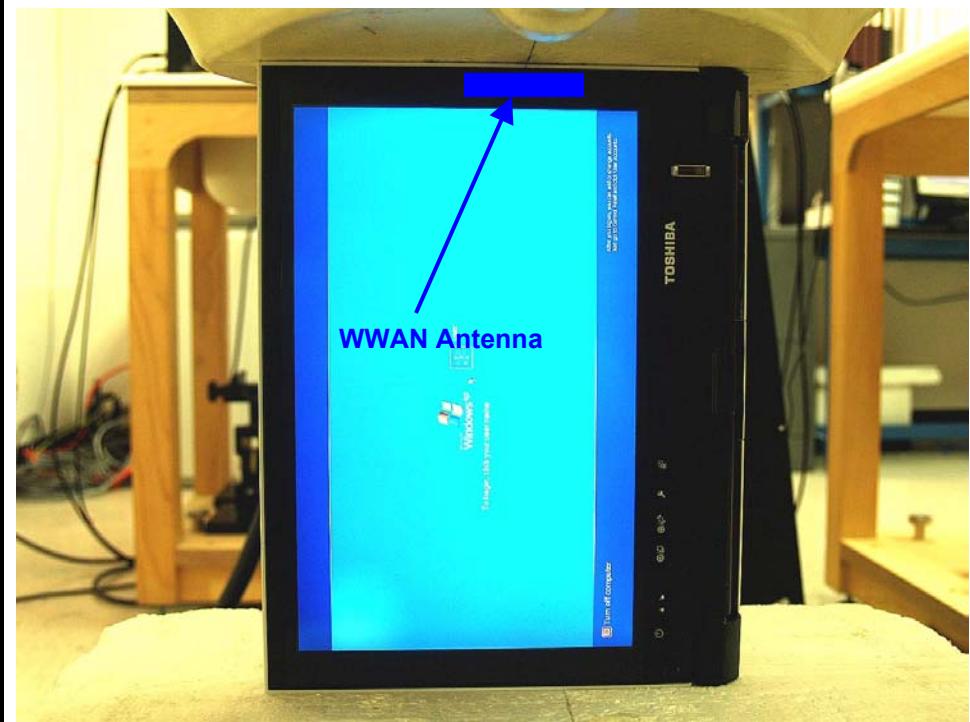

Notes:

- 1) The exact method of extrapolation is Measured SAR x $10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

1.2.3 PRIMARY LANDSCAPE



GPRS 4 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.051	0.000	0.051
810	1909.80			

EGPRS 4 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.027	0.000	0.027
810	1909.80			

WCDMA 12.2k RMC

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40			
9400	1880.00	0.012	0.000	0.012
9538	1907.60			

WCDMA 12.2k RMC + HSDPA

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40			
9400	1880.00	0.003	0.000	0.003
9538	1907.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{-(\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

1.2.4 SECONDARY LANDSCAPE



GPRS 4 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.135	0.000	0.135
810	1909.80			

EGPRS 4 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.069	-0.084	0.070
810	1909.80			

WCDMA 12.2k RMC

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40			
9400	1880.00	0.031	-0.120	0.032
9538	1907.60			


WCDMA 12.2k RMC + HSDPA

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40			
9400	1880.00	0.008	0.000	0.008
9538	1907.60			

Notes:

- 1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

1.2.5 LAPHELD

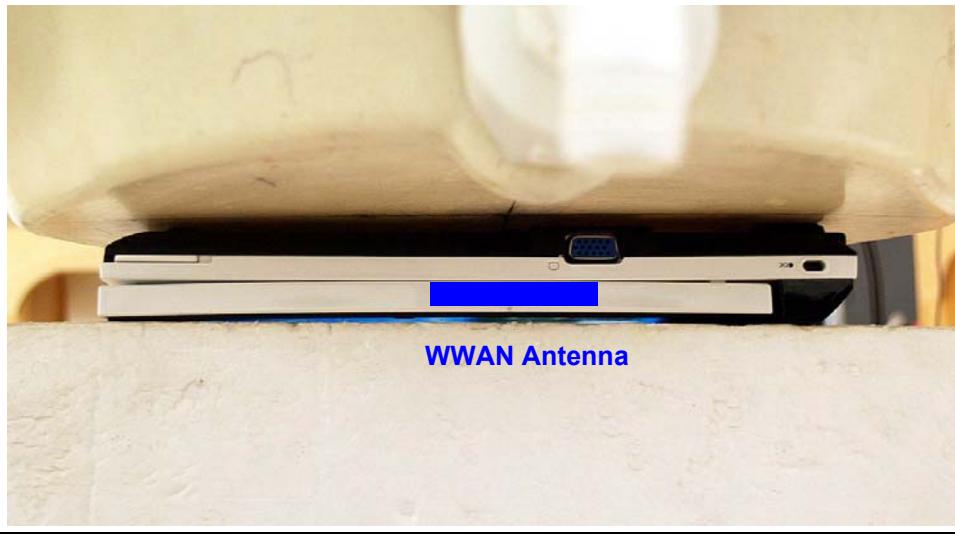

GPRS 4 slots


Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20			
661	1880.00	0.037	0.000	0.037
810	1909.80			

Notes:


- 1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.
- 3) EGPRS, WCDMA and WCDMA + HSDPA modes are skipped since SAR Values are too low.

2 PHOTOS


DUT

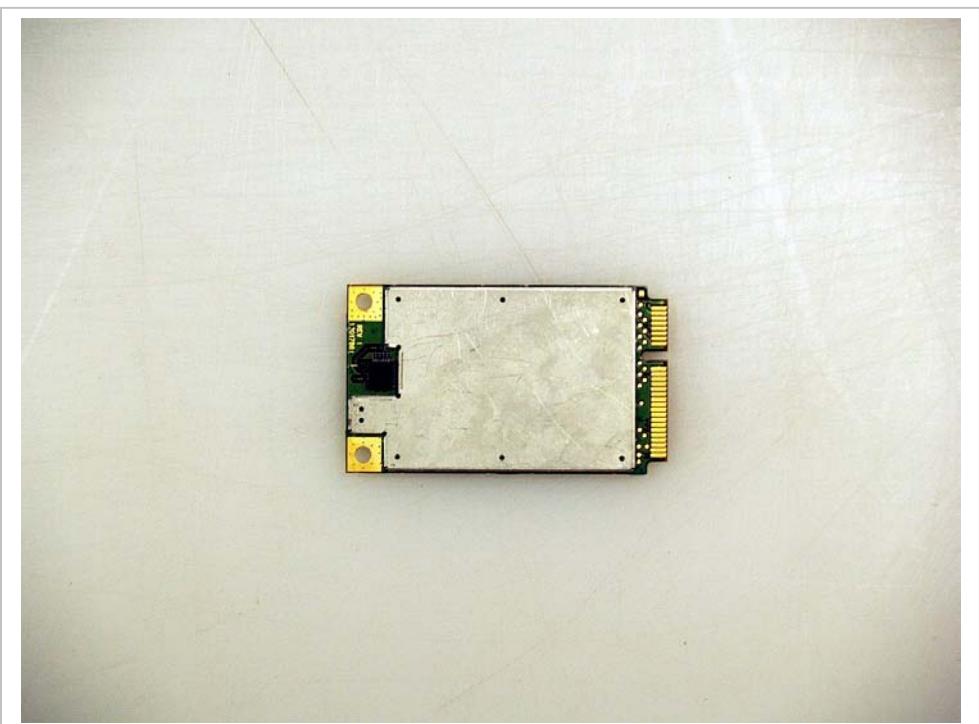


Host Device

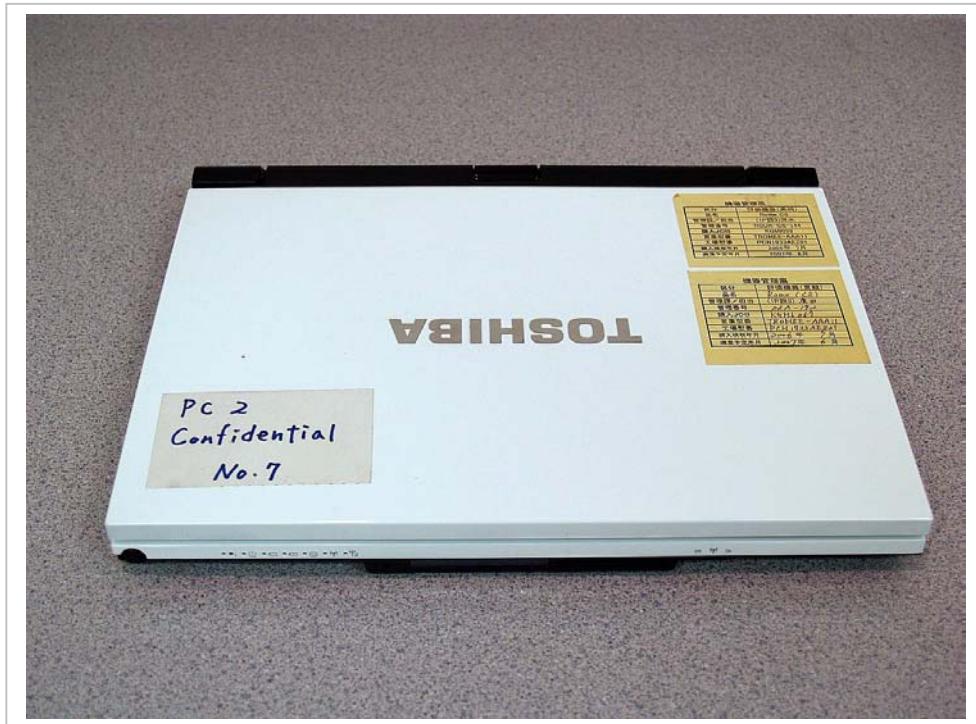

DUT Location

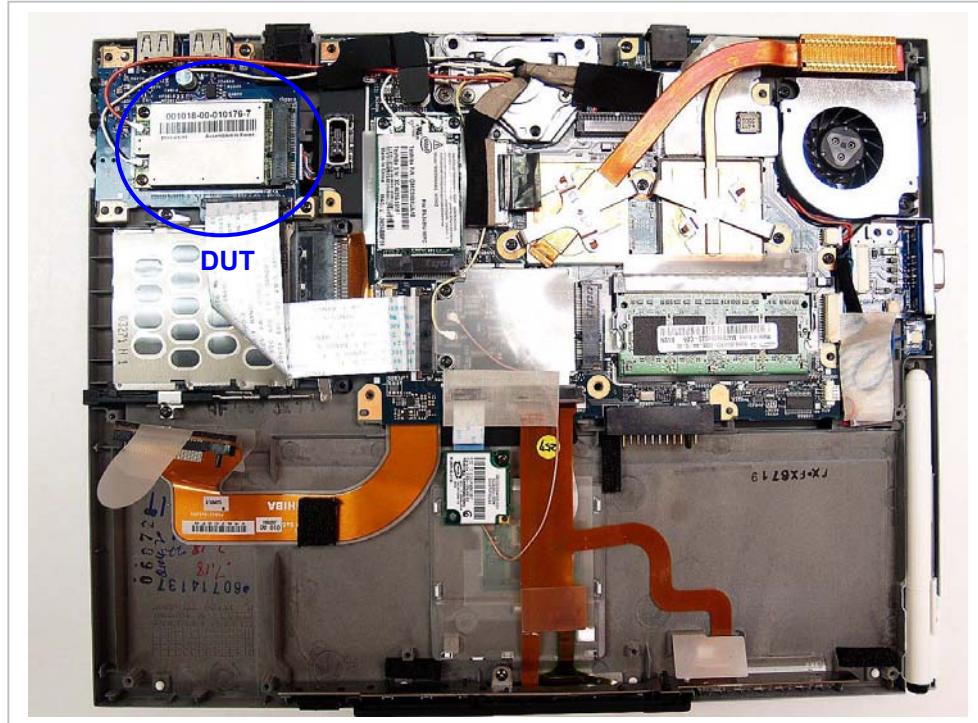

Antenna Location

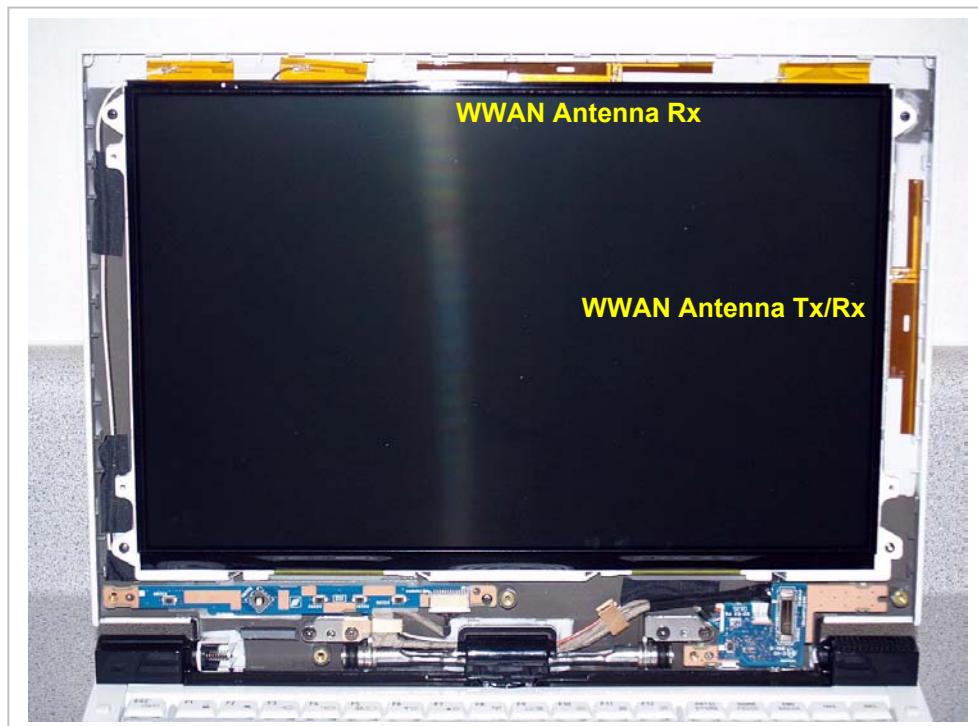

3 ATTACHMENTS

No.	Contents	No. Of Pages
1	System Performance Check Plots	8
2-1	Cell Band SAR Test Plots	15
2-3	PCS Band SAR Test Plots	18
3	Certificate of E-Field Probe - EXDV4SN3552	9
4	Certificate of System Validation Dipole - D835V2 SN:4d002	9
5	Certificate of System Validation Dipole - D1900V2 SN:5d043	9