


Panic Button Remote

General Information

The Panic Button Remote (2GIG-PANIC100-345) is a compact, battery powered, wireless panic button that transmits an Emergency signal from any location within 345MHz frequency (RF) range of the 2GIG® control panel. The Emergency signal can be transmitted to the control panel, whether the security system is armed or disarmed.

Users can mount the panic button in a convenient location in the wall or use one of these wearable options: lanyard, wristband, belt clip, and car visor clip. It is water-resistant and also offers a five (5)-second button lockout.

Figure 1 Panic Button Remote

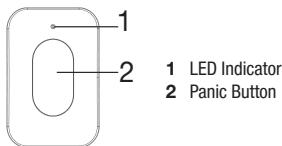


Box Contents

Verify that the package includes the following:

- (1) Panic Button Remote
- (1) Battery
- (1) Lanyard (A)
- (1) Car-Visor Clip (D)
- (1) Belt Clip (C)
- (1) Wrist Band (E)
- (1) Sensor (B) for clips (belts and visor) with option to wall mount using two (2) screws (not included)

Figure 2 Panic Button Remote — Wearable Options

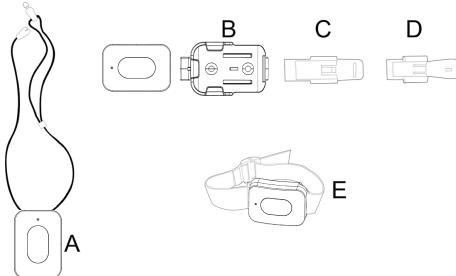

Inserting and Replacing the Batteries

WARNING: Maintain the battery strength in the Panic Button to ensure emergency use when needed. It's recommended that the battery be checked/replaced regularly, at least one or more times per year. Under typical conditions, the battery life is approximately two (2) years. When the battery is low, the control panel's Home screen will display a trouble notification. To help to ensure that the panic button is available during a duress event, always replace the battery when the low battery notification first appears.

WARNING: Always use the recommended replacement batteries and ensure that it is new, in good condition, and fully charged. See "Specifications" on page 2.


- 1 Insert a small, flathead screwdriver into the opening on the panic button. Then remove the top cover.

Figure 3 Removing the Top Cover



- 2 Gently insert the flathead screwdriver between the battery and one of the metal clips in the battery compartment, then remove the old battery.

Figure 4 Battery Compartment

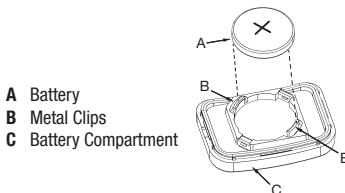

IMPORTANT: Dispose of or recycle used batteries per local hazardous waste regulations. Additional city, state or national requirements may apply.

- 3 Insert the replacement battery with the positive (+) sign facing up.
- 4 If you remove the circuit board (not recommended), ensure the LED aligns with the appropriate hole on the top cover.
- 5 Verify that the panic button is programmed into the control panel and ensure that it has quality radio frequency (RF) communications with the panel.

NOTE: Consult the Control Panel Installation & Programming Guide for wireless sensor programming.

- 6 Replace the panic button's top cover.

WARNING: Failure to follow these warnings and instructions can lead to heat generation, rupture, leakage, explosion, fire, or other injury or damage. Do not insert the battery into the compartment in the wrong direction. Always replace the battery with the same or equivalent type (see **Specifications**).

Never recharge or disassemble the battery. Never place the battery in fire or water. Always keep batteries away from small children. If batteries are swallowed, promptly see a doctor.

WARNING: After replacing the battery, always test the panic button. For testing information, see the Control Panel's Installation & Programming Guide.

Encrypted/Unencrypted Mode Switch

The sensor is capable of transmitting signals in encrypted mode or unencrypted mode. The mode is set through a switch inside the sensor (see Figure 4).

The sensor comes with default set to encrypted enabled. To change to unencrypted mode, do the following:

- 1 Open the sensor housing and remove battery from the slot.
- 2 Locate the dip switch and note the switch setting: **X** indicating *encrypted* and **Y** for *unencrypted* mode.
- 3 Move the switch position to **Y**.

Activating the Panic Button Remote

To activate the panic button:

- 1 Press and hold the panic button for about two seconds. When the LED turns RED, a signal is transmitted to the control panel.
- 2 When the control panel alarm sounds and the System in Alarm message displays, enter your code to silence the alarm. Any valid user code will silence the alarm. An alarm report is transmitted to the monitoring service. To acknowledge that the alarm report was sent, tap **OK**.
- 3 If you want to clear the alarm history on the control panel, tap **Clear Alarm History** to place a checkmark in the corresponding box, then tap **OK**.

Specifications

Wireless Signal Range	500 ft (152.4 m), open air, with 2GIG Control Panel
Code Outputs	Alarm; Supervisory; Low Battery
Transmitter Frequency	345.000 MHz (crystal controlled)
Unique ID Codes	Over one (1) million different code combinations
Supervisory Interval	70 minutes
LED	RED when activated
Dimensions (L x W x H)	1.65 x 1.20 x 0.50 in. (4.19 x 3.05 x 1.27 cm)
Weight (including battery and bracket)	0.45 oz. (12.8 g)
Housing Material	ABS Plastic
Color	White with Grey Button
Operating temperature	32° to 120° F (0° to 49° C)
Relative Humidity	Water-Resistant
Battery (included, not installed)	One (1) Panasonic CR 2032 or equivalent Lithium battery
Regulatory Listings	ETL, FCC and IC
Equipment Code	2868 (encrypted), 0868 (unencrypted)
Panel Programming Sensor Loop	Loop 1

Regulatory Information

FCC and IC Notice

This device complies with Part 15 of the FCC's Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) The device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. Federal Communication Commission (FCC) Radiation Exposure Statement Power is so low that no RF exposure calculation is needed.

IC: Radiation Exposure Statement

The product complies with the Canada portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

CAUTION: Any changed or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Renseignements réglementaires

Nous, Nice North America LLC du 5919 Sea Otter Place STE 100, Carlsbad, CA 92010, déclarons sous notre entière responsabilité que le dispositif 2GIG-PANIC100-345 est conforme à la Partie 15 des règles de la FCC.

Avis concernant la FCC et IC

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada. Cet équipement génère, utilise et peut émettre une énergie de fréquence radio et, s'il n'est pas installé et utilisé conformément aux instructions, peut causer des interférences nuisibles aux communications radio. Il n'existe toutefois aucune garantie que de telles interférences ne se produiront pas dans une installation particulière. Si cet équipement cause des interférences nuisibles à la réception des signaux de la radio ou de la télévision, ce qui peut être mis en évidence par sa mise sous tension et hors tension, l'utilisateur est invité à essayer de corriger le problème en prenant une ou plusieurs des mesures suivantes :

- Réorientez ou déplacez l'antenne de réception.
- Augmentez la distance entre l'équipement et le récepteur.
- Branchez l'appareil à une prise sur un circuit différent de celui auquel le récepteur est branché.
- Consultez le revendeur ou un technicien radio/TV expérimenté pour obtenir de l'aide.



IC: Déclaration d'exposition aux radiations : Le produit est conforme aux limites d'exposition pour les appareils portables RF pour les Etats-Unis et le Canada établies pour un environnement non contrôlé.

Le produit est sûr pour un fonctionnement tel que décrit dans ce manuel. La réduction aux expositions RF peut être augmentée si l'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible.

WARNING

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

* For more warranty and compliance information, visit www.2gig.com

LIMITED WARRANTY

This Nice North America LLC product is warranted against defects in material and workmanship for two (2) years. This warranty extends only to wholesale customers who buy direct from Nice North America LLC or through Nice North America LLC's normal distribution channels. Nice North America LLC does not warrant this product to consumers. Consumers should inquire from their selling dealer as to the nature of the dealer's warranty, if any.

There are no obligations or liabilities on the part of Nice North America LLC for consequential damages arising out of or in connection with use or performance of this product or other indirect damages, with respect to loss of property, revenue, or profit, or cost of removal, installation, or reinstatement. All implied warranties for functionality are valid only until the warranty expires. This Nice North America LLC Warranty is in lieu of all other warranties expressed or implied.



Customer Service

760-438-7000
Monday – Friday, 5 a.m. – 4 p.m. PST
Saturday, 7 a.m. – 3:30 p.m. PST

www.2gig.com

Nice North America LLC
5919 Sea Otter Place, Suite 100
Carlsbad, CA 92010 USA

